

**BigFix Lifecycle
Power Management User's Guide**



Special notice

Before using this information and the product it supports, read the information in [Notices \(on page xlv\)](#).

Edition notice

This edition applies to BigFix version 10 and to all subsequent releases and modifications until otherwise indicated in new editions.

Contents

- Chapter 1. Overview..... 6**
 - System requirements 6
 - Definitions 8
 - Key features 9
 - Dashboards overview..... 9
 - Power Management Health Checks dashboard..... 10
 - Power Consumption Summary dashboard..... 12
- Chapter 2. Use Power Management..... 17**
 - Power savings strategies..... 17
 - Reduce Power Consumption..... 17
 - Manage power profiles..... 18
 - Change current power state..... 19
 - Manage PC Insomnia..... 19
 - Manage standby behavior..... 20
- Chapter 3. Manage wakeup behavior..... 22**
 - Setup..... 22
 - Schedule Wake-on-LAN..... 23
 - Schedule Wake-from-Standby..... 25
 - Wake-from-Standby tasks..... 25
 - Configuration..... 26
 - Manage Last Man Standing..... 26
 - Manage Wake-on-LAN Forwarders..... 28
 - Wake-from-Standby by Magic Packet..... 29
 - Using Intel vPro with Wake-on-LAN Medic to wake up endpoints..... 31
- Chapter 4. Web Reports..... 33**
 - Model Power Savings..... 35
 - Power consumption over time..... 35
 - Weekly Power Consumption Over Time..... 37
 - Power Management Daily Activity State breakdown..... 38
 - Weekly Idle Time Breakdown Over Time..... 38

Power Management settings.....	39
Wake on Web.....	40
Appendix A. Support.....	42
Appendix B. Frequently asked questions	43
Notices.....	xlv

Chapter 1. Overview

With the BigFix® Power® Management solution, IT organizations can enforce conservation policies across the enterprise, while providing granularity that enables application of these policies to a single computer. Specifically, you can monitor, manage, and control the power usage settings on the computers in your network

The *User's Guide* describes some of the primary features of Power® Management and how to optimize its benefits in your deployment. For information about installing and activating Power® Management components in your environment, see the *Power® Management Setup Guide*.

Power® Management supports many features, including:

- Managing computer power settings and policies
- Tracking and reporting on computer power usage that includes measuring power usage, potential power savings, and more
- Tracking of computer states, which allows you to create power policies that maximize power savings
- Advanced Wake-on-LAN capabilities (that require no network modifications) including Last Man Standing, Wake-on-LAN Medic, scheduled wake-up times, and more
- Support for PC Insomnia detection and prevention
- A client-side dashboard to view power usage

New Features

BigFix Power Management has extended support to include the following Microsoft Windows and Mac OS X versions.

- Windows 8.1
- Windows 10
- Windows Server 2016
- OS X 10.9
- OS X 10.10
- OS X 10.11
- macOS 10.12
- macOS 10.13
- macOS 10.14
- macOS 10.15

System requirements

BigFix Power Management supports various versions of Windows and Mac operating systems, including Windows 7, Windows 10, Windows 11, and macOS 10.15. Users are advised that Microsoft XP, Windows Vista, and Windows 2003 have reached end of life, and BigFix no longer provides support for products that have reached their end of support date.

BigFix Power Management supports the following Windows and Mac versions.

Windows

- Windows 2008
- Windows 2008 R2
- Windows Server 2012 R2
- Windows Server 2016
- Windows Server 2019
- Windows Server 2022
- Windows 7
- Windows 8
- Windows 8.1
- Windows 10
- Windows 11

Mac OS

- Mac OS 10.4
- Mac OS 10.5
- Mac OS 10.6
- Mac OS 10.7
- Mac OS 10.8
- OS X 10.9
- OS X 10.10
- OS X 10.11
- macOS 10.12
- macOS 10.13
- macOS 10.14
- macOS 10.15

*Microsoft XP, Windows Vista, and Windows 2003 have reached end of life (EOL). Microsoft products have a lifecycle that ends when the product is no longer supported. When a product reaches EOL or its end of support date, Microsoft no longer supports and releases updates for the product, including automatic fixes, updates, and online technical assistance.

BigFix, in turn, no longer provides security and non-security content and support for products that reached its end of support date. However, users of existing Windows content can use the standard HCL support channels to raise concerns and for troubleshooting support.

Microsoft provides extended support for some products that have reached their end of life. If you signed for extended support with Microsoft, it is suggested that you contact your HCL account representative. To see information about product offerings, see <https://www.hcltech.com/software#products>.

Definitions

This section defines common Power Management terms:

Active power state

A computer is in the Active power state when a user is working on the computer and is using one of the input devices (specifically the mouse or keyboard). The computer is considered to be using full power in this state.

CO2 Emissions

Carbon dioxide (CO₂) is one of the primary greenhouse gases and power generation is one of the largest sources of carbon dioxide emissions. The amount of carbon dioxide emitted per kWh generated varies significantly based on how the electricity is generated. For example, hydroelectric and nuclear power plants do not emit carbon dioxide, but coal-fired power plants emit significant carbon dioxide.

Idle power state

This state is considered to be using full power but the user is not actively interacting with the system. In many cases, the idle power state is considered to be wasted electricity because the computer is not using low power modes, but is not being used.

Power® off state

The computer is off.

Power® States

System Power® States define the overall power consumption of a system. BigFix Power® Management tracks four main power states: Active, Idle, Standby or Hibernation, and Power® Off. See the definition entries for Active, Idle, Standby, and Power-off.

Price per kWh

This is the amount you pay for electricity. One kWh is equal to 1,000 watts used for one hour. As a reference point, a standard desktop and monitor runs for approximately six hours on one kWh of electricity. A typical cost for a kWh is \$0.10 in many regions of North America. However, electricity costs vary significantly depending on region and power provider, and different computer models have different power usage.

Standby power state

Also known as "Sleep" or "Hibernation". This state is the low power mode where the user's working session is saved in the memory or to the disk.

Wake-on-LAN

Wake-on-LAN (WoL) is a standard mechanism for waking computers by sending them a specific network packet which is known as the magic packet. Wake-on-LAN is difficult in many network environments because of network restrictions regarding broadcasts from other subnets. BigFix Power Management handles these complexities by sending WoL packets from nearby agents in the same subnet.

Wake-from-Standby

Windows™ and other operating systems allow applications to wake a computer from standby at predefined times. Using Wake-from-Standby, a computer wakes itself without the need for Wake-on-LAN.

Key features

This section defines the purpose and function of key features of Endpoint Manager Power® Management:

PC Insomnia Prevention

Computers can be set to go into sleep states after configurable amounts of user idle time. The term PC Insomnia is used to describe a situation where applications prevent a computer from sleeping. *PC Insomnia Prevention* is a mechanism that the BigFix agent uses to monitor user idle time and force the computer to sleep at the appropriate times.

Wake-on-LAN Forwarder (WoLF)

Many enterprise networks do not allow broadcasting from different subnets, which makes Wake-on-LAN difficult. To solve this issue, BigFix agents can be designated as Wake-on-LAN Forwarders (WoLFs), which send the Wake-on-LAN packets to nearby computers in the same subnet. This method allows organizations to use Wake-on-LAN without requiring network changes.

Last Man Standing (LMS)

Wake-on-LAN technology requires at least one computer in a subnet to be active to serve as Wake-on-LAN Forwarder for other computers. An LMS-designated computer ensures that a computer is always active by resisting shutdowns and by automatically being awakened if powered off.

Power® Management Efficiency

A measure of how efficiently a computer spends its non-active time, whereby *Idle Time* is considered inefficient and *standby* is efficient. The formula is: $\text{Standby Time} / (\text{Standby Time} + \text{Idle Time})$.

Minimum Power® Consumption

The amount of power used by a computer if it is only powered on when in active use and powered off at all other times.


Full Power® Consumption

The amount of power used if a computer was powered on all day without any power management settings enabled.

Dashboards overview

BigFix Power Management includes the following dashboards for viewing power settings summaries in your deployment:

- Power Management Health Checks
- Power Consumption Summary

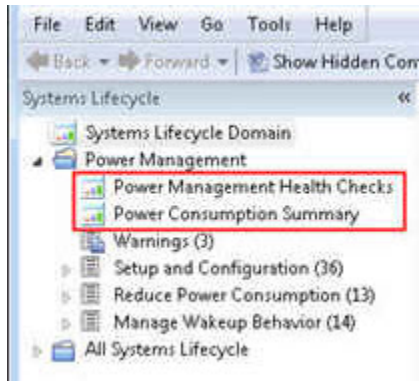

Power Management Health Checks dashboard

The *Power Management Health Checks* dashboard provides troubleshooting and optimization checks for your Power Management Deployment. The dashboard is organized into *Setup*, *Historical Power Tracking*, and *Wake-on-LAN* sections.

Power Management Health Checks

The Power Management Health Checks Dashboard provides troubleshooting and optimization checks for your Power Management Deployment. You can drill down into individual health checks to see their results and a resolution path for failing checks.

Setup

<u>Name</u>	<u>Status</u>	<u>Severity</u>
+ Power Tracking Enabled	Pass	Critical
+ Power Tracking Utility at Latest Version	Pass	Critical
+ Power Tracking Utility Running	Pass	Critical
+ Power Tracking Utility Tracks Accurate Data	Pass	High
+ Power Analyses Activated	Pass	High
+ PC Insomnia	Pass	Medium
+ Clients Set to use Max Power State	Pass	Low


Historical Power Tracking

<u>Name</u>	<u>Status</u>	<u>Severity</u>
+ Store Power Data Utility is Running	Warning	Critical
+ Store Power Data Utility at Latest Version	Pass	Critical
+ Historical Tracking Groups	Pass	High

Wake-on-LAN

<u>Name</u>	<u>Status</u>	<u>Severity</u>
+ Wake-on-LAN Medic Running	Pass	Critical
+ Wake-on-LAN Medic at Latest Version	Pass	Critical
+ Wake-on-LAN Forwarders Deployed	Pass	High
+ Last Man Standing Deployed	Fail	Medium

You can drill down into individual health checks to see their results and a resolution path for failing checks. Expand each item to see the detailed results and resolution.

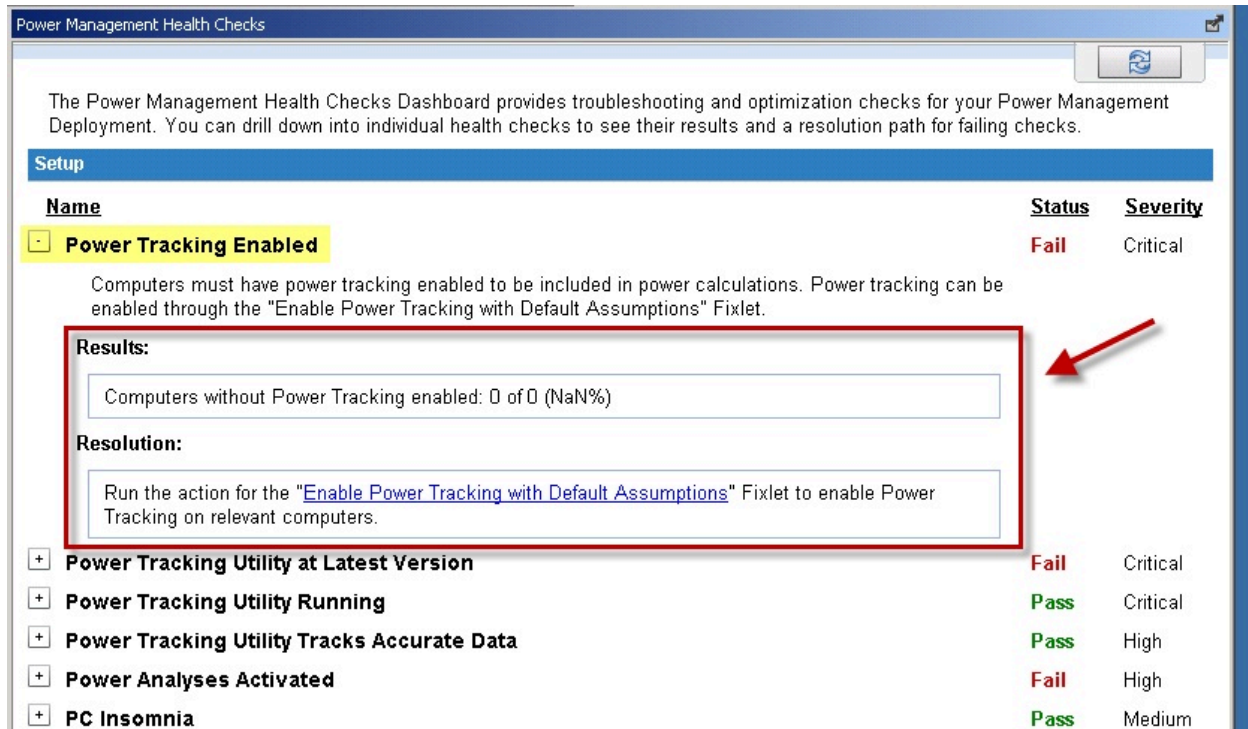

The Power Management Health Checks Dashboard provides troubleshooting and optimization checks for your Power Management Deployment. You can drill down into individual health checks to see their results and a resolution path for failing checks.

Setup

Name	Status	Severity
Power Tracking Enabled	Fail	Critical
Computers must have power tracking enabled to be included in power calculations. Power tracking can be enabled through the "Enable Power Tracking with Default Assumptions" Fixlet.		
Results:		
Computers without Power Tracking enabled: 0 of 0 (NaN%)		
Resolution:		
Run the action for the " Enable Power Tracking with Default Assumptions " Fixlet to enable Power Tracking on relevant computers.		
Power Tracking Utility at Latest Version	Fail	Critical
Power Tracking Utility Running	Pass	Critical
Power Tracking Utility Tracks Accurate Data	Pass	High
Power Analyses Activated	Fail	High
PC Insomnia	Pass	Medium

Power Consumption Summary dashboard

The *Power Consumption Summary* dashboard is a composite report that includes separate sections highlighting different aspects of your power usage.


The Power Consumption Summary dashboard captures the following information:

- Aggregate Power Usage
- Average day breakdown of the activity states (Idle, Active, Standby, Powered off)
- Power Management (PM) Efficiency Rating
- Idle Time breakdown for last week
- Total tracked computers and computers removed from calculations
- Power profile settings
- Average Statistics
- PM Efficiency Rating
- Powered on computers

Aggregate Power Usage

The Aggregate Power Usage section displays the overall power used by your deployment and compares it with your estimated Minimum Power Consumption. The section shows the different scenarios of your power usage, in terms of power, cost, and carbon for various computer types in your deployment.

The following image shows the Aggregate Power Usage section:

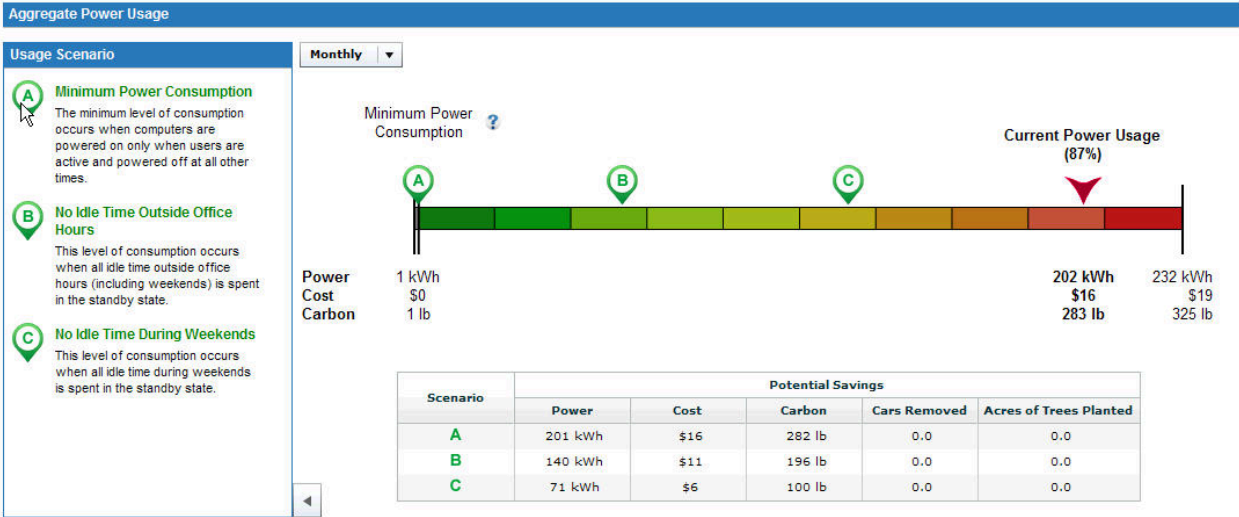

In the power spectrum, the letters A, B, and C correspond to usage scenarios that are described on the left side of the Aggregate Power Usage section.

Minimum Power Consumption

The amount of power used when computers are powered on only when users are active, as opposed to idle, standby, or hibernate modes, and powered off at all other times.

No Idle Time Outside Office hours

The amount of power used when there is no idle time outside office hours. Power usage is calculated by converting idle state to standby state.


No Idle Time During Weekends


Occurs when there is no idle time during weekends. Power usage is calculated by converting idle state to standard state.

You can also view potential savings in the table found under the power spectrum.

Average day breakdown of the activity states

This section shows the amount of time the average computer spends in various power states in an average day. The computers can be in Idle, Active, Standby, or Powered off power states. Move the mouse pointer over the pie chart sections to see the values for each power state. You can also view the Average Day Breakdown values in pie chart, graph, or tabular form.

 **Note:** Ensure that RESTAPI is set up correctly to avoid results that are not accurate in the Power Consumption Summary dashboard and the Power Consumption Analysis result. RESTAPI is supported by BigFix server version 9.0 and later.

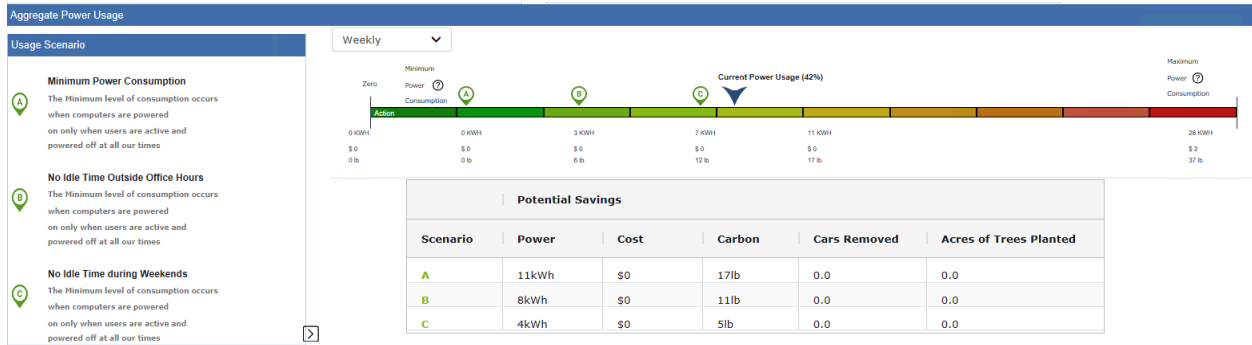

PM Efficiency Rating

The Efficiency Rating measures the total amount of user idle time that is spent in the standby power state. The lower the rating, the more opportunity an organization has to save power. The rating is calculated as follows: standby time / (standby time + idle time).

Average Idle Time breakdown for last week

Shows the weekly idle time breakdown per computer over a selected period of time.

Total tracked computers and computers removed from calculations

This table captures the distribution of computer types such as laptops, desktops, and servers, in the deployment, and computers excluded from power calculations due to errors and insufficient data. Click the values in the System column to see details of the endpoints under a particular computer type.

Power profile settings

The *Power Profile Settings* displays the distribution of the following power management settings in your deployment:

- Computers with system standby enabled
- Computers with monitor standby enabled
- Computers with hard drive spindown enabled

Average Statistics

Daily power consumption of an average computer in your deployment.

Idle Time Breakdown for Last week			
Outside Office Hours			
Office Hours	Weekends	Workdays	Full Week
43.10	63	58.5	164.60
45	63	60	168
95.78%	100.00%	97.50%	97.98%

Total Tracked Computers	
Type	Systems
Laptops	0 (0%)
Desktops	1(100%)
Servers	0 (0%)
Totals	1(100%)
Removed due to errors	0
Removed due to insufficient data	0

Power Profile Setting	
Computers with System Standby Enabled:	1 of 1 -100 %
Computers with Monitor Standby Enabled :	1 of 1 -100 %
Computers with Hard Drive Spindown Enabled :	1 of 1 -100 %

Average Statistics	
Average Cost per KWh	\$0.08
Daily Usage Computer	
Power	1.76 kWh
Cost	\$0.14
Carbon	2.46 lb

Powered on computers

The *Powered on Computers* section shows the number of computers that were powered on during various periods. The graph displays the following settings:

Minimum

Shows computers that were on continuously through the whole interval.


Maximum

Shows computers that reported on at least once during the interval.

Average

Shows computers that were on more often than off during the interval.

The graph displays trends of when users turn off their computers throughout different intervals: hour, day, week, or month.

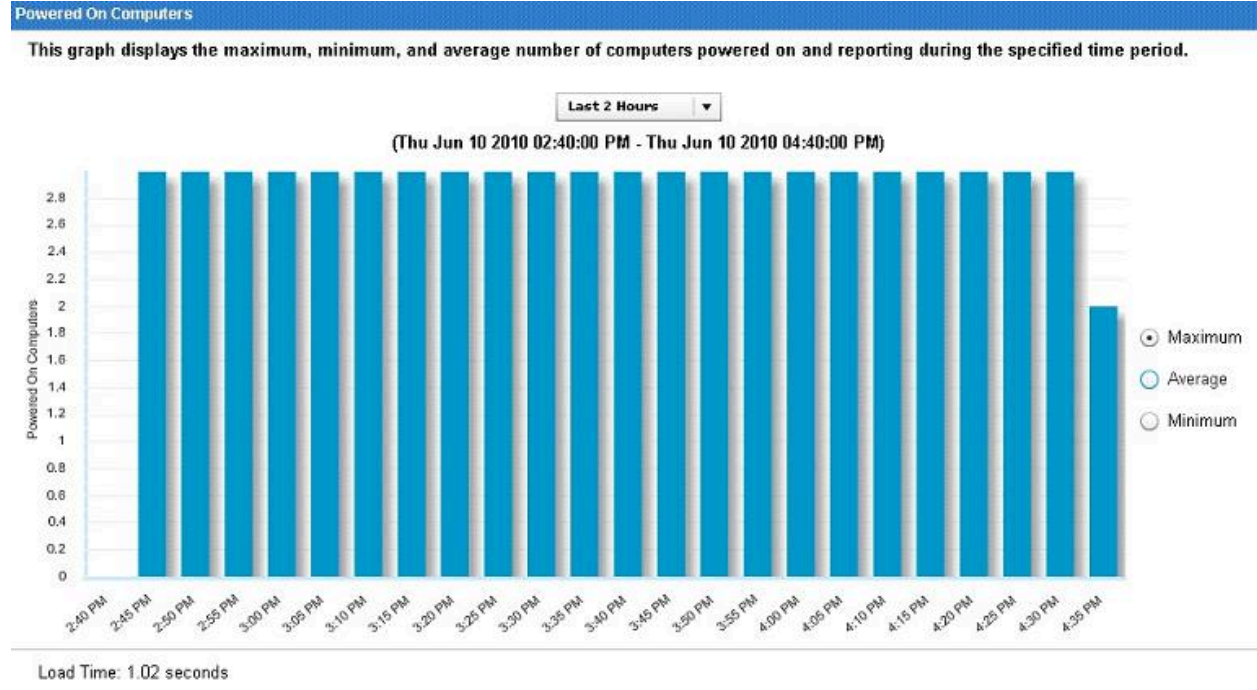

Note: The Powered On Computers graph cannot be filtered.

Chapter 2. Use Power Management

Power Management provides a suite of Fixlets and wizards to help control computer power states and minimize waste caused by computers running while not in use. You can manage sleep, hibernation, and standby states on your running computers in the *Reduce Power Consumption* node in the navigation tree.


Power savings strategies

BigFix includes a number of strategies for saving power. The following list includes some common power saving strategies, though it is not comprehensive.

- **Enable Monitor Standby:** Monitors represent a significant portion of power usage for desktops and laptops. Enabling Monitor Standby has minimal end-user impact because most monitors recover quickly from low power mode. Monitor Standby can be easily combined with the System Standby or Power-off strategies below. Use the Power Profile Wizard to change monitor standby policies.
- **Enable System Standby:** As computers use very low power in standby mode, System Standby is considered the best approach to power management. Users must wake computers with a mouse click or keyboard strike before using them, but most computers wake from standby within 10 seconds.
- **Power-off Computers:** You can power off computers at predefined times to save electricity. Powering off computers has the most end user impact, as this method can potentially cause work to be lost.

Reduce Power Consumption


The Reduce Power Consumption section gives tools to implement the power savings strategies.

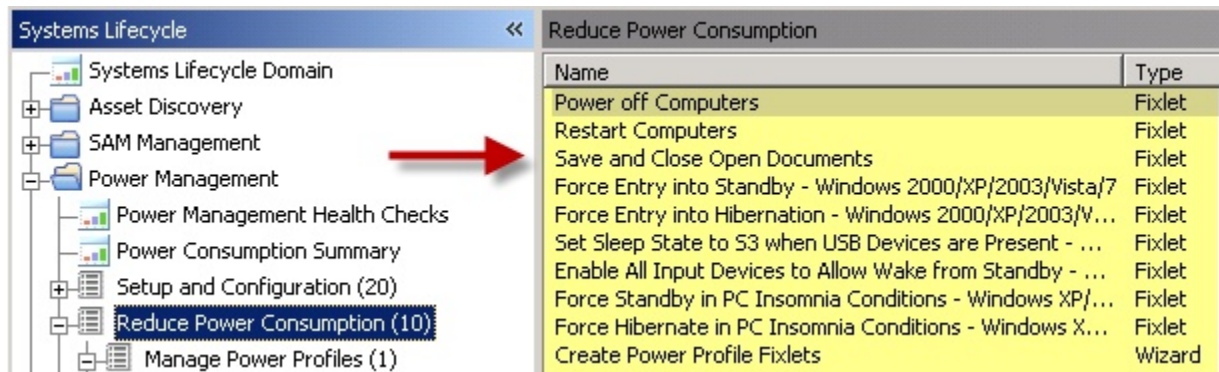

The screenshot shows the BigFix console interface. On the left, the 'Systems Lifecycle' navigation tree is visible, with 'Reduce Power Consumption (10)' highlighted. A red arrow points from this node to the main content area on the right. The main area displays a table of Fixlets and a Wizard under the heading 'Reduce Power Consumption'.

Name	Type
Power off Computers	Fixlet
Restart Computers	Fixlet
Save and Close Open Documents	Fixlet
Force Entry into Standby - Windows 2000/XP/2003/Vista/7	Fixlet
Force Entry into Hibernation - Windows 2000/XP/2003/V...	Fixlet
Set Sleep State to S3 when USB Devices are Present - ...	Fixlet
Enable All Input Devices to Allow Wake from Standby - ...	Fixlet
Force Standby in PC Insomnia Conditions - Windows XP/...	Fixlet
Force Hibernate in PC Insomnia Conditions - Windows X...	Fixlet
Create Power Profile Fixlets	Wizard

In the *Reduce Power Consumption* node, the Manage Power Profiles subnode includes a wizard for creating power profile Fixlets and a listing of the Fixlets already created.

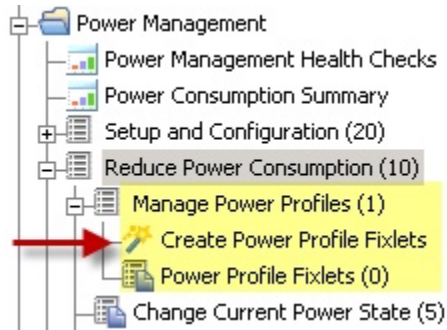

Manage power profiles

Use power profiles so that computers can go into a low-power state when the user is idle for a predetermined amount of time. You can manage the power profiles for your deployment by using the *Create Power Profile Fixlets* wizard. Click the wizard from the *Manage Power Profiles* node in the navigation tree.

The wizard for creating Power Profile Fixlets is organized into parts: selecting a power profile, and setting power profile options. You can choose to create single or multiple power profiles.

Creating single power profiles

To create a single power profile, go to the *Single Profile Policy* tab. Select a power profile from the drop-down list. You can also select *Custom* and create a power profile name. Select the Power Profile options.

You can create a one-time action or create a Fixlet that can later be reused. You can also choose to apply the action only if the proposed setting is more aggressive than the existing setting.

Click *Create Fixlet*. In the Fixlet window, click in the Actions box to initiate the deployment. Click *OK* when complete.

Creating multiple power profiles

To create a policy with multiple power profiles, go to the *Multiple Profile Policy* tab. Click the **Add Profile** button. The *Power Settings* window opens. Set the time and day settings. Click the *All remaining time windows on all days* checkbox to set power profiles for the remaining time windows you have not set in the options. This is required to set power profiles by time of day and by day of week.

In the same way as for creating a single power profile, select the power profile and the power profile actions. Click **Add to List**. The profile is now added to the list. You have the option of creating a one-time action. To create a Fixlet you can reuse, leave the box unchecked and the power profile remains in the list.

Click **Create Fixlet**. In the Fixlet window, click in the Actions box to start the deployment. Click *OK* when complete.



Note: The action must be taken as a policy to allow it to keep applying multiple power profiles. In the Take Action dialog, select Policy from the Present drop-down menu to enable the policy action.

Change current power state

You can force your computer into a low power mode, such as standby or hibernation. The tasks to do this can be used to immediately force systems into low power mode or schedule low power modes regardless of the power profile or user activity on that particular computer.

 **Note:** There is also a Force Entry into Standby version of this Task.

Task: Force Entry into Hibernation - Windows

Take Action | Edit | Copy | Export | Hide Locally | Hide Globally | Remove

Description | Details | Applicable Computers (1) | Action History (0)

Description

When this Task is run, the targeted machine will instantly enter Hibernation.

Use the "Execution" tab of the "Take-Action" dialog to schedule Hibernation at a specific time.

Note: The status will be "Pending Download" when machine goes into hibernation. It will report "Completed" as soon as the machine is back on.


Note: This Task is not applicable on computers designated as Last Man Standing.


Actions

Click [here](#) to force Hibernation.

Manage PC Insomnia

Some Windows computers fail to enter hibernate or standby mode after the appropriate amount of user idle time, due to PC Insomnia. The Manage PC Insomnia Fixlets force a computer to enter standby or hibernate once the amount of user idle time specified in the power profile has elapsed. Forcing a computer into Standby will allow for faster wake times. Forcing a computer into hibernation causes longer wake-up times, but allows for slightly greater power savings.

 **Note:** The *Force Hibernate in PC Insomnia Conditions* task is not run more than once in a 15-minute interval.

 **Note:** The *Force Hibernate in PC Insomnia Conditions* task is not applicable on computers designated as Last Man Standing.

Task: Force Hibernate in PC Insomnia Conditions - Windows XP/Vista/7

Take Action Edit Copy Export Hide Locally Hide Globally Remove

Description Details Applicable Computers (0) Action History (0)

Description

This Task will force computers into Hibernate using the BigFix Agent when the user has been idle long enough (the BigFix Agent will use the settings specified in the Windows system Hibernate options).

This will solve the PC Insomnia problem where some computers will not properly enter Hibernate in the timespan specified in its power settings.

The computer will only be put into Hibernate if the following conditions are met:

- The system is Windows XP, Vista, or 7
- Only one user is logged into the computer and no remote users are logged on
- [object RelevanceResult]Power Tracking Utility must be enabled
- The user has been idle for the time specified in the Windows "System Hibernates" Power setting (see [Power Consumption Analysis](#))

Note: This Task will not be run more than once in a 15-minute interval.

Note: This Task is not applicable on computers designated as Last Man Standing.


Actions

- Click [here](#) to enforce hibernation.

Manage standby behavior

Only certain input devices are capable of waking a computer from standby by user interaction, and only if the correct Windows settings are enabled. This task finds all wake capable input devices and enables them to allow Wake-from-Standby.

Task: Enable All Input Devices to Allow Wake from Standby - Windows

 Take Action |  Edit | Copy |  Export | Hide Locally | Hide Globally |  Remove

Description | Details | Applicable Computers (1) | Action History (0)

Description


This Task will enable all input devices (Keyboard, Mouse, etc.) on the system to allow Wake-from-Standby.

These settings can be viewed under the "Power Management" tab of the devices properties description in device manager.

Note: If the computer does not have input devices that support Wake from Standby, the action will return "failed".

Note: This Task is not applicable on computers designated as Last Man Standing.


Actions

 Click [here](#) to change input device settings.


Chapter 3. Manage wakeup behavior

Power Management provides Fixlets and Wizards to bring a computer online and take actions and manage the computer at specific times.

You can control the wakeup settings of a computer in the *Manage Wakeup Behavior* node using dashboards, Fixlets, and wizards.

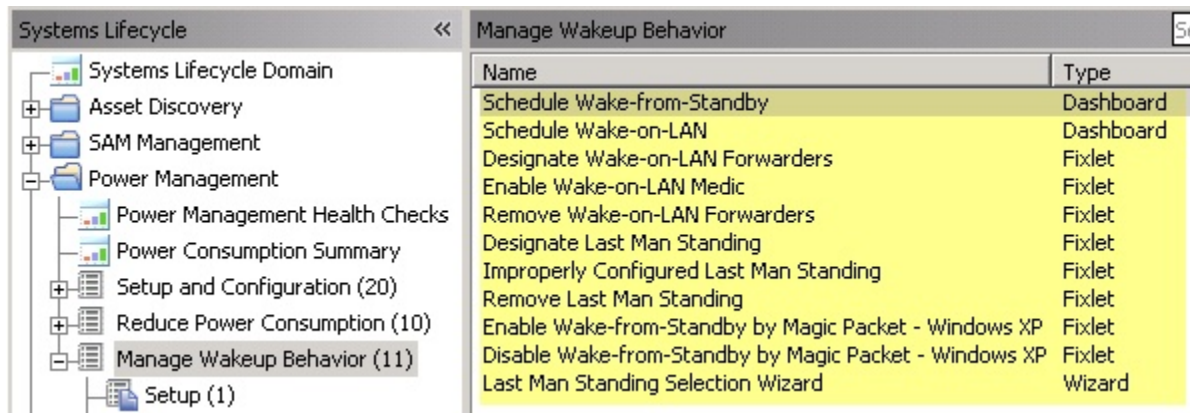

In the *Manage Wakeup Behavior* node, you see *Setup* and *Wake-from-Standby* tasks, along with wizards for scheduling Wake-on-LAN and Wake-from-Standby.

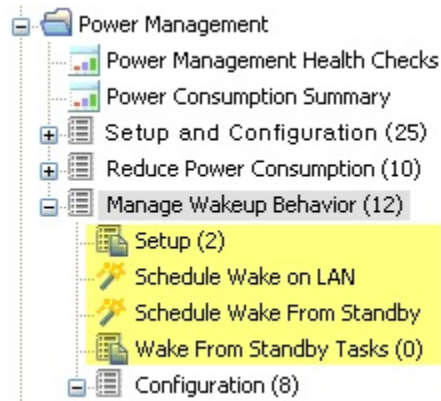

Setup

The Wake-on-LAN Medic utility is a process that runs on the BigFix server. This utility manages Wake-on-LAN scheduling and keeps Last Man Standing computers awake.

You must enable the Wake-on-LAN Medic so that Wake-on-LAN features work correctly.

Use the Setup task to install the latest version of the Wake-on-LAN Medic utility. Click this task from the navigation tree. When the Task window opens, review the description and click in the Actions box to initiate the utility.



Note: Ensure that RESTAPI is set up correctly to avoid errors and for the Wake-on-Lan Medic Utility to function properly.

- If Wake-on-LAN Medic utility is not enabled, the Enable Wake-on-LAN task might not be relevant.
- If the Wake-on-LAN Medic utility is enabled, the scheduled Wake-on-LAN feature will not work.

RESTAPI is supported by BigFix server version 9.0 and later.

Task: Enable Wake-on-LAN Medic

Take Action | Edit | Copy | Export | Hide Locally | Hide Globally | Remove

Description | Details | Applicable Computers (0) | Action History (0)

Description

This Task will install the latest version of the Wake-on-LAN Medic Utility.

This utility is used to wake up computers based on the schedule defined in the Schedule Wake on LAN wizard. Additionally, it will send a wake up request to any Last Men Standing that may have been shutdown.

Note: The BES Server Plugin Service must be installed on the BES server in order to deploy this utility.

File Size: 3.18 MB

Actions

Click [here](#) to enable the Wake-on-LAN Medic utility.

Schedule Wake-on-LAN

You can create and maintain scheduled wake-ups using the *Schedule Wake-on-LAN Wizard*. Scheduled wake-ups run on client local time and do not require the use of Actions or special router configurations to run.

Schedule Wake-on-LAN

Use this wizard to create and maintain scheduled wake-ups using BigFix Wake-on-LAN technology. Scheduled wake-ups run on client local time, and do not require the use of BigFix Actions or special router configuration to run.

Scheduled Wake-ups

+ New Scheduled Wake-up


Policy Name	Schedule	Targeting Rule	
VPRO wake	At 01:29:09 PM on Wed, Jun 9 2010	All computers whose property "Computer Name" contains "par"	
patch Tuesday	At 04:53:25 PM on the second Tue of every month, starting on Thu, Jun 10 2010	All computers whose property "OS" contains "XP"	

Create New WoL Policy

Policy Name:

Start Time: Client Local Time

Schedule Task:

Starting on: 

Every Day(s)

Create New WoL Policy

Create Targeting Rule:

- All computers with the values selected below
- All computers within the selected computer group
- The computers specified in the list of names below (separated by spaces or newlines)

Include computers with the following property:

vPro Settings:

- Use Intel vPro technology along with BigFix WoL to wake these computers.



Note: The vPro Settings option is only enabled if you are subscribed to the Client Manager for Intel vPro site.


After you schedule a WoL policy, the WoL Medic component is set to wake the systems. By default, the WoL Medic checks every five minutes to see if it is time to run scheduled WoL policies.



Note: Ensure that RESTAPI is set up correctly to avoid errors and for the Wake-on-Lan Medic Utility to function properly. RESTAPI is supported by BigFix server version 9.0 and later.


Schedule Wake-from-Standby

You can create and view Wake-from-Standby Scheduling Fixlets using the Schedule Wake-from-Standby Wizard. A computer scheduled to Wake-from-Standby awakens itself at the designated time. This does not require any hardware or network configuration, and is useful for computers that cannot be awakened using WoL.

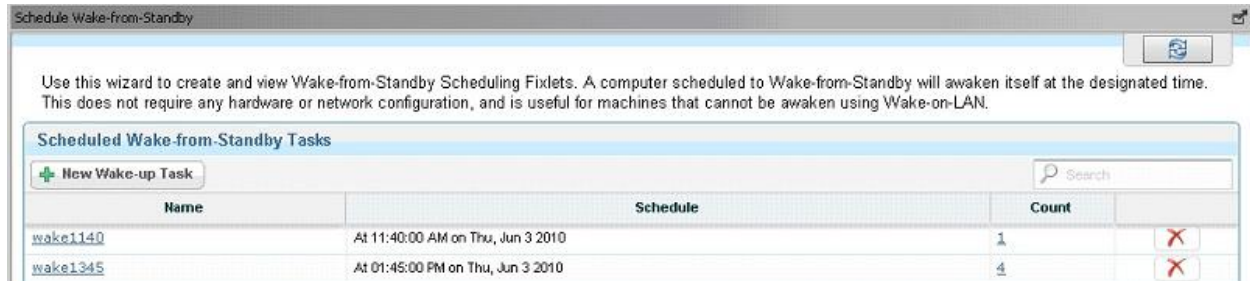

Wake-from-Standby tasks

To schedule a Wake-from-Standby task, click the *Schedule Wake-from-Standby* wizard in the navigation tree. From here, you can create new Wake-from-Standby tasks that populate in the *Wake-from-Standby Tasks* part of the navigation tree.

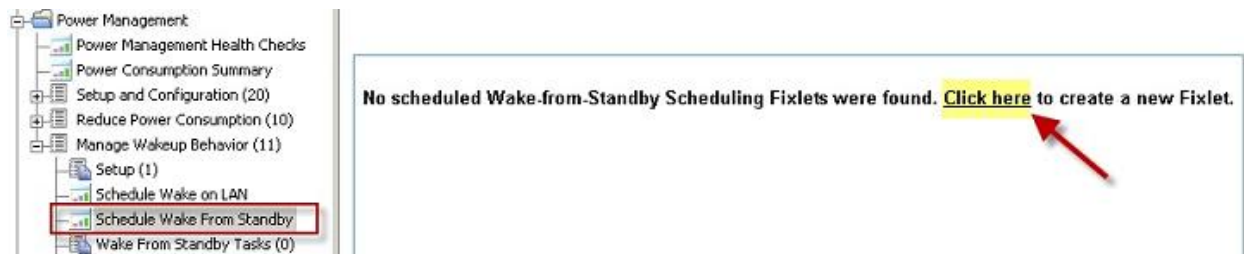

Create Task

Policy Name:

Start Time: Client Local Time

Schedule Task:

Starting on:

Every week(s) on:

Mon Sat

Tue Sun

Wed

Thu


Fri



Note: You must run the action before the scheduled wakeup time. Scheduled wakeup actions require that Windows Task Scheduler Service is active.

Configuration


From the Configuration node of the Power Management navigation tree, you can manage Last Man Standing Fixlets, Wake on LAN Forwarders, and Wake from Standby by Magic Packet options. The sections below highlight these features.

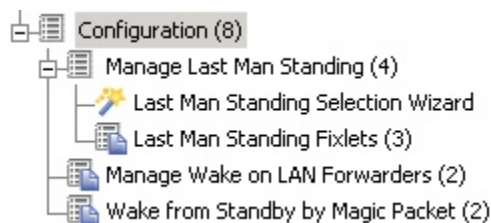

Manage Last Man Standing

Last Man Standing (LMS) ensures that computers in a subnet can be awakened using the Wake-on-LAN feature. However, LMS computers must be running all the time, so you must select only one or two computers in a subnet for this designation. When choosing which computers to designate as LMS, select a type of computer that is likely to be running all the time, such as servers.

The LMS Selection Wizard automates the selection of LMS computers *per subnet*, where you can define your own custom set of LMS computers.

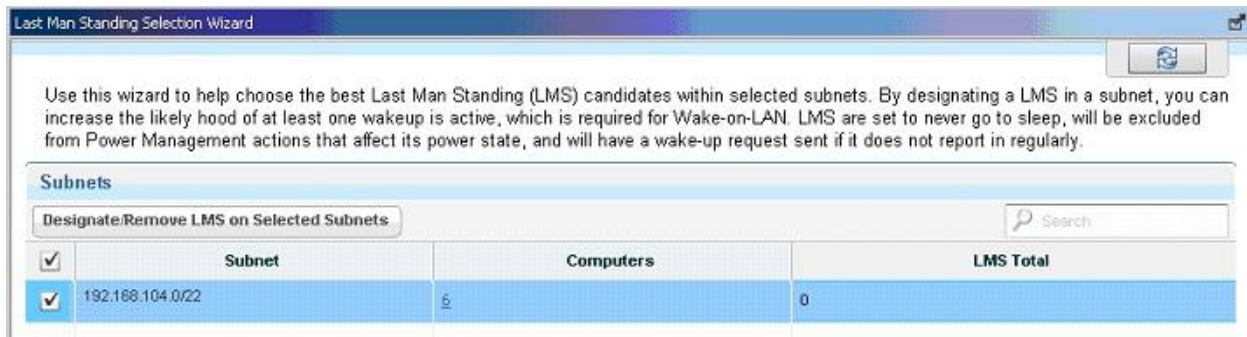

The LMS wizard finds computers that match the entered criteria and submits them as potential LMS candidates.

Designate/Remove Last Man Standing

Choose criteria by which LMS candidates will be selected.

Subnet Criteria

LMSs per Subnet:

LMS Selection Criteria

LMS can be:

- Servers
- Desktops
- Laptops

LMS must have reported within the last : **Day(s)** ▼

LMS must have average daily on-time of at least: Hour(s)

You can review all proposed LMS candidates and select from that list before issuing the action in this section.

Designate/Remove Last Man Standing

BigFix has selected the best LMS candidates based on the selection criteria, and will remove LMS's that do not meet this criteria. Select individual subnets to customize LMS selection and removal.

Subnet	Current		LMS Action			Meets Criteria
	Computers	LMS Total	LMSs Added	LMSs Removed	Final LMS Total	
192.168.104.0/22	6	0	2	0	2	

Computers in Selected Subnet

Computer	Daily On-Time	Type	Last Reported	Meets Criteria	LMS Quality	LMS Action
1122-WIN7X86	24:00:00	Workstation	9 minutes ago		Excellent	Designate LMS*
1119-WIN7X64	23:00:00	Workstation	20 hours ago		Average	Designate LMS*
PARAKEET	22:00:00	Workstation	3 minutes ago		Average	Nothing
PARROT	22:00:00	Laptop	9 minutes ago		Poor	Nothing
ibac_Nois	9:00:00	Workstation	3 days ago		Poor	Nothing
WIN7LAPTOP	N/A	Laptop	6 days ago 9 minutes ago		Poor	Nothing

* denotes that the action will be run on the endpoint.

Manage Wake-on-LAN Forwarders


Wake-on-LAN Forwarders (WoLFs) are BigFix Agent computers that forward Wake-on-LAN packets to other computers in the same subnet. There must be at least one powered-on WoLF in a subnet to wake other computers in the subnet.

All BigFix agents are set as WoLFs when Power Tracking is enabled. BigFix includes heuristics to keep network traffic to a minimum, so all agents can be made Wake-on-LAN Forwarders. Designating all clients as WoLFs provides for wake redundancy by increasing the likelihood that at least one forwarder in each subnet is powered-on and can be used to wake targeted computers.


Power Management includes tasks for designating and removing WoL forwarders. Access these tasks by clicking on *Manage Wake-on-LAN Forwarders* in the navigation tree and selecting the appropriate task in the List Panel.

Manage Wake on LAN Forwarders		
Name	Source Severity	Site
Designate Wake-on-LAN Forwarders	<Unspecified>	Power Management QA
Remove Wake-on-LAN Forwarders	<Unspecified>	Power Management QA

The *Designate Wake-on-LAN Forwarders* task configures selected clients to forward the Wake-on-LAN packet to computers in their respective subnets. To designate Wake-on-LAN forwarders, click in the Actions box.

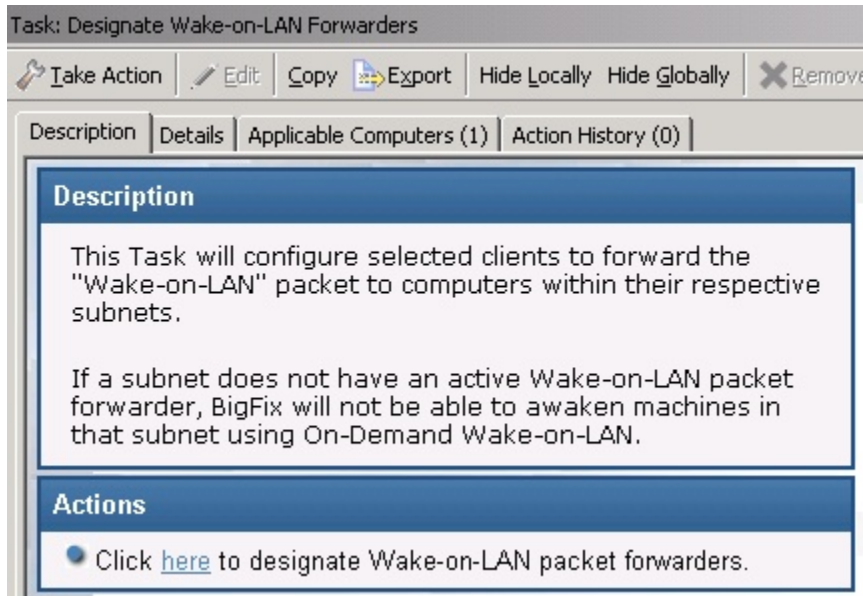


To remove Wake-on-LAN packet forwarders, click the *Remove Wake-on-LAN Forwarders* task in the List Panel, and click in the Actions box to initiate the action.

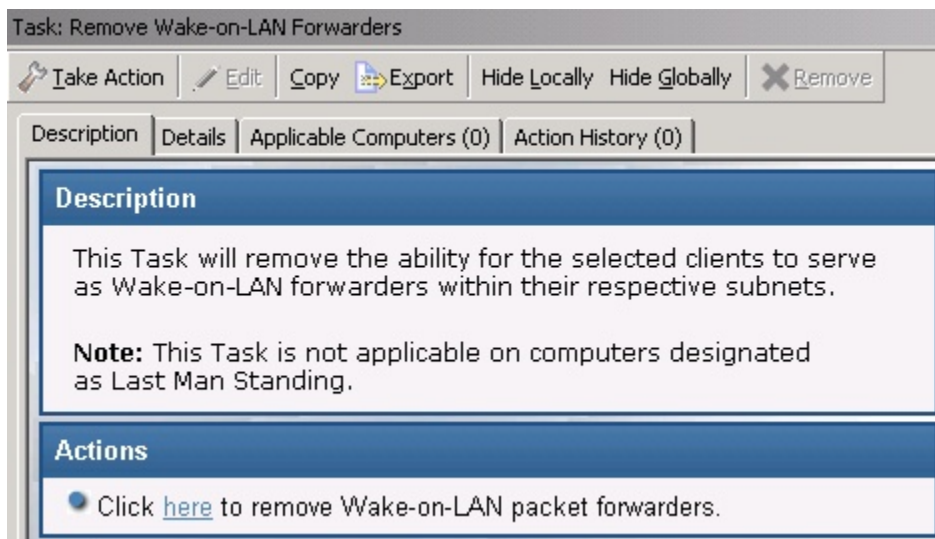

Wake-from-Standby by Magic Packet

Power Management includes two tasks for disabling and enabling *Wake-from-Standby by Magic Packet*. A *Magic Packet*, also known as the Wake-on-LAN packet, is a broadcast packet that wakes a computer.

These tasks change the Windows network adapter setting from "Allow this device to wake the computer?" to "Only allow a magic packet to wake the computer?". These settings are available in the network adapter properties in Windows.

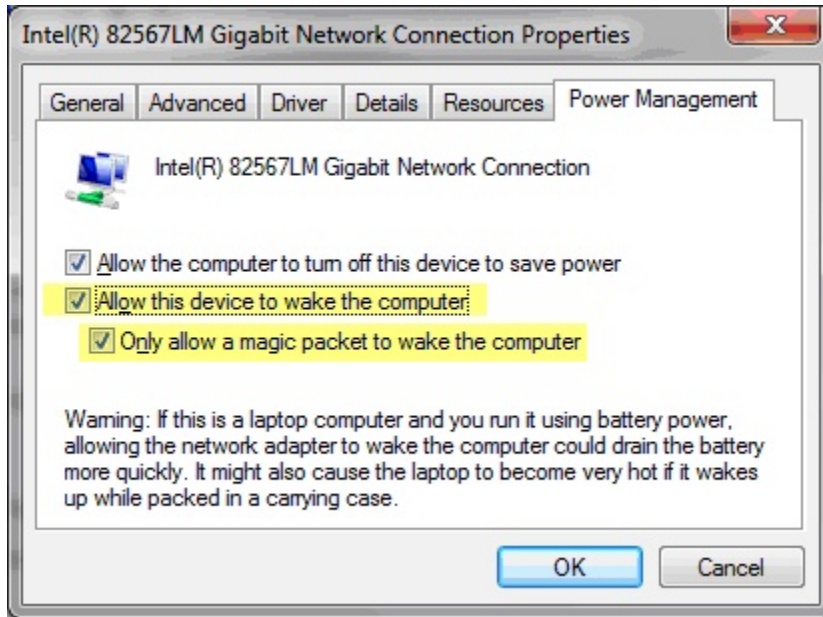

Access these tasks by clicking *Wake-from-Standby by Magic Packet* in the navigation tree and selecting the appropriate task in the List Panel.

Power Management

- Power Management Health Checks
- Power Consumption Summary
- Setup and Configuration (20)
- Reduce Power Consumption (10)
- Manage Wakeup Behavior (11)
 - Setup (1)
 - Schedule Wake on LAN
 - Schedule Wake From Standby
 - Wake From Standby Tasks (0)
 - Configuration (8)
 - Manage Last Man Standing (4)
 - Manage Wake on LAN Forwarders (2)
 - Wake from Standby by Magic Packet (2)
- All Systems Lifecycle


Name	Source Severity	Site
Disable Wake-from-Standby by Magic Packet - Wind...	<Unspecified>	Power Management QA
Enable Wake-from-Standby by Magic Packet - Windo...	<Unspecified>	Power Management QA

To disable or enable *Wake-from-Standby by Magic Packet*, click the appropriate task and click in the Actions box of the task window to initiate the action.

Using Intel vPro with Wake-on-LAN Medic to wake up endpoints

Follow these steps to setup and schedule endpoints to wake up using the BigFix Wake-on-LAN Medic utility with Intel vPro.

Ensure that you have the following requirements to use vPro with the BigFix Wake-on-LAN (WoL) Medic utility.

- Subscribe to the latest versions of one of the following sites:
 - BES Support site
 - Power Management site
- BigFix server requires .NET Framework 2.0
- Enable the Wake-on-LAN Medic utility. For more information, see Enable Wakeup.
- Target computers require Intel AMT 3.0 and later versions
- If Intel Setup and Configuration Servers (SCS) will be used (optional), use SCS Server version 7.0 or later
-  **Note:** Ensure that RESTAPI is set up correctly to avoid errors and for the Wake-on-Lan Medic Utility to function properly. RESTAPI is supported by BigFix server version 9.0 and later.

You can use Intel vPro with the BigFix WoL Medic utility to wake up endpoints. BigFix Power Management uses policies to perform wake-on-LAN. The policies can be set to wake specific endpoints at specific times and to use vPro.

When the policy is executed, the BESWolMedic.exe utility is invoked to query the applicable endpoints and to send WOL packets.

When the vPro option is enabled, a utility called amtpowercmd.exe uses vPro after successful authentication to send the WoL signal over HTTP to wake up the applicable endpoints.



Note: The BESWolMedic.exe and amtpowercmd.exe are invoked on the BES server.

These steps apply to infrastructures with or without Intel SCS. It is assumed that the vPro infrastructure is set up.

1. Set up the registry values.

- With SCS

For x64

- "HKEY_LOCAL_MACHINE\SOFTWARE\WOW6432\BigFix\ EnterpriseServer \MFSConfig\PowerWoLSCSServer"



Note: This value is either the host name or the IP address of the server.

- "HKEY_LOCAL_MACHINE\SOFTWARE\WOW6432\BigFix\ EnterpriseServer \MFSConfig\PowerWoLSCSUsername"
- "HKEY_LOCAL_MACHINE\SOFTWARE\WOW6432\BigFix\ EnterpriseServer \MFSConfig\PowerWoLSCSPassword"

For x86

- "HKEY_LOCAL_MACHINE\SOFTWARE\BigFix\Enterprise Server\MFSConfig \PowerWoLSCSServer"



Note: This value is either the host name or the IP address of the server.

- "HKEY_LOCAL_MACHINE\SOFTWARE\BigFix\Enterprise Server\MFSConfig \PowerWoLSCSUsername"
- "HKEY_LOCAL_MACHINE\SOFTWARE\BigFix\Enterprise Server\MFSConfig \PowerWoLSCSPassword"

◦ Without SCS

For x64

- "HKEY_LOCAL_MACHINE\SOFTWARE\WOW6432\ BigFix\EnterpriseServer \MFSConfig\PowerWoLvProUsername"
- "HKEY_LOCAL_MACHINE\SOFTWARE\WOW6432\ BigFix\EnterpriseServer \MFSConfig\PowerWoLvProPassword"

For x86

- "HKEY_LOCAL_MACHINE\SOFTWARE\BigFix\Enterprise Server\MFSConfig \PowerWoLvProUsername"
- "HKEY_LOCAL_MACHINE\SOFTWARE\BigFix\Enterprise Server\MFSConfig \PowerWoLvProPassword"



Note: If you do not use SCS, ensure that the credentials are the same on each endpoint to avoid wake up failure.


2. From the BigFix console, select the vPro option in the wake-on-LAN policy.
 - a. Go to the **BES Support > Wizards > Schedule Wake-on-LAN wizard**.
 - b. Create a new policy or select an existing policy.
 - c. Select **Use Intel vPro technology along with BigFix WoL to wake these computers**.
 - d. Click **Create Policy** for new policies or save the change, for existing policies.

For more information about using the Schedule Wake-on-LAN wizard to create and maintain scheduled wake-ups, see [Using Intel vPro with Wake-on-LAN Medic to wake up endpoints \(on page 31\)](#).

Chapter 4. Web Reports

Power Management Web Reports provides high-level summary data for management and decision makers to view and assess power usage in a deployment.

To access Web Reports, click **Tools > Launch Web Reports**.

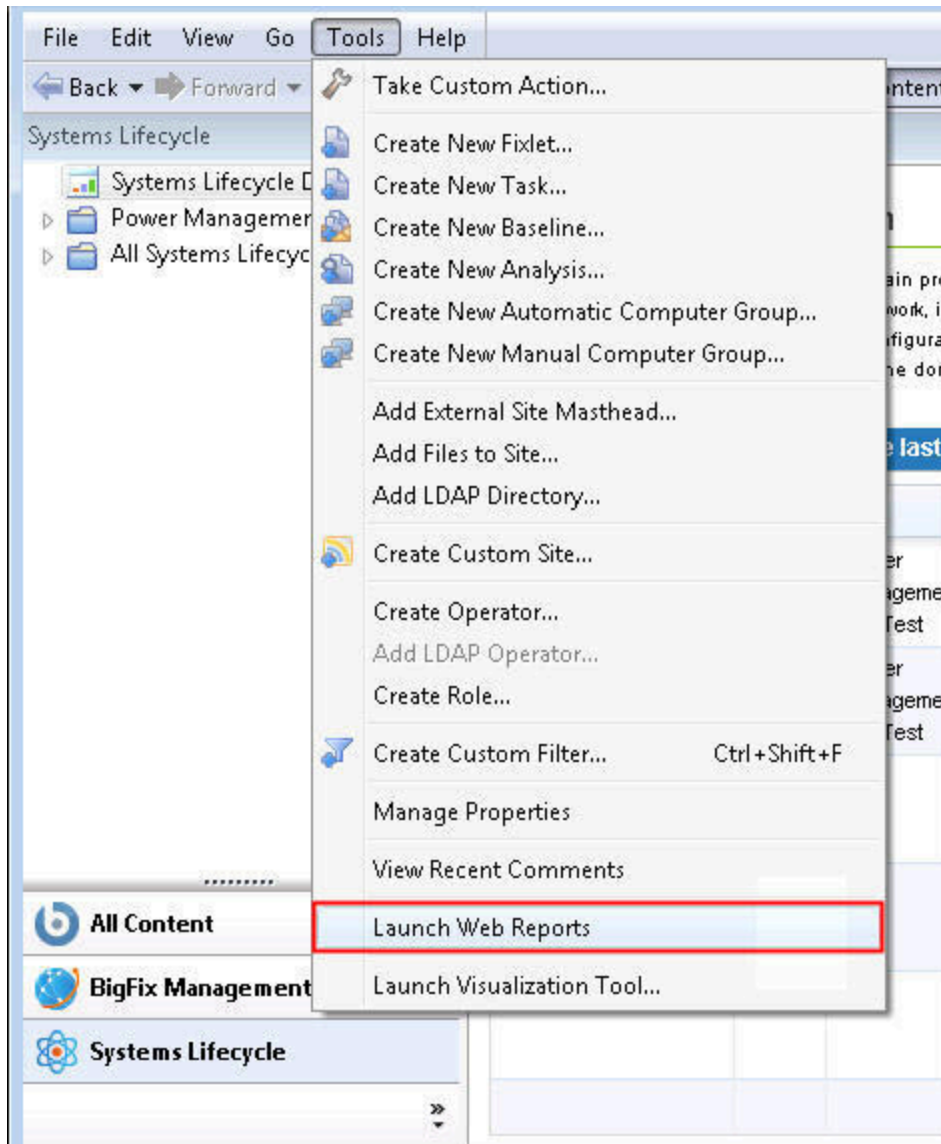

Enter your Web Reports username and password. Click Login.

BigFix

Login
Please enter your username and password to connect to Web Reports.


Username:

Password:

The main Web Reports page opens in a new browser. To see a list of Power Management reports, select **Systems Lifecycle**.

Explore Data
Report List
Administration
Version: 8.2.1079.0


Choose a category to view reports:



Starred
My favorite reports



My Authored
Reports that I've created



Systems Lifecycle

You see a list of Power Management reports displayed under the **Report List** menu:

Explore Data
Report List
Administration

Only show starred

Filter by Label clear

Systems Lifecycle

Selected labels:

Systems Lifecycle

Label ▾
Delete

Select: All, None

	Name
<input type="checkbox"/>	☆ Model Power Savings
<input type="checkbox"/>	☆ Power Consumption Over Time
<input type="checkbox"/>	☆ Power Management Daily Activity State Breakdown
<input type="checkbox"/>	☆ Power Management Settings
<input type="checkbox"/>	☆ Wake on Web
<input type="checkbox"/>	☆ Weekly Idle Time Breakdown Report
<input type="checkbox"/>	☆ Weekly Power Consumption Over Time

Model Power Savings

This report calculates how much power you can lose or save if you apply different power profiles across your deployment based on your current usage patterns.

You can use this report to formulate what-if scenarios for potential savings by implementing various power policies. By default, the results in this report are based on the actual power state history for each agent for the last two weeks. These results are expected to be an accurate projection of power savings.

This report shows estimated Yearly power consumption savings of your deployment if every endpoint had the following power profile values set:

Estimated savings for

[Export To PDF](#)

Power Profile	Potential Standby Settings		Potential Total Savings			Potential Average Savings Per Computer		
	System	Monitor	Power	Cost	Carbon	Power	Cost	Carbon
Minimal	Never	60 Min	-787 kWh	-\$63	-1,101 lb	-112 kWh	-\$9	-157 lb
Moderate	60 Min	30 Min	+1,420 kWh	+\$114	+1,988 lb	+203 kWh	+\$16	+284 lb
Aggressive	30 Min	10 Min	+1,507 kWh	+\$121	+2,110 lb	+215 kWh	+\$17	+301 lb

Power consumption over time

The *Power consumption over time* report charts the average computer power consumption over a specified time period, and displays cost or savings compared to a baseline cost based on the start date.

Use this report to review historical savings and progress of power management policies. You must have *Historical Power Tracking* enabled to use this report.



Note: If you select the current date as the End Date, the report might take significantly longer to generate as previous dates are pre-calculated.

Description:

The following report shows the average power consumption data (in cost, power, or carbon) per computer over a selected period of time. It also shows the average savings realized compared to the average cost on the start date.

Select the reporting groups on which to report:

Report Grouping Policy: ▼

Report Groups:

Find Group names containing:

- Win2008R2 6.1.7600
- Win2008R2 6.1.7601
- Win7 6.1.7600
- WinXP 5.1.2600

[Select All](#) [Deselect All](#)

Show results for: Laptops Desktops Servers


Consumption Period: ▼

[Generate Report](#)

[Store](#) [Export to PDF](#)

Report Options:

Average Power Consumption data per computer over a period from 06/08/2010 to 06/15/2010, with savings compared to start date average on 06/08/2010 for Laptops, Desktops in the "Location By Subnet" grouping policy.

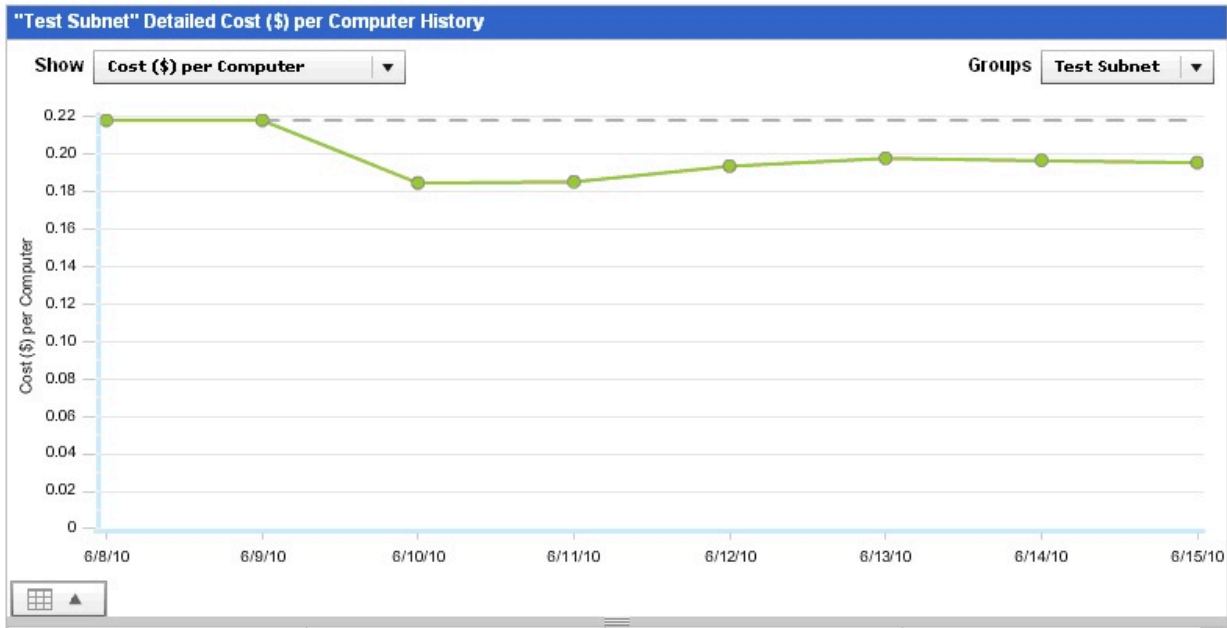

Groups	Total Consumption over Period			Savings Compared to Start Date		
	Cost	Power	Carbon	Cost	Power	Carbon
Test Subnet	\$1.59	19.9 kWh	28 kg	\$0.15	1.9 kWh	3 kg

Weekly Power Consumption Over Time

The *Weekly Power Consumption Over Time* report charts the average weekly power consumption data (in cost, power, or carbon) per computer over a weekly period.

It also shows the average savings realized compared to the average cost on the start week. Each data point in the chart found in the *Detailed Cost (\$) per Computer History* section of the report shows a breakdown of the power usage for a particular week in terms of cost, power, and carbon.

The Average per Computer Consumption Over Period by Group table shows a breakdown of the chart. The table shows the total consumption over the period and the savings compared to the start week.



Note: You must have Historical Power Tracking enabled to use this report.

Power Management Daily Activity State breakdown

The *Power Management Daily Activity State breakdown* report displays a breakdown of the average day by activity state.

The activity states are Active, Idle, Standby, and Powered off. You can use this report to evaluate changes you make to your power policies. For example, if many computers have high idle times, you set a Standby power policy to save significant power. It can also be set to compare improvements between two different days. The comparison function requires that historical power tracking is enabled.

Description:

The following report displays a breakdown of the average day by activity state. The four activity states include Active, Idle, Standby, and Powered Off.

Select the reporting groups on which to report:

Report Grouping Policy: **Location By Subnet** ▼

Report Groups:

Find Group names containing:

Test Subnet

[Select All](#) [Deselect All](#)

Show results for: Laptops Desktops Servers

Show data for date: 06/15/2010 Compare against date: 06/15/2010

[Generate Report](#)

Report Options:

[Store](#)

[Export To PDF](#)

Power Management Daily Average State Breakdown data on 06/15/2010 for Laptops, Desktops in the "Location By Subnet" grouping policy.

Group	Total Computers	Active	Idle	Standby	Powered Off	PM Efficiency
Test Subnet						
06/15/2010	2	1.74	21.10	0.55	0.60	2%



Note: If you select the current date as the compare against date, the report might take significantly longer to generate, as previous dates are pre-calculated.

Weekly Idle Time Breakdown Over Time

The Weekly Idle Time Breakdown Over Time report shows the weekly idle time breakdown per computer over a selected time period. It also shows the reduction of idle time (in hours) realized compared to the start week.

The report shows the data of all weeks between the two selected weeks. The comparison function requires that historical power tracking is enabled. You are prompted to select a new week when there is no historical data stored in the selected report group.



Notes:

- When selecting the weeks for the report to cover, the dates that are in gray mean that there is no data.
- You might notice some cases where there is a slight difference in the actual data and the value in the dashboard. This difference in values happens because the calculation uses real data while the dashboard uses rounded off values.

Power Management settings

The *Power Management settings* report shows the percentage of computers that have power management settings enabled on a specific day. It can also be set to compare the improvements between two different days. The comparison function requires that historical power tracking is enabled.

Description:

The following report shows the penetration percentage of Power Management on selected computers, divided into four categories:

- Monitor Power Management
- Hard Disk Power Management
- System Standby Power Management
- Hibernate Power Management

Select the reporting groups on which to report:

Report Grouping Policy:

Report Groups:

Find Group names containing:

All Computers

Show results for: Laptops Desktops Servers

[Select All](#) [Deselect All](#)

Show data for date:  Compare against date: 

[Generate Report](#)


Report Options:

Store

Export To PDF

Power Management Settings data comparison from 07/01/2010 to 07/15/2010 for Laptops, Desktops in the "All Computers" grouping policy.

Select Group: All Computers ▼

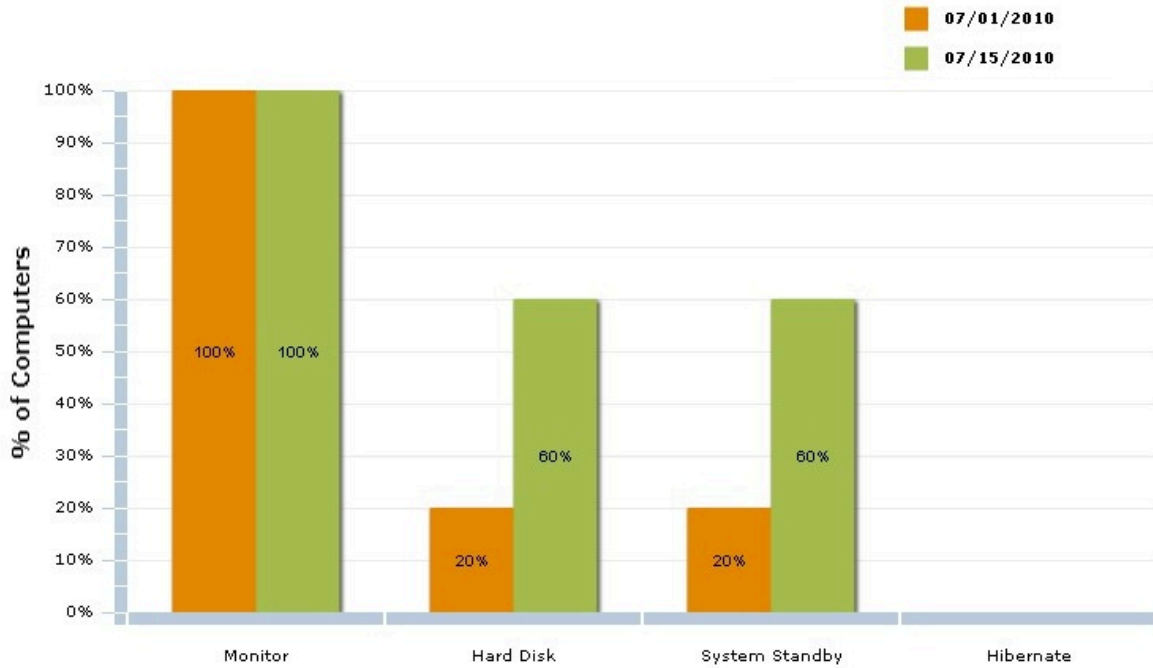

Note: If you select the current date as the compare against date, the report might take significantly longer to generate because previous dates are pre-calculated.

Wake on Web

This report issues a Wake-on-LAN request to a specified list of computers, and displays warnings if the WoL infrastructure is not configured correctly to issue a wakeup.

Enter Computer Names

Enter a list of computer names, separated by spaces, of computers you wish to wake up.

Send Wake up

Select Computers to Wake Up

1 computer was found.

Computer	Subnet	Status
<u>NINJABIRD</u>	192.168.104.0/22	Can receive wake up requests

Wake request successfully sent!

Appendix A. Support

For more information about this product, see the following resources:

- [BigFix Support Portal](#)
- [BigFix Developer](#)
- [BigFix Playlist on YouTube](#)
- [BigFix Tech Advisors channel on YouTube](#)
- [BigFix Forum](#)

Appendix B. Frequently asked questions

In this section, find the list of commonly asked questions and answers related to power management.

How are power savings calculated?

Power savings are determined by the amount of time your computer is on but not in use. For example, Idle mode is considered wasteful because the computer is using power without being actively used.

Your power savings is equal to *Current Consumption minus Minimum Power Consumption*. Minimum Power Consumption is the amount of time in active state per day times the *Active Power Usage* of the computer, for example, 70 kWh. Current Consumption is the amount of time in active and idle modes (Active Power Usage) plus Standby Power Usage, for example, 3 kWh.

These basic formulas will vary for each individual deployment. For specific parameters for setting and understanding power calculation formulas, contact your Sales Engineer or technical support. See the [Power Management Calculations Documentation](#) for detailed explanations of the calculations used in some key features of Power Management.

How realistic are the power savings calculations?

BigFix power savings calculations are based on tracking different aspects of the computer including: the time spent in each power state, the computer type (server, desktop, laptop), monitor count, and more. The results are used in combination with the electricity costs and power draw values to calculate the amount of power the computer is using.

To ensure the calculations are as accurate as possible, review the Manage Assumptions values and verify that the data, such as the cost you pay for electricity, is appropriate for your organization.

Can I see how my power management efforts are affecting my CO2 emissions?

Yes. The BigFix Power Management visual power spectrum provides data on the projected CO2 savings from your power management efforts.

What is the methodology used in calculating carbon savings?

BigFix carbon estimates are based on the results of research studies that determine the average carbon emissions needed to generate a kilowatt-hour of power. For more information, see the DOE [Energy Information Administration](#) website.

Are carbon savings findings robust enough to be used for external trading and regulatory reporting uses?

BigFix Power Management uses carbon estimates from the US Department of Energy for the average amount of CO2 released per kilowatt-hour. Carbon emissions per kilowatt-hour will vary per region and per power source. For more information about power compliance and rules, contact your regulatory agency.

What if power settings are accidentally set on my servers and it causes a problem?

Typically, power settings are set on desktop and laptop computers rather than servers. If power settings are set on a server, the administrator has the ability to correct the issue within a matter of minutes.

There are Fixlets that alert you if Standby policies are enabled on your servers.

Can I get a centralized view and control of my power management efforts?

Yes. You can centrally manage up to 250,000 endpoints with a single BigFix server. You can also view your deployment through the Web Reports feature.

Can I set different power schemes for different groups of computers?

Yes. You can apply different power schemes to a wide variety of groups of computers, including ad hoc schemes, to target specific settings for specific groups such as help desk workstations vs. mobile laptops.

How can I change the default values of cost, power draw, and CO2?

You can create and manage different cost and power assumptions for each endpoint with the Manage Custom Assumptions wizard.

Is there be a difference between the new and previous power calculations?

The new version of BigFix Power Management is considered to be more accurate than previous versions. The new version improvements include: specifically tracking standby time, more granular calculations on a per-agent level, rather than averaging certain values deployment wide, and a better algorithm for calculating power used based on recent activities.

What is the resource impact of power tracking on my computer?

The calculations and tracking for BigFix Power Management are relatively simple and low-cost for the agent. Enabling power management is not expected to impact the computers of users in any noticeable way.

What is the Client Logging Service used for?

BigFix agents version 8.0 and later have a native ability to track standby and idle times. If you do not yet have the BigFix version 8.0 agent installed, you can use the Client Logging service to track these values on the computers with the older agents.

What happens if the RESTAPI is not correctly set up?

Users might encounter errors and get inaccurate data if the RESTAPI is not correctly set up.

- Results in the Power Consumption Summary dashboard might not be accurate. The dashboard uses the Power Consumption Summary analysis.
- The Wake-on-LAN Medic utility might be affected. If the WoL Medic is not enabled yet, the Enable Wake-on-LAN will not be relevant. If it is enabled, the scheduled Wake-on-LAN might not function correctly.



Note: BigFix server version 9.0 and later supports RESTAPI.

Notices

This information was developed for products and services offered in the US.

HCL may not offer the products, services, or features discussed in this document in other countries. Consult your local HCL representative for information on the products and services currently available in your area. Any reference to an HCL product, program, or service is not intended to state or imply that only that HCL product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any HCL intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-HCL product, program, or service.

HCL may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

HCL

330 Potrero Ave.

Sunnyvale, CA 94085

USA

Attention: Office of the General Counsel

For license inquiries regarding double-byte character set (DBCS) information, contact the HCL Intellectual Property Department in your country or send inquiries, in writing, to:

HCL

330 Potrero Ave.

Sunnyvale, CA 94085

USA

Attention: Office of the General Counsel

HCL TECHNOLOGIES LTD. PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. HCL may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-HCL websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this HCL product and use of those websites is at your own risk.

HCL may use or distribute any of the information you provide in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

HCL

330 Potrero Ave.

Sunnyvale, CA 94085

USA

Attention: Office of the General Counsel

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by HCL under terms of the HCL Customer Agreement, HCL International Program License Agreement or any equivalent agreement between us.

The performance data discussed herein is presented as derived under specific operating conditions. Actual results may vary.

Information concerning non-HCL products was obtained from the suppliers of those products, their published announcements or other publicly available sources. HCL has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-HCL products. Questions on the capabilities of non-HCL products should be addressed to the suppliers of those products.

Statements regarding HCL's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to actual people or business enterprises is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to HCL, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. HCL, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS," without warranty of any kind. HCL shall not be liable for any damages arising out of your use of the sample programs.

Each copy or any portion of these sample programs or any derivative work must include a copyright notice as follows:

© (your company name) (year).

Portions of this code are derived from HCL Ltd. Sample Programs.

Trademarks

HCL Technologies Ltd. and HCL Technologies Ltd. logo, and hcl.com are trademarks or registered trademarks of HCL Technologies Ltd., registered in many jurisdictions worldwide.

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Other product and service names might be trademarks of HCL or other companies.

Terms and conditions for product documentation

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability

These terms and conditions are in addition to any terms of use for the HCL website.

Personal use

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of HCL.

Commercial use

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of HCL.

Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

HCL reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by HCL, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

HCL MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.