

参考资料



内容

第 1 章. 参考资料 1	
键盘布局和映射引用: 目录..... 1	
图..... 1	
表..... 2	
键盘布局..... 2	
键盘映射..... 43	
主机代码页引用..... 47	
主机代码页 037-1/697-1 巴西、加拿大、荷兰、葡萄牙、美国和 037/1175 繁体中文..... 48	
主机代码页 273-1/697-1 奥地利、德国..... 49	
主机代码页 275-1/697-1 巴西..... 50	
主机代码页 277-1/697-1 丹麦, 挪威..... 51	
主机代码页 278-1/697-1 芬兰、瑞典..... 52	
主机代码页 280-1/697-1 意大利..... 53	
主机代码页 284-1/697-1 拉丁美洲、西班牙..... 54	
主机代码页 285-1/697-1 英国..... 55	
主机代码页 290/930 日本 (片假名) 扩展..... 56	
主机代码页 297-1/697-1 法国..... 57	
主机代码页 420 阿拉伯语双语..... 58	
主机代码页 424/941 以色列 (希伯来语 - 公告代码) 59	
主机代码页 500-1/697-1 国际..... 60	
主机代码页 803 以色列 (希伯来语 - 旧代码) 61	
主机代码页 833/1173 韩国字母..... 62	
主机代码页 836/1174 简体中文..... 63	
主机代码页 870/959 拉丁语 2 - EBCDIC 多多言..... 64	
主机代码页 871-1/697-1 冰岛..... 65	
主机代码页 875 希腊..... 66	
主机代码页 924-1/1353-1 国际..... 67	
主机代码页 1025/1150 西里尔语..... 68	
主机代码页 1026/1152 拉丁语 5 - 土耳其..... 69	
主机代码页 1027/939 日本 (拉丁语) 扩展..... 70	
主机代码页 1047/103 拉丁语 1 (开放式系统) 71	
主机代码页 1112/1035 拉脱维亚、立陶宛..... 72	
主机代码页 1122/1037 爱沙尼亚..... 73	
主机代码页 1123 乌克兰..... 74	
主机代码页 1130 越南..... 75	
主机代码页 1132 老挝..... 76	
主机代码页 1137 印度..... 77	
主机代码页 1140-1/695-1 巴西、加拿大、荷兰、葡萄牙、美国和 1140/1175 繁体中文..... 78	
主机代码页 1141-1/695-1 奥地利、德国..... 79	
主机代码页 1142-1/695-1 丹麦, 挪威..... 80	
主机代码页 1143-1/695-1 芬兰、瑞典..... 81	
主机代码页 1144-1/695-1 意大利..... 82	
主机代码页 1145-1/695-1 拉丁美洲、西班牙..... 83	
主机代码页 1146-1/695-1 英国..... 84	
主机代码页 1147-1/695-1 法国..... 85	
主机代码页 1148-1/695-1 国际..... 86	
主机代码页 1149-1/695-1 冰岛..... 87	
主机代码页 1153/1375 拉丁语 2 - EBCDIC 多多言..... 88	
主机代码页 1154/1381 西里尔语..... 89	
主机代码页 1155/1378 拉丁语 5 - 土耳其..... 90	
主机代码页 1156/1393 拉脱维亚、立陶宛..... 91	
主机代码页 1157/1391 爱沙尼亚..... 92	
主机代码页 1158/1388 乌克兰..... 93	
主机代码页 1160/1395 泰国..... 94	
主机代码页 1164/1397 越南..... 95	

第 1 章. 参考资料

键盘布局和映射引用

目录

[图 \(on page 1\)](#)

[表 \(on page 2\)](#)

[键盘布局 \(on page 2\)](#)

- [增强型键盘、Microsoft 自然键盘 \(仅限 3270\) \(on page 2\)](#)
- [增强型键盘、Microsoft 自然键盘 \(仅限 5250\) \(on page 2\)](#)
- [增强型键盘、Microsoft 自然键盘 \(3270 和 5250 组合\) \(on page 2\)](#)
- [增强型键盘、Microsoft 自然键盘 \(VT 键盘布局\) \(on page 2\)](#)
- [增强型键盘、Microsoft 自然键盘 \(仅限 VT 本地编辑方式\) \(on page 2\)](#)
- [节省空间键盘 \(仅限 3270\) \(on page 2\)](#)
- [节省空间键盘 \(仅限 5250\) \(on page 2\)](#)
- [节省空间键盘 \(3270 和 5250 组合\) \(on page 2\)](#)
- [5576-001 \(仅限 3270\) \(on page 2\)](#)
- [5576-001 \(仅限 5250\) \(on page 2\)](#)
- [5576-001 \(3270 和 5250 组合\) \(on page 2\)](#)
- [5576-A01 \(仅限 3270\) \(on page 2\)](#)
- [5576-A01 键盘 \(仅限 5250\) \(on page 2\)](#)
- [5576-A01 键盘 \(3270 和 5250 组合\) \(on page 2\)](#)
- [5576-002/003 \(仅限 3270\) \(on page 2\)](#)
- [5576-002/003 键盘 \(仅限 5250\) \(on page 2\)](#)
- [5576-002/003 键盘 \(3270 和 5250 组合\) \(on page 2\)](#)
- [APL 键盘布局 \(仅限 3270\) \(on page 2\)](#)

[键盘映射 \(on page 43\)](#)

[Home3270 的键映射 \(on page 43\)](#)

附录 A. 声明

商标

[【 页面顶部 \(on page 1\) | 上一页 | 下一页 \(on page 1\) | 目录 \(on page 1\) 】](#)

键盘布局和映射引用

图

1. [功能键的 Shift 状态 \(on page 2\)](#)
2. [类型 1 APL 键盘 \(on page 2\)](#)

3. [类型 2 APL 键盘 \(on page 2\)](#)
4. [类型 3 APL 键盘 \(on page 2\)](#)
5. [类型 4 APL 键盘 \(on page 2\)](#)
6. [非日语键盘的键盘核心段的通用控制代码 \(on page 43\)](#)
7. [日语键盘的键盘核心段的通用控制代码 \(on page 43\)](#)
8. [美国增强型键盘的键盘核心段的控制代码映射 \(on page 43\)](#)

[\[页面顶部 \(on page 1\) | 上一页 \(on page 1\) | 下一页 \(on page 2\) | 目录 \(on page 1\) \]](#)

键盘布局和映射引用

表

1. [右上和右下字符的组合键 \(on page 43\)](#)
2. [本地编辑键 \(on page 43\)](#)
3. [键段 B 的其他控制代码映射 \(on page 43\)](#)

[\[页面顶部 \(on page 2\) | 上一页 \(on page 1\) | 下一页 \(on page 2\) | 目录 \(on page 1\) \]](#)

键盘布局和映射引用

键盘布局

本章介绍主机系统支持的美国键盘布局。键盘是在安装或定制过程中选择的。可以使用键盘布局来在键盘上找到字符位置。

不同的字符可能会出现在不同的键位置，具体取决于所选的国家或地区语言。不会显示键盘顶部的功能键。阴影区域显示某些美国键盘上不可用的键。

有关键盘布局和映射的更多信息，请参阅 *Emulator User's Reference* 和联机个人通信帮助。有关国家或地区和代码页选项的更多信息，请参阅 Windows^(R) 文档。

功能键具有以下 Shift 状态。

图 1.功能键的 Shift 状态 (on page 1)

-Status-	
BASE	BASE : Normal shift
SHIFT	SHIFT : Up shift by pressing Shift
CTRL	CTRL : Control shift by pressing Ctrl
ALT	ALT : Alternate shift by pressing Alt
ALTGR	ALTGR : Shift by pressing Ctrl+Alt
CTRLSFT	CTRLSFT : Shift by pressing Ctrl+Shift

下面是这些键的一些缩写。

AltCur

备用光标

AltView

备用视图

BackSp

退格

BackTb

退格制表

BgnOLn

行首

BotOPg

页面底部

BtbWord

退格制表字

CarRtn

回车

ChgFmt

更改格式

ChgScrn

更改屏幕

ChrAdv

字符前进

Ctrl

控制

CurBlink

光标闪烁

CurSel

光标选择

DelWord

删除字

DevCan

设备取消

DspTxC

显示文本代码

Dup

复制

EditCop

编辑复制

EditPst

编辑粘贴

EditUnd

编辑撤消

EndFld

字段结束

EndOLn

行尾

ErEOF

擦除 EOF

ErFld

擦除字段

ErInp

擦除输入

Fld-

字段 -

Fld+

字段 +

FldColor

字段颜色

FldExt

字段退出

FldHigh

字段突出显示

FldMark

字段标记

FldTrns

透明度字段继承

FastDn

快速下移

FastDow

快速下移

FastUp

快速上移

FieldCol

字段颜色

GrpCsr

图形光标

HostPr

主机打印

JmpNext

跳转到下一个

跳转到下一个

跳转到下一个

MarkLef

标记左移

MkDown

标记下移

MkLeft

标记左移

MkRight

标记右移

MrkUp

标记上移

MarkDow

标记下移

MarkRig

标记右移

MoveDow

下移

MoveLef

向左移动

MoveRig

向右移动

MvDown

下移

MvLeft

向左移动

MvRight

向右移动

MvUp

上移

NewLin

换行

ReqBSp

必需的退格

ReqTab

必需的跳格

RoIDwn

向下滚动

RollDow

向下滚动

RoIUp

向上滚动

Rst/Ctrl

Reset/Ctrl

RPause

录制/播放暂停

SOSI

SOSI 显示

SOSI/G

SOSI 生成

SysAttn

系统注意

SysReq

系统请求

TabFld

跳格字段

TopOPg

页面顶部

TransOp

透明度不透明

Trnfdl

透明度字段继承

TrnOp

透明度不透明

TstReq

测试请求

Turquoise

Turquoise

UnderSc

下划线


UndScr

下划线

WdWrap

自动换行

增强型键盘、Microsoft 自然键盘 (仅限 3270)

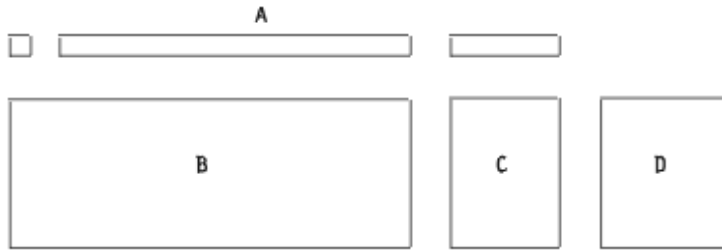

Segment A assignment:

110 SysAttn SysReq ----- ----- ----- -----	112 PF1 PF13 SOSI Doc Doc Red	113 PF2 PF14 ----- WdWrap WdWrap Pink	114 PF3 PF15 CfGfmt CfGfmt Green	115 PF4 PF16 ----- ----- Yellow	116 PF5 PF17 Record ----- Blue	117 PF6 PF18 Play ----- Turq	118 PF7 PF19 RPaase ----- White	119 PF8 PF20 ----- APL APL FlaColor	120 PF9 PF21 ----- CurSel CurSel -----	121 PF10 PF22 ----- CurBlink CurBlink -----	122 PF11 PF23 RTM AltCur AltCur -----	123 PF12 PF24 ----- +Cr +Cr -----
--	---	---	---	--	---	---	--	---	--	---	---	---

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- Break ----- ----- -----
--	--	---

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- NUL ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- RS ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ----- ----- -----	12 ----- ----- US ----- ----- -----	13 ----- ----- RS ----- ----- -----	14 ----- ----- ----- ----- -----	15 BackSp BackSp ----- EditUnd ----- -----
16 TabFld BackTab ----- ----- -----	17 DC1 ----- ----- -----	18 ETB ----- ----- -----	19 ENQ ----- ----- -----	20 DC2 ----- ----- -----	21 DC4 ----- ----- -----	22 EM ----- ----- -----	23 NAK ----- ----- -----	24 HT ----- ----- -----	25 SI ----- ----- -----	26 DLE ----- ----- -----	27 NUL ----- ----- -----	28 ESC ----- ----- -----	29 ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 SOH ----- ----- -----	32 DC3 ----- ----- -----	33 EOT ----- ----- -----	34 ACK ----- ----- -----	35 BEL ----- ----- -----	36 BS ----- ----- -----	37 LF ----- ----- -----	38 VT ----- ----- -----	39 FF ----- ----- -----	40 ----- ----- ----- ----- -----	41 ----- ----- ----- ----- -----	43 NewLine NewLine ----- ----- -----		
44 ----- ----- ----- ----- -----	46 SUB ----- ----- -----	47 CAN ----- ----- -----	48 ETX ----- ----- -----	49 SYN ----- ----- -----	50 STX ----- ----- -----	51 SO ----- ----- -----	52 CR ----- ----- -----	53 ----- ----- ----- ----- -----	54 ----- ----- ----- ----- -----	55 ----- ----- ----- ----- -----	57 ----- ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl Quit Quit ----- -----	60 ----- ----- ----- ----- -----	61 ----- ----- ----- ----- -----	62 ----- ----- ----- ----- -----	64 Enter/Ctrl Enter/Ctrl ----- ----- -----										

Segment C assignment:

75	80	85
Insert	Home	-----
Dup	FM	PA3
EditCop	Rule	CngScrn
PA1	PA2	JmpNext
PA1	PA2	JmpNext
EditPst	-----	-----
76	81	86
Delete	ErEOF	-----
EditCut	ErFld	EditPst
DelWord	-----	Test
DelWord	ErInp	-----
DelWord	ErInp	-----
-----	-----	-----


	83	
	Up	
	Mkup	
	Mvup	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MkLeft	MkDown	MkRight
MvLeft	MvDown	MvRight
BtdWord	FastDn	TabWord
BtdWord	FastDn	TabWord
-----	-----	-----

Segment D assignment:

90	95	100	105
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	Reverse	-----
-----	-----	Reverse	-----
-----	TrnOp	-----	-----
91	96	101	106
Home	Up	-----	-----
-----	-----	-----	TabFld
-----	MvUp	-----	-----
-----	FastUp	-----	-----
-----	FastUp	-----	-----
-----	TrnFldI	FldTrns	-----
92	97	102	
Left	-----	Right	
-----	-----	-----	
MvLeft	-----	MvRight	
-----	-----	UndScr	
-----	-----	UndScr	
-----	-----	-----	
93	98	103	108
EndFld	Down	Esc J	Enter
-----	-----	-----	Enter
-----	MvDown	-----	-----
-----	FastDn	FldHign	-----
-----	FastDn	FldHign	-----
-----	-----	-----	-----
99	104		
Insert	Delete		
-----	-----		
-----	DelWord		
-----	DelWord		
-----	DelWord		
-----	-----		

增强型键盘、Microsoft 自然键盘 (仅限 5250)

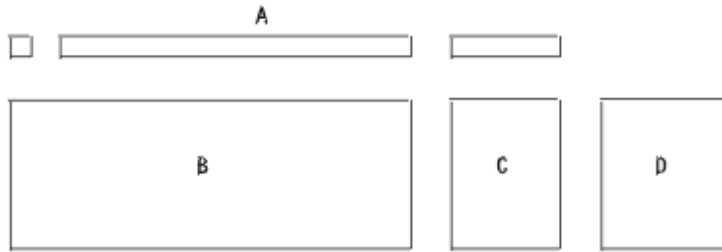

Segment A assignment:

110 SysActn SysReq ----- ----- ----- -----	112 PF1 PF13 SOS1 Help ----- ----- -----	113 PF2 PF14 ----- ----- ----- -----	114 PF3 PF15 ----- ----- ----- -----	115 PF4 PF16 ----- ----- ----- -----	116 PF5 PF17 Record ----- ----- -----	117 PF6 PF18 Play ----- ----- -----	118 PF7 PF19 RPause ----- ----- -----	119 PF8 PF20 SOS1/G SOS1/G FieldCo1 ----- ----- -----	120 PF9 PF21 ----- ----- -----	121 PF10 PF22 ----- CarBlink CarBlink ----- -----	122 PF11 PF23 ----- AltCur AltCur ----- -----	123 PF12 PF24 ----- TestReq TestReq ----- -----
--	---	--	--	--	---	---	---	---	---	--	--	--

124 ----- ----- ----- -----	125 ----- ----- ----- -----	126 Clear ----- HostPr TstReq ----- -----
---	---	---

Segment B assignment:

1 ----- ----- ----- -----	2 ----- ----- ----- -----	3 ----- ----- ----- -----	4 ----- ----- ----- -----	5 ----- ----- ----- -----	6 ----- ----- ----- -----	7 ----- ----- ----- -----	8 ----- ----- ----- -----	9 ----- ----- ----- -----	10 ----- ----- ----- -----	11 ----- ----- ----- -----	12 ----- ----- ----- -----	13 ----- ----- ----- -----	14 ----- ----- ----- -----	15 BackSp BackSp ReqBSp ----- -----
16 TabFid BackTd ReqTab ----- ----- -----	17 ----- ----- ----- -----	18 ----- ----- ----- -----	19 ----- ----- ----- -----	20 ----- ----- ----- -----	21 ----- ----- ----- -----	22 ----- ----- ----- -----	23 ----- ----- ----- -----	24 ----- ----- ----- -----	25 ----- ----- ----- -----	26 ----- ----- ----- -----	27 ----- ----- ----- -----	28 ----- ----- ----- -----	29 ----- ----- ----- -----	
30 ----- ----- ----- -----	31 ----- ----- ----- -----	32 ----- ----- ----- -----	33 ----- ----- ----- -----	34 ----- ----- ----- -----	35 ----- ----- ----- -----	36 ----- ----- ----- -----	37 ----- ----- ----- -----	38 ----- ----- ----- -----	39 ----- ----- ----- -----	40 ----- ----- ----- -----	41 ----- ----- ----- -----	43 FldExt NewLin CarRtn ----- -----		
44 ----- ----- ----- -----	46 ----- ----- ----- -----	47 ----- ----- ----- -----	48 ----- ----- ----- -----	49 ----- ----- ----- -----	50 ----- ----- ----- -----	51 ----- ----- ----- -----	52 ----- ----- ----- -----	53 ----- ----- ----- -----	54 ----- ----- ----- -----	55 ----- ----- ----- -----	57 ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl ----- Quit Quit -----	60 ----- ----- ----- -----	61 ----- ----- ----- -----	62 ----- ----- ----- -----	64 Enter/Ctrl Enter/Ctrl ----- -----										



Segment A assignment:

110 SysAttn SysReq ----- ----- ----- -----	112 PF1 PF13 SOSI Doc Doc Red	113 PF2 PF14 ----- WdWrap WdWrap Pink	114 PF3 PF15 CfGfmt CfGfmt Green	115 PF4 PF16 ----- ----- Yellow	116 PF5 PF17 Record ----- Blue	117 PF6 PF18 Play ----- Turq	118 PF7 PF19 RPaase ----- White	119 PF8 PF20 ----- APL APL FlaColor	120 PF9 PF21 ----- CurSel CurSel -----	121 PF10 PF22 ----- CurBlink CurBlink -----	122 PF11 PF23 RTM AltCur AltCur -----	123 PF12 PF24 ----- +Cr +Cr -----
--	---	---	---	--	---	---	--	---	--	---	---	---

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- Break ----- ----- -----
--	--	---

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- NUL ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ----- ----- -----	12 ----- ----- ----- US ----- -----	13 ----- ----- ----- RS ----- -----	14 ----- ----- ----- ----- ----- -----	15 BackSp ChrAdv ----- ----- ----- -----
16 TabFld BackTab ----- ----- -----	17 ----- ----- DC1 ----- ----- -----	18 ----- ----- ETB ----- ----- -----	19 ----- ----- ENQ ----- ----- -----	20 ----- ----- DC2 ----- ----- -----	21 ----- ----- DC4 ----- ----- -----	22 ----- ----- EM ----- ----- -----	23 ----- ----- NAK ----- ----- -----	24 ----- ----- HT ----- ----- -----	25 ----- ----- SI ----- ----- -----	26 ----- ----- DLE ----- ----- -----	27 ----- ----- NUL ----- ----- -----	28 ----- ----- ESC ----- ----- -----	29 ----- ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 ----- ----- SOH ----- ----- -----	32 ----- ----- DC3 ----- ----- -----	33 ----- ----- EOT ----- ----- -----	34 ----- ----- ACK ----- ----- -----	35 ----- ----- BEL ----- ----- -----	36 ----- ----- BS ----- ----- -----	37 ----- ----- LF ----- ----- -----	38 ----- ----- VT ----- ----- -----	39 ----- ----- FF ----- ----- -----	40 ----- ----- ----- ----- ----- -----	41 ----- ----- ----- ----- ----- -----	43 NewLine NewLine ----- ----- ----- -----		
44 ----- ----- ----- ----- -----	46 ----- ----- SUB ----- ----- -----	47 ----- ----- CAN ----- ----- -----	48 ----- ----- ETX ----- ----- -----	49 ----- ----- SYN ----- ----- -----	50 ----- ----- STX ----- ----- -----	51 ----- ----- SO ----- ----- -----	52 ----- ----- CR ----- ----- -----	53 ----- ----- ----- ----- ----- -----	54 ----- ----- ----- ----- ----- -----	55 ----- ----- ----- ----- ----- -----	57 ----- ----- ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl Quit Quit ----- -----	60 ----- ----- ----- ----- ----- -----	61 ----- ----- ----- ----- ----- -----	62 ----- ----- ----- ----- ----- -----	64 Enter/Ctrl Enter/Ctrl ----- ----- ----- -----										

Segment C assignment:

75	80	85
Insert	Home	Ro1Dwn
Dup	FM	PA3
EditCop	Rule	ChgScr
PA1	PA2	JmpNxt
PA1	PA2	JmpNxt
EditPst	-----	-----
76	81	86
Delete	ErEOF	Ro1Up
EditCut	ErFla	EditPst
De1Word	-----	Test
De1Word	ErInp	-----
De1Word	ErInp	-----
-----	-----	-----

	83	
	Up	
	Mkup	
	Mvup	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MkLeft	MkDown	MkRight
MvLeft	MvDown	MvRight
BtWord	FastDn	TabWord
BtWord	FastDn	TabWord
-----	-----	-----


Segment D assignment:

90	95	100	105
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	Reverse	-----
-----	-----	Reverse	-----
-----	TrnOp	-----	-----
91	96	101	106
Home	up	-----	Field+
-----	-----	-----	TabFla
-----	MvUp	-----	-----
-----	FastUp	-----	-----
-----	FastUp	-----	-----
-----	TrnFla1	FlaTrns	-----
92	97	102	
Left	-----	Right	
-----	-----	-----	
MvLeft	-----	MvRight	
-----	-----	UndScr	
-----	-----	UndScr	
-----	-----	-----	
93	98	103	108
EndFla	Down	ESC J	Enter
-----	-----	-----	Enter
-----	MvDown	-----	-----
-----	FastDn	FlaRigh	-----
-----	FastDn	FlaRigh	-----
-----	-----	-----	-----
99	104		
Insert	Delete		
-----	-----		
-----	De1Word		
-----	De1Word		
-----	De1Word		
-----	-----		

增强型键盘、Microsoft 自然键盘 (VT 键盘布局)

注意:

此键盘布局不包括个人通信本地功能 (例如、编辑复制、编辑粘贴等)。

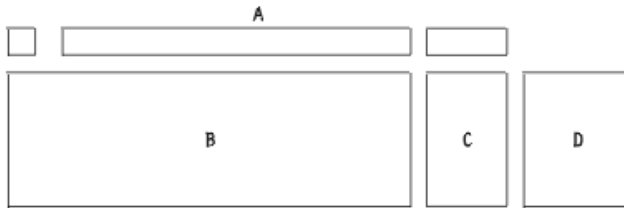

Segment A assignment:

110 ESC ESC ----- ----- -----	112 FldScrn F13 ----- ----- ----- OsrF13	113 Compose F14 ----- ----- ----- UsrF14	114 Help F15 ----- ----- ----- UsrF15	115 Do F16 ----- ----- ----- UsrF16	116 Break F17 ----- ----- ----- UsrF17	117 F6 F18 UsrF6 ----- ----- ----- UsrF18	118 F7 F19 UsrF7 ----- ----- ----- UsrF19	119 F8 F20 OsrF8 ----- ----- ----- OsrF20	120 F9 ----- ----- ----- UsrF9	121 F10 UsrF10 ----- ----- ----- UsrF10	122 F11 UsrF11 ----- ----- ----- UsrF11	123 F12 UsrF12 ----- ----- ----- UsrF12
--	--	--	---	---	--	--	--	--	---	---	---	---

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 ----- ----- ----- ----- -----
--	--	--

Segment B assignment:

1 ^ ansI7e ----- ----- -----	2 I ----- ----- -----	3 2 @ NULL ----- ----- -----	4 3 # ----- ----- -----	5 4 \$ ----- ----- -----	6 5 % ----- ----- -----	7 6 ^ RS ----- ----- -----	8 7 & ----- ----- -----	9 8 * ----- ----- -----	10 9 (----- ----- -----	11 0) ----- ----- -----	12 > US ----- ----- -----	13 = + ----- ----- -----	15 Backspace Backspace ----- ----- -----
16 Tab Field Backtab ----- ----- -----	17 q Q DC1 ----- ----- -----	18 w W ETB ----- ----- -----	19 e E ENQ ----- ----- -----	20 r R DC2 ----- ----- -----	21 t T DC4 ----- ----- -----	22 y Y EM ----- ----- -----	23 u U NAK ----- ----- -----	24 i I HT ----- ----- -----	25 o O SI ----- ----- -----	26 p P DLE ----- ----- -----	27 l L ESC ----- ----- -----	28 j J GS ----- ----- -----	29 ansI7e FS ----- ----- -----
30 ----- ----- ----- -----	31 a A SOH ----- ----- -----	32 s S DC3 ----- ----- -----	33 d D EOT ----- ----- -----	34 f F ACK ----- ----- -----	35 g G BEL ----- ----- -----	36 h H BS ----- ----- -----	37 j J LF ----- ----- -----	38 k K VT ----- ----- -----	39 l L FF ----- ----- -----	40 :; :; ----- ----- -----	41 y Y * ----- ----- -----	43 Newline Newline ----- ----- -----	
44 ----- ----- ----- -----	46 z Z SUB ----- ----- -----	47 x X CAN ----- ----- -----	48 c C ETX ----- ----- -----	49 v V SYN ----- ----- -----	50 b B STX ----- ----- -----	51 n N SO ----- ----- -----	52 m M CR ----- ----- -----	53 , ----- ----- -----	54 > ----- ----- -----	55 /? /? ----- ----- -----	57 ----- ----- ----- -----		
58 ----- ----- ----- -----	60 ----- ----- ----- -----	61 Space Space ----- ----- ----- -----				62 ----- ----- ----- -----	64 ----- ----- ----- -----						

Segment C assignment:

75 InsertHere >>>> >>>> >>>> >>>>	80 Select >>>> >>>> >>>> >>>>	85 PrevScn >>>> >>>> >>>> >>>>
76 Remove >>>> >>>> >>>> >>>>	81 Find >>>> >>>> >>>> >>>>	86 NextScn >>>> >>>> >>>> >>>>

	83 Up >>>> >>>> >>>> >>>>	
79 Left >>>> >>>> >>>> >>>>	84 Down >>>> >>>> >>>> >>>>	89 Right >>>> >>>> >>>> >>>>


Segment D assignment:

90 PF1 >>>> >>>> >>>> >>>>	95 PF2 >>>> >>>> >>>> >>>>	100 PF3 >>>> >>>> >>>> >>>>	105 PF4 >>>> >>>> >>>> >>>>
91 Select numpd 7 >>>> >>>> >>>> >>>>	96 Up numpd 8 >>>> >>>> >>>> >>>>	101 PrvScn numpd 9 >>>> >>>> >>>> >>>>	106 numpd - numpd , >>>> >>>> >>>> >>>>
92 Left numpd 4 >>>> >>>> >>>> >>>>	97 numpd 5 >>>> >>>> >>>> >>>>	102 Right numpd 6 >>>> >>>> >>>> >>>>	
93 Find numpd 1 >>>> >>>> >>>> >>>>	98 Down numpd 2 >>>> >>>> >>>> >>>>	103 NXPg numpd 3 >>>> >>>> >>>> >>>>	108 numpd Newln >>>> >>>> >>>> >>>>
99 InsertHere numpd 0 >>>> >>>> >>>> >>>>		104 Remove numpd . >>>> >>>> >>>> >>>>	

增强型键盘、Microsoft 自然键盘 (仅限 VT 本地编辑方式)

注意:

此键盘布局不包括个人通信本地功能 (例如、编辑复制、编辑粘贴等)。

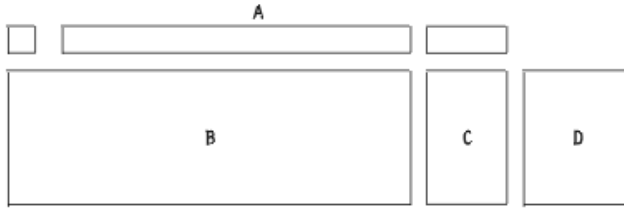

Segment A assignment:

110 ESC ESC	112 FldScrfl F13 OsrF13	113 Compose F14 UsrF14	114 Help F15 UsrF15	115 Do F16 UsrF16	116 Break F17 UsrF17	117 F6 F18 UsrF6 UsrF18	118 F7 F19 UsrF7 UsrF19	119 F8 F20 OsrF8 OsrF20	120 F9 UsrF9	121 F10 UsrF10 UsrF10	122 F11 UsrF11	123 F12 UsrF12
124			125		126							

Segment B assignment:

1 ^ ans17e	2 1	3 2 @ NULL	4 3 #	5 4 \$	6 5 %	7 6 ^ RS	8 7 &	9 8 *	10 9 (.....	11 0)	12 > US	13 = +	15 Backspace Backspace
16 Tab Field Backtab	17 q Q DC1	18 w W ETB	19 e E ENQ	20 r R DC2	21 t T DC4	22 y Y EM	23 u U NAK	24 i I HT	25 o O SI	26 p P DLE	27 l L ESC	28 j J GS	29 ans17e FS
30		31 s S SOH	32 S DC3	33 d D EOT	34 f F ACK	35 g G BEL	36 h H BS	37 j J LF	38 k K VT	39 l L FF	40 :;	41 y Y *	43 Newline/Transit Newline/Transit
44		46 z Z SUB	47 x X CAN	48 c C ETX	49 v V SYN	50 b B STX	51 n N SO	52 m M CR	53 ,	54 >	55 /?	57	
58		60		61 Space Space						62		64	

Segment C assignment:


75 Insrt/Overstrk ----- ----- ----- -----	80 Select EDIT ----- ----- ----- -----	85 PrevPg ----- ----- ----- -----
76 ClrFld ClrPg ----- ----- ----- -----	81 HomeCar ----- ----- ----- -----	86 NextPg ----- ----- ----- -----

	83 Up ----- ----- ----- -----	
79 Left ----- ----- ----- -----	84 Down ----- ----- ----- -----	89 Right ----- ----- ----- -----

Segment D assignment:

90 BkTab TabFla ----- ----- ----- -----	95 InertLn ----- ----- ----- -----	100 DeLLn ----- ----- ----- -----	105 DeChar ----- ----- ----- -----
91 Select numpd 7 ----- ----- ----- -----	96 Up numpd 8 ----- ----- ----- -----	101 PrvPg numpd 9 ----- ----- ----- -----	106 numpd - numpd . ----- ----- ----- -----
92 Left numpd 4 ----- ----- ----- -----	97 ----- numpd 5 ----- ----- ----- -----	102 Right numpd 6 ----- ----- ----- -----	
93 HmeCur numpd 1 ----- ----- ----- -----	98 Down numpd 2 ----- ----- ----- -----	103 NxtPg numpd 3 ----- ----- ----- -----	108 ----- Transmit ----- ----- ----- -----
99 Insert/Overstrike numpd 0 ----- ----- ----- -----		104 ClrFld numpd . ----- ----- ----- -----	

节省空间键盘 (仅限 3270)

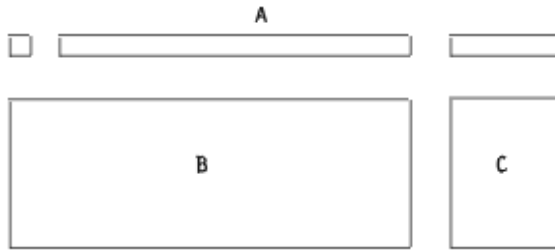

Segment A assignment:

110 SysAttn SysReq ----- ----- ----- -----	112 PF1 PF13 ----- Doc Doc Red	113 PF2 PF14 ----- WdWrap WdWrap Pink	114 PF3 PF15 ----- CfGfmt CfGfmt Green	115 PF4 PF16 ----- ----- Yellow	116 PF5 PF17 Record ----- ----- Blue	117 PF6 PF18 Play ----- ----- Turq	118 PF7 PF19 RPaase ----- ----- White	119 PF8 PF20 ----- APL APL FlaColor	120 PF9 PF21 ----- CurSel CurSel -----	121 PF10 PF22 ----- CurBlink CurBlink -----	122 PF11 PF23 RTM ----- AltCur AltCur -----	123 PF12 PF24 ----- +Cr +Cr -----
--	--	---	--	--	--	--	---	---	--	---	--	---

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- Break ----- ----- -----
--	--	---

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ----- ----- -----	12 ----- ----- ----- ----- -----	13 ----- ----- ----- ----- -----	14 ----- ----- ----- ----- -----	15 BackSp BackSp ----- ----- -----
16 TabFld BackTab ----- ----- ----- -----	17 ----- ----- ----- ----- -----	18 ----- ----- ----- ----- -----	19 ----- ----- ----- ----- -----	20 ----- ----- ----- ----- -----	21 ----- ----- ----- ----- -----	22 ----- ----- ----- ----- -----	23 ----- ----- ----- ----- -----	24 ----- ----- ----- ----- -----	25 ----- ----- ----- ----- -----	26 ----- ----- ----- ----- -----	27 ----- ----- ----- ----- -----	28 ----- ----- ----- ----- -----	29 ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 ----- ----- ----- ----- -----	32 ----- ----- ----- ----- -----	33 ----- ----- ----- ----- -----	34 ----- ----- ----- ----- -----	35 ----- ----- ----- ----- -----	36 ----- ----- ----- ----- -----	37 ----- ----- ----- ----- -----	38 ----- ----- ----- ----- -----	39 ----- ----- ----- ----- -----	40 ----- ----- ----- ----- -----	41 ----- ----- ----- ----- -----	43 NewLine NewLine ----- ----- -----		
44 ----- ----- ----- ----- -----	46 ----- ----- ----- ----- -----	47 ----- ----- ----- ----- -----	48 ----- ----- ----- ----- -----	49 ----- ----- ----- ----- -----	50 ----- ----- ----- ----- -----	51 ----- ----- ----- ----- -----	52 ----- ----- ----- ----- -----	53 ----- ----- ----- ----- -----	54 ----- ----- ----- ----- -----	55 ----- ----- ----- ----- -----	57 ----- ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl Quit Quit -----	60 ----- ----- ----- ----- -----	61 ----- ----- ----- ----- -----	62 ----- ----- ----- ----- -----	64 Enter/Ctrl Enter/Ctrl ----- ----- -----										


Segment C assignment:

75	80	85
Insert	Home	-----
Dup	FM	PA3
-----	Rule	ChgScrn
PA1	PA2	JmpNext
PA1	PA2	JmpNext
-----	-----	-----
76	81	86
Delete	ErEOF	-----
Delete	ErFid	-----
DelWord	-----	Test
DelWord	ErInp	-----
DelWord	ErInp	-----
-----	-----	-----

	83	
	Up	
	Mkup	
	Mvup	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MkLeft	MkDown	MkRight
MvLeft	MvDown	MvRight
BlbWord	FastDn	TabWord
BlbWord	FastDn	TabWord
-----	-----	-----

节省空间键盘 (仅限 5250)

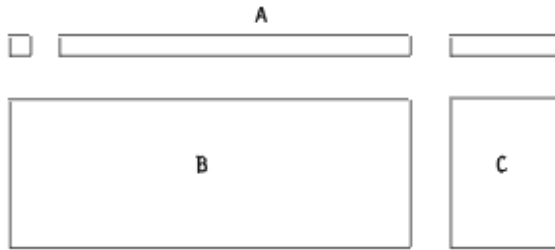

Segment A assignment:

110 SysAttn SysReq ----- ----- ----- -----	112 PF1 PF13 ----- Help ----- ----- -----	113 PF2 PF14 ----- ----- ----- -----	114 PF3 PF15 ----- ----- ----- -----	115 PF4 PF16 ----- ----- ----- -----	116 PF5 PF17 Record ----- ----- ----- -----	117 PF6 PF18 Play ----- ----- ----- -----	118 PF7 PF19 RPause ----- ----- ----- -----	119 PF8 PF20 ----- ----- ----- -----	120 PF9 PF21 ----- ----- ----- -----	121 PF10 PF22 ----- CurBlink CurBlink ----- -----	122 PF11 PF23 ----- AltCur AltCur ----- -----	123 PF12 PF24 ----- ----- ----- -----
--	--	--	--	--	--	--	--	--	--	--	--	---

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- HostPr TstReq ----- -----
--	--	---

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ----- ----- -----	12 ----- ----- ----- ----- -----	13 ----- ----- ----- ----- -----	14 ----- ----- ----- ----- -----	15 BackSp BackSp ReqBSp ----- -----
16 TabFld BackTd ReqTab ----- ----- ----- -----	17 ----- ----- ----- ----- -----	18 ----- ----- ----- ----- -----	19 ----- ----- ----- ----- -----	20 ----- ----- ----- ----- -----	21 ----- ----- ----- ----- -----	22 ----- ----- ----- ----- -----	23 ----- ----- ----- ----- -----	24 ----- ----- ----- ----- -----	25 ----- ----- ----- ----- -----	26 ----- ----- ----- ----- -----	27 ----- ----- ----- ----- -----	28 ----- ----- ----- ----- -----	29 ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 ----- ----- ----- ----- -----	32 ----- ----- ----- ----- -----	33 ----- ----- ----- ----- -----	34 ----- ----- ----- ----- -----	35 ----- ----- ----- ----- -----	36 ----- ----- ----- ----- -----	37 ----- ----- ----- ----- -----	38 ----- ----- ----- ----- -----	39 ----- ----- ----- ----- -----	40 ----- ----- ----- ----- -----	41 ----- ----- ----- ----- -----	43 FldExt NewLin CorRtn ----- -----		
44 ----- ----- ----- ----- -----	46 ----- ----- ----- ----- -----	47 ----- ----- ----- ----- -----	48 ----- ----- ----- ----- -----	49 ----- ----- ----- ----- -----	50 ----- ----- ----- ----- -----	51 ----- ----- ----- ----- -----	52 ----- ----- ----- ----- -----	53 ----- ----- ----- ----- -----	54 ----- ----- ----- ----- -----	55 ----- ----- ----- ----- -----	57 ----- ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl ----- Quit Quit -----	60 ----- ----- ----- ----- -----	61 ----- ----- ----- ----- -----	62 ----- ----- ----- ----- -----	64 Enter/Ctrl Enter/Ctrl ----- ----- -----										


Segment C assignment:

75	80	85
Insert	Home	RoLDwn
Dup	FM	RoLDwn
DspTxC	Rule	-----
-----	-----	JmpNxt
-----	-----	JmpNxt
-----	-----	-----
76	81	86
Delete	ErEOF	RoLUp
Delete	-----	RoLUp
DelWord	-----	-----
DelWord	ErInp	-----
DelWord	ErInp	-----
-----	-----	-----

	83	
	Up	
	Mkup	
	Mvup	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MkLeft	MkDown	MkRight
MvLeft	MvDown	MvRight
BlbWord	FastDn	TabWord
BlbWord	FastDn	TabWord
-----	-----	-----

节省空间键盘 (3270 和 5250 组合)

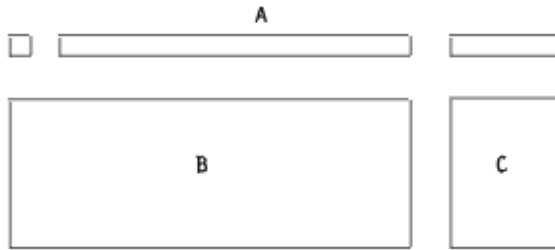

Segment A assignment:

110 SysAttn SysReq ----- ----- ----- -----	112 PF1 PF13 ----- Doc Doc Red	113 PF2 PF14 ----- WdWrap WdWrap Pink	114 PF3 PF15 ----- CfGfmt CfGfmt Green	115 PF4 PF16 ----- ----- Yellow	116 PF5 PF17 Record ----- Blue	117 PF6 PF18 Play ----- Turq	118 PF7 PF19 RPaase ----- White	119 PF8 PF20 ----- APL APL FlaColor	120 PF9 PF21 ----- CurSel CurSel -----	121 PF10 PF22 ----- CurBlink CurBlink -----	122 PF11 PF23 RTM AltCur AltCur -----	123 PF12 PF24 ----- +Cr +Cr -----
--	--	---	--	--	---	---	--	---	--	---	---	---

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- Break ----- ----- -----
--	--	---

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ----- ----- -----	12 ----- ----- ----- ----- -----	13 ----- ----- ----- ----- -----	14 ----- ----- ----- ----- -----	15 BackSp ChrAdv ----- ----- -----
16 TabFld BackTab ----- ----- ----- -----	17 ----- ----- ----- ----- -----	18 ----- ----- ----- ----- -----	19 ----- ----- ----- ----- -----	20 ----- ----- ----- ----- -----	21 ----- ----- ----- ----- -----	22 ----- ----- ----- ----- -----	23 ----- ----- ----- ----- -----	24 ----- ----- ----- ----- -----	25 ----- ----- ----- ----- -----	26 ----- ----- ----- ----- -----	27 ----- ----- ----- ----- -----	28 ----- ----- ----- ----- -----	29 ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 ----- ----- ----- ----- -----	32 ----- ----- ----- ----- -----	33 ----- ----- ----- ----- -----	34 ----- ----- ----- ----- -----	35 ----- ----- ----- ----- -----	36 ----- ----- ----- ----- -----	37 ----- ----- ----- ----- -----	38 ----- ----- ----- ----- -----	39 ----- ----- ----- ----- -----	40 ----- ----- ----- ----- -----	41 ----- ----- ----- ----- -----	43 NewLine NewLine ----- ----- -----		
44 ----- ----- ----- ----- -----	46 ----- ----- ----- ----- -----	47 ----- ----- ----- ----- -----	48 ----- ----- ----- ----- -----	49 ----- ----- ----- ----- -----	50 ----- ----- ----- ----- -----	51 ----- ----- ----- ----- -----	52 ----- ----- ----- ----- -----	53 ----- ----- ----- ----- -----	54 ----- ----- ----- ----- -----	55 ----- ----- ----- ----- -----	57 ----- ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl Quit Quit -----	60 ----- ----- ----- ----- -----	61 ----- ----- ----- ----- -----	62 ----- ----- ----- ----- -----	64 Enter/Ctrl Enter/Ctrl ----- ----- -----										


Segment C assignment:

75	80	85
Insert	Home	RoIDwn
Dup	FM	PA3
-----	Rule	ChgScrn
PA1	PA2	JmpNxt
PA1	PA2	JmpNxt
-----	-----	-----
76	81	86
Delete	ErEOF	RoIUp
Delete	ErFid	-----
DelWord	-----	Test
DelWord	ErInp	-----
DelWord	ErInp	-----
-----	-----	-----

	83	
	Up	
	Mkup	
	Mvup	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MkLeft	MkDown	MkRight
MvLeft	MvDown	MvRight
BlbWord	FastDn	TabWord
BlbWord	FastDn	TabWord
-----	-----	-----

5576-001 (仅限 3270)

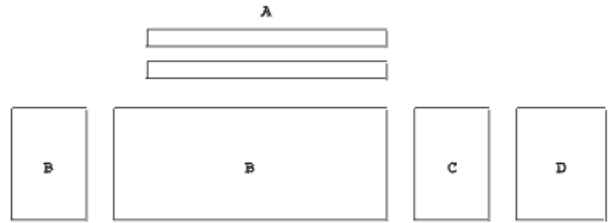

Segment A assignment:

----	----	CrErr	----	----	----	----	----	ErEOF	SysAttn	PA1	PA2
----	----	AltCr	----	----	----	----	----	ErrInp	CrSel	DevCom	PA3
----	----	----	----	----	----	----	----	----	----	----	----

112	113	114	115	116	117	118	119	120	121	122	123
PF1	PF2	PF3	PF4	PF5	PF6	PF7	PF8	PF9	PF10	PF11	PF12
PF13	PF14	PF15	PF16	PF17	PF18	PF19	PF20	PF21	PF22	PF23	PF24
SOSI	WordWrap	AltView	----	----	----	----	APL	----	----	----	GrpCsr
Doc	----	CfgMnt	----	----	----	----	APL	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----

Segment B assignment:

Clear	----	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Clear	----	SysRtn	----	----	----	----	----	----	----	----	----	----	US	RS	----	BackSp
SysReq	----	SysReq	----	----	----	----	----	----	----	----	----	----	----	----	----	BackSp
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	ExitUnd
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Play	----	16	17	18	19	20	21	22	23	24	25	26	27	28	29	----
----	----	Tab	DCI	RTB	ENQ	DC2	DC4	EM	NAK	BT	ST	DLR	NUL	RSC	----	----
rkPause	----	BackTab	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	30	31	32	33	34	35	36	37	38	39	40	41	42	43	NewLine
----	----	----	SOH	DC3	ROT	ACK	BEL	BS	LF	VT	PF	----	----	GS	NewLine	NewLine
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	44	46	47	48	49	50	51	52	53	54	55	56	57	58	59
----	----	----	SUB	CAN	RTX	STX	STX	SO	CR	----	----	FS	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Reset	----	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74
Reset	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	Entr/Ctl
Record	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	Entr/Ctl
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

Segment C assignment:

75 ----- ----- ----- ----- -----	80 ----- ----- ----- ChgScr ChgScr -----	85 UpNext UpNext ----- ----- -----
76 Insert EditPaste EditCopy ----- ----- -----	81 DelChar EditCut ----- ----- -----	86 ----- ----- ----- ----- -----

	83 Up MarkUp MoveUp ----- -----	
79 Left MarkLef MoveLef FastLef ----- -----	84 Home Home Rule ----- -----	89 Right MarkRig MoveRig FastRig ----- -----
	Down MarkDow MoveDow ----- -----	

Segment D assignment:

90 Dup Dup ----- Reverse -----	95 FldMark FldMark ----- Red ----- TrnOp	100 ----- ----- ----- Pink Reverse -----	105 ----- ----- ----- Break ----- -----
91 ----- ----- ----- ----- -----	96 ----- ----- ----- Green ----- TrnFldI	101 ----- ----- ----- Yellow ----- -----	106 ----- ----- ----- ----- -----
92 ----- ----- ----- UnderSc ----- -----	97 ----- ----- ----- Blue ----- -----	102 ----- ----- ----- Turquoi ----- -----	
93 ----- ----- ----- FieldH ----- -----	98 ----- ----- ----- White ----- -----	103 ESC_J ----- ----- ----- ----- -----	108 Enter Enter ----- ----- -----
99 ----- ----- ----- ----- -----		104 ----- ----- ----- FldColor ----- -----	

5576-001 (仅限 5250)

Segment C assignment:


75 RollDwn RollDwn ----- ----- -----	80 Home FlcMk Rule ----- ----- -----	85 RollUp RollUp ----- ----- -----
76 Insert EditPaste EditCopy ----- ----- -----	81 DelChar ----- ----- ----- -----	86 ----- ----- ----- ----- -----

Segment D assignment:

90 Dup Dup Dup Dup ----- -----	95 FlcMark FlcMark FlcMark FlcMark ----- -----	100 ----- ----- ----- ----- ----- -----	105 Field- Field- Field- Field- ----- -----
91 ----- ----- ----- ----- -----	96 ----- ----- ----- ----- -----	101 ----- ----- ----- ----- -----	106 Field+ Field+ Field+ Field+ ----- -----
92 ----- ----- ----- ----- -----	97 ----- ----- ----- ----- -----	102 ----- ----- ----- ----- -----	
93 ----- ----- ----- ----- -----	98 ----- ----- ----- ----- -----	103 ----- ----- ----- ----- -----	108 FldExt. FldExt. ----- ----- -----
99 ----- ----- ----- ----- -----		104 ----- ----- ----- ----- -----	

	83 Up MarkUp MoveUp FastUp ----- -----	
79 Left MarkLef MoveLef FastLef ----- -----	84 Home Home Rule ----- -----	89 Right MarkRig MoveRig FastRig ----- -----
	Down MarkDow MoveDow FastDow ----- -----	

5576-001 (3270 和 5250 组合)

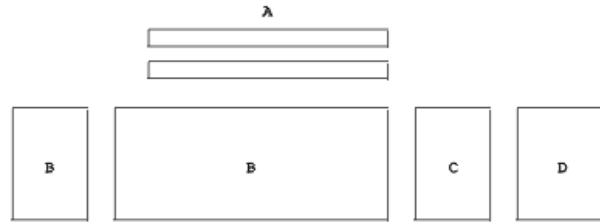

Segment A assignment:

----	----	CrBak	----	Help	----	SOSI	HostPrt	ErEOP	SysAttn	PA1	PA2
----	----	AltCur	----	Help	----	SOSI	----	ErTop	CrSel	DevCom	PA3
----	----	----	----	----	----	----	----	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----

112	113	114	115	116	117	118	119	120	121	122	123
PF1	PF2	PF3	PF4	PF5	PF6	PF7	PF8	PF9	PF10	PF11	PF12
SOSI	PF14	PF15	PF16	PF17	PF18	PF19	PF20	PF21	PF22	PF23	PF24
Doc	WordWrap	AltView	----	----	----	----	APL	----	----	----	+Cr
----	----	CfgPrint	----	----	----	----	APL	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----

Segment B assignment:

Clear	----	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
	Clear	SysAttn	----	----	----	----	----	----	----	----	----	Ansi 7R	----	----	----	BackSp
SysReq	----	----	----	----	----	----	----	----	----	----	----	US	RS	----	----	CharAdv
SysReq	----	----	----	----	----	----	----	----	----	----	----	Ansi A3	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Play	----	16	17	18	19	20	21	22	23	24	25	26	27	28	29	----
	Play	Tab	DCI	RTB	BNQ	DC2	DC4	RM	NAX	HT	SI	DLE	NUL	BSC	----	----
RPause	----	----	----	----	----	----	----	----	----	----	----	Ansi A2	----	----	----	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
----	----	30	31	32	33	34	35	36	37	38	39	40	41	42	43	----
----	----	----	SOH	DC3	EOP	ACK	BEL	BS	LF	VT	PF	----	----	GS	NewLine	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	NewLine	----
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Reset	----	44	46	47	48	49	50	51	52	53	54	55	Ansi 5C	57	----	----
	Reset	----	SUB	CAN	RTX	SYN	STX	SO	CR	----	----	----	RS	----	----	----
Reset	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Record	----	58	60	61								62	64	----	----	
Record	----	----	----	----								----	Entr/Ctl	----	----	
Record	----	----	----	----								----	Retx/Ctl	----	----	
----	----	----	----	----								----	----	----	----	
----	----	----	----	----								----	----	----	----	

Segment C assignment:


75 RollDwn ----- ----- ----- ----- -----	80 ----- ----- ChgScr ----- ChgScr ----- -----	85 RollDwn ----- ----- ----- ----- -----
76 Insert EditPaste ----- EditCopy ----- ----- -----	81 DelChar ----- EditCut ----- ----- -----	86 ----- ----- ----- ----- -----

	83 Up MarkUp ----- MoveUp ----- FastUp ----- FastUp -----	
79 Left MarkLef ----- MoveLef ----- FastLef ----- -----	84 Home ----- Home ----- Rule ----- ----- -----	89 Right MarkRig ----- MoveRig ----- FastRig ----- -----
	Down MarkDwn ----- MoveDwn ----- ----- -----	

Segment D assignment:

90 Dup ----- Dup ----- Reverse ----- -----	95 FlcMark ----- FlcMark ----- ----- Red ----- TrnOp -----	100 ----- ----- ----- Pink ----- -----	105 Field- ----- Field- ----- Field- ----- Break ----- -----
91 ----- ----- ----- ----- ----- -----	96 ----- ----- ----- ----- Green ----- ----- FldTrns -----	101 ----- ----- ----- ----- Yellow ----- -----	106 Field+ ----- Field+ ----- ----- ----- -----
92 ----- ----- ----- ----- UnderSc ----- -----	97 ----- ----- ----- ----- Blue ----- -----	102 ----- ----- ----- ----- Turquoi ----- -----	
95 ----- ----- ----- ----- FieldH ----- -----	98 ----- ----- ----- ----- White ----- -----	103 ESC_J ----- ----- ----- ----- ----- -----	108 Enter ----- Enter ----- ----- ----- -----
99 ----- ----- ----- ----- ----- -----		104 ----- ----- ----- ----- FldCol ----- -----	

5576-A01 (仅限 3270)

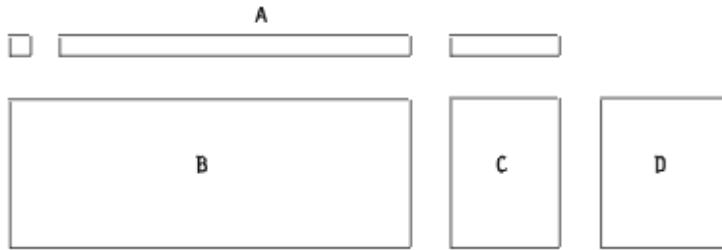

Segment A assignment:

110 SysAttn SysReq ----- ----- ----- -----	112 PF1 PF13 SOSI Doc Doc Red	113 PF2 PF14 ----- WordWrap WordWrap Pink	114 PF3 PF15 AltView CfgFmt CfgFmt Green	115 PF4 PF16 ----- ----- ----- Yellow	116 PF5 PF17 Record ----- ----- Blue	117 PF6 PF18 Play ----- ----- Turq	118 PF7 PF19 RPaase ----- ----- White	119 PF8 PF20 APL ----- ----- FlaColor	120 PF9 PF21 CrSel ----- ----- -----	121 PF10 PF22 CrBnk ----- ----- -----	122 PF11 PF23 RTM AltCr AltCr -----	123 PF12 PF24 ----- GrpCsr GrpCsr -----
--	---	---	--	---	--	--	---	---	--	---	---	---

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- Break ----- ----- -----
--	--	---

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- NUL ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- RS ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ----- ----- -----	12 ----- ----- US ----- ----- -----	13 ----- ----- RS ----- ----- -----	14 ----- ----- ----- ----- -----	15 BackSp BackSp ----- EditUnd ----- -----
16 Tab BackTab ----- ----- -----	17 ----- ----- DC1 ----- ----- -----	18 ----- ----- ETB ----- ----- -----	19 ----- ----- EMQ ----- ----- -----	20 ----- ----- DC2 ----- ----- -----	21 ----- ----- DC4 ----- ----- -----	22 ----- ----- EM ----- ----- -----	23 ----- ----- NAK ----- ----- -----	24 ----- ----- HT ----- ----- -----	25 ----- ----- SI ----- ----- -----	26 ----- ----- DLE ----- ----- -----	27 ----- ----- NUL ----- ----- -----	28 ----- ----- ESC ----- ----- -----	29 ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 ----- ----- SOH ----- ----- -----	32 ----- ----- DC3 ----- ----- -----	33 ----- ----- EOT ----- ----- -----	34 ----- ----- ACK ----- ----- -----	35 ----- ----- BEL ----- ----- -----	36 ----- ----- BS ----- ----- -----	37 ----- ----- LF ----- ----- -----	38 ----- ----- VT ----- ----- -----	39 ----- ----- FF ----- ----- -----	40 ----- ----- ----- ----- -----	41 ----- ----- ----- ----- -----	43 NewLine NewLine ----- ----- -----		
44 ----- ----- ----- ----- -----	46 ----- ----- SUB ----- ----- -----	47 ----- ----- CAN ----- ----- -----	48 ----- ----- ETX ----- ----- -----	49 ----- ----- SYN ----- ----- -----	50 ----- ----- STX ----- ----- -----	51 ----- ----- SO ----- ----- -----	52 ----- ----- CR ----- ----- -----	53 ----- ----- ----- ----- -----	54 ----- ----- ----- ----- -----	55 ----- ----- ----- ----- -----	57 ----- ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl Quit Quit -----	60 ----- ----- ----- ----- -----	61 ----- ----- ----- ----- -----	62 ----- ----- ----- ----- -----	64 Enter/Ctrl Enter/Ctrl ----- ----- -----										

Segment C assignment:

75	80	85
Insert	Home	-----
Dup	FldMk	PA3
EditCop	Rule	ChgScn
PA1	PA2	JmpNext
PA1	PA2	JmpNext
EditPst	-----	-----
76	81	86
Delete	ErEOF	-----
EditCut	ErFld	EditPst
DelWd	-----	Test
DelWd	ErInp	-----
-----	ErInp	-----
-----	-----	-----


	83	
	Up	
	MarkUp	
	MoveUp	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MarkLef	MarkDow	MarkRig
MoveLef	MoveDow	MoveRig
BackWd	FastDow	FwdWd
BackWd	FastDow	FwdWd
-----	-----	-----

Segment D assignment:

90	95	100	105
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	Reverse	-----
-----	-----	Reverse	-----
-----	TrnOp	-----	-----
91	96	101	106
Home	Up	-----	-----
-----	-----	-----	-----
-----	MoveUp	-----	-----
-----	FastUp	-----	-----
-----	FastUp	-----	-----
-----	TrnFldI	-----	-----
92	97	102	
Left	-----	Right	
-----	-----	-----	
MoveLeft	-----	MoveRig	
-----	-----	UnderSc	
-----	-----	UnderSc	
-----	-----	-----	
93	98	103	108
EndFld	Down	ESC J	Enter
-----	-----	-----	Enter
-----	MoveDow	-----	-----
-----	FastDow	FieldHf	-----
-----	FastDow	FieldHf	-----
-----	-----	-----	-----
99	104		
Insert	Delete		
-----	-----		
-----	DelWd		
-----	DelWd		
-----	-----		
-----	-----		

5576-A01 键盘 (仅限 5250)

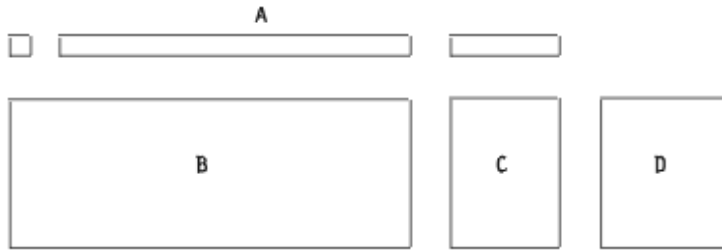

Segment A assignment:

110 SysAttn SysReq ----- ----- ----- -----	112 PF1 PF13 SOSI Help ----- ----- -----	113 PF2 PF14 ----- ----- ----- -----	114 PF3 PF15 AltView ----- ----- -----	115 PF4 PF16 ----- ----- -----	116 PF5 PF17 Record ----- ----- -----	117 PF6 PF18 Play ----- ----- -----	118 PF7 PF19 RPause ----- ----- -----	119 PF8 PF20 SOSI/G SOSI/G FieldCol ----- ----- -----	120 PF9 PF21 ----- ----- -----	121 PF10 PF22 ----- ----- -----	122 PF11 PF23 AltCur AltCur ----- -----	123 PF12 PF24 ----- TestReq TestReq ----- -----
--	---	--	--	---	---	---	---	---	---	--	---	--

124 ----- ----- ----- -----	125 ----- ----- ----- -----	126 Clear HostPr ----- ----- -----
---	---	---

Segment B assignment:

1 ----- ----- ----- -----	2 ----- ----- ----- -----	3 ----- ----- ----- -----	4 ----- ----- ----- -----	5 ----- ----- ----- -----	6 ----- ----- ----- -----	7 ----- ----- ----- -----	8 ----- ----- ----- -----	9 ----- ----- ----- -----	10 ----- ----- ----- -----	11 ----- Ansi 7E ----- -----	12 ----- Ansi A3 ----- -----	13 ----- ----- ----- -----	14 ----- Ansi AC ----- -----	15 CharBsp CharAdv ----- EditUnd -----
16 Tab BackTab ----- ----- -----	17 ----- ----- ----- -----	18 ----- ----- ----- -----	19 ----- ----- ----- -----	20 ----- ----- ----- -----	21 ----- ----- ----- -----	22 ----- ----- ----- -----	23 ----- ----- ----- -----	24 ----- ----- ----- -----	25 ----- ----- ----- -----	26 ----- ----- ----- -----	27 ----- Ansi A2 ----- -----	28 ----- ----- ----- -----	29 ----- ----- ----- -----	
30 ----- ----- ----- -----	31 ----- ----- ----- -----	32 ----- ----- ----- -----	33 ----- ----- ----- -----	34 ----- ----- ----- -----	35 ----- ----- ----- -----	36 ----- ----- ----- -----	37 ----- ----- ----- -----	38 ----- ----- ----- -----	39 ----- ----- ----- -----	40 ----- ----- ----- -----	41 ----- ----- ----- -----	43 FieldExt FieldExt ----- -----		
44 ----- ----- ----- -----	46 ----- ----- ----- -----	47 ----- ----- ----- -----	48 ----- ----- ----- -----	49 ----- ----- ----- -----	50 ----- ----- ----- -----	51 ----- ----- ----- -----	52 ----- ----- ----- -----	53 ----- ----- ----- -----	54 ----- ----- ----- -----	55 ----- ----- ----- -----	57 ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl Quit ----- -----	60 ----- ----- ----- -----	61 ----- ----- ----- -----	62 ----- ----- ----- -----	64 Enter/Ctrl Enter/Ctrl ----- -----										

Segment C assignment:

75	80	85
Insert	Home	RollDwn
Dup	FldMk	RollDwn
EditCop	Rule	-----
-----	-----	JumpNxt
-----	-----	JumpNxt
EditPst	-----	-----
76	81	86
Delete	ErEOF	RollUp
EditCut	-----	EditPst
DelWd	-----	-----
DelWd	ErInp	-----
-----	ErInp	-----
-----	-----	-----


	83	
	Up	
	Markup	
	MoveUp	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MarkLef	MarkDow	MarkRig
MoveLef	MoveDow	MoveRig
BackWd	FastDow	TabWord
BackWd	FastDow	TabWord
-----	-----	-----

Segment D assignment:

90	95	100	105
-----	FldMk	Dup	Ansi 2D
-----	FldMk	Dup	Ansi 2D
-----	FldMk	-----	Field-
-----	FldMk	-----	Field-
-----	FldMk	-----	Field-
-----	-----	-----	-----
91	96	101	106
Home	Up	RollDwn	Field+
-----	-----	-----	Field+
-----	MoveUp	-----	Field+
-----	FastUp	-----	Field+
-----	FastUp	-----	Field+
-----	-----	-----	-----
92	97	102	
Left	-----	Right	
-----	-----	-----	
MoveLft	-----	MoveRig	
-----	-----	-----	
-----	-----	-----	
-----	-----	-----	
93	98	103	108
ErEOF	Down	Rollup	FldExt
-----	-----	-----	FldExt
-----	MoveDow	-----	-----
-----	FastDow	-----	-----
-----	FastDow	-----	-----
-----	-----	-----	-----
99	104		
Insert	Delete		
-----	-----		
-----	DelWord		
-----	DelWord		
-----	-----		
-----	-----		

5576-A01 键盘 (3270 和 5250 组合)

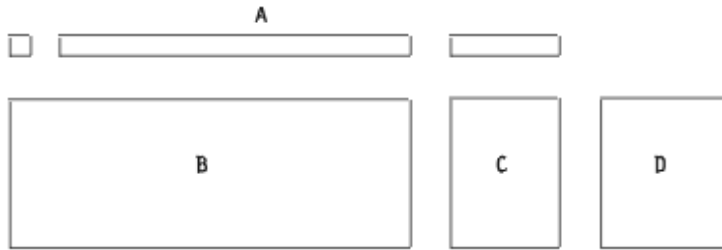

Segment A assignment:

110 Attn SysReq ----- ----- ----- -----	112 PF1 PF13 SOSI Doc Doc Red	113 PF2 PF14 ----- WordWrap WordWrap Pink	114 PF3 PF15 AltView CfGfmt CfGfmt Green	115 PF4 PF16 ----- ----- ----- Yellow	116 PF5 PF17 Record ----- ----- Blue	117 PF6 PF18 Play ----- ----- Turquoise	118 PF7 PF19 RPause ----- ----- White	119 PF8 PF20 APL ----- ----- -----	120 PF9 PF21 ----- CrSel CrSel -----	121 PF10 PF22 CrBnk ----- ----- -----	122 PF11 PF23 AltCur ----- AltCur -----	123 PF12 PF24 ----- +Cr +Cr -----
---	---	---	--	---	--	---	---	--	--	---	---	---

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- Break ----- ----- -----
--	--	---

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- NUL ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ANSI 7E ----- ----- -----	12 ----- ----- US ANSI A3 ----- ----- -----	13 ----- ----- RS ----- ----- -----	14 ----- ----- ANSI AC ----- ----- -----	15 BackSp CharAdv ----- ----- -----
16 Tab BackTab ----- ----- -----	17 ----- ----- DC1 ----- ----- -----	18 ----- ----- ETB ----- ----- -----	19 ----- ----- ENQ ----- ----- -----	20 ----- ----- DC2 ----- ----- -----	21 ----- ----- DC4 ----- ----- -----	22 ----- ----- EM ----- ----- -----	23 ----- ----- NAK ----- ----- -----	24 ----- ----- HT ----- ----- -----	25 ----- ----- SI ----- ----- -----	26 ----- ----- DLE ----- ----- -----	27 ----- ----- NUL ANSI A2 ----- ----- -----	28 ----- ----- ESC ----- ----- -----	29 ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 ----- ----- SOH ----- ----- -----	32 ----- ----- DC3 ----- ----- -----	33 ----- ----- EOT ----- ----- -----	34 ----- ----- ACK ----- ----- -----	35 ----- ----- BEL ----- ----- -----	36 ----- ----- BS ----- ----- -----	37 ----- ----- LF ----- ----- -----	38 ----- ----- VT ----- ----- -----	39 ----- ----- FF ----- ----- -----	40 ----- ----- ----- ----- -----	41 ----- ----- ----- ----- -----	43 NewLine NewLine ----- ----- -----		
44 ----- ----- ----- ----- -----	46 ----- ----- SUB ----- ----- -----	47 ----- ----- CAN ----- ----- -----	48 ----- ----- ETX ----- ----- -----	49 ----- ----- SYN ----- ----- -----	50 ----- ----- STX ----- ----- -----	51 ----- ----- SO ----- ----- -----	52 ----- ----- CR ----- ----- -----	53 ----- ----- ----- ----- -----	54 ----- ----- ----- ----- -----	55 ----- ----- ----- ----- -----	57 ----- ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl Quit Quit ----- -----	60 ----- ----- ----- ----- -----	61 ----- ----- ----- ----- -----	62 ----- ----- ----- ----- -----	64 Enter/Ctrl Enter/Ctrl ----- ----- -----										

Segment C assignment:

75	80	85
Insert	Home	RollDwn
Dup	FieldMk	PA3
EditCop	Rule	ChgScn
PA1	PA2	JumpNxt
PA1	PA2	JumpNxt
EditPst	-----	-----
76	81	86
Delete	ErEOF	RollUp
EditCut	ErFld	EditPst
DelWord	-----	Test
DelWord	ErInp	-----
-----	ErInp	-----
-----	-----	-----

	83	
	Up	
	MarkUp	
	MoveUp	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MarkLef	MarkDow	MarkRig
MoveLef	MoveDow	MoveRig
BackWd	FastDow	FwdWd
BackWd	FastDow	FwdWd
-----	-----	-----

Segment D assignment:

90	95	100	105
-----	-----	-----	ANSI 2D
-----	-----	-----	ANSI 2D
-----	-----	-----	-----
-----	-----	Reverse	-----
-----	-----	Reverse	-----
-----	TrnOp	-----	-----
91	96	101	106
Home	Up	-----	Field
-----	-----	-----	-----
-----	MoveUp	-----	-----
-----	FastUp	-----	-----
-----	FastUp	-----	-----
-----	TrnFldI	-----	-----
92	97	102	
Left	-----	Right	
-----	-----	-----	
MoveLet	-----	MoveRig	
-----	-----	UnderSc	
-----	-----	UnderSc	
-----	-----	-----	
93	98	103	108
EndFld	Down	ESC J	Enter
-----	-----	-----	Enter
-----	MoveDow	-----	-----
-----	FastDow	FieldHf	-----
-----	FastDow	FieldHf	-----
-----	-----	-----	-----
99	104		
Insert	Delete		
-----	-----		
-----	DelWord		
-----	DelWord		
-----	-----		
-----	-----		

5576-002/003 (仅限 3270)



Segment A assignment:

110 SysSettn SysRq ----- ----- ----- -----	112 PF1 PF13 SOSI Doc Doc Red	113 PF2 PF14 ----- WordWrap WordWrap Pink	114 PF3 PF15 AltView CfGfmt CfGfmt Green	115 PF4 PF16 ----- ----- ----- Yellow	116 PF5 PF17 Record ----- ----- Blue	117 PF6 PF18 Play ----- ----- Turquoise	118 PF7 PF19 RPause ----- ----- White	119 PF8 PF20 APL ----- ----- FieldCol	120 PF9 PF21 CrSel ----- ----- CrSel	121 PF10 PF22 CrBnk ----- ----- CrBnk	122 PF11 PF23 RTM AltCr AltCr -----	123 PF12 PF24 ----- GrpCsr GrpCsr -----
--	---	---	--	---	--	---	---	---	--	---	---	---

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- Break ----- ----- -----
--	--	---

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- NUL ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- RS ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ----- ----- -----	12 ----- ----- US ----- ----- -----	13 ----- ----- RS ----- ----- -----	14 ----- ----- ----- ----- -----	15 BackSp BackSp ----- EditUnd ----- -----
16 Tab BackTab ----- ----- -----	17 ----- ----- DC1 ----- ----- -----	18 ----- ----- ETB ----- ----- -----	19 ----- ----- ENQ ----- ----- -----	20 ----- ----- DC2 ----- ----- -----	21 ----- ----- DC4 ----- ----- -----	22 ----- ----- EM ----- ----- -----	23 ----- ----- NAK ----- ----- -----	24 ----- ----- HT ----- ----- -----	25 ----- ----- SI ----- ----- -----	26 ----- ----- DLE ----- ----- -----	27 ----- ----- NUL ----- ----- -----	28 ----- ----- ESC ----- ----- -----	29 ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 ----- ----- SOH ----- ----- -----	32 ----- ----- DC3 ----- ----- -----	33 ----- ----- EOT ----- ----- -----	34 ----- ----- ACK ----- ----- -----	35 ----- ----- BEL ----- ----- -----	36 ----- ----- BS ----- ----- -----	37 ----- ----- LF ----- ----- -----	38 ----- ----- VT ----- ----- -----	39 ----- ----- FF ----- ----- -----	40 ----- ----- ----- ----- -----	41 ----- ----- ----- ----- -----	43 NewLine NewLine ----- ----- -----		
44 ----- ----- ----- ----- -----	46 ----- ----- SUB ----- ----- -----	47 ----- ----- CAN ----- ----- -----	48 ----- ----- ETX ----- ----- -----	49 ----- ----- SYN ----- ----- -----	50 ----- ----- STX ----- ----- -----	51 ----- ----- SO ----- ----- -----	52 ----- ----- CR ----- ----- -----	53 ----- ----- ----- ----- -----	54 ----- ----- ----- ----- -----	55 ----- ----- ----- ----- -----	57 ----- ----- ----- ----- -----			
58 Reset/Ctrl Reset/Ctrl Quit Quit -----	60 ----- ----- ----- ----- -----	61 ----- ----- ----- ----- -----	62 ----- ----- ----- ----- -----	64 Entr/Ctl Entr/Ctl ----- ----- -----										

Segment C assignment:

75	80	85
Insert	Home	-----
Dup	FldMk	PA3
EditCop	Rule	ChgScn
PA1	PA2	JmpNext
PA1	PA2	JmpNext
EditPst	-----	-----
76	81	86
Delete	ErEOF	-----
EditCut	ErFld	EditPst
DelWd	-----	Test
DelWd	ErInp	-----
-----	ErInp	-----
-----	-----	-----


	83	
	Up	
	MarkUp	
	MoveUp	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MarkLef	MarkDow	MarkRig
MoveLef	MoveDow	MoveRig
BackWd	FastDow	FwdWd
BackWd	FastDow	FwdWd
-----	-----	-----

Segment D assignment:

90	95	100	105
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	Reverse	-----
-----	-----	Reverse	-----
-----	TrnOp	-----	-----
91	96	101	106
Home	Up	-----	-----
-----	-----	-----	-----
-----	MoveUp	-----	-----
-----	FastUp	-----	-----
-----	FastUp	-----	-----
-----	TrnFldI	-----	-----
92	97	102	
Left	-----	Right	
-----	-----	-----	
MoveLeft	-----	MoveRig	
-----	-----	UnderSc	
-----	-----	UnderSc	
-----	-----	-----	
93	98	103	108
EndFld	Down	ESC J	Enter
-----	-----	-----	Enter
-----	MoveDow	-----	-----
-----	FastDow	FieldHf	-----
-----	FastDow	FieldHf	-----
-----	-----	-----	-----
99	104		
Insert	Delete		
-----	-----		
-----	DelWd		
-----	DelWd		
-----	-----		
-----	-----		

5576-002/003 键盘 (仅限 5250)

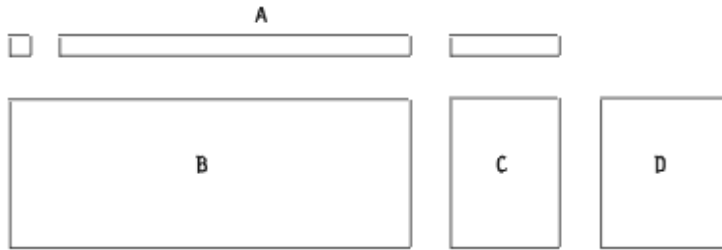

Segment A assignment:

110 SysAttn SysReq ----- ----- ----- -----	112 PF1 PF13 SOSI Help ----- ----- -----	113 PF2 PF14 ----- ----- ----- -----	114 PF3 PF15 AltView ----- ----- -----	115 PF4 PF16 ----- ----- -----	116 PF5 PF17 Record ----- ----- -----	117 PF6 PF18 Play ----- ----- -----	118 PF7 PF19 Pause ----- ----- -----	119 PF8 PF20 SOSI/6 ----- ----- ----- FieldCol	120 PF9 PF21 ----- ----- -----	121 PF10 PF22 ----- ----- -----	122 PF11 PF23 AltCur ----- ----- ----- AltCur	123 PF12 PF24 ----- ----- ----- TestReq TestReq
--	---	--	--	---	---	---	--	---	---	--	--	--

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- HostPr ----- ----- -----
--	--	--

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ----- ----- ----- Ansi 7E	12 ----- ----- ----- ----- ----- Ansi A3	13 ----- ----- ----- ----- ----- RS	14 ----- ----- ----- ----- ----- ANSI AC	15 ----- ----- ----- ----- ----- CharBsp CharAdv EditUnd
16 Tab BackTab ----- ----- -----	17 ----- ----- ----- ----- -----	18 ----- ----- ----- ----- -----	19 ----- ----- ----- ----- -----	20 ----- ----- ----- ----- -----	21 ----- ----- ----- ----- -----	22 ----- ----- ----- ----- -----	23 ----- ----- ----- ----- -----	24 ----- ----- ----- ----- -----	25 ----- ----- ----- ----- -----	26 ----- ----- ----- ----- -----	27 ----- ----- ----- ----- ----- Ansi A2	28 ----- ----- ----- ----- -----	29 ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 ----- ----- ----- ----- -----	32 ----- ----- ----- ----- -----	33 ----- ----- ----- ----- -----	34 ----- ----- ----- ----- -----	35 ----- ----- ----- ----- -----	36 ----- ----- ----- ----- -----	37 ----- ----- ----- ----- -----	38 ----- ----- ----- ----- -----	39 ----- ----- ----- ----- -----	40 ----- ----- ----- ----- -----	41 ----- ----- ----- ----- -----	43 ----- ----- ----- ----- ----- FieldExt FieldExt		
44 ----- ----- ----- ----- -----	46 ----- ----- ----- ----- -----	47 ----- ----- ----- ----- -----	48 ----- ----- ----- ----- -----	49 ----- ----- ----- ----- -----	50 ----- ----- ----- ----- -----	51 ----- ----- ----- ----- -----	52 ----- ----- ----- ----- -----	53 ----- ----- ----- ----- -----	54 ----- ----- ----- ----- -----	55 ----- ----- ----- ----- -----	57 ----- ----- ----- ----- -----			
58 Reset/Ctl Reset/Ctl Quit ----- -----	60 ----- ----- ----- ----- -----	61 ----- ----- ----- ----- -----	62 ----- ----- ----- ----- -----	64 ----- ----- ----- ----- ----- Entr/Ctl Entr/Ctl										

Segment C assignment:

75	80	85
Insert	Home	RollDwn
Dup	FldMk	RollDwn
EditCop	Rule	-----
-----	-----	JumpNxt
-----	-----	JumpNxt
EditPst	-----	-----
76	81	86
Delete	ErEOF	RollUp
EditCut	-----	EditPst
DelWd	-----	-----
DelWd	ErInp	-----
-----	ErInp	-----
-----	-----	-----


	83	
	Up	
	MarkUp	
	MoveUp	
	FastUp	
	FastUp	

79	84	89
Left	Down	Right
MarkLef	MarkDow	MarkRig
MoveLef	MoveDow	MoveRig
BackWd	FastDow	TabWord
BackWd	FastDow	TabWord
-----	-----	-----

Segment D assignment:

90	95	100	105
Dup	FldMk	-----	ANSI 2D
Dup	FldMk	-----	ANSI 2D
Dup	FldMk	-----	-----
Dup	FldMk	-----	-----
Dup	FldMk	-----	-----
-----	-----	-----	-----
91	96	101	106
Home	Up	RollDwn	Fielat
-----	-----	-----	Fielat
-----	MoveUp	-----	Fielat
-----	FastUp	-----	Fielat
-----	FastUp	-----	Fielat
-----	-----	-----	-----
92	97	102	
Left	-----	Right	
-----	-----	-----	
MoveLft	-----	MoveRig	
-----	-----	-----	
-----	-----	-----	
-----	-----	-----	
93	98	103	108
ErEOF	Down	Rollup	FldExt
-----	-----	-----	FldExt
-----	MoveDow	-----	-----
-----	FastDow	-----	-----
-----	FastDow	-----	-----
-----	-----	-----	-----
	99	104	
	Insert	Delete	
	-----	-----	
	-----	DelWord	
	-----	DelWord	
	-----	-----	
	-----	-----	

5576-002/003 键盘 (3270 和 5250 组合)

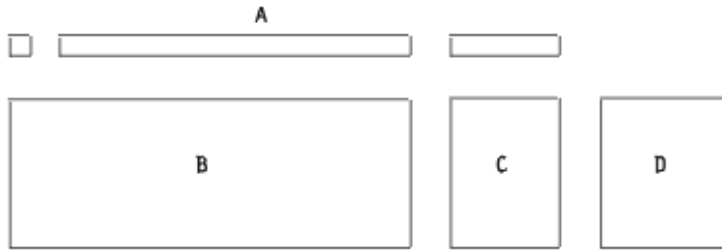

Segment A assignment:

110 Attn SysReq ----- ----- ----- -----	112 PF1 PF13 SOSI Doc Doc Red	113 PF2 PF14 ----- WordWrap WordWrap Pink	114 PF3 PF15 AltView CfGfmt CfGfmt Green	115 PF4 PF16 ----- ----- ----- Yellow	116 PF5 PF17 Record ----- ----- Blue	117 PF6 PF18 Play ----- ----- Turquoise	118 PF7 PF19 Pause ----- ----- White	119 PF8 PF20 APL ----- ----- APL	120 PF9 PF21 ----- CrSel CrSel -----	121 PF10 PF22 ----- CrBnk CrBnk -----	122 PF11 PF23 AltCur ----- ----- AltCur	123 PF12 PF24 ----- ----- +Cr +Cr -----
---	---	---	--	---	--	---	--	--	--	---	---	--

124 ----- ----- ----- ----- -----	125 ----- ----- ----- ----- -----	126 Clear ----- Break ----- ----- -----
--	--	---

Segment B assignment:

1 ----- ----- ----- ----- -----	2 ----- ----- ----- ----- -----	3 ----- ----- NUL ----- ----- -----	4 ----- ----- ----- ----- -----	5 ----- ----- ----- ----- -----	6 ----- ----- ----- ----- -----	7 ----- ----- ----- ----- -----	8 ----- ----- ----- ----- -----	9 ----- ----- ----- ----- -----	10 ----- ----- ----- ----- -----	11 ----- ----- ANSI 7E ----- ----- -----	12 ----- ----- US ANSI A3 ----- ----- -----	13 ----- ----- RS ----- ----- -----	14 ----- ----- ANSI AC ----- ----- -----	15 BackSp CharAdv ----- ----- -----
16 Tab BackTab ----- ----- -----	17 ----- ----- DC1 ----- ----- -----	18 ----- ----- ETB ----- ----- -----	19 ----- ----- ENQ ----- ----- -----	20 ----- ----- DC2 ----- ----- -----	21 ----- ----- DC4 ----- ----- -----	22 ----- ----- EM ----- ----- -----	23 ----- ----- NAK ----- ----- -----	24 ----- ----- HT ----- ----- -----	25 ----- ----- SI ----- ----- -----	26 ----- ----- DLE ----- ----- -----	27 ----- ----- NUL ANSI A2 ----- ----- -----	28 ----- ----- ESC ----- ----- -----	29 ----- ----- ----- ----- -----	
30 ----- ----- ----- ----- -----	31 ----- ----- SOH ----- ----- -----	32 ----- ----- DC3 ----- ----- -----	33 ----- ----- EOT ----- ----- -----	34 ----- ----- ACK ----- ----- -----	35 ----- ----- BEL ----- ----- -----	36 ----- ----- BS ----- ----- -----	37 ----- ----- LF ----- ----- -----	38 ----- ----- VT ----- ----- -----	39 ----- ----- FF ----- ----- -----	40 ----- ----- ----- ----- -----	41 ----- ----- ----- ----- -----	43 NewLine NewLine ----- ----- -----		
44 ----- ----- ----- ----- -----	46 ----- ----- SUB ----- ----- -----	47 ----- ----- CAN ----- ----- -----	48 ----- ----- ETX ----- ----- -----	49 ----- ----- SYN ----- ----- -----	50 ----- ----- STX ----- ----- -----	51 ----- ----- SO ----- ----- -----	52 ----- ----- CR ----- ----- -----	53 ----- ----- ----- ----- -----	54 ----- ----- ----- ----- -----	55 ----- ----- ----- ----- -----	57 ----- ----- ----- ----- -----			
58 Reset/Ctl Reset/Ctl Quit Quit -----	60 ----- ----- ----- ----- -----	61 ----- ----- ----- ----- -----	62 ----- ----- ----- ----- -----	64 Entr/Ctl Entr/Ctl ----- ----- -----										

Segment C assignment:

75	80	85
Insert	Home	RollDwn
Dup	FieldMk	PA3
EditCop	Rule	ChgScn
PA1	PA2	JumpNxt
PA1	PA2	JumpNxt
EditPst	-----	-----
76	81	86
Delete	ErEOF	RollUp
EditCut	ErFld	EditPst
DelWord	-----	Test
DelWord	ErInp	-----
-----	ErInp	-----
-----	-----	-----

Segment D assignment:

90	95	100	105
Home	-----	-----	ANSI 2D
-----	-----	-----	ANSI 2D
-----	-----	-----	-----
-----	-----	Reverse	-----
-----	-----	Reverse	-----
-----	TrnOp	-----	-----
91	96	101	106
Home	Up	-----	Field+
-----	-----	-----	-----
-----	MoveUp	-----	-----
-----	FastUp	-----	-----
-----	FastUp	-----	-----
-----	TrnFldI	-----	-----
92	97	102	
Left	-----	Right	
-----	-----	-----	
MoveLef	-----	MoveRig	
-----	-----	UnderSc	
-----	-----	UnderSc	
-----	-----	-----	
93	98	103	108
EndFld	Down	Esc J	Enter
-----	-----	-----	Enter
-----	MoveDow	-----	-----
-----	FastDow	FieldHi	-----
-----	FastDow	FieldHi	-----
-----	-----	-----	-----
99	104		
Insert	Delete		
-----	-----		
-----	DelWord		
-----	DelWord		
-----	-----		
-----	-----		

APL 键盘布局 (仅限 3270)

本节显示每个国家或地区的 APL 键盘布局。每个 Shift 位置仅显示 APL 字符 (向上/向下/ALT)。

语言	类型
奥地利语/德语	1
比利时语	2
加拿大语-双语	1
丹麦	1
芬兰语/瑞典语	1
法语 AZERTY	2
韩语字母	4
意大利语	1
日语	4
拉丁美洲西班牙语	1

语言	类型
挪威语	1
葡萄牙语	1
简体中文	4
西班牙语	1
瑞士法语	1
瑞士德语	1
繁体中文	4
英国英语	1
美国英语	3

图 2.类型 1 APL 键盘 (on page 1)

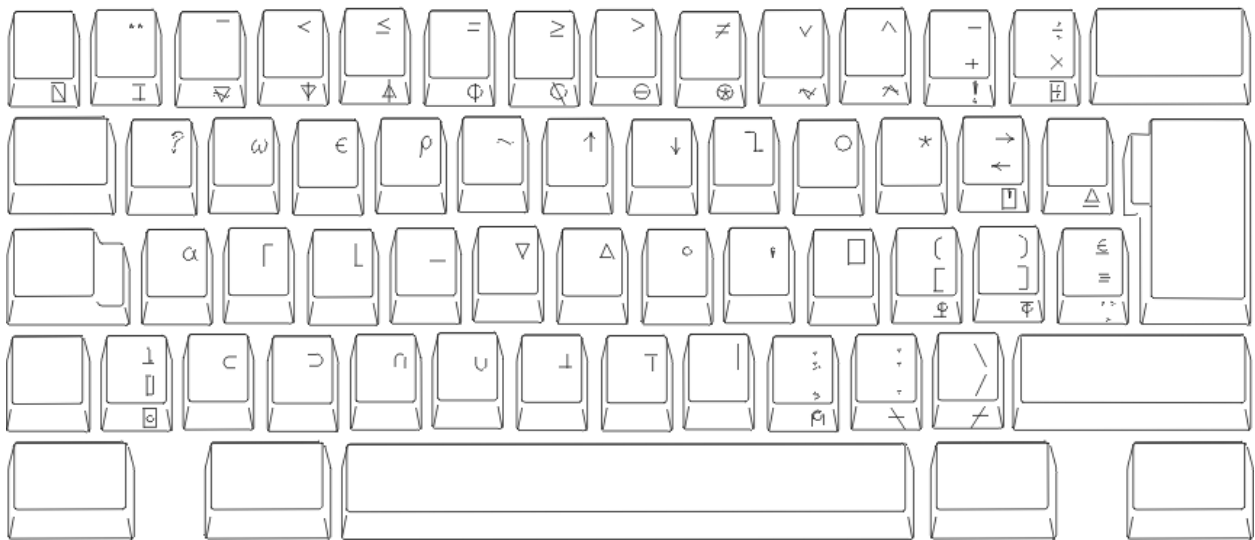


图 3.类型 2 APL 键盘 (on page 1)

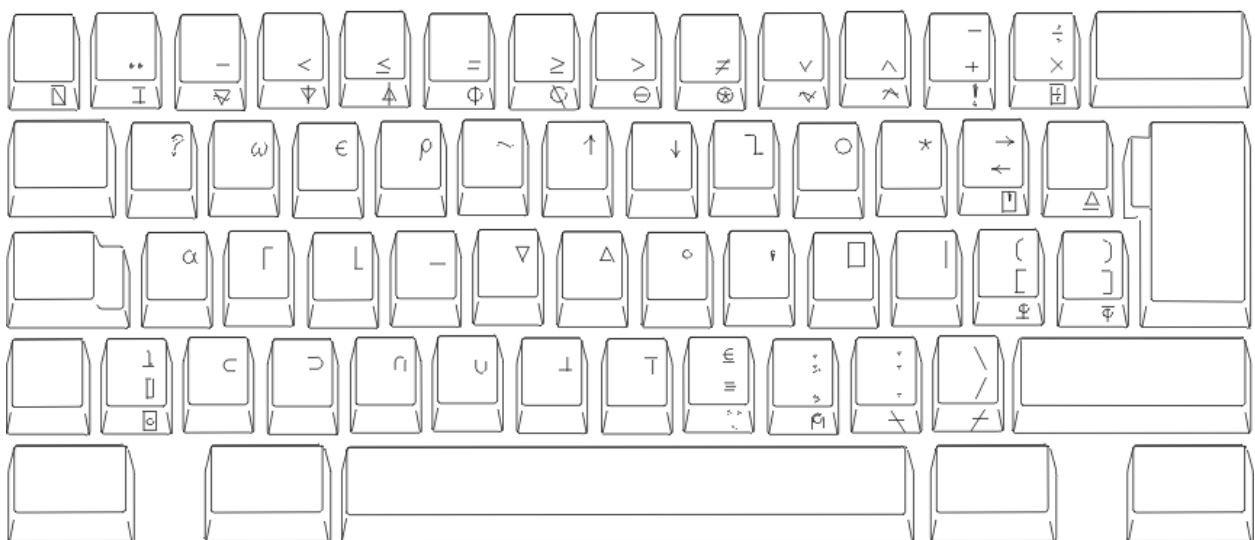


图 4. 类型 3 APL 键盘 (on page 1)


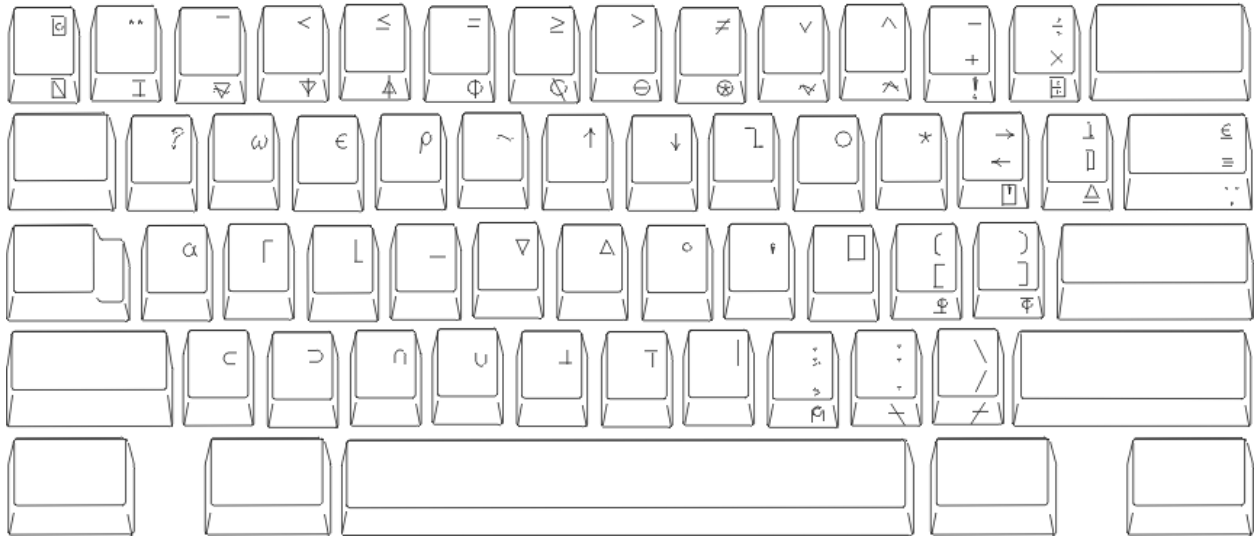


图 5. 类型 4 APL 键盘 (on page 1)

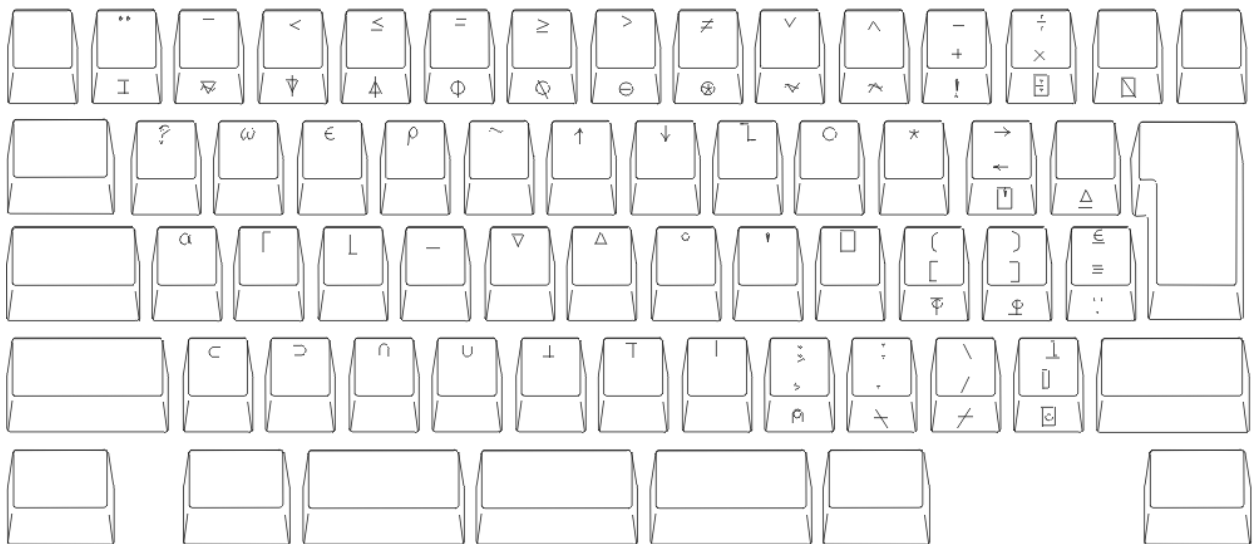

[【 页面顶部 \(on page 2\) | 上一页 \(on page 2\) | 下一页 \(on page 43\) | 目录 \(on page 1\) 】](#)

键盘布局和映射引用

键盘映射

本章介绍主机系统支持的键盘映射。键盘是在安装或定制过程中选择的。可以使用键盘布局来在键盘上找到字符位置。有关更多信息，请参阅 *Emulator User's Reference*。

对于显示三个或四个字符的键，请使用表 1 (on page 44)中的组合键生成所需的右上和右下字符。左下字符不需要额外的键。对左上字符使用 Shift 键。

表 1.右上和右下字符的组合键 (on page 2)

国家或地区	右下字符 增强模板 ¹	右上字符 所有模板
丹麦	AltGr	Ctrl
芬兰	AltGr	Ctrl
挪威	AltGr	Ctrl
瑞典	AltGr	Ctrl
所有其他部门	AltGr	无人
<p>注意:</p> <p>1</p> <p>在 DOS 方式下，Alt 和 AltGr 键在增强型键盘上均生成相同的字符。</p>		

本地编辑键

表 2 (on page 44) 显示了本地编辑使用的键。这些键在本地编辑方式和交互式编辑 (ECHO) 方式之间的行为不同。

表 2.本地编辑键 (on page 2)

VT 键助记符	本地编辑功能	本地编辑方式下的操作
VT 查找	主光标	将光标移到内存中某页的左上位置。
VT 插入	插入/覆盖	选择输入的新字符是替换右侧的现有字符，还是替换现有字符。
VT 删除	Clear	清除所有字符的不受保护字段。与 SHIFT 键一起按下可清除滚动区域中所有未受保护的字段。
VT 选择	编辑	与 SHIFT 键一起按下可进入或退出本地编辑方式。状态行显示当前状态。
VT 上一步	PrevPage	将光标移至上一页的开头。
VT 下一步	NextPage	将光标移至下一页的开头。
VT PF1	Tab 键	<p>将光标移至以下项的第一个实例：</p> <ul style="list-style-type: none"> • 未受保护字段开头的制表符停止位 • 未受保护字段 • 滚动区域的末尾 <p>与此键一起按下 SHIFT 可将光标移回以下项的第一个实例：</p> <ul style="list-style-type: none"> • 上一个制表符停止位 • 当前未受保护字段的开头 • 上一个未受保护字段的开头 • 滚动区域的开头
VT PF2	插入行	在屏幕上添加一个空行并向下移动后续行。不能在包含受保护字段的行上选择此键。

VT 键助记符	本地编辑功能	本地编辑方式下的操作
VT PF3	DeleteLine	从屏幕中删除一行并上移后续行。不能在包含受保护字段的行上选择此键。
VT PF4	DeleteChar	删除光标处不受保护字符。
VT 数字小键盘输入换行符	传输	将编辑过的文本块发送到主机。如果选择“行传输”，则与传输键一样工作。

Home3270 的键映射

本节显示以下控制代码的位置： NUL (X'00') ESC (X'1B') FS (X'1C') GS (X'1D') RS (X'1E') US (X'1F')

这些控制代码的位置是固定的，适用于所有语言（包括美国英语），而不考虑为键的 BASE 和 UP SHIFT 位置分配的字符。这些控制代码位于图 6 (on page 45) 至图 7 (on page 45) 所示键的 CONTROL 位置。

图 6.非日语键盘的键盘核心段的通用控制代码 (on page 1)


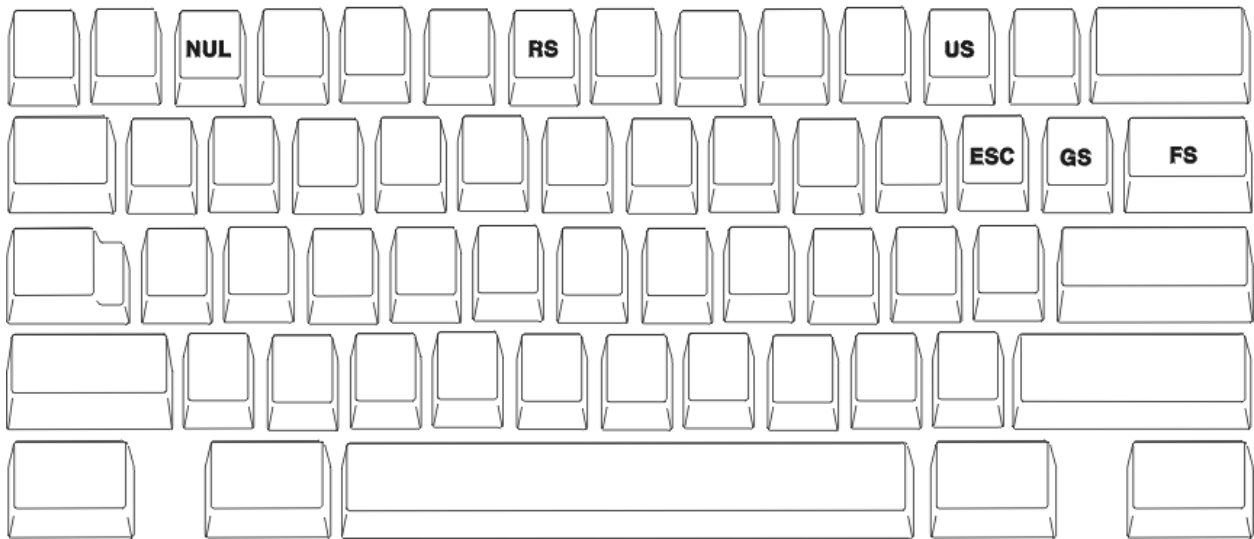


图 7.日语键盘的键盘核心段的通用控制代码 (on page 1)

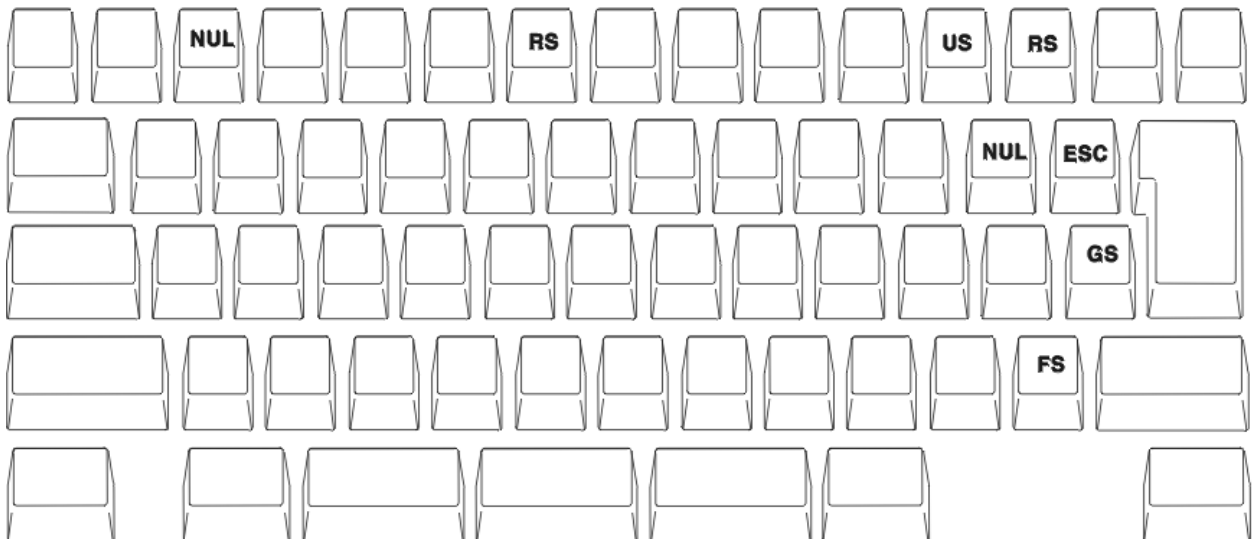


其他控制代码的位置会因语言而异。这些控制代码位于关联字母键的 CONTROL 位置。这些控制代码和关联的字母字符如下所示。

表 3. 键段 B 的其他控制代码映射 (on page 2)

控件代码	关联字母
SOH (X'01')	a
STX (X'02')	b
ETX (X'03')	c
EOT (X'04')	d
ENQ (X'05')	e
ACK (X'06')	f
BEL (X'07')	g
BS (X'08')	h
HT (X'09')	i
LF (X'0A')	j
VT (X'0B')	k
FF (X'0C')	l
CR (X'0D')	m
SO (X'0E')	n
SI (X'0F')	o
DLE (X'10')	p
DC1(XON) (X'11')	q
DC2 (X'12')	r
DC3(XOF) (X'13')	s
DC4 (X'14')	t
NAK (X'15')	u
SYN (X'16')	v
ETB (X'17')	w
CAN (X'18')	x
EM (X'19')	y
SUB (X'1A')	z

下面是美国增强型键盘的控制代码映射示例。

图 8. 美国增强型键盘的键盘核心段的控制代码映射 (on page 1)

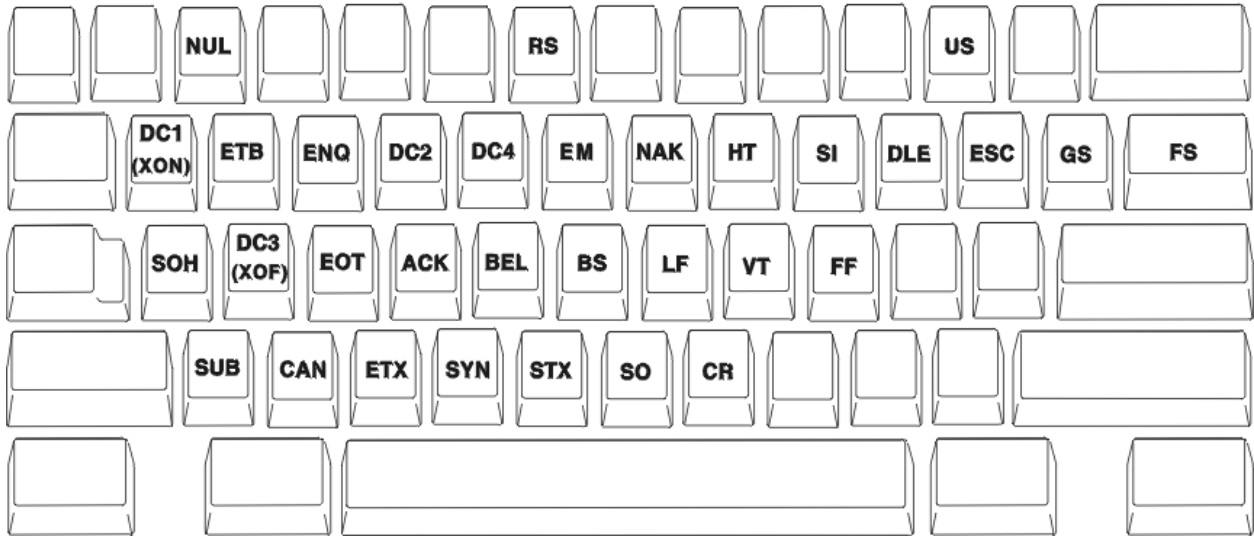

[\[页面顶部 \(on page 43\) | 上一页 \(on page 2\) | 下一页 | 目录 \(on page 1\) \]](#)

主机代码页引用

目录

主机代码页表

- [主机代码页 037-1/697-1 巴西、加拿大、荷兰、葡萄牙、美国和 037/1175 繁体中文 \(on page 48\)](#)
- [主机代码页 273-1/697-1 奥地利、德国 \(on page 49\)](#)
- [主机代码页 275-1/697-1 巴西 \(on page 50\)](#)
- [主机代码页 277-1/697-1 丹麦, 挪威 \(on page 51\)](#)
- [主机代码页 278-1/697-1 芬兰、瑞典 \(on page 52\)](#)
- [主机代码页 280-1/697-1 意大利 \(on page 53\)](#)
- [主机代码页 284-1/697-1 拉丁美洲、西班牙 \(on page 54\)](#)
- [主机代码页 285-1/697-1 英国 \(on page 55\)](#)
- [主机代码页 290/930 日本 \(片假名\) 扩展 \(on page 56\)](#)
- [主机代码页 297-1/697-1 法国 \(on page 57\)](#)
- [主机代码页 420 阿拉伯语双语 \(on page 58\)](#)
- [主机代码页 424/941 以色列 \(希伯来语 - 公告代码\) \(on page 59\)](#)
- [主机代码页 500-1/697-1 国际 \(on page 60\)](#)
- [主机代码页 803 以色列 \(希伯来语 - 旧代码\) \(on page 61\)](#)
- [主机代码页 833/1173 韩国字母 \(on page 62\)](#)
- [主机代码页 836/1174 简体中文 \(on page 63\)](#)
- [主机代码页 870/959 拉丁语 2 - EBCDIC 多多言 \(on page 64\)](#)
- [主机代码页 871-1/697-1 冰岛 \(on page 65\)](#)
- [主机代码页 875 希腊 \(on page 66\)](#)

- [主机代码页 924-1/1353-1 国际 \(on page 67\)](#)
- [主机代码页 1025/1150 西里尔语 \(on page 68\)](#)
- [主机代码页 1026/1152 拉丁语 5 - 土耳其 \(on page 69\)](#)
- [主机代码页 1027/939 日本 \(拉丁语\) 扩展 \(on page 70\)](#)
- [主机代码页 1047/103 拉丁语 1 \(开放式系统\) \(on page 71\)](#)
- [主机代码页 1112/1035 拉脱维亚、立陶宛 \(on page 72\)](#)
- [主机代码页 1122/1037 爱沙尼亚 \(on page 73\)](#)
- [主机代码页 1123 乌克兰 \(on page 74\)](#)
- [主机代码页 1130 越南 \(on page 75\)](#)
- [主机代码页 1132 老挝 \(on page 76\)](#)
- [主机代码页 1137 印度 \(on page 77\)](#)
- [主机代码页 1140-1/695-1 巴西、加拿大、荷兰、葡萄牙、美国和 1140/1175 繁体中文 \(on page 78\)](#)
- [主机代码页 1141-1/695-1 奥地利、德国 \(on page 79\)](#)
- [主机代码页 1142-1/695-1 丹麦, 挪威 \(on page 80\)](#)
- [主机代码页 1143-1/695-1 芬兰、瑞典 \(on page 81\)](#)
- [主机代码页 1144-1/695-1 意大利 \(on page 82\)](#)
- [主机代码页 1145-1/695-1 拉丁美洲、西班牙 \(on page 83\)](#)
- [主机代码页 1146-1/695-1 英国 \(on page 84\)](#)
- [主机代码页 1147-1/695-1 法国 \(on page 85\)](#)
- [主机代码页 1148-1/695-1 国际 \(on page 86\)](#)
- [主机代码页 1149-1/695-1 冰岛 \(on page 87\)](#)
- [主机代码页 1153/1375 拉丁语 2 - EBCDIC 多多言 \(on page 88\)](#)
- [主机代码页 1154/1381 西里尔语 \(on page 89\)](#)
- [主机代码页 1155/1378 拉丁语 5 - 土耳其 \(on page 90\)](#)
- [主机代码页 1156/1393 拉脱维亚、立陶宛 \(on page 91\)](#)
- [主机代码页 1157/1391 爱沙尼亚 \(on page 92\)](#)
- [主机代码页 1158/1388 乌克兰 \(on page 93\)](#)
- [主机代码页 1160/1395 泰国 \(on page 94\)](#)
- [主机代码页 1164/1397 越南 \(on page 95\)](#)

[【页面顶部 \(on page 47\) | 上一页 | 下一页 | 目录 \(on page 47\)】](#)

主机代码页引用

主机代码页 037-1/697-1 巴西、加拿大、荷兰、葡萄牙、美国和 037/1175 繁体中文

列表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LG0610000	Ø LG0620000	° SM190000	μ SM170000	^ SD150000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LF010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LF150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LF130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ì LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	´ SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	é SC040000	! SP020000	¡ SM650000	: SP130000	« SP170000	ª SM210000	ï SP030000	[SM060000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	º SM200000	¿ SP160000] SM080000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ð LD630000	æ LA510000	Ð LD620000	- SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	' SP050000	ý LY110000	ÿ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	 SM130000	¬ SM660000	? SP150000	" SP040000	± SA020000	⌘ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	Ⓜ SC010000

Code Page 00037

[[页面顶部 \(on page 48\)](#) | [上一页](#) | [下一页 \(on page 49\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 273-1/697-1 奥地利、德国

列表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LG0610000	Ø LG0620000	° SM190000	μ SM170000	¢ SC040000	ä LA170000	ü LU170000	Ö LO180000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LF010000	ß LS610000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LF150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	{ SM110000	ë LE170000	[SM060000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LF130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	@ SM050000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Î LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	ä LA270000	ï LI170000	Ä LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	~ SD190000	Ñ LN200000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	Ä LA180000	Ü LU180000	ö LO170000	: SP130000	« SP170000	ª SM210000	ì SP030000	¬ SM660000	Š (SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	§ SM240000	ð LD630000	æ LA510000	Ð LD620000	- SM150000	! SM650000	}	\] SM080000
-D	(SP060000) SP070000	— SP090000	' SP050000	ý LY110000	ÿ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	∩ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	€ (€)

Code Page 00273

[[页面顶部 \(on page 49\)](#) | [上一页 \(on page 48\)](#) | [下一页 \(on page 50\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 275-1/697-1 巴西

列表表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	␣ SP010000	& SM030000	- SP100000	ø LO610000	Ø LO620000	° SM190000	μ SM170000	¢ SC040000	õ LO190000	é LE110000	\ SM070000	0 ND100000
-1	␣ ^(RSP) SP300000	}	/	[a	j	~	£	A	J	÷	1
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b	k	s	¥	B	K	S	2
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c	l	t	·	C	L	T	3
-4	à LA130000	è LE130000	À LA140000	È LE140000	d	m	u	©	D	M	U	4
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e	n	v	§	E	N	V	5
-6	` SD130000	î LI150000	@	Î LI160000	f	o	w	¶	F	O	W	6
-7	ä LA270000	ï LI170000	Ä LA280000	Ï LI180000	g	p	x	¼	G	P	X	7
-8	ì SM650000	î LI130000]	Ì LI140000	h	q	y	½	H	Q	Y	8
-9	ñ LN190000	ß LS610000	Ñ LN200000	ã LA190000	i	r	z	¾	I	R	Z	9
-A	Ê LF120000	\$ SC030000	ç LC410000	:	«	ª	ı	¬	(šřŸ) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	Ç LC420000	,	Ö LO200000	»	º	ı		ô	û	Ô	Û
-C	< SA030000	* SM040000	% SM020000	Ã LA200000	ð	æ	Ð	-	ö	ü	Ö	Ü
-D	(SP060000) SP070000	_	´	ý	¸	Ý	¨	ò	ù	Ò	Ù
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ	Æ	Þ	´	ó	ú	Ó	Ú
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	⌘ SC010000	® SM530000	×	{	ÿ	#	© ND040000

Code Page 00275

[\[页面顶部 \(on page 50\) | 上一页 \(on page 49\) | 下一页 \(on page 51\) | 目录 \(on page 47\) \]](#)

主机代码页引用

主机代码页 277-1/697-1 丹麦, 挪威

列表示第一个数字, 行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ı SM650000	@ SM050000	° SM190000	μ SM170000	¢ SC040000	æ LA510000	å LA270000	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LF010000	ü LU170000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LF150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LF130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	} SM140000	ï LI170000	Ş SC030000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	# SM010000	☒ SC010000	ø LO610000	: SP130000	« SP170000	ª SM210000	ı SP030000	¬ SM660000	Š (SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	. SP110000	Å LA280000	, SP080000	Æ LA520000	» SP180000	Ω SM200000	ı SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ø LO620000	ð LD630000	{ SM110000	Ð LD620000	ˉ SM150000	ö LO170000	˜ SD190000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	' SP050000	ý LY110000	ˆ SD410000	Ý LY120000	ˆ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	[SM060000	Þ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000] SM080000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	€ (€)

Code Page 00277

[[页面顶部 \(on page 51\)](#) | [上一页 \(on page 50\)](#) | [下一页 \(on page 52\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 278-1/697-1 芬兰、瑞典

列表表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LG0610000	Ø LG0620000	° SM190000	μ SM170000	¢ SC040000	ä LA170000	å LA270000	É LE120000	0 ND100000
-1	(RSP) SP300000	` SD130000	/ SP120000	\ SM070000	a LA010000	j LF010000	ü LU170000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LF150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	{ SM110000	ë LE170000	# SM010000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LF130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	[SM060000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Î LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	} SM140000	ï LI170000	§ SC030000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	é LE110000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	§ SM240000	☒ SC010000	ö LO170000	: SP130000	« SP170000	ª SM210000	ï SP030000	¬ SM660000	̄ (SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	. SP110000	Å LA280000	, SP080000	Ä LA180000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ö LO180000	ø LD630000	æ LA510000	Ð LD620000	- SM150000	! SM650000	~ SD190000	@ SM050000	Û LU180000
-D	(SP060000) SP070000	— SP090000	' SP050000	ý LY110000	ˆ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Ɔ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000] SM080000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	€ (€)

Code Page 00278

[页面顶部 (on page 52) | 上一页 (on page 51) | 下一页 (on page 53) | 目录 (on page 47)]

主机代码页引用

主机代码页 280-1/697-1 意大利

列表表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LG0610000	Ø LG0620000	[SM050000	μ SM170000	¢ SC040000	à LA130000	è LE130000	ç LC410000	0 ND100000
-1	(RSP) SP300000]] SM080000	/ SP120000	É LE120000	a LA010000	j LF010000	ì LI130000	# SM010000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	{ SM110000	} SM140000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	@ SM050000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	\ SM070000	~ SD190000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	ù LU130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	° SM190000	é LE110000	ò LO130000	: SP130000	« SP170000	ª SM210000	ï SP030000	¬ SM660000	Š (SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	£ SC020000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	§ SM240000	ð LD630000	æ LA510000	Ð LD620000	ˉ SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	' SP050000	ý LY110000	˙ SD410000	Ý LY120000	¨ SD170000	¡ SM650000	´ SD130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	∩ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	€ (E)

Code Page 00280

[[页面顶部 \(on page 53\)](#) | [上一页 \(on page 52\)](#) | [下一页 \(on page 54\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 284-1/697-1 拉丁美洲、西班牙

列表表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO610000	Ø LO620000	° SM190000	μ SM170000	¢ SC040000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LF010000	“ SD170000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LF150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LF130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ı SM650000	ß LS610000	# SM010000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000] SM080000	ñ LN190000	: SP130000	« SP170000	ª SM210000	ı SP030000	^ SD150000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	. SP110000	\$ SC030000	, SP080000	Ñ LN200000	» SP180000	Ω SM200000	¿ SP160000	! SP020000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ð LD630000	æ LA510000	Ð LD620000	– SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	– SP090000	' SP050000	ý LY110000	Ÿ SD410000	Ý LY120000	~ SD190000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	 SM130000	¬ SM660000	? SP150000	" SP040000	± SA020000	⌘ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	€ EC0

Code Page 00284

[[页面顶部 \(on page 54\)](#) | [上一页 \(on page 53\)](#) | [下一页 \(on page 55\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 285-1/697-1 英国

列表表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO610000	Ø LO620000	° SM190000	μ SM170000	¢ SC040000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LF010000	ˉ SM150000	[SM060000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LF150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LF130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	\$ SC030000	!	¡ SM650000	:	« SP170000	ª SM210000	ï SP030000	^ SD150000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	. SP110000	£ SC020000	, SP080000	# SM010000	» SP180000	Ω SM200000	¿ SP160000] SM080000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ð LD630000	æ LA510000	Ð LD620000	~ SD190000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	' SP050000	ý LY110000	˙ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	 SM130000	¬ SM660000	? SP150000	" SP040000	± SA020000	⌘ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	Ⓜ ND000000

Code Page 00285

[[页面顶部 \(on page 55\)](#) | [上一页 \(on page 54\)](#) | [下一页 \(on page 56\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 290/930 日本 (片假名) 扩展

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-	
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-	
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-	
-0	(SP) SP010000	& SM030000	- SP100000	[SM060000] SM080000	ソ JS500000	~ SD190000	^ SD150000	{ SM110000	}	\$ SM140000	0 SC030000	ND100000
-1	。 (JQ700000)	エ (JE010000)	/ (SP120000)	i (LI010000)	ア (JA000000)	夕 (JT100000)	- (SM150000)	¢ (SC040000)	A (LA020000)	J (LJ020000)	€ (SC200000)	1 (ND010000)	
-2	「 (JQ710000)	オ (JO010000)	a (LA010000)	j (LJ010000)	イ (JI000000)	チ (JT200000)	へ (JH400000)	\ (SM070000)	B (LB020000)	K (LK020000)	S (LS020000)	2 (ND020000)	
-3	」 (JQ720000)	ヤ (JY110000)	b (LB010000)	k (LK010000)	ウ (JU000000)	ツ (JT300000)	ホ (JH500000)	t (LT010000)	C (LC020000)	L (LL020000)	T (LT020000)	3 (ND030000)	
-4	、 (JQ730000)	ユ (JY310000)	c (LC010000)	l (LL010000)	エ (JE000000)	テ (JT400000)	マ (JM100000)	u (LU010000)	D (LD020000)	M (LM020000)	U (LU020000)	4 (ND040000)	
-5	・ (JQ740000)	ヨ (JY510000)	d (LD010000)	m (LM010000)	オ (JO000000)	ト (JT500000)	ミ (JM200000)	v (LV010000)	E (LE020000)	N (LN020000)	V (LV020000)	5 (ND050000)	
-6	ヲ (JW500000)	ツ (JT310000)	e (LE010000)	n (LN010000)	カ (JK100000)	ナ (JN100000)	ム (JM300000)	w (LW010000)	F (LF020000)	O (LO020000)	W (LW020000)	6 (ND060000)	
-7	ア (JA010000)		f (LF010000)	o (LO010000)	キ (JK200000)	ニ (JN200000)	メ (JM400000)	x (LX010000)	G (LG020000)	P (LP020000)	X (LX020000)	7 (ND070000)	
-8	イ (JI010000)	ー (JX700000)	g (LG010000)	p (LP010000)	ク (JK300000)	ヌ (JN300000)	モ (JM500000)	y (LY010000)	H (LH020000)	Q (LQ020000)	Y (LY020000)	8 (ND080000)	
-9	ウ (JU010000)		h (LH010000)	` (SD130000)	ケ (JK400000)	ネ (JN400000)	ヤ (JY100000)	z (LZ010000)	I (LI020000)	R (LR020000)	Z (LZ020000)	9 (ND090000)	
-A	£ (SC020000)	! (SP020000)		:	コ (JK500000)	ノ (JN500000)	ユ (JY300000)	レ (JR400000)					
-B	・ (SP110000)	¥ (SC050000)	,	# (SM010000)	q (LQ010000)	r (LR010000)	s (LS010000)	ロ (JR500000)					
-C	< (SA030000)	*	% (SM020000)	@ (SM050000)	サ (JS100000)		ヨ (JY500000)	ワ (JW100000)					
-D	((SP060000)) (SP070000)	_ (SP080000)	´ (SP050000)	シ (JS200000)	ハ (JH100000)	ラ (JR100000)	ン (JN000000)					
-E	+ (SA010000)	;	> (SA050000)	= (SA040000)	ス (JS300000)	ヒ (JH200000)	リ (JR200000)	° (JX710000)					
-F	(SM130000)	∟ (SM660000)	? (SP150000)	" (SP040000)	セ (JS400000)	フ (JH300000)	ル (JR300000)	° (JX720000)				(EO)	

Code Page 00290

[\[页面顶部 \(on page 56\) | 上一页 \(on page 55\) | 下一页 \(on page 57\) | 目录 \(on page 47\) \]](#)

主机代码页引用

主机代码页 297-1/697-1 法国

列表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LG0610000	Ø LG0620000	[SM050000	` SD130000	¢ SC040000	é LE110000	è LE130000	ç LC410000	0 ND100000
-1	(RSP) SP300000	{ SM110000	/ SP120000	É LE120000	a LA010000	j LF010000	¨ SD170000	# SM010000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	@ SM050000	} SM140000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000] SM080000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	\ SM070000	ì LI130000	Ç LC420000	Ì LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	μ SM170000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	° SM190000	§ SM240000	ù LU130000	: SP130000	« SP170000	ª SM210000	ı SP030000	¬ SM660000	̄ (SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	£ SC020000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	à LA130000	ð LD630000	æ LA510000	Ð LD620000	ˉ SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	’ SP050000	ý LY110000	ˆ SD410000	Ý LY120000	˜ SD190000	ò LO130000	ı SM650000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Ɔ LT640000	’ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	⊠ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	Ⓜ (EO)

Code Page 00297

[[页面顶部 \(on page 57\)](#) | [上一页 \(on page 56\)](#) | [下一页 \(on page 58\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 420 阿拉伯语双语

列表表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ح AH450003	ش AS230000	ظ AZ450000	غ AG310003	ك AK010003	؛ SP140007	؟ SP150007	× SA070000	0 ND100000
-1	(RSP) SP300000	أ AA310002	/ SP120000	ح AH470000	a LA010000	j LJ010000	÷ SA060000	ل AL010000	A LA020000	J LJ020000	(NSP) SP310000	1 ND010000
-2	و AX100000	ؤ AW310000	ة AT020000	خ AH470003	b LB010000	k LK010000	s LS010000	ي AL220000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ع AX100004		ت AT010000	د AD010000	c LC010000	l LL010000	t LT010000	ي AL220003	C LC020000	L LL020000	T LT020000	3 ND030000
-4	- SM860000		ت AT010003	ذ AD470000	d LD010000	m LM010000	u LU010000	ي AL320000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	ع SM870000	ث AY310000	ث AT470000	ر AR010000	e LE010000	n LN010000	v LV010000	ي AL320003	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ء AX300000	ا AA010000	ث AT470003	ز AZ010000	f LF010000	o LO010000	w LW010000		F LF020000	O LO020000	W LW020000	6 ND060000
-7	آ AA210000	ا AA010002	ج AG230000	س AS010000	g LG010000	p LP010000	x LX010000		G LG020000	P LP020000	X LX020000	7 ND070000
-8	آ AA210002	ب AB010000	ج AG230003	س AS010003	h LH010000	q LQ010000	y LY010000	ي AL020000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	أ AA310000	ب AB010003	ح AH450000	، SP080007	i LI010000	r LR010000	z LZ010000	ي AL020003	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	ع SC040000	!	ا SM650000	: SP130000	ش AS230003	ع AC470000	غ AG310004	ل AL010003	(SHY) SP320000	ي AA020000	ا ND010001	
-B	.	\$,	#	ص AS450000	ع AC470002	ف AF010000	م AM010000	ه AH010003	ي AA020002	٢ ND020001	٦ ND060001
-C	<	*	%	@	ص AS450003	ع AC470003	ف AF010003	م AM010003		ي AY010000		٧ ND070001
-D	()	_	'	ض AD450000	ع AC470004	ق AQ010000	ن AN010000	ف AH010004	ي AY010002	٣ ND030001	٨ ND080001
-E	+	;	>	=	ض AD450003	غ AG310000	ق AQ010003	ن AN010003		ي AY010003	٤ ND040001	٩ ND090001
-F		٧	?	"	ط AT450000	غ AG310002	ك AK010000	ه AH010000	و AW010000	.	٥ ND050001	(EO)

Code Page 00420

[[页面顶部 \(on page 58\)](#) | [上一页 \(on page 57\)](#) | [下一页 \(on page 59\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 424/941 以色列 (希伯来语 - 公告代码)

列表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000			° SM190000	μ SM170000	^ SD150000	{ SM110000	}	\ SM070000	0 ND100000
-1	⌘ HX330000	‘ HY010000	/ SP120000	⌘ HT010000	a LA010000	j LJ010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	ב HF010000	ג HK610000	ע HX350000		b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ג HG010000	כ HK010000	ך HP610000		c LC010000	l LL010000	t LT010000	• SM570000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	ד HD010000	ה HI010000	פ HP010000	(RSP) SP300000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	ה HI1010000	ו HM610000	ז HS610000		e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ו HW010000	ז HM010000	ח HS450000		f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	ז HZ010000	ח HN610000	ט HQ010000		g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ח HH450000	ט HN010000	ך HR010000	= SM100000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ט HT450000	פ HS010000	ש HS210000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	¢ SC040000	! SP020000	! SM650000	: SP130000	« SP170000			[SM060000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000] SM080000				
-C	< SA030000	* SM040000	% SM020000	@ SM050000				- SM150000				
-D	(SP060000) SP070000	— SP090000	’ SP050000		• SD410000		“ SD170000				
-E	+ SA010000	; SP140000	> SA050000	= SA040000				’ SD110000				
-F	 SM130000	⌋ SM660000	? SP150000	" SP040000	± SA020000	☒ SC010000	® SM530000	× SA070000				© ND000000

Code Page 00424

[[页面顶部 \(on page 59\)](#) | [上一页 \(on page 58\)](#) | [下一页 \(on page 60\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 500-1/697-1 国际

列表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO610000	Ø LO620000	° SM190000	μ SM170000	¢ SC040000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LF010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LF150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LF130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000]	¡ SM650000	:	« SP170000	ª SM210000	¡ SP030000	¬ SM660000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ð LD630000	æ LA510000	Ð LD620000	ˉ SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	' SP050000	ý LY110000	˙ SD410000	Ý LY120000	ˆ SD170000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	∩ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	€ EC0

Code Page 00500

[\[页面顶部 \(on page 60\) | 上一页 \(on page 59\) | 下一页 \(on page 61\) | 目录 \(on page 47\) \]](#)

主机代码页引用

主机代码页 803 以色列 (希伯来语 - 旧代码)

列表表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	₩ HX330000	- SP100000									0 ND100000
-1			/ SP120000		ㄱ HB010000	ㄴ HK610000			A LA020000	J LJ020000		1 ND010000
-2					ㄷ HG010000	ㄹ HK010000	ㅅ HP610000		B LB020000	K LK020000	S LS020000	2 ND020000
-3					ㅈ HD010000	ㅊ HL010000	ㅌ HP010000		C LC020000	L LL020000	T LT020000	3 ND030000
-4					ㅍ HH010000	ㅍ HM610000	ㅠ HS610000		D LD020000	M LM020000	U LU020000	4 ND040000
-5					ㅇ HW010000	ㅎ HM010000	ㅑ HS450000		E LE020000	N LN020000	V LV020000	5 ND050000
-6					ㅓ HZ010000	ㅕ HN610000	ㅗ HQ010000		F LF020000	O LO020000	W LW020000	6 ND060000
-7					ㅛ HH450000	ㅜ HN010000	ㅠ HR010000		G LG020000	P LP020000	X LX020000	7 ND070000
-8					ㅝ HT450000	ㅟ HS010000	ㅛ HS210000		H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9					ㅠ HY010000	ㅡ HX350000	ㅜ HT010000		I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	\$ SC030000	! SP020000		:								
-B	. SP110000	ㄹ SC150000	,	#								
-C	< SA030000	* SM040000	%	@								
-D	(SP060000) SP070000	_	'								
-E	+ SA010000	; SP140000	>	=								
-F	 SM130000	ㄹ SM660000	? SP150000	"								EO

Code Page 00803

[[页面顶部 \(on page 61\)](#) | [上一页 \(on page 60\)](#) | [下一页 \(on page 62\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 833/1173 韩国字母

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	[SM060000] SM080000		- SM150000	^ SD150000	{ SM110000	}	W SM140000	0 ND100000
-1			/ SP120000		a LA010000	j LJ010000	~ SD190000		A LA020000	J LJ020000		1 ND010000
-2	ㄱ SP400000	ㄴ OD100000	ㄷ OL300000	ㄹ OJ000000	b LB010000	k LK010000	s LS010000	\ SM070000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ㅋ OG000000	ㆁ OL000000	ㆂ OM000000	ㆃ OJ100000	c LC010000	l LL010000	t LT010000		C LC020000	L LL020000	T LT020000	3 ND030000
-4	ㆄ OG100000	ㆅ OL200000	ㆆ OB000000	ㆇ OC200000	d LD010000	m LM010000	u LU010000		D LD020000	M LM020000	U LU020000	4 ND040000
-5	ㆈ OG200000	ㆉ OL400000	ㆊ OB100000	ㆋ OK000000	e LE010000	n LN010000	v LV010000		E LE020000	N LN020000	V LV020000	5 ND050000
-6	ㆌ ON000000	ㆍ OL100000	ㆎ OB200000	㆏ OT000000	f LF010000	o LO010000	w LW010000		F LF020000	O LO020000	W LW020000	6 ND060000
-7	㆓ ON100000	㆔ OL600000	㆕ OS000000	㆖ OP000000	g LG010000	p LP010000	x LX010000		G LG020000	P LP020000	X LX020000	7 ND070000
-8	㆘ ON100000	㆙ OL700000	㆚ OS100000	㆛ OH000000	h LH010000	q LQ010000	y LY010000		H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	㆜ OD000000	㆝ OL500000	㆞ ON200000	㆟ SD130000	i LI010000	r LR010000	z LZ010000		I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	ㄱ SC400000	! SP200000	 SM650000	: SP130000	ㅏ OA000000	ㅑ OY400000	ㅓ OY500000	ㅡ OE300000				
-B	. SP110000	\$ SC300000	, SP060000	# SM010000	ㅕ OA200000	ㅗ OY300000	ㅛ OU000000	ㅜ OE400000				
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ㅜ OY200000	ㅝ OO000000	ㅞ OU300000	ㅣ OI000000				
-D	(SP060000) SP070000	— SP080000	’ SP050000	ㅝ OY250000	ㅞ OO100000	ㅟ OU200000					
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ㅟ OY200000	ㅠ OO200000	ㅡ OU400000					
-F	 SM130000	ㄱ SM660000	? SP150000	" SP040000	ㅡ OE000000	ㅢ OO300000	ㅣ OY600000					(EO)

Code Page 00833

[页面顶部 (on page 62) | 上一页 (on page 61) | 下一页 (on page 63) | 目录 (on page 47)]

主机代码页引用

主机代码页 836/1174 简体中文

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000				~ SD190000	^ SD150000	{ SM110000	} SM140000	\$ SC030000	0 ND100000
-1		/ SP120000		a LA010000	j LJ010000	- SM150000		A LA020000	J LJ020000			1 ND010000
-2				b LB010000	k LK010000	s LS010000	\ SM070000	B LB020000	K LK020000	S LS020000		2 ND020000
-3				c LC010000	l LL010000	t LT010000		C LC020000	L LL020000	T LT020000		3 ND030000
-4				d LD010000	m LM010000	u LU010000		D LD020000	M LM020000	U LU020000		4 ND040000
-5				e LE010000	n LN010000	v LV010000		E LE020000	N LN020000	V LV020000		5 ND050000
-6				f LF010000	o LO010000	w LW010000		F LF020000	O LO020000	W LW020000		6 ND060000
-7				g LG010000	p LP010000	x LX010000		G LG020000	P LP020000	X LX020000		7 ND070000
-8				h LH010000	q LQ010000	y LY010000		H LH020000	Q LQ020000	Y LY020000		8 ND080000
-9			` SD130000	i LI010000	r LR010000	z LZ010000		I LI020000	R LR020000	Z LZ020000		9 ND090000
-A	£ SC020000	! SP020000	 SM050000	: SP130000				[SM060000				
-B	. SP110000	¥ SC120000	, SP080000	# SM010000] SM080000				
-C	< SA030000	* SM040000	% SM020000	@ SM050000								
-D	(SP060000) SP070000	_ SP090000	‘ SP050000								
-E	+ SA010000	; SP140000	> SA050000	= SA040000								
-F	 SM130000	⌋ SM060000	? SP150000	" SP040000								(EO)

Code Page 00836

[[页面顶部 \(on page 63\)](#) | [上一页 \(on page 62\)](#) | [下一页 \(on page 64\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 870/959 拉丁语 2 - EBCDIC 多多言

列表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	˘ SD210000	˘ SD230000	˚ SM190000	ą LA430000	· SD290000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	~ SD190000	Ą LA440000	À LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ç LF430000	Â LA160000	Ě LE440000	b LB010000	k LK010000	s LS010000	ż LZ290000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	Ť LT420000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	ı LT410000	û LU270000	" SD250000	Û LU280000	d LD010000	m LM010000	u LU010000	Ž LZ300000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ǎ LA230000	î LI150000	Ǻ LA240000	Î LI160000	f LF010000	o LO010000	w LW010000	ž LZ210000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	č LC210000	ï LI210000	Č LC220000	Ľ LL220000	g LG010000	p LP010000	x LX010000	ž LZ110000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	í LI110000	Ç LC420000	Ĺ LL120000	h LH010000	q LQ010000	y LY010000	Ž LZ220000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	é LC110000	ß LS610000	Ć LC120000	` SD130000	i LI010000	r LR010000	z LZ010000	Ž LZ120000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000] SM080000	 SM130000	: SP130000	ś LS110000	ł LL610000	Ś LS120000	Ł LL620000	(SHY) SP320000	Ě LE220000	ď LD210000	Ď LD220000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	ñ LN210000	ń LN110000	Ń LN220000	Ň LN120000	ô LO150000	ů LU250000	Ô LO160000	Ů LU260000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	đ LD610000	š LS210000	Đ LD620000	Š LS220000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	‘ SP050000	ý LY110000	Ÿ SY410000	Ý LY120000	“ SD170000	í LR110000	ř LT210000	Ř LR120000	Ť LT220000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ř LR210000	š SD430000	Ř LR220000	’ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	ş LS410000	Ź SC010000	Ş LS420000	× SA070000	õ LO250000	ě LE210000	Õ LO260000	Ⓔ [®]

Code Page 00870

[页面顶部 (on page 64) | 上一页 (on page 63) | 下一页 (on page 65) | 目录 (on page 47)]

主机代码页引用

主机代码页 871-1/697-1 冰岛

列表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LG0610000	Ø LG0620000	° SM190000	μ SM170000	¢ SC040000	þ LT630000	æ LA510000	' SD110000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LF010000	ö LO170000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LF150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LF130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ì LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	β LS610000	Ñ LN200000	ð LD630000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	þ LT640000	Æ LA520000	ı SM650000	: SP130000	« SP170000	ª SM210000	ı SP030000	¬ SM660000	̄ (SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ð LD620000	` SD130000	} SM140000	@ SM050000	- SM150000	~ SD190000	ü LU170000	^ SD150000	Û LU180000
-D	(SP060000) SP070000	— SP090000	' SP050000	´ LY110000	ˆ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	{ SM110000] SM080000	[SM060000	\ SM070000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	Ö LO180000	? SP150000	" SP040000	± SA020000	⊠ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Û LO200000	€ (€)

Code Page 00871

[[页面顶部 \(on page 65\)](#) | [上一页 \(on page 64\)](#) | [下一页 \(on page 66\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 875 希腊

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	“ SD170000	’ SD730000	o SM190000	’ SD110000	£ SC020000	{ SM110000	} SM140000	\ SM070000	0 ND100000
-1	A GA020000	K GK020000	/ SP120000	À GA120000	a LA010000	j LJ010000	~ SD190000	á GA110000	À LA020000	J LJ020000		1 ND010000
-2	B GB020000	Λ GL020000	T GT020000	’E GE120000	b LB010000	k LK010000	s LS010000	é GE110000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	Γ GG020000	M GM020000	Y GU020000	’H GE200000	c LC010000	l LL010000	t LT010000	ή GE710000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	Δ GD020000	N GN020000	Φ GF020000	(RSP) SP300000	d LD010000	m LM010000	u LU010000	ï GI170000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	E GE020000	Ξ GX020000	X GH020000	’I GI120000	e LE010000	n LN010000	v LV010000	í GI100000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	Z GZ020000	O GO020000	Ψ GP020000	’O GO120000	f LF010000	o LO010000	w LW010000	ó GO100000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	H GE320000	Π GP020000	Ω GO320000	’Y GU120000	g LG010000	p LP010000	x LX010000	ú GU100000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	Θ GT620000	P GR020000	Ï GI180000	’Ω GO720000	h LH010000	q LQ010000	y LY010000	ü GU170000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	I GI020000	Σ GS020000	ÿ GU180000	` SD130000	i LI010000	r LR010000	z LZ010000	ó GO710000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000] SM080000	 SM130000	: SP130000	α GA010000	η GE310000	ν GN010000	ς GS810000	(SHY) SP320000	± SA020000	² ND021000	³ ND031000
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	β GB010000	θ GT610000	ξ GX010000	τ GT010000	ω GC0310000	½ NF010000	§ SM240000	© SM520000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	γ GG010000	ι GI010000	ο GO010000	υ GU010000	í GI730000			€ SC200000
-D	(SP060000) SP070000	— SP080000	’ SP050000	δ GD010000	κ GK010000	π GP010000	φ GF010000	ú GU730000	• SD630000		
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ε GE010000	λ GL010000	ρ GR010000	χ GH010000	‘ SP190000	’ SP200000	« SP170000	» SP180000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	ζ GZ010000	μ GM010000	σ GS010000	ψ GP610000	— SM120000	 SM650000	⌋ SM660000	(EO)

Code Page 00875

[[页面顶部 \(on page 66\)](#) | [上一页 \(on page 65\)](#) | [下一页 \(on page 67\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 924-1/1353-1 国际

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-		5-		6-		7-		8-		9-		A-		B-		C-		D-		E-		F-	
1ST →	4-		5-		6-		7-		8-		9-		A-		B-		C-		D-		E-		F-	
2ND ↓	4-		5-		6-		7-		8-		9-		A-		B-		C-		D-		E-		F-	
-0	(SP)	&	-	ø	Ø	°	μ	¢	{	}	\	0	SP010000	SM030000	SP100000	LO810000	LO820000	SM190000	SM170000	SC040000	SM110000	SM140000	SM070000	ND100000
-1	(RSP)	é	/	É	a	j	~	£	A	J	÷	1	SP300000	LE110000	SP120000	LE120000	LA010000	LJ010000	SD190000	SC020000	LA020000	LJ020000	SA060000	ND010000
-2	â	ê	Â	Ê	b	k	s	¥	B	K	S	2	LA150000	LE150000	LA160000	LE160000	LB010000	LK010000	LS010000	SC050000	LB020000	LK020000	LS020000	ND020000
-3	ä	ë	Ä	Ë	c	l	t	·	C	L	T	3	LA170000	LE170000	LA180000	LE180000	LC010000	LL010000	LT010000	SD630000	LC020000	LL020000	LT020000	ND030000
-4	à	è	À	È	d	m	u	©	D	M	U	4	LA130000	LE130000	LA140000	LE140000	LD010000	LM010000	LU010000	SM520000	LD020000	LM020000	LU020000	ND040000
-5	á	í	Á	Í	e	n	v	§	E	N	V	5	LA110000	LI110000	LA120000	LI120000	LE010000	LN010000	LV010000	SM240000	LE020000	LN020000	LV020000	ND050000
-6	ã	î	Ã	Î	f	o	w	¶	F	O	W	6	LA190000	LI190000	LA200000	LI180000	LF010000	LO010000	LW010000	SM250000	LF020000	LO020000	LW020000	ND060000
-7	ä	ï	Ä	Ï	g	p	x	œ	G	P	X	7	LA270000	LI170000	LA280000	LI180000	LG010000	LP010000	LX010000	LOS20000	LG020000	LP020000	LX020000	ND070000
-8	ç	ì	Ç	Ì	h	q	y	æ	H	Q	Y	8	LC410000	LI130000	LC420000	LI140000	LH010000	LQ010000	LY010000	LOS10000	LH020000	LQ020000	LY020000	ND080000
-9	ñ	β	Ñ	`	i	r	z	ÿ	I	R	Z	9	LN190000	LS810000	LN200000	SD130000	LI010000	LR010000	LZ010000	LY180000	LI020000	LR020000	LZ020000	ND090000
-A	Ý	!	Š	:	«	ª	ı	¬	(SHY)	1	2	3	LY120000	SP020000	LS220000	SP130000	SP170000	SM210000	SP030000	SM680000	SP320000	ND011000	ND021000	ND031000
-B	.	\$,	#	»	Ω	ı	š	ô	û	Ô	Û	SP110000	SC030000	SP080000	SM010000	SP180000	SM200000	SP160000	LS210000	LO150000	LU150000	LO160000	LU160000
-C	<	*	%	@	ð	æ	Ð	-	ö	ü	Ö	Ü	SA030000	SM040000	SM020000	SM050000	LD630000	LA510000	LD640000	SD310000	LO170000	LU170000	LO180000	LU180000
-D	()	_	'	ý	ž	[]	ò	ù	Ò	Ù	SP060000	SP070000	SP090000	SP050000	LY110000	LZ210000	SM060000	SM080000	LO130000	LU130000	LO140000	LU140000
-E	+	;	>	=	þ	Æ	Þ	Ž	ó	ú	Ó	Ú	SA010000	SP140000	SA050000	SA040000	LT630000	LA520000	LT640000	LZ220000	LO110000	LU110000	LO120000	LU120000
-F		^	?	"	±	€	®	×	õ	ÿ	Õ	(EO)	SM130000	SD150000	SP150000	SP040000	SA020000	SC200000	SM530000	SA070000	LO190000	LY170000	LO200000	

Code Page 00924

[[页面顶部 \(on page 67\)](#) | [上一页 \(on page 66\)](#) | [下一页 \(on page 68\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1025/1150 西里尔语

列表示第一个数字，行表示第二个数字。如果此代码页未与西里尔语主机结合使用，则某些字符可能无法正确显示。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	Ъ KN120000	ц KC010000	й KJ110000	я KA150000	ь KX110000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	Љ KL410000	/ SP120000	Ѡ KC120000	a LA010000	j LJ010000	~ SD190000	ы KY010000	A LA020000	J LJ020000	§ SM240000	1 ND010000
-2	ђ KD610000	њ KN110000	ѓ KG120000	ќ KK120000	b LB010000	k LK010000	s LS010000	з KZ010000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ѓ KG110000	ћ KC110000	Ë KH100000	(SHY) SP320000	с LC010000	l LL010000	t LT010000	ш KS210000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	ë KF170000	ќ KK110000	€ KF160000	Ў KU240000	d LD010000	m LM010000	u LU010000	э KV130000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	е KE150000	ÿ KU230000	S KZ160000	Ц KG220000	e LE010000	n LN010000	v LV010000	щ KS150000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	s KZ150000	Ц KG210000	I KI120000	ю KU150000	f LF010000	o LO010000	w LW010000	ч KC210000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	i KI110000	Ђ KU220000	Ї KI100000	a KA010000	g LG010000	p LP010000	x LX010000	ъ KU210000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ï KI170000	Nº SM000000	J KJ020000	б KB010000	h LH010000	q LQ010000	y LY010000	Ю KU160000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	j KJ010000	Ђ KT620000	Љ KT420000	` SD130000	i LI010000	r LR010000	z LZ010000	А KA020000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000] SM080000	 SM130000	: SP130000	д KD010000	к KC010000	р KR010000	Б KB020000	X KI020000	H KN020000	T KT020000	З KZ020000
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	e KE010000	л KL010000	с KS010000	Ц KC020000	И KI020000	О KO020000	У KU020000	Ш KS220000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ф KF010000	м KM010000	т KT010000	Д KD020000	Й KJ120000	П KP020000	Ж KZ220000	Э KE140000
-D	(SP060000) SP070000	_ SP090000	' SP050000	г KG010000	н KN010000	у KU010000	Е KE020000	К KK020000	Я KA160000	В KV020000	Щ KS160000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	х KH010000	о KO010000	ж KZ210000	Ф KF020000	Л KL020000	Р KR020000	Ь KY120000	Ч KC220000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	и KI010000	п KP010000	в KV010000	Г KG020000	М KM020000	С KS020000	Ы KY020000	Ё (E0)

Code Page 01025

[[页面顶部 \(on page 68\)](#) | [上一页 \(on page 67\)](#) | [下一页 \(on page 69\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1026/1152 拉丁语 5 - 土耳其

列表表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LG0610000	Ø LG0620000	° SM190000	μ SM170000	¢ SC040000	ç LC410000	ğ LG230000	ü LU170000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LF010000	ö LO170000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LF150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LF130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	{ SM110000	ì LI130000	[SM060000	Ì LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	ı LI1610000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	Ç LC420000	Ĝ LG240000	ş LS410000	:	« SP170000	ª SM210000	ı SP030000	¬ SM660000	̄ (SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	İ LI130000	, SP080000	Ö LO180000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ş LS420000	}	æ LA510000] SM080000	- SM150000	~ SD190000	\ SM070000	# SM010000	" SP040000
-D	(SP060000) SP070000	— SP090000	‘ SP050000	’ SD130000	ˆ SD1410000	§ SC030000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ı SM650000	Æ LA520000	@ SM050000	’ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	Ü LU180000	± SA020000	⊘ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	€ (E)

Code Page 01026

[[页面顶部 \(on page 69\)](#) | [上一页 \(on page 68\)](#) | [下一页 \(on page 70\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1027/939 日本 (拉丁语) 扩展

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	コ JK500000			- SM150000	^ SD150000	{ SM110000	} SM140000	\ SM070000	0 ND100000
-1		ウ JU010000	/ SP120000	サ JS100000	a LA010000	j LJ010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	€ SC200000	1 ND010000
-2	。. JQ700000	エ JE010000	イ JI000000	シ JS200000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	「 JQ710000	オ JO010000	ウ JU000000	ス JS300000	c LC010000	l LL010000	t LT010000	ヤ JY100000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	」 JQ720000	ヤ JY110000	エ JE000000	セ JS400000	d LD010000	m LM010000	u LU010000	ユ JY300000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	、 JQ730000	ユ JY310000	オ JO000000	ソ JS500000	e LE010000	n LN010000	v LV010000	ヨ JY500000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	・ JQ740000	ヨ JY510000	カ JK100000	タ JT100000	f LF010000	o LO010000	w LW010000	ラ JR100000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	ヲ JW500000	ツ JT310000	キ JK200000	チ JT200000	g LG010000	p LP010000	x LX010000	リ JR200000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ア JA010000	ー JX700000	ク JK300000	ツ JT300000	h LH010000	q LQ010000	y LY010000	ル JR300000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	イ JI010000	ア JA000000	ケ JK400000	、 SD130000	i LI010000	r LR010000	z LZ010000	レ JR400000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	¢ SC040000	! SP020000		: SP130000	テ JT400000	ノ JN500000	マ JM100000	ロ JR500000				
-B	・ SP110000	\$ SC030000	, SP080000	# SM010000	ト JT500000	ハ JH100000	ミ JM200000	ワ JW100000				
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ナ JN100000	ヒ JH200000	ム JM300000	ン JN000000				
-D	(SP060000) SP070000	_ SP090000	、 SP050000	ニ JN200000	フ JH300000	[SM060000] SM080000				
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ヌ JN300000	へ JH400000	メ JM400000	° JX710000				
-F	 SM130000	∟ SM660000	? SP150000	" SP040000	ネ JN400000	ホ JH500000	モ JM500000	° JX720000				(EO)

Code Page 01027

[\[页面顶部 \(on page 70\) | 上一页 \(on page 69\) | 下一页 \(on page 71\) | 目录 \(on page 47\) \]](#)

主机代码页引用

主机代码页 1047/103 拉丁语 1 (开放式系统)

列表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO610000	Ø LO620000	° SM190000	μ SM170000	¬ SM660000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	Ê LE120000	a LA010000	j LJ010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ì LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	´ SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	é SC040000	! SP020000	¡ SM650000	: SP130000	« SP170000	ª SM210000	ï SP030000	Ý LY120000	(šřŸ) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	º SM200000	ı SP160000	¨ SD170000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ð LD630000	æ LA510000	Ð LD620000	ˉ SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	_ SP090000	´ SP050000	ý LY110000	¸ SD410000	[SM060000] SM080000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	´ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	 SM130000	^ SD150000	? SP150000	" SP040000	± SA020000	⊘ SC010000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	Ⓢ LO000000

Code Page 01047

[[页面顶部 \(on page 71\)](#) | [上一页 \(on page 70\)](#) | [下一页 \(on page 72\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1112/1035 拉脱维亚、立陶宛

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	^ SD150000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	š LS210000	ç LE430000	Š LS220000	Ě LE440000	b LB010000	k LK010000	s LS010000	ī LI310000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	è LE290000	Ä LA180000	Ě LE300000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	ą LA430000	č LC210000	Ą LA440000	Č LC220000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	ì LI430000	ı LU430000	İ LI440000	U LU440000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ū LU310000	” SP230000	Ū LU320000	Ī LI320000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	ä LA270000	“ SP210000	Ä LA280000	Ł LL420000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ë LE310000	ĝ LG410000	Ē LE320000	Ĝ LG420000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ž LZ210000	ß LS810000	Ž LZ220000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	é SC040000	! SP020000	ı SM650000	: SP130000	« SP170000	Ŕ LR420000	” SP220000	[SM060000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	ŕ LR410000	ź LZ110000] SM080000	ō LO310000	ć EC110000	ō LO320000	Ć LC120000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ā LA310000	æ LA510000	Ā LA320000	Ž LZ120000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	’ SP050000	ż LZ290000	ķ LK410000	Ž LZ300000	Ķ LK420000	ŋ LN410000	ł LL610000	Ń LN420000	Ł LL620000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ń LN110000	Æ LA520000	Ń LN120000	ł LL410000	ó LO110000	ś LS110000	Ó LO120000	Ś LS120000
-F	 SM130000	⌋ SM860000	? SP150000	" SP040000	± SA020000	⌘ SC010000	® SM530000	× SA070000	õ LO190000	’ SP200000	Õ LO200000	(EO)

Code Page 01112

[页面顶部 (on page 72) | 上一页 (on page 71) | 下一页 (on page 73) | 目录 (on page 47)]

主机代码页引用

主机代码页 1122/1037 爱沙尼亚

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	ä LA170000	å LA270000	É LE120000	0 ND100000
-1	(RSP) SP300000	` SD130000	/ SP120000	\ SM070000	á LA010000	â LJ010000	ü LU170000	£ SC020000	À LA020000	Å LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	{ SM110000	ë LE170000	# SM010000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	[SM060000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI180000	Ã LA200000	Î LI190000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	} SM140000	ï LI170000	Š SC030000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	é LE110000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	§ SM240000	☒ SC010000	ö LO170000	: SP130000	« SP170000	ª SM210000	ï SP030000	¬ SM680000	̄ (SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	Å LA280000	, SP080000	Ä LA180000	» SP180000	Ω SM200000	ı SP180000	SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ö LO180000	š LS210000	æ LA510000	Š LS220000	– SM150000	ı SM650000	~ SD180000	@ SM050000	Ü LU180000
-D	(SP060000) SP070000	– SP090000	ı SP050000	ý LY110000	Ÿ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ž LZ210000	Æ LA520000	Ž LZ220000	’ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000] SM080000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	Ⓜ (EO)

Code Page 01122

[[页面顶部 \(on page 73\)](#) | [上一页 \(on page 72\)](#) | [下一页 \(on page 74\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1123 乌克兰

列表表示第一个数字，行表示第二个数字。

HEX DIGITS	4-		5-		6-		7-		8-		9-		A-		B-		C-		D-		E-		F-	
1ST →																								
2ND ↓																								
-0	(SP) SP010000	& SM030000	- SP100000	Ъ KN120000	ц KC010000	й KJ110000	я KA150000	ь KX110000	{ SM110000	}	\ SM070000	0 ND100000												
-1	(RSP) SP300000	Љ KL410000	/ SP120000	Ѡ KC120000	а LA010000	ј LJ010000	~ SD190000	ы KY010000	А LA020000	Ј LJ020000	§ SM240000	1 ND010000												
-2	ђ KD610000	њ KN110000	Г KG300000	Ќ KK120000	б LB010000	к LK010000	ѕ LS010000	з KZ010000	В LB020000	К LK020000	ѕ LS020000	2 ND020000												
-3	г KG290000	ћ KC110000	Ё KE180000	(SŪY) SP320000	с LC010000	l LL010000	t LT010000	ш KS210000	С LC020000	Л LL020000	Т LT020000	3 ND030000												
-4	ё KE170000	ќ KK110000	Є KE160000	Ў KU240000	d LD010000	m LM010000	u LU010000	э KE130000	Д LD020000	М LM020000	U LU020000	4 ND040000												
-5	е KE150000	ђ KU230000	Ѕ KZ150000	Ц KG220000	e LE010000	n LN010000	v LV010000	щ KS150000	Е LE020000	Н LN020000	V LV020000	5 ND050000												
-6	s KZ150000	ц KG210000	І KI120000	ю KU150000	f LF010000	o LO010000	w LW010000	ч KC210000	F LF020000	O LO020000	W LW020000	6 ND060000												
-7	i KI110000	Ђ KU220000	Ї KI180000	а KA010000	g LG010000	p LP010000	x LX010000	ь KU210000	G LG020000	P LP020000	X LX020000	7 ND070000												
-8	ï KI170000	№ SM000000	J KJ020000	б KB010000	h LH010000	q LQ010000	y LY010000	Ю KU160000	Н LH020000	Q LQ020000	Y LY020000	8 ND080000												
-9	j KJ010000	Ђ KD620000	Љ KL420000	` SD130000	i LI010000	r LR010000	z LZ010000	А KA020000	І LI020000	R LR020000	Z LZ020000	9 ND090000												
-A	[SM060000]	 SM130000	: SP130000	д KD010000	к KJ010000	р KR010000	Б KB020000	Х KH020000	Н KN020000	Т KT020000	З KZ020000												
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	e KE010000	л KL010000	с KS010000	Ц KC020000	И KI020000	О KO020000	У KU020000	Ш KS220000												
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ф KF010000	м KM010000	т KT010000	Д KD020000	Й KJ120000	П KP020000	Ж KZ220000	Э KE140000												
-D	(SP060000) SP070000	_ SP090000	' SP050000	г KG010000	н KN010000	у KU010000	Е KE020000	К KK020000	Я KA160000	В KV020000	Щ KS160000												
-E	+ SA010000	; SP140000	> SA050000	= SA040000	х KH010000	о KO010000	ж KZ210000	Ф KF020000	Л KL020000	Р KR020000	Ь KX120000	Ч KC220000												
-F	! SP020000	^ SD150000	? SP150000	" SP040000	и KI010000	п KP010000	в KV010000	Г KG020000	М KM020000	С KS020000	Ы KY020000	(E0)												

Code Page 01123

[[页面顶部 \(on page 74\)](#) | [上一页 \(on page 73\)](#) | [下一页 \(on page 75\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1130 越南

列表表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	{ SM110000	}	\ SM140000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA230000	î LI180000	Ã LA240000	Ï LI180000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ñ SD198000	Ç LC420000	Đ SC180000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	´ SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000] SM080000	 SM650000	: SP130000	« SP170000	ª SM210000	ï SP030000	¬ SM660000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	º SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	đ LD610000	æ LA510000	Ð LD600000	- SD310000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP080000	´ SP050000	ò SD918000	Œ LO520000	Œ SD458000	œ LO510000	ƒ LU910000	ù LU130000	Ɔ LU920000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ò SD138000	Æ LA520000	Œ SD118000	ÿ LY180000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	☒ SC010000	® SM530000	× SA070000	σ LO810000	ÿ LY170000	Œ LO820000	(EO)

Code Page 01130

[[页面顶部 \(on page 75\)](#) | [上一页 \(on page 74\)](#) | [下一页 \(on page 76\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1132 老挝

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	Ɔ SC190000				○ U0000ED0	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000		/ SP120000		a LA010000	j LJ010000	~ SD190000	◊ U0000ED1	A LA020000	J LJ020000		1 ND010000
-2	ᠠ U0000E81	ᠡ U0000E8D	ᠢ U0000E8B	ᠣ U0000EA3	b LB010000	k LK010000	s LS010000	ᠸ U0000ED2	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ᠨ U0000E82	ᠨ U0000E84	ᠨ U0000E8C	ᠨ U0000EA5	c LC010000	l LL010000	t LT010000	ᠨ U0000ED3	C LC020000	L LL020000	T LT020000	3 ND030000
-4	ᠨ U0000E84	ᠨ U0000E85	ᠨ U0000E8D	ᠨ U0000EA7	d LD010000	m LM010000	u LU010000	ᠨ U0000ED4	D LD020000	M LM020000	U LU020000	4 ND040000
-5	ᠨ U0000E87	ᠨ U0000E86	ᠨ U0000E8E	ᠨ U0000EAB	e LE010000	n LN010000	v LV010000	ᠨ U0000ED5	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ᠨ U0000E88	ᠨ U0000E87	ᠨ U0000E8F	ᠨ U0000EAD	f LF010000	o LO010000	w LW010000	ᠨ U0000ED6	F LF020000	O LO020000	W LW020000	6 ND060000
-7	ᠨ U0000EAA	ᠨ U0000E99	ᠨ U0000EA1	ᠨ U0000EAE	g LG010000	p LP010000	x LX010000	ᠨ U0000ED7	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ᠨ U0000E8A	ᠨ U0000E8A	ᠨ U0000EA2		h LH010000	q LQ010000	y LY010000	ᠨ U0000ED8	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	[SM080000] SM080000	^ SD150000	` SD130000	i LI010000	r LR010000	z LZ010000	ᠨ U0000ED9	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	¢ SC040000	! SP020000	! SM650000	: SP130000		ᠨ U0000EB4	ᠨ U0000EBC			ᠨ U0000ECD		
-B	. SP110000	\$ SC030000	, SP080000	# SM010000		ᠨ U0000EB5	ᠨ U0000EB1	ᠨ U0000EC0	ᠨ U0000EC8	ᠨ U0000EC8		
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ᠨ U0000EAF	ᠨ U0000EB6	ᠨ U0000EBB	ᠨ U0000EC1	ᠨ U0000EC8			
-D	(SP060000) SP070000	_ SP090000	' SP050000	ᠨ U0000EB0	ᠨ U0000EB7	ᠨ U0000EBD	ᠨ U0000EC2	ᠨ U0000ECA	ᠨ U0000EDC		
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ᠨ U0000EB2	ᠨ U0000EB8		ᠨ U0000EC3	ᠨ U0000ECB	ᠨ U0000EDD		
-F	 SM130000	ᠨ SM880000	? SP150000	" SP040000	ᠨ U0000EB3	ᠨ U0000EB9		ᠨ U0000EC4	ᠨ U0000ECC			(EO)

Code Page 01132

[页面顶部 (on page 76) | 上一页 (on page 75) | 下一页 (on page 77) | 目录 (on page 47)]

主机代码页引用

主机代码页 1137 印度

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	झ U000091D	द U000092B	म U000092E	(RM) SP530020	ा U000093E	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	ॠ U000090B	/ SP120000	ज U000091E	a LA010000	j LJ010000	~ SD190000	ि U000093F	A LA020000	J LJ020000	(ZM) SP540020	1 ND010000
-2	ँ U0000901	ॡ U000090C	औ U0000914	ट U000091F	b LB010000	k LK010000	s LS010000	ी U0000940	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ं U0000902	ँ U000090D	क U0000915	ठ U0000920	c LC010000	l LL010000	t LT010000	ु U0000941	C LC020000	L LL020000	T LT020000	3 ND030000
-4	ः U0000903	ऐ U000090E	ख U0000916	ड U0000921	d LD010000	m LM010000	u LU010000	ू U0000942	D LD020000	M LM020000	U LU020000	4 ND040000
-5	अ U0000905	ए U000090F	ग U0000917	ढ U0000922	e LE010000	n LN010000	v LV010000	ृ U0000943	E LE020000	N LN020000	V LV020000	5 ND050000
-6	आ U0000906	ऐ U0000910	घ U0000918	ण U0000923	f LF010000	o LO010000	w LW010000	ृ U0000944	F LF020000	O LO020000	W LW020000	6 ND060000
-7	इ U0000907	औ U0000911	ङ U0000919	त U0000924	g LG010000	p LP010000	x LX010000	ँ U0000945	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ई U0000908	औ U0000912	च U000091A	थ U0000925	h LH010000	q LQ010000	y LY010000	े U0000946	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	उ U0000909	ओ U0000913	छ U000091B	ँ SD130000	i LI010000	r LR010000	z LZ010000	े U0000947	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	ऊ U000090A	!	ज U000091C	: SP130000	घ U0000927	य U000092F	ष U0000937	ै U0000948	् U000094D	ॠ U0000960	० U0000966	६ U000096C
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	न U0000928	र U0000930	स U0000938	ाँ U0000949	ऊँ U0000950	ॡ U0000961	१ U0000967	७ U000096D
-C	< SA030000	* SM040000	% SM020000	@ SM050000	प U000092A	ल U0000932	ह U0000939	ी U000094A	ं U0000951	ू U0000962	२ U0000968	८ U000096E
-D	(SP060000) SP070000	_ SP090000	’ SP050000	फ U000092B	ळ U0000933	[SM060000] SM080000	ु U0000952	ृ U0000963	३ U0000969	९ U000096F
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ब U000092C	व U0000935	ः U000093C	ी U000094B		। U0000964	४ U000096A	० U0000970
-F	 SM130000	^ SD150000	? SP150000	" SP040000	भ U000092D	ष U0000936	ऽ U000093D	ी U000094C		॥ U0000965	५ U000096B	(EO)

Code Page 01137

[[页面顶部 \(on page 77\)](#) | [上一页 \(on page 76\)](#) | [下一页 \(on page 78\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1140-1/695-1 巴西、加拿大、荷兰、葡萄牙、美国和 1140/1175 繁体中文

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	^ SD150000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Ï LI180000	f LF010000	o LO010000	w LW010000	¶ SM290000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	ä LA270000	ï LI170000	Ä LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	é SC040000	! SP020000	¡ SM650000	: SP130000	« SP170000	ª SM210000	ï SP030000	[SM060000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	Ω SM200000	¿ SP160000] SM080000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ð LD630000	æ LA510000	Ð LD620000	- SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	´ SP050000	ý LY110000	Ÿ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	´ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	 SM130000	¬ SM660000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO)

Code Page 01140

[\[页面顶部 \(on page 78\) | 上一页 \(on page 77\) | 下一页 \(on page 79\) | 目录 \(on page 47\) \]](#)

主机代码页引用

主机代码页 1141-1/695-1 奥地利、德国

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓												
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	ä LA170000	ü LU170000	Ö LO180000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	ß LS610000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	{ SM110000	ë LE170000	[SM060000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	@ SM050000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI180000	Ã LA200000	Î LI190000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	ä LA270000	ï LI170000	Ä LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	~ SD190000	Ñ LN200000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	Ä LA180000	Ü LU180000	ö LO170000	: SP130000	« SP170000	ª SM210000	ï SP030000	¬ SM680000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	§ SM240000	ð LD630000	æ LA510000	Ð LD620000	- SM150000	 SM650000	}	\] SM080000
-D	(SP060000) SP070000	— SP090000	´ SP050000	ý LY110000	Ÿ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	´ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO)

Code Page 01141

[[页面顶部 \(on page 79\)](#) | [上一页 \(on page 78\)](#) | [下一页 \(on page 80\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1142-1/695-1 丹麦, 挪威

列表示第一个数字, 行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	¡ SM650000	@ SM050000	° SM190000	μ SM170000	¢ SC040000	æ LA510000	ä LA270000	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	ü LU170000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Î LI190000	f LF010000	o LO010000	w LW010000	¶ SM290000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	} SM140000	ï LI170000	Ş SC030000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	# SM010000	€ SC200000	ø LO610000	: SP130000	« SP170000	ª SM210000	ï SP030000	¬ SM680000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	Å LA280000	, SP080000	Æ LA520000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ø LO620000	ð LD630000	{ SM110000	Ð LD620000	- SM150000	ö LO170000	~ SD190000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	´ SP050000	ý LY110000	Š SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	[SM060000	Þ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000] SM080000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO)

Code Page 01142

[\[页面顶部 \(on page 80\) | 上一页 \(on page 79\) | 下一页 \(on page 81\) | 目录 \(on page 47\) \]](#)

主机代码页引用

主机代码页 1143-1/695-1 芬兰、瑞典

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	ä LA170000	å LA270000	É LE120000	0 ND100000
-1	(RSP) SP300000	` SD130000	/ SP120000	\ SM070000	á LA010000	â LJ010000	ü LU170000	£ SC020000	À LA020000	Å LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	{ SM110000	ë LE170000	# SM010000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	[SM060000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI180000	Ã LA200000	Î LI190000	f LF010000	o LO010000	w LW010000	¶ SM290000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	} SM140000	ï LI170000	\$ SC030000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	é LE110000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	§ SM240000	€ SC200000	ö LO170000	: SP130000	« SP170000	ª SM210000	ï SP030000	¬ SM680000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	À LA280000	, SP080000	Ä LA180000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ö LO180000	ð LD630000	æ LA510000	Ð LD620000	- SM150000	¡ SM650000	~ SD190000	@ SM050000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	´ SP050000	ý LY110000	Š SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Ɔ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000] SM080000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO) ND000000

Code Page 01143

[[页面顶部 \(on page 81\)](#) | [上一页 \(on page 80\)](#) | [下一页 \(on page 82\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1144-1/695-1 意大利

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	[SM080000	μ SM170000	¢ SC040000	à LA130000	è LE130000	ç LC410000	0 ND100000
-1	(RSP) SP300000]] SM080000	/ SP120000	É LE120000	a LA010000	j LJ010000	ì LI130000	# SM010000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	{ SM110000	} SM140000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	@ SM050000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI180000	Ã LA200000	Î LI180000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	\ SM070000	~ SD190000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	ù LU130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	ó SM180000	é LE110000	ò LO130000	: SP130000	« SP170000	ª SM210000	ì SP030000	¬ SM680000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	. SP110000	\$ SC030000	, SP080000	£ SC020000	» SP180000	Ω SM200000	¿ SP180000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	§ SM240000	ð LD630000	æ LA510000	Ð LD620000	- SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP080000	´ SP050000	ý LY110000	Ÿ SD410000	Ý LY120000	¨ SD170000	¡ SM650000	´ SD130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	ß LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO) ND200000

Code Page 01144

[\[页面顶部 \(on page 82\) | 上一页 \(on page 81\) | 下一页 \(on page 83\) | 目录 \(on page 47\) \]](#)

主机代码页引用

主机代码页 1145-1/695-1 拉丁美洲、西班牙

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	{ SM110000	} SM140000	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	“ SD170000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Ï LI180000	f LF010000	o LO010000	w LW010000	¶ SM290000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ı SM850000	ß LS810000	# SM010000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000] SM080000	ñ LN190000	: SP130000	« SP170000	ª SM210000	ı SP030000	^ SD150000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	Ñ LN200000	» SP180000	Ω SM200000	¿ SP160000	! SP020000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ð LD630000	æ LA510000	Ð LD620000	- SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	‘ SP050000	ý LY110000	ˆ SD410000	Ý LY120000	~ SD190000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	’ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	 SM130000	¬ SM660000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO)

Code Page 01145

[\[页面顶部 \(on page 83\) | 上一页 \(on page 82\) | 下一页 \(on page 84\) | 目录 \(on page 47\) \]](#)

主机代码页引用

hcp_

主机代码页 1146-1/695-1 英国

列表表示第一个数字，行表示第二个数字。

HEX DIGITS 1ST → 2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	- SM150000	[SM060000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI150000	Ã LA200000	Ï LI160000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	´ SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	\$ SC030000	! SP020000	¡ SM650000	: SP130000	« SP170000	® SM210000	ï SP030000	^ SD150000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	. SP110000	£ SC020000	, SP080000	# SM010000	» SP160000	® SM200000	¿ SP160000] SM060000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ð LD630000	æ LA510000	Ð LD620000	~ SD190000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	´ SP050000	ý LY110000	¸ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA320000	Þ LT640000	´ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	 SM130000	¬ SM660000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO)

Code Page 01146

[[页面顶部 \(on page 84\)](#) | [上一页 \(on page 83\)](#) | [下一页 \(on page 85\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1147-1/695-1 法国

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	[SM080000	` SD130000	¢ SC040000	é LE110000	è LE130000	ç LC410000	0 ND100000
-1	(RSP) SP300000	{ SM110000	/ SP120000	É LE120000	a LA010000	j LJ010000	¨ SD170000	# SM010000	À LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	@ SM050000	}	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000] SM080000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Ï LI180000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	\ SM070000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	μ SM170000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	° SM190000	§ SM240000	ù LU130000	: SP130000	« SP170000	ª SM210000	ı SP030000	¬ SM680000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	£ SC020000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	à LA130000	ð LD630000	æ LA510000	Ð LD620000	– SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	– SP090000	´ SP050000	ý LY110000	ÿ SD410000	Ý LY120000	~ SD190000	ò LO130000	ı SM650000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	ß LT640000	’ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO)

Code Page 01147

[[页面顶部 \(on page 85\)](#) | [上一页 \(on page 84\)](#) | [下一页 \(on page 86\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1148-1/695-1 国际

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Ï LI180000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000]	¡ SM650000	:	« SP170000	ª SM210000	¡ SP030000	¬ SM660000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ð LD630000	æ LA510000	Ð LD620000	- SM150000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	´ SP050000	ý LY110000	Ÿ SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Ù LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	þ LT630000	Æ LA520000	Þ LT640000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO)

Code Page 01148

[\[页面顶部 \(on page 86\) | 上一页 \(on page 85\) | 下一页 \(on page 87\) | 目录 \(on page 47\) \]](#)

主机代码页引用

主机代码页 1149-1/695-1 冰岛

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	þ LT630000	æ LA510000	' SD110000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	ö LO170000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Ï LI180000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	ð LD630000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	þ LT640000	Æ LA520000	ı SM650000	: SP130000	« SP170000	ª SM210000	ı SP030000	¬ SM660000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	Ω SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ð LD620000	` SD130000	} SM140000	@ SM050000	- SM150000	~ SD190000	ü LU170000	^ SD150000	Û LU180000
-D	(SP060000) SP070000	— SP090000	´ SP050000	ý LY110000	Š SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	{ SM110000] SM090000	[SM060000	\ SM070000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	Ö LO180000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO) ND000000

Code Page 01149

[[页面顶部 \(on page 87\)](#) | [上一页 \(on page 86\)](#) | [下一页 \(on page 88\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1153/1375 拉丁语 2 - EBCDIC 多多言

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-		5-		6-		7-		8-		9-		A-		B-		C-		D-		E-		F-									
1ST →																																
2ND ↓																																
-0	(SP) SP010000	& SM030000	- SP100000	˘ SD210000	˘ SD230000	˘ SM190000	ą LA430000	· SD290000	{ SM110000	}	SM140000	\ SM070000	0 ND100000																			
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	~ SD190000	À LA440000	À LA020000	J LJ020000	÷ SA060000	1 ND010000																				
-2	â LA150000	ç LE430000	Â LA160000	Ě LE440000	b LB010000	k LK010000	s LS010000	ž LZ290000	B LB020000	K LK020000	S LS020000	2 ND020000																				
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	Ť LT420000	C LC020000	L LL020000	T LT020000	3 ND030000																				
-4	ı LT410000	û LU270000	" SD250000	Û LU280000	d LD010000	m LM010000	u LU010000	Ž LZ300000	D LD020000	M LM020000	U LU020000	4 ND040000																				
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000																				
-6	ă LA230000	î LI180000	Ă LA240000	Î LI180000	f LF010000	o LO010000	w LW010000	ž LZ210000	F LF020000	O LO020000	W LW020000	6 ND060000																				
-7	č LC210000	ï LI210000	Č LC220000	Ľ LL220000	g LG010000	p LP010000	x LX010000	ž LZ110000	G LG020000	P LP020000	X LX020000	7 ND070000																				
-8	ç LC410000	í LI110000	Ç LC420000	Ľ LL120000	h LH010000	q LQ010000	y LY010000	Ž LZ220000	H LH020000	Q LQ020000	Y LY020000	8 ND080000																				
-9	é LC110000	ß LS810000	Ć LC120000	` SD130000	i LI010000	r LR010000	z LZ010000	Ž LZ120000	I LI020000	R LR020000	Z LZ020000	9 ND090000																				
-A	[SM060000] SM080000	 SM130000	: SP130000	ś LS110000	ł LL810000	Ś LS120000	Ł LL820000	(SHY) SP320000	Ě LE220000	ď LD210000	Ď LD220000																				
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	ñ LN210000	ń LN110000	Ñ LN220000	Ń LN120000	ô LO150000	ű LU150000	Ô LO160000	Ű LU260000																				
-C	< SA030000	* SM040000	% SM020000	@ SM050000	đ LD610000	š LS210000	Đ LD600000	Š LS220000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000																				
-D	(SP060000) SP070000	— SP090000	‘ SP050000	ý LY110000	Ÿ SD410000	Ý LY120000	¨ SD170000	í LR110000	ı LT210000	Ř LR120000	Ť LT220000																				
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ř LR210000	š SD430000	Ř LR220000	’ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000																				
-F	! SP020000	^ SD150000	? SP150000	" SP040000	ş LS410000	€ SC200000	Ş LS420000	× SA070000	ő LO250000	ě LE210000	Ő LO260000	(EO)																				

Code Page 01153

[[页面顶部 \(on page 88\)](#) | [上一页 \(on page 87\)](#) | [下一页 \(on page 89\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1154/1381 西里尔语

列表表示第一个数字，行表示第二个数字。如果此代码页未与西里尔语主机结合使用，则某些字符可能无法正确显示。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	Ъ KN120000	ц KC010000	й KJ110000	я KA150000	ь KX110000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	Љ KL410000	/ SP120000	Ѡ KC120000	а LA010000	ј LJ010000	~ SD190000	ы KY010000	А LA020000	Ј LJ020000	€ SC200000	1 ND010000
-2	ђ KD610000	њ KN110000	ѓ KG120000	ќ KK120000	б LB010000	к LK010000	ѕ LS010000	з KZ010000	В LB020000	К LK020000	Ѕ LS020000	2 ND020000
-3	ѓ KG110000	ћ KC110000	Ё KE180000	(S̄HY) SP320000	с LC010000	l LL010000	t LT010000	ш KS210000	С LC020000	Л LL020000	Т LT020000	3 ND030000
-4	ё KE170000	ќ KK110000	Є KE160000	Ў KU240000	d LD010000	m LM010000	u LU010000	э KE130000	Д LD020000	М LM020000	U LU020000	4 ND040000
-5	є KE150000	ђ KU230000	Ѕ KZ150000	Ц KG220000	e LE010000	n LN010000	v LV010000	щ KS150000	Е LE020000	Н LN020000	В LV020000	5 ND050000
-6	s KZ150000	ц KG210000	І KI120000	ю KU150000	f LF010000	o LO010000	w LW010000	ч KC210000	Ф LF020000	О LO020000	W LW020000	6 ND060000
-7	i KI110000	Ђ KU220000	Ї KI180000	а KA010000	g LG010000	p LP010000	x LX010000	ь KU210000	Г LG020000	Р LP020000	Х LX020000	7 ND070000
-8	ï KI170000	№ SM000000	Ј KJ020000	б KB010000	h LH010000	q LQ010000	y LY010000	Ю KU180000	Н LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	j KJ010000	Ђ KD620000	Љ KL420000	` SD130000	i LI010000	r LR010000	z LZ010000	А KA020000	І LI020000	Р LR020000	Z LZ020000	9 ND090000
-A	[SM060000]	 SM130000	: SP130000	д KD010000	к KK010000	р KR010000	Б KB020000	Х KH020000	Н KN020000	Т KT020000	З KZ020000
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	e KE010000	л KL010000	с KS010000	Ц KC020000	И KI020000	О KO020000	У KU020000	Ш KS220000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ф KF010000	м KM010000	т KT010000	Д KD020000	Й KJ120000	П KP020000	Ж KZ220000	Э KE140000
-D	(SP060000) SP070000	_ SP080000	' SP050000	г KG010000	н KN010000	у KU010000	Е KE020000	К KK020000	Я KA160000	В KV020000	Щ KS160000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	х KH010000	о KO010000	ж KZ210000	Ф KF020000	Л KL020000	Р KR020000	Ь KY120000	Ч KC220000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	и KI010000	п KP010000	в KV010000	Г KG020000	М KM020000	С KS020000	Ы KY020000	(EO)

Code Page 01154

[[页面顶部 \(on page 89\)](#) | [上一页 \(on page 88\)](#) | [下一页 \(on page 90\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1155/1378 拉丁语 5 - 土耳其

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	ç LC410000	ğ LG230000	ü LU170000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	ö LO170000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI190000	Ã LA200000	Ï LI180000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	{ SM110000	ì LI130000	[SM060000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	ı LI810000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	Ç LC420000	Ğ LG240000	ş LS410000	: SP130000	« SP170000	ª SM210000	ı SP030000	¬ SM680000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	İ LI300000	, SP080000	Ö LO180000	» SP180000	Ω SM200000	¿ SP180000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ş LS420000	} SM140000	æ LA510000] SM060000	- SD310000	~ SD190000	\ SM070000	# SM010000	" SP040000
-D	(SP060000) SP070000	— SP090000	ı SP050000	` SD130000	\$ SD410000	\$ SC030000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ı SM650000	Æ LA520000	@ SM050000	' SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	Ü LU180000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(EO)

Code Page 01155

[[页面顶部 \(on page 90\)](#) | [上一页 \(on page 89\)](#) | [下一页 \(on page 91\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1156/1393 拉脱维亚、立陶宛

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	^ SD150000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	š LS210000	ç LE430000	Š LS220000	Ě LE440000	b LB010000	k LK010000	s LS010000	ī LI310000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	è LE290000	Ä LA180000	Ě LE300000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	ą LA430000	č LC210000	Ą LA440000	Č LC220000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	ì LI430000	ı LU430000	İ LI440000	U LU440000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ū LU310000	” SP230000	Ū LU320000	Ī LI320000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	ă LA270000	“ SP210000	Ă LA280000	Ł LL420000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ë LE310000	ğ LG410000	Ē LE320000	Ġ LG420000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ž LZ210000	ß LS810000	Ž LZ220000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	ć SC040000	! SP020000	ı SM650000	: SP130000	« SP170000	Ŕ LR420000	” SP220000	[SM060000	(SHY) SP320000	ı ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	ŕ LR410000	ź LZ110000]	ō LO310000	ć LC110000	ō LO320000	Ć LC120000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ā LA310000	æ LA510000	Ā LA320000	Ž LZ120000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP090000	’ SP050000	ż LZ290000	ķ LK410000	Ž LZ300000	Ɔ LK420000	ŋ LN410000	ł LL610000	Ń LN420000	Ł LL620000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ń LN110000	Æ LA520000	Ń LN120000	ı LL410000	ó LO110000	ś LS110000	Ó LO120000	Ś LS120000
-F	 SM130000	⌋ SM860000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	õ LO190000	’ SP200000	Õ LO200000	(EO)

Code Page 01156

[[页面顶部 \(on page 91\)](#) | [上一页 \(on page 90\)](#) | [下一页 \(on page 92\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1157/1391 爱沙尼亚

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	ä LA170000	å LA270000	É LE120000	0 ND100000
-1	(RSP) SP300000	` SD130000	/ SP120000	\ SM070000	á LA010000	â LJ010000	ü LU170000	£ SC020000	À LA020000	Å LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	{ SM110000	ë LE170000	# SM010000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	[SM060000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA190000	î LI180000	Ã LA200000	Î LI180000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	} SM140000	ï LI170000	Ş SC030000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ì LI130000	Ç LC420000	Ï LI140000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS810000	Ñ LN200000	é LE110000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	§ SM240000	€ SC200000	ö LO170000	: SP130000	« SP170000	ª SM210000	ï SP030000	¬ SM680000	Š (SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	Å LA280000	, SP080000	Ä LA180000	» SP180000	Ω SM200000	¿ SP180000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	Ö LO180000	š LS210000	æ LA510000	Š LS220000	- SD310000	¡ SM650000	~ SD190000	@ SM050000	Ü LU180000
-D	(SP060000) SP070000	— SP080000	‘ SP050000	ý LY110000	Š SD410000	Ý LY120000	¨ SD170000	ò LO130000	ù LU130000	Ò LO140000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ž LZ210000	Æ LA520000	Ž LZ220000	’ SD110000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000] SM080000	® SM530000	× SA070000	õ LO190000	ÿ LY170000	Õ LO200000	(€) ND200000

Code Page 01157

[[页面顶部 \(on page 92\)](#) | [上一页 \(on page 91\)](#) | [下一页 \(on page 93\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1158/1388 乌克兰

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	Ъ KN120000	ц KC010000	й KJ110000	я KA150000	ь KX110000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	Љ KL410000	/ SP120000	Ѡ KC120000	а LA010000	ј LJ010000	~ SD190000	ы KY010000	А LA020000	Ј LJ020000	€ SC200000	1 ND010000
-2	ђ KD610000	њ KN110000	Г KG300000	Ќ KK120000	б LB010000	к LK010000	ѕ LS010000	з KZ010000	В LB020000	К LK020000	Ѕ LS020000	2 ND020000
-3	г KG290000	ћ KC110000	Ё KE180000	(S̄HY) SP320000	с LC010000	l LL010000	t LT010000	ш KS210000	С LC020000	Л LL020000	Т LT020000	3 ND030000
-4	ë KE170000	ќ KK110000	Є KE160000	Ў KU240000	d LD010000	m LM010000	u LU010000	э KE130000	Д LD020000	М LM020000	U LU020000	4 ND040000
-5	ё KE150000	ђ KU230000	Ѕ KZ150000	Ц KG220000	e LE010000	n LN010000	v LV010000	щ KS150000	Е LE020000	Н LN020000	V LV020000	5 ND050000
-6	s KZ150000	ц KG210000	І KI120000	ю KU150000	f LF010000	o LO010000	w LW010000	ч KC210000	Ф LF020000	О LO020000	W LW020000	6 ND060000
-7	i KI110000	Ђ KU220000	Ї KI180000	а KA010000	g LG010000	p LP010000	x LX010000	ь KU210000	Г LG020000	Р LP020000	X LX020000	7 ND070000
-8	ï KI170000	№ SM000000	Ј KJ020000	б KB010000	h LH010000	q LQ010000	y LY010000	Ю KU180000	Н LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	j KJ010000	Ђ KD620000	Љ KL420000	` SD130000	i LI010000	r LR010000	z LZ010000	А KA020000	І LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000]	 SM130000	: SP130000	д KD010000	к KK010000	р KR010000	Б KB020000	Х KH020000	Н KN020000	Т KT020000	З KZ020000
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	e KE010000	л KL010000	с KS010000	Ц KC020000	И KI020000	О KO020000	У KU020000	Ш KS220000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	ф KF010000	м KM010000	т KT010000	Д KD020000	Й KJ120000	П KP020000	Ж KZ220000	Э KE140000
-D	(SP060000) SP070000	_ SP090000	' SP050000	г KG010000	н KN010000	у KU010000	Е KE020000	К KK020000	Я KA160000	В KV020000	Щ KS160000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	х KH010000	о KO010000	ж KZ210000	Ф KF020000	Л KL020000	Р KR020000	Ь KY120000	Ч KC220000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	и KI010000	п KP010000	в KV010000	Г KG020000	М KM020000	С KS020000	Ы KY020000	(EO)

Code Page 01158

[[页面顶部 \(on page 93\)](#) | [上一页 \(on page 92\)](#) | [下一页 \(on page 94\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1160/1395 泰国

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	Ⓔ SC130000	Ⓢ BQ400000	Ⓣ BQ500000	Ⓝ BQ800000	○ ND100002	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	' BZ100300	/ SP120000	ˆ BE400000	a LA010000	j LW010000	~ SD190000	๑ ND010002	A LA020000	J LJ020000	๗ BZ300300	1 ND010000
-2	ก BK100000	จ BC100000	ฉ BT100000	ช BT800000	b LB010000	k LK010000	s LS010000	๒ ND020002	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ข BK200000	ฉ BX100000	ฉ BT200000	ก BT700000	c LC010000	l LL010000	t LT010000	๓ ND030002	C LC020000	L LL020000	T LT020000	3 ND030000
-4	ข BK300000	ช BS100000	ก BT300000	ช BT800000	d LD010000	m LM010000	u LU010000	๔ ND040002	D LD020000	M LM020000	U LU020000	4 ND040000
-5	ค BK400000	ช BX200000	ฉ BT400000	น BN300000	e LE010000	n LN010000	v LV010000	๕ ND050002	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ค BK500000	ฉ BX300000	น BN200000	บ BB100000	f LF010000	o LO010000	w LW010000	๖ ND060002	F LF020000	O LO020000	W LW020000	6 ND060000
-7	ข BK600000	ญ BY100000	ด BD200000	ป BP100000	g LG010000	p LP010000	x LX010000	๗ ND070002	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ง BN100000	ฉ BD100000	ด BT500000	ฝ BP200000	h LH010000	q LQ010000	y LY010000	๘ ND080002	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	[SM080000] SM080000	^ SD150000	` SD130000	i LI010000	r LR010000	z LZ010000	๙ ND090002	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	¢ SC040000	! SP020000	! SM650000	: SP130000	ฝ BF100000	ร BR100000	๒ BS300000	๗ BQ200000	๒ BZ200300	• BQ300000	๗ BA700000	+ BZ400000
-B	. SP110000	\$ SC030000	, SP080000	# SM010000	พ BP300000	ถ BR200000	๓ BS400000	๒๒ BA200000	๒ B200000	๒ BE200000	๗ BQ100000	๓ BZ500000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	พ BF200000	ล BL100000	ห BH100000	๒ BA100000	๒ BU100000	๒๒ BE300000	๓ BE100000	๓ BN400000
-D	(SP060000) SP070000	_ SP090000	' SP050000	ภ BP400000	ภ BL200000	ฬ BL300000	๗ BA300000	๒ BU200000	๒ BO200000	' BZ100000	+ BZ400300
-E	+ SA010000	; SP140000	> SA050000	= SA040000	ม BM100000	ว BW100000	อ BO100000	๗ BA400000	๗ BU300000	๒ BA500000	๒ BZ200000	€ SC200000
-F	 SM130000	๗ SM880000	? SP150000	" SP040000	ย BY200000	ค BS200000	๒ BH200000	๒ B100000	๗ BU400000	๒ BA600000	๒ BZ300000	(EO)

Code Page 01160

[[页面顶部 \(on page 94\)](#) | [上一页 \(on page 93\)](#) | [下一页 \(on page 95\)](#) | [目录 \(on page 47\)](#)]

主机代码页引用

主机代码页 1164/1397 越南

列表示第一个数字，行表示第二个数字。

HEX DIGITS	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
1ST →	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
2ND ↓	4-	5-	6-	7-	8-	9-	A-	B-	C-	D-	E-	F-
-0	(SP) SP010000	& SM030000	- SP100000	ø LO810000	Ø LO820000	° SM190000	μ SM170000	¢ SC040000	{ SM110000	}	\ SM070000	0 ND100000
-1	(RSP) SP300000	é LE110000	/ SP120000	É LE120000	a LA010000	j LJ010000	~ SD190000	£ SC020000	A LA020000	J LJ020000	÷ SA060000	1 ND010000
-2	â LA150000	ê LE150000	Â LA160000	Ê LE160000	b LB010000	k LK010000	s LS010000	¥ SC050000	B LB020000	K LK020000	S LS020000	2 ND020000
-3	ä LA170000	ë LE170000	Ä LA180000	Ë LE180000	c LC010000	l LL010000	t LT010000	· SD630000	C LC020000	L LL020000	T LT020000	3 ND030000
-4	à LA130000	è LE130000	À LA140000	È LE140000	d LD010000	m LM010000	u LU010000	© SM520000	D LD020000	M LM020000	U LU020000	4 ND040000
-5	á LA110000	í LI110000	Á LA120000	Í LI120000	e LE010000	n LN010000	v LV010000	§ SM240000	E LE020000	N LN020000	V LV020000	5 ND050000
-6	ã LA230000	î LI180000	Ã LA240000	Ï LI180000	f LF010000	o LO010000	w LW010000	¶ SM250000	F LF020000	O LO020000	W LW020000	6 ND060000
-7	å LA270000	ï LI170000	Å LA280000	Ï LI180000	g LG010000	p LP010000	x LX010000	¼ NF040000	G LG020000	P LP020000	X LX020000	7 ND070000
-8	ç LC410000	ö SD198000	Ç LC420000	đ SC180000	h LH010000	q LQ010000	y LY010000	½ NF010000	H LH020000	Q LQ020000	Y LY020000	8 ND080000
-9	ñ LN190000	ß LS610000	Ñ LN200000	` SD130000	i LI010000	r LR010000	z LZ010000	¾ NF050000	I LI020000	R LR020000	Z LZ020000	9 ND090000
-A	[SM060000] SM080000	 SM650000	: SP130000	« SP170000	ª SM210000	ï SP030000	¬ SM660000	(SHY) SP320000	1 ND011000	2 ND021000	3 ND031000
-B	· SP110000	\$ SC030000	, SP080000	# SM010000	» SP180000	º SM200000	¿ SP160000	 SM130000	ô LO150000	û LU150000	Ô LO160000	Û LU160000
-C	< SA030000	* SM040000	% SM020000	@ SM050000	đ LD610000	æ LA510000	Ð LD600000	- SD310000	ö LO170000	ü LU170000	Ö LO180000	Ü LU180000
-D	(SP060000) SP070000	— SP080000	' SP050000	◊ SD918000	Œ LO520000	◊ SD458000	œ LO510000	ƣ LU910000	ù LU130000	Ů LU920000	Û LU140000
-E	+ SA010000	; SP140000	> SA050000	= SA040000	◊ SD138000	Æ LA520000	◊ SD118000	ÿ LY180000	ó LO110000	ú LU110000	Ó LO120000	Ú LU120000
-F	! SP020000	^ SD150000	? SP150000	" SP040000	± SA020000	€ SC200000	® SM530000	× SA070000	σ LO810000	ÿ LY170000	Œ LO820000	(EO)

Code Page 01164

[[页面顶部 \(on page 95\)](#) | [上一页 \(on page 94\)](#) | [下一页](#) | [目录 \(on page 47\)](#)]