

HCL Informix 14.10 - ESQL/C Programmer's Guide



Contents

Chapter 1. ESQL/C Guide.....	3
What is Informix® ESQL/C?.....	3
Informix® ESQL/C programming.....	3
Compile programs.....	46
Informix® ESQL/C data types.....	79
Character and string data types.....	93
Numeric data types.....	107
Time data types.....	124
Simple large objects.....	135
Smart large objects.....	178
Complex data types.....	203
Opaque data types.....	254
Database server communication.....	276
Exception handling.....	276
Working with the database server.....	318
Informix® libraries.....	365
Dynamic SQL.....	399
Using dynamic SQL.....	399
Determine SQL statements.....	438
A system-descriptor area.....	477
An sqllda structure.....	519
Appendixes.....	547
The ESQL/C example programs.....	547
The ESQL/C function library.....	547
Examples for smart-large-object functions.....	823
Index.....	836

Chapter 1. ESQL/C Guide

The topics explain how to use IBM® Informix® ESQL/C, the Informix® implementation of Embedded Structured Query Language (SQL) for C (ESQL/C), to create client applications with database-management capabilities.

These topics serve as complete guide to the features of Informix® ESQL/C that enable you to interact with the database server, access databases, manipulate the data in your program, and check for errors. However, certain operating systems do not support every documented ESQL/C feature. Check the HCL® Informix® Client Software Development Kit (Client SDK) machine notes for your operating system to determine exactly which features do not operate in your environment.

These topics progress from general topics to more advanced programming techniques and examples.

These topics are written primarily for C programmers who want to embed SQL statements in their programs to access HCL Informix® databases.

These topics assume that you have the following background:

- A working knowledge of your computer, your operating system, and the utilities that your operating system provides
- Some experience working with relational or object-relational databases, or exposure to relational database concepts
- C language programming

The following users might also be interested in some of these topics:

- Database server administrators
- Performance engineers

For information about software compatibility, see the Informix® Client SDK release notes.

These topics are taken from *HCL® Informix® Enterprise Replication Guide*.

What is Informix® ESQL/C?

Informix® ESQL/C programming

The last section of these topics, [A sample Informix ESQL/C program on page 43](#), presents the **demo1** sample program, which is annotated. The **demo1** program illustrates the basic concepts of Informix® ESQL/C programming that these topics introduce.

What is Informix® ESQL/C?

IBM® Informix® ESQL/C is an SQL application programming interface (API) that enables you to embed Structured Query Language (SQL) statements directly into a C program.

The Informix® ESQL/C preprocessor, `esql`, converts each SQL statement and all code specific to HCL® Informix® to C-language source code and starts the C compiler to compile it.

ESQL/C components

IBM® Informix® ESQL/C consists of the following software components:

- The Informix® ESQL/C libraries of C functions, which provide access to the database server.
- The Informix® ESQL/C header files, which provide definitions for the data structures, constants, and macros useful to the Informix® ESQL/C program.
- The `esql` command, which processes the Informix® ESQL/C source code to create a C source file that it passes to the C compiler.
- The `finderr` utility on the UNIX™ system and the Windows™ Informix Error Messages utility, which enable you to obtain information about error messages specific to Informix®.
- The Informix® GLS locale and code-set-conversion files, which provide locale-specific information.

For more information about these files, see the *HCL® Informix® GLS User's Guide*.

ESQL/C files for Windows™

For Windows™ environments, the IBM® Informix® ESQL/C product contains the following additional executable files:

- The `Setnet32` utility is a Windows-based utility that enables you to set configuration information.

For more information, see the *Informix® Client Products Installation Guide*.

- The `ILOGIN` utility is a demonstration program that opens a dialog box with fields for the connection parameters, for testing a connection to the database server (uses the **stores7** database).

For more information, see the *Informix® Client Products Installation Guide*.

- The `ESQLMF.EXE` multibyte filter changes escape characters in multibyte strings into hexadecimal literals.

These Informix® ESQL/C executable files are located in the `%INFORMIXDIR%\bin`, `%INFORMIXDIR%\lib`, and `%INFORMIXDIR%\demo` directories. The `%INFORMIXDIR%` variable represents the value of the **INFORMIXDIR** environment variable.

ESQL/C library functions

The IBM® Informix® ESQL/C library contains a set of C functions that you can use in your application.

These functions fall into the following categories:

- Data type alignment library functions provide support for computer-independent size and alignment information for different data types and assist in working with null database values.
- Character and string library functions provide character-based manipulations such as comparison and copying.
- DECIMAL library functions support access to DECIMAL values through the **decimal** structure.
- Formatting functions enable you to specify display formats for different data types.
- DATE library functions support access to DATE values.

- DATETIME and INTERVAL library functions support access to values of these data types through the **datetime** and **interval** structures.
- Error message functions provide support for obtaining and formatting error-message text that is specific to Informix® .
- Database server control functions enable your application to implement such features as canceling queries and terminating connections.
- INT8 library functions enable you to access INT8 values through the **int8** structure.
- Smart-large-object library functions provide a file-like interface to the BLOB and CLOB data types.

Creating an ESQL/C program

About this task

To create an ESQL/C program:

1. Embed Informix® ESQL/C statements in a C-language source program to perform the following tasks:
 - Define host variables to store data for transfer between the Informix® ESQL/C program and the database server.
 - Access the database server through SQL statements.
 - Provide directives for the Informix® ESQL/C preprocessor and the C compiler.
2. Preprocess the Informix® ESQL/C source file with the `esql` command to create a C-language source file and start the C compiler.
3. As necessary, correct errors reported by the preprocessor and the compiler and repeat [step 2 on page 5](#).
4. Using the `esql` command, link the compiled object code into one or more executable files.

Results

The Informix® ESQL/C source file can contain the following types of statements:

Preprocessor directives

Informix® ESQL/C preprocessor directives to create simple macro definitions, include Informix® ESQL/C files, and perform conditional Informix® ESQL/C compilation.

C preprocessor directives to create macro definitions, include system and C source files, and perform conditional C compilation.

Language statements

Informix® ESQL/C host variable definitions to store data for transfer between the Informix® ESQL/C program and the database server.

Embedded SQL statements to communicate with the database server.

C language statements to provide program logic.

For information about C preprocessor directives and C language statements, see a C programming text.

Your Informix® ESQL/C source code file name can have either of the following forms:

- `esqlc_source.ec`
- `esqlc_source.ecp`

The particular suffix that your Informix® ESQL/C source file has determines the default order in which that source file gets compiled by the `esql` command. The `.ec` suffix is the default suffix. For more information about the `.ecp` suffix and the non-default order of compilation, see [Run the C preprocessor before the ESQL/C preprocessor on page 63](#).

Embed SQL statements

The IBM® Informix® ESQL/C program can use SQL statements to communicate with the database server. The program can use both *static* and *dynamic* SQL statements.

A static SQL statement is one in which all the components are known when you compile the program. A dynamic SQL statement is one in which you do not know all the components at compile time; the program receives all or part of the statement at run time. For a description of dynamic SQL, see [Using dynamic SQL on page 399](#).

You can embed SQL statements in a C function with one of two formats:

- The EXEC SQL keywords:

```
EXEC SQL SQL_statement;
```

Using EXEC SQL keywords is the ANSI-compliant method to embed an SQL statement.

- The dollar sign (\$) notation:

```
$_SQL_statement;
```

In either of these formats, replace `SQL_statement` with the complete text of a valid statement. Informix® ESQL/C statements can include host variables in most places where you can use a constant. For any exceptions, see the syntax of individual statements in the *HCL® Informix® Guide to SQL: Syntax*.

Case sensitivity in embedded SQL statements

The following table describes how the IBM® Informix® ESQL/C preprocessor treats uppercase and lowercase letters.

Table 1. Case sensitivity in ESQL/C files

ESQL/C identifier	Case sensitive	Example
Host variable	Yes	Informix® ESQL/C treats the variables fname and Fname as distinct variables: <pre>EXEC SQL BEGIN DECLARE SECTION; char fname[16], lname[16]; char Fname[16]; EXEC SQL END DECLARE SECTION;</pre>

Table 1. Case sensitivity in ESQL/C files (continued)

ESQL/C identifier	Case sensitive	Example
		This sample does not generate a warning from the preprocessor.
Variable types	Yes	<p>Both Informix® ESQL/C and C treat the names of data types as case sensitive. The CHAR type in the following example is considered distinct from the char data type and it generates an error:</p> <pre>EXEC SQL BEGIN DECLARE SECTION; char fname[16], lname[16]; CHAR Fname[16]; EXEC SQL END DECLARE SECTION;</pre> <p>The CHAR type does not generate an error, however, if you provide a typedef statement for it. In the following example, the CHAR type does not generate an error:</p> <pre>typedef char CHAR; EXEC SQL BEGIN DECLARE SECTION; char fname[16], lname[16]; CHAR Fname[16]; EXEC SQL END DECLARE SECTION;</pre>
SQL keyword	No	<p>Both CONNECT statements are valid ways of establishing a connection to the stores7 demonstration database:</p> <pre>EXEC SQL CONNECT TO 'stores7'; or EXEC SQL connect to 'stores7';</pre> <p>In examples given in this publication, SQL keywords are displayed as lowercase characters.</p>
Statement identifiers	No	The following example shows the creation of statement IDs and cursor names:
Cursor names		<pre>EXEC SQL prepare st from 'select * from tab1'; /* duplicate */ EXEC SQL prepare ST from 'insert into tab2 values (1,2)'; EXEC SQL declare curname cursor for st; /* duplicate */ EXEC SQL declare CURNAME cursor for ST;</pre> <p>This code produces errors because the statement IDs st and ST are duplicates, as are the cursor names curname and CURNAME. For more information about statement IDs and cursor names, see the <i>HCL® Informix® Guide to SQL: Syntax</i>.</p>

Quotation marks and escape characters

An escape character indicates to the IBM® Informix® ESQL/C preprocessor that it should print the character as a literal character instead of interpreting it. You can use the escape character with an interpreted character to make the compiler escape, or ignore, the interpreted meaning.

In ANSI SQL, the backslash character (\) is the escape character. To search for data that begins with the string `\abc`, the WHERE clause must use an escape character as follows:

```
... where col1 = '\\abc';
```

However, ANSI standards specify that using the backslash character (\) to escape single (') or double (") quotation marks is invalid. For example, the following attempt to find a quotation mark does not conform to ANSI standards:

```
... where col1 = '\';
```

In non-embedded tools such as DB-Access, you can escape a quotation mark with either of the following methods:

- You can use the same quotation mark as an escape character, as follows:

```
... where col1 = '''';
```

- You can use an alternative quotation mark. For example, to look for a double quotation mark, you can enclose this double quotation mark with quotation marks, as follows:

```
... where col1 = ' "';
```

The following figure shows a SELECT statement with a WHERE clause that contains a double quotation mark enclosed with quotation marks.

Figure 1. A SELECT statement with an invalid WHERE clause

```
EXEC SQL select col1 from tab1 where col1 = ' "';
```

For the WHERE clause in [Table 2: Escaped query string as it is processed on page 9](#), the Informix® ESQL/C preprocessor does not process a double quotation mark; it passes it on to the C compiler. When the C compiler receives the string `' "'` (double quotation mark enclosed with quotation marks), it interprets the first quotation mark as the start of a string and the double quotation mark as the end of a string. The compiler cannot match the quotation mark that remains and therefore generates an error.

To cause the C compiler to interpret the double quotation mark as a character, precede the double quotation mark with the C escape character, the backslash (\). The following example illustrates the correct syntax for the query in [Table 2: Escaped query string as it is processed on page 9](#):

```
EXEC SQL select col1 from tab1 where col1 = '\\"';
```

Because both C and ANSI SQL use the backslash character as the escape character, be careful when you search for the literal backslash in embedded queries. The following query shows the correct syntax to search for the string `"\"` (where the double quotation marks are part of the string):

```
EXEC SQL select col1 from tab1 where col1 = '\\\\"';
```

This string requires five backslashes to obtain the correct interpretation. Three of the backslashes are escape characters, one for each double quotation mark and one for the backslash. The following table shows the string after it passes through each of the processing steps.

Table 2. Escaped query string as it is processed

Processor	After processing
ESQL/C preprocessor	<code>"\\\\"</code>
C compiler	<code>"\"</code>
ANSI-compliant database server	<code>"\"</code>

Informix® ESQL/C supports strings in either quotation marks (*'string'*) or double quotation marks (*"string"*). However, the C language supports strings only in double quotation marks. Therefore, the Informix® ESQL/C preprocessor converts every statement in the Informix® ESQL/C source file into a double-quoted string.

Newline characters in quoted strings

IBM® Informix® ESQL/C does not allow a newline character (0x0A) in a quoted string. The database server does allow a newline character in a quoted string, however, if you specify that you want to allow it. Consequently, you can include the newline character in a quoted string that is part of a dynamically prepared SQL statement because the database server, rather than Informix® ESQL/C, processes the prepared statement.

You can specify that you want the database server to allow the newline character in a quoted string either on a per session basis or on an all session basis. A session is the duration of the client connection to the database server.

To allow or disallow a newline character in a quoted string for a particular session, you must execute the user-defined routine `ifx_allow_newline(boolean)`. The following example illustrates how to start the `ifx_allow_newline()` user-defined routine to allow newlines in quoted strings:

```
EXEC SQL execute procedure ifx_allow_newline('t');
```

To disallow newline in quoted strings, change the argument to `f` as in the following example:

```
EXEC SQL execute procedure ifx_allow_newline('f');
```

To allow or disallow a newline character in a quoted string for all sessions, set the `ALLOW_NEWLINE` parameter in the `onconfig` file. A value of `1` allows the newline character. A value of `0` disallows the newline character. For more information about the `ALLOW_NEWLINE` parameter, see your *HCL® Informix® Administrator's Guide*.

Add comments to ESQL/C programs

To add comments to the IBM® Informix® ESQL/C program, you can use either of the following formats:

- You can use a double dash (--) comment indicator on any Informix® ESQL/C statement. The statement must begin with either EXEC SQL or \$ and terminate with a semicolon. The comment continues to the end of the line.

For example, the comment on the first of the following lines notes that the Informix® ESQL/C statement opens the **stores7** demonstration database:

```
EXEC SQL database stores7;  -- stores7 database is open now!
printf("\nDatabase opened\n"); /* This is not an ESQL/C */
                               /* line so it needs a      */
                               /* regular C notation      */
                               /* for a comment */
```

- You can use a standard C comment on the Informix® ESQL/C line, as the following example shows:

```
EXEC SQL begin work; /* You can also use a C comment here */
```

Host variables

Host variables are IBM® Informix® ESQL/C or C variables that you use in embedded SQL statements to transfer data between database columns and the Informix® ESQL/C program.

When you use a host variable in an SQL statement, you must precede its name with a symbol to distinguish it as a host variable. You can use either of the following symbols:

- A colon (:)

For example, to specify the host variable that is called **hostvar** as a connection name, use the following syntax:

```
EXEC SQL connect to :hostvar;
```

Using the colon (:) as a host-variable prefix conforms to ANSI SQL standards.

- A dollar sign (\$)

For example, to specify the host variable that is called **hostvar** as a connection name, use the following syntax:

```
EXEC SQL connect to $hostvar;
```

When you list more than one host variable within an SQL statement, separate the host variables with commas (,). For example, the esql command interprets the following line as two host variables, **host1** and **host2**:

```
EXEC SQL select fname, lname into :host1, :host2 from customer;
```

If you omit the comma, esql interprets the second variable as an indicator variable for the first host variable. The esql command interprets the following line as one host variable, **host1**, and one indicator variable, **host2**, for the **host1** host variable:

```
EXEC SQL select fname, lname into :host1 :host2 from customer;
```

Outside an SQL statement, treat a host variable as you would a regular C variable.

Declaring and using host variables

About this task

In IBM® Informix® ESQL/C applications, the SQL statements can refer to the contents of *host variables*. A host variable is an ESQL/C program variable that you use to transfer information between the Informix® ESQL/C program and the database.

You can use host variables in Informix® ESQL/C expressions in the same way that you use literal values except that they cannot be used:

- In prepared statements
- In stored procedures
- In check constraints
- In views
- In triggers
- As part of a string concatenation operation

To use a host variable in an SQL statement:

1. Declare the host variable in the C program.
2. Assign a value to the host variable.
3. Specify the host variable in an embedded SQL statement.

Declare a host variable

You must define the data storage that a host variable needs before you can use that variable in IBM® Informix® ESQL/C programs. To assign an identifier to the variable and associate it with a data type, you declare the variable.

You declare host variables within the Informix® ESQL/C program as C variables, with the same basic syntax as C variables.

To identify the variable as a host variable, you must declare it in either of the following ways:

- Put the declarations in an ESQL declare section:

```
EXEC SQL BEGIN DECLARE SECTION;
    -- put host variable declarations here
EXEC SQL END DECLARE SECTION;
```

Make sure that you terminate the statements EXEC SQL BEGIN DECLARE SECTION and EXEC SQL END DECLARE SECTION with semicolons.

Using the EXEC SQL BEGIN DECLARE SECTION and EXEC SQL END DECLARE SECTION keywords conforms to ANSI standards.

- Preface each declaration with a dollar sign (\$).


Within the declaration itself, you must specify the following information:

- The name of the host variable
- The data type of the host variable
- The initial value of the host variable (optional)
- The scope of the host variable (which the placement of the declaration within the program determines)

Host variable names


The name of the host variable must conform to the naming conventions of the C language. In addition, you must follow any limitations that your C compiler imposes.

In general, a C variable must begin with a letter or an underscore (`_`) and can include letters and digits and underscores.

 **Important:** Many variable names used in the implementation of the IBM® Informix® ESQL/C product begin with an underscore. To avoid conflicting with internal Informix® ESQL/C variable names, avoid the use of an underscore for the first character of a variable name.

The C variable names are case-sensitive, so the variables `hostvar` and `HostVar` are distinct.

You can use non-ASCII (non-English) characters in Informix® ESQL/C host-variable names if your client locale supports these non-ASCII characters. For more information about how the client locale affects host-variable names, see the *HCL® Informix® GLS User's Guide*.

 **Tip:** Good programming practice requires that you create a naming convention for host-variable names.

Host-variable data types

Because a host variable is a C variable, you must assign a C data type to the variable when you declare it. Likewise, when you use a host variable in an SQL statement, you also associate it with an SQL data type.

For more information about the relationship between SQL data types and C data types, see [Informix ESQL/C data types on page 79](#). In addition, the *HCL® Informix® Guide to SQL: Reference* contains information about the SQL data types.

You can also declare host variables as many of the more complex C data types, such as pointers, structures, `typedef` expressions, and function parameters. For more information, see [Host variables in data structures on page 18](#).

Initial host-variable values

You can declare host variables with normal C initializer expressions by using IBM® Informix® ESQL/C.

The following example shows valid C initializers:

```
EXEC SQL BEGIN DECLARE SECTION;
    int varname = 12;
    long cust_nos[8] = {0,0,0,0,0,0,0,9999};
    char descr[100] = "Steel eyelets; Nylon cording.";
EXEC SQL END DECLARE SECTION;
```

The Informix® ESQL/C preprocessor does not check initializer expressions for valid C syntax; it copies them to the C source file. The C compiler diagnoses any errors.

Scope of host variables

The scope of reference, or the scope, of a host variable is that portion of the program in which the host variable can be accessed.

The placement of the IBM® Informix® ESQL/C declaration statement determines the scope of the variable as follows:

- If the declaration statement is inside a program block, the variable is *local* to that program block.

Only statements within that program block can access the variable.

- If the declaration statement is outside a program block, the variable is *modular*.

All program blocks that occur after the declaration can access the variable.

Host variables that you declare within a block of code are local to that block. You define a block of code with a pair of curly braces, {}.

For example, the host variable **blk_int** in the following figure is valid only in the block of code between the curly braces, whereas **p_int** is valid both inside and outside the block.

Figure 2. Declaring host variables inside and outside a code block

```
EXEC SQL BEGIN DECLARE SECTION;
    int p_int;
EXEC SQL END DECLARE SECTION;
:
EXEC SQL select customer_num into :p_int from customer
    where lname = "Miller";
:
{
    EXEC SQL BEGIN DECLARE SECTION;
        int blk_int;
    EXEC SQL END DECLARE SECTION;

    blk_int = p_int;

:
    EXEC SQL select customer_num into :blk_int from customer
        where lname = "Miller";
:
}
```

You can nest blocks up to 16 levels. The global level counts as level one.

The following C rules govern the scope of Informix® ESQL/C host variables as well:

- A host variable is an automatic variable unless you explicitly define it as an **external** or **static** variable or unless it is defined outside of any function.
- A host variable that a function declares is local to that function and masks a definition with the same name outside the function.
- You cannot define a host variable more than once in the same block of code.

Sample host-variable declarations

The following figure shows an example of how to use the EXEC SQL syntax to declare host variables.

Figure 3. Declaring host variables with the EXEC SQL syntax

```
EXEC SQL BEGIN DECLARE SECTION;
char  *hostvar;    /* pointer to a character */
int   hostint;    /* integer */
double hostdbl;   /* double */
char  hostarr[80]; /* character array */
struct {
    int svar1;
    int svar2;
:
} hoststruct;    /* structure */
EXEC SQL END DECLARE SECTION;
```

The following figure shows an example of how to use the dollar sign (\$) notation to declare host variables.

Figure 4. Declaring host variables with the dollar sign (\$) notation

```
$char  *hostvar;
$int   hostint;
$double hostdbl;
$char  hostarr[80];

$struct {
    int svar1;
    int svar2;
:
} hoststruct;
```

Host variable information

You can use host variables to contain the following types of information:

SQL identifiers

SQL identifiers include names of parts of the database such as tables, columns, indexes, and views.

Data

Data is information that the database server fetches from or stores in the database. This information can include null values. A null value indicates that the value of the column or variable is unknown.

Host variables can be displayed within an SQL statement as syntax allows. (For information about the syntax of SQL statements, see the *HCL® Informix® Guide to SQL: Syntax*.) However, you must precede the host-variable name with a symbol to distinguish it from regular C variables.

SQL identifiers

An SQL identifier is the name of a database object.

The following objects are examples of SQL identifiers:

- Parts of the database schema such as tables, columns, views, indexes, synonyms, and stored procedure names
- Dynamic IBM® Informix® ESQL/C structures such as cursors and statement IDs

As syntax allows, you can use a host variable within an embedded SQL statement to hold the name of an SQL identifier.

For information about the sizes and naming conventions for SQL identifiers, see the Identifier segment in the *HCL® Informix® Guide to SQL: Syntax*.

Long identifiers

HCL Informix® allows identifiers of up to 128 characters in length, and user names up to 32 characters in length. Other versions of Informix® database servers support an identifier length of 18 characters and a user name length of 8 characters.

The database server uses the following two criteria to determine whether the client program can receive long identifiers:

- The internal version number of the client program
- The setting of the **IFX_LONGID** environment variable

If the **IFX_LONGID** environment variable is set to 0 (zero) the database server treats the client as if it cannot handle long identifiers. If **IFX_LONGID** is set to 1 (one) and the client version is recent enough, then the database server treats the client as if it is able to receive long identifiers. If **IFX_LONGID** is not set it is treated as if it is set to 1 (one).



Important: If you set **IFX_LONGID** in the environment of the client, it takes effect only for that client. If you set the **IFX_LONGID** environment variable in the environment of the database server, it takes effect for all client programs.

For more information about the **IFX_LONGID** environment variable, see the *HCL® Informix® Guide to SQL: Reference*.

Client programs that meet the following conditions can use long identifiers and long user names without recompiling:

- It was compiled with a version of ESQL/C that was released later than version 9.20
- It uses shared libraries (that is, program was compiled without the `-static` option)

If the database server truncates a long identifier or long user name, it sets the SQLSTATE variable to `'01004'` and sets the **sqlwarn1** flag to `'W'` in the SQL Communications Area (**sqlca**).

Delimited identifiers

If an identifier name does not conform to naming conventions, you must use a *delimited identifier*. A delimited identifier is an SQL identifier that is enclosed in double quotation marks, " ".

When you use double quotation marks to delimit identifiers, you conform to ANSI standards; single quotation marks (') delimit strings.

Use delimited identifiers when your program must specify some identifier name that would otherwise be syntactically invalid. Examples of possible invalid identifiers include:

- An identifier that is the same as an SQL reserved word.
For a list of SQL reserved words, see the description of identifiers in the *HCL® Informix® Guide to SQL: Syntax*.
- An identifier that does not contain alphabetic characters.

To use delimited identifiers, you must compile and run your IBM® Informix® ESQL/C program with the **DELIMITED** environment variable set. You can set **DELIMITED** at either of the following phases:

- At compile time, the Informix® ESQL/C preprocessor allows quoted strings in areas of the SQL syntax where identifiers are valid.
- At run time, the database server accepts quoted strings in dynamic SQL statements where identifiers are valid.

Database utilities such as **dbexport** and DB-Access also accept delimited identifiers.



Important: When you use the **DELIMITED** environment variable, you can no longer use double quotation marks to delimit strings. If you want to indicate a quoted string, enclose the text with single quotation marks (').

Delimited identifiers are case sensitive. All database object names that you place within quotation marks maintain their case. Keep in mind that Informix® ESQL/C restricts identifier names to a maximum of 128 characters.

The following restrictions apply to delimited identifiers:

- You cannot use a delimited identifier for a database name.
- You cannot use a delimited identifier for a storage identifier, for instance, the name of a dbspace.

The **DELIMITED** environment variable applies only to database identifiers.

Example of a delimited identifier

The following figure shows a delimited identifier that specifies characters that are not alphabetic in both a cursor name and a statement ID.

Figure 5. Using delimited identifiers for a cursor name

```
EXEC SQL BEGIN DECLARE SECTION;
    char curname1[10];
    char stmtname[10];
EXEC SQL END DECLARE SECTION;

strcpy("%#!", curname1);
strcpy("_=", stmtname);
EXEC SQL prepare :stmtname from
    'select customer_num from customer';
EXEC SQL declare :curname1 cursor for $stmtname;
EXEC SQL open :curname1;
```

In the previous figure, you can also list the cursor name or statement ID directly in the SQL statement. For example, the following PREPARE statement is also valid (with **DELIMIDENT** set):

```
EXEC SQL prepare "%#!" from
    'select customer_num from customer';
```

If you set **DELIMIDENT**, the SELECT string in the preceding PREPARE statement must be enclosed in quotation marks for the preprocessor to treat it as a string. If you enclose the statement in double quotation marks, the preprocessor treats it as an identifier.

To declare a cursor name that contains a double quotation mark, you must use escape characters in the delimited identifier string. For example, to use the string "abc" as a cursor name, you must escape the initial quotation mark in the cursor name:

```
EXEC SQL BEGIN DECLARE SECTION;
    char curname2[10];
    char stmtname[10];
EXEC SQL END DECLARE SECTION;

strcpy("\\"abc\"", curname2);
EXEC SQL declare :curname2 cursor for :stmtname;
```

In the preceding example, the cursor name requires several escape characters:

- The backslash (\) is the C escape character. You need it to escape the double quotation mark.

Without the escape character, the C compiler would interpret the double quotation mark as the end of the string.

- The cursor name must contain two double quotation marks.

The first double quotation mark escapes the double quotation mark and the second double quotation mark is the literal double quotation mark. The ANSI standard states that you cannot use a backslash to escape quotation marks. Instead, you must escape the quotation mark in the cursor name with another quotation mark.

The following table shows the string that contains the cursor name as it is processed.

Table 3. Escaped cursor name string as it is processed

Processor	After processing
ESQL/C preprocessor	\\"abc
C Compiler	"abc
ANSI-compliant database server	"abc

Null values in host variables

A null value represents unknown or not applicable values. This value is distinct from all legal values in any given data type.

The representation of null values depends on both the computer and the data type. Often, the representation does not correspond to a legal value for the C data type. Do not attempt to perform arithmetic or other operations on a host variable that contains a null value.

A program must, therefore, have some way to recognize a null value. To handle null values, IBM® Informix® ESQL/C provides the following features:

- The `risnull()` and `rsetnull()` library functions enable you to test whether a host variable contains a null value and to set a host variable to a null value.
- Indicator variables are special Informix® ESQL/C variables that you can associate with host variables that hold values for database columns that allow null values.

The value of the indicator variable can show whether the associated host variable contains a null value.

In an ANSI-compliant database, a host variable that is used in an INSERT statement or in the WHERE clause of any SQL statement must be null terminated.

Host variables in data structures

IBM® Informix® ESQL/C supports the use of host variables in the following data structures:

- Arrays
- C structures (**struct**)
- C **typedef** statements
- Pointers
- Function parameters

Arrays of host variables

IBM® Informix® ESQL/C supports the declaration of arrays of host variables. You must provide an integer value as the size of the array when you declare the array. An array of host variables can be either one or two dimensional.

You can use elements of an array within Informix® ESQL/C statements. For example, if you provide the following declaration:

```
EXEC SQL BEGIN DECLARE SECTION;
    long customer_nos[10];
EXEC SQL END DECLARE SECTION;
```

you can use the following syntax:

```
for (i=0; i<10; i++)
{
    EXEC SQL fetch customer_cursor into :customer_nos[i];
:
}
```

You can also use the array name alone within some SQL statements if the array is of type CHAR. For information about specific statements, see the *HCL® Informix® Guide to SQL: Syntax*.

C structures as host variables

IBM® Informix® ESQL/C supports the declaration of a C structure (**struct**) as a host variable. You can use the components of the structure within Informix® ESQL/C statements.

The following definition of the **cust_rec** variable serves as a host variable for the first three columns of the **customer** table in the **stores7** database:

```
EXEC SQL BEGIN DECLARE SECTION;
    struct customer_t
    {
        int    c_no;
        char   fname[32];
        char   lname[32];
    } cust_rec;
EXEC SQL END DECLARE SECTION;
```

The following INSERT statement specifies the components of the **cust_rec** host variable in its VALUES clause:

```
EXEC SQL insert into customer (customer_num, fname, lname)
    values (:cust_rec.c_no, :cust_rec.fname,
        :cust_rec.lname);
```

If an SQL statement requires a single host variable, you must use the structure component name to specify the host variable. Informix® requires structure component names in the SET clause of an UPDATE statement.

In SQL statements that allow a list of host variables, you can specify the name of the C structure and Informix® ESQL/C expands the name of the structure variable to each of its component elements. You can use this syntax with SQL statements such as the FETCH statement with an INTO clause or the INSERT statement with a VALUES clause.

The following INSERT statement specifies the entire **cust_rec** structure in its VALUES clause:

```
EXEC SQL insert into customer (customer_num, fname, lname)
    values (:cust_rec);
```

This insert performs the same task as the insert that specifies the individual component names of the **cust_rec** structure.

C typedef statements as host variables

IBM® Informix® ESQL/C supports the C **typedef** statements and allows the use of **typedef** names in declaring the types of host variables.

For example, the following code creates the **smallint** type as a short integer and the **serial** type as a long integer. It then declares a **row_nums** variable as an array of **serial** variables and a variable **counter** as a **smallint**.

```
EXEC SQL BEGIN DECLARE SECTION;
  typedef short smallint;
  typedef long serial;

  serial row_nums [MAXROWS];
  smallint counter;
EXEC SQL END DECLARE SECTION;
```

You cannot use a **typedef** statement that names a multidimensional array, or a union, or a function pointer, as the type of a host variable.

Pointers as host variables

Use a pointer as a host variable if your program uses the pointer to input data to an SQL statement.

For example, the following figure shows how you can associate a cursor with a statement and insert values into a table.

Figure 6. Declaring a character pointer to input data

```
EXEC SQL BEGIN DECLARE SECTION;
  char *s;
  char *i;
EXEC SQL END DECLARE SECTION;

/* Code to allocate space for two pointers not shown */

s = "select * from cust_calls";
i = "NS";

:

EXEC SQL prepare x from :s;
EXEC SQL insert into state values (:i, 'New State');
```

The following figure shows how to use an integer pointer to input data to an INSERT statement.

Figure 7. Declaring an integer pointer to input data

```

EXEC SQL BEGIN DECLARE SECTION;
  short *i;
  int *o;
  short *s;
EXEC SQL END DECLARE SECTION;

short i_num = 3;
int o_num = 1002;
short s_num = 8;

i = &i_num;
o = &o_num;
s = &s_num;

EXEC SQL connect to 'stores7';
EXEC SQL insert into items values (:*i, :*o, :*s, 'ANZ', 5, 125.00);
EXEC SQL disconnect current;

```

If you use a host variable that is a pointer to **char** to receive data from a **SELECT** statement, you receive a compile-time warning and your results might be truncated.

Function parameters as host variables

You can use host variables as parameters to functions. You must precede the name of the host variable with the **parameter** keyword to declare it as a function parameter.

For example, the following figure shows a code fragment with a Kernighan and Ritchie-style prototype declaration that expects three parameters, two of which are host variables.

Figure 8. Using EXEC SQL to declare host variables as parameters to a Kernighan and Ritchie-Style function declaration

```

f(s, id, s_size)
EXEC SQL BEGIN DECLARE SECTION;
  PARAMETER char s[20];
  PARAMETER int id;
EXEC SQL END DECLARE SECTION;
int s_size;
{
  select fname into :s from customer
  where customer_num = :id;
;
}

```

You can also declare parameter host variables with the dollar sign (\$) notation. For example, the following figure shows the function header in [Figure 8: Using EXEC SQL to declare host variables as parameters to a Kernighan and Ritchie-Style function declaration on page 21](#), with the dollar sign (\$) notation.

Figure 9. Using the dollar sign (\$) to declare host variables as parameters to a function

```
f(s, id, s_size)
$parameter char s[20];
$parameter int id;
int s_size;
```

You can declare parameters in an ANSI-style prototype function declaration as host variables as well. You can also put all parameters to a prototype function declaration inside the EXEC SQL declare section, even if some of the parameters cannot be used as host variables. The following figure shows that the function pointer `f` can be included in the EXEC SQL declare section, even though it is not a valid host-variable type and cannot be used as a host variable.

Figure 10. Using EXEC SQL to declare host variables as parameters to ANSI-style function declaration

```
int * foo(
EXEC SQL BEGIN DECLARE SECTION;
    PARAMETER char s[20],
    PARAMETER int id,
    PARAMETER int (*f) (double)
EXEC SQL END DECLARE SECTION;
)
{
    select fname into :s from customer
        where customer_num = :id;
};
}
```

The functionality that allows inclusion of function parameters inside of the EXEC SQL declare section is in compliance with the requirement that any valid C declaration syntax must be allowed inside the EXEC SQL declare sections to use common header files for C and Informix® ESQL/C source files. For more information about how to use common header files between C and Informix® ESQL/C source files, see [Define host variables based on C #defines and typedefs on page 65](#).

! **Important:** If you want to define Informix® ESQL/C host variables that are ANSI-style parameters, you must use the EXEC SQL BEGIN DECLARE SECTION and the EXEC SQL END DECLARE SECTION syntax. You cannot use the \$BEGIN DECLARE and \$END DECLARE syntax. This restriction is because SQL statements that begin with the dollar sign (\$) notion must end with a semicolon (;). However, ANSI syntax requires that each parameter in a parameter list does not end with a semicolon terminator, but with a comma (,) delimiter.

The following limitations apply to using host variables as function parameters:

- You cannot declare a parameter variable inside a block of C code.
- You cannot use the **parameter** keyword in declarations of host variables that are not part of a function header. If you do, you receive unpredictable results.

Host variables in Windows™ environments

This section describes the following topics about IBM® Informix® ESQL/C host variables that are unique to the Windows™ environments:

- How to declare host variables with non-ANSI storage-class modifiers
- How global Informix® ESQL/C variables are declared

Declare variables with non-ANSI storage-class modifiers

The ANSI C standards define a set of storage-class specifiers for variable declarations. The C compilers in Windows™ environments often support non-ANSI storage-class specifiers. To provide support for these non-ANSI storage-class specifiers in IBM® Informix® ESQL/C host-variable declarations, the Informix® ESQL/C preprocessor supports the form of the ANSI syntax, as shown.

```
{ EXEC SQL BEGIN DECLARE SECTION; <Declaration> EXEC SQL END DECLARE SECTION; | $ <Declaration> }
```

Declaration

```
"@"
```

```
" [ ( 'modifier name ' ) ] "
```

```
" variable type "
```

```
" [ ( 'modifier name ' ) ] "
```

```
" variable name "
```

Element	Purpose	Restrictions	Syntax
<i>modifier name</i>	Text that you want to pass to the C compiler for translation. This text is usually the name of the storage-class modifier.	The modifier must be valid for your C compiler or be a name that you define in your program.	See your C compiler documentation.
<i>variable name</i>	Identifier name of the ESQL/C host variable	None.	See Declare a host variable on page 11 .
<i>variable type</i>	Data type of the ESQL/C host variable	The type must be a valid C or ESQL/C data type.	See Declare a host variable on page 11 .

For example, the Microsoft™ Visual C++ compiler supports the **declspec** compiler directive to enable you to declare extended storage-class attributes. This compiler directive has the following syntax:

```
__declspec(attribute) var_type var_name;
```

In this example, *attribute* is a supported keyword (such as **thread**, **dllimport**, or **dlexport**), *var_type* is the data type of the variable, and *var_name* is the variable name.

To enable you to declare Informix® ESQL/C host variables as extended storage-class variables, the Informix® ESQL/C preprocessor supports the **declspec** directive with the following syntax:

```
@("__declspec(attribute)") var_type var_name;
```

In this example, *attribute*, *var_type*, and *var_name* are the same as in the previous example. You might find it convenient to declare a macro for the **declspec** syntax. The following example declares **threadCount** as an instance-specific integer variable of the thread-extended storage class:

```
#define DLLTHREAD __declspec(thread)
;;

EXEC SQL BEGIN DECLARE SECTION;
    @("DLLTHREAD") int threadCount;
EXEC SQL END DECLARE SECTION;
```

This example creates the DLLTHREAD macro to simplify the declaration of thread-extended storage-class attributes. You can declare similar macros to simplify declaration of variables to be exported (or imported) to the dynamic link library (DLL), as follows:

```
#define DLLEXPORT __declspec(dllexport);
;;

EXEC SQL BEGIN DECLARE SECTION;
    @("DLLEXPORT") int winHdl;
EXEC SQL END DECLARE SECTION;
```

Indicator variables

When an SQL statement returns a value, it returns it in the host variable for the specified column. In some cases, you can associate an indicator variable with the host variable to obtain additional information about the value that is returned. If you specify an indicator variable, IBM® Informix® ESQL/C sets it in addition to returning the value to the host variable.

The indicator variable provides additional information in the following situations:

- If the host variable is associated with a database column or an aggregate function that allows null values, the indicator variable can specify whether the value is null.
- If the host variable is a character array and the column value is truncated by the transfer, the indicator variable can specify the size of the returned value.

The following topics describe how to declare an indicator variable and associate it with a host variable, and also how Informix® ESQL/C sets an indicator variable to specify the two preceding conditions.

Declare indicator variables

You declare indicator variables in the same way as host variables, between BEGIN DECLARE SECTION and END DECLARE SECTION statements as the following example shows:

```
EXEC SQL BEGIN DECLARE SECTION;
    -- put indicator variable declarations here
EXEC SQL END DECLARE SECTION;
```

Indicator variables can be any valid numeric host-variable data type. Usually, you declare an indicator variable as an integer. For example, suppose your program declares a host variable called **name**. You can declare a **short** integer-indicator variable called **nameind**, as the following example shows:

```
EXEC SQL BEGIN DECLARE SECTION;
char name[16];
short nameind;
EXEC SQL END DECLARE SECTION;
```

You can use non-ASCII (non-English) characters in Informix® ESQL/C indicator-variable names if your client locale supports these non-ASCII characters. For more information about how the client locale affects host-variable names, see the *HCL® Informix® GLS User's Guide*.

Associate an indicator variable with a host variable

You associate an indicator variable with its host variable in one of the following two ways:

- Prefix the indicator variable with a colon (:) and place the keyword INDICATOR between the host variable name and the indicator variable name as follows:

```
:hostvar INDICATOR :indvar
```

- Place a separator symbol between the host variable name and the indicator variable name. The following separator symbols are valid:

- A colon (:)

```
:hostvar:indvar
```

- A dollar sign (\$)

```
$hostvar$indvar
```

You can use a dollar sign (\$) instead of a colon (:), but the colon makes the code easier to read.

You can have one or more white space characters between the host variable and indicator variable. For example, both of the following formats are valid to specify an indicator variable, **hostvarind**, on the **hostvar** host variable:

```
$hostvar:hostvarind
$hostvar :hostvarind
```

Indicate null values

When the IBM® Informix® ESQL/C statement returns a null value to a host variable, the value might not be a meaningful C value. Your program can take one of the following actions:

- If you have defined an indicator variable for this host variable, Informix® ESQL/C sets the indicator variable to -1.

Your program can check the indicator variable for a value of -1.

- If you did not define an indicator variable, the runtime behavior of Informix® ESQL/C depends on how you compiled the program:

- If you compile the program with the **-icheck** preprocessor option, Informix® ESQL/C generates an error and sets **sqlca.sqlcode** to a negative value when the database server returns a null value.
- If you compile the program without the **-icheck** option, Informix® ESQL/C does not generate an error when the database server returns a null value. In this case, you can use the **risnull()** function to test the host variable for a null value.

If the value returned to the host variable is not null, Informix® ESQL/C sets the indicator variable to 0. If the SQL operation is not successful, the value of the indicator variable is not meaningful. Therefore, check the outcome of the SQL statement before you check for a null value in the host variable.

The NULL keyword of an INSERT statement allows you to insert a null value into a table row. As an alternative to the NULL keyword in an INSERT statement, you can use a negative indicator variable with the host variable.

If you want to insert a variable while the indicator is set to NULL (-1), the indicator value takes precedence over the variable value. The value inserted in this case will NULL instead of the value of the host variable.

When you return aggregate function values into a host variable, keep in mind that when the database server performs an aggregate function on an empty table, the result of the aggregate operation is the null value. The only exception to this rule is the **COUNT(*)** aggregate function, which returns 0 in this case.



Important: If you activate the DATASKIP feature of the database server, an aggregate function also returns null if all fragments are offline or if all the fragments that are online are empty.

Indicate truncated values

When an SQL statement returns a non-null value into a host-variable character array, it might truncate the value to fit into the variable. If you define an indicator variable for this host variable, IBM® Informix® ESQL/C:

- Sets the SQLSTATE variable to "01004" to signal the occurrence of truncation.

For more information about SQLSTATE, see [List of SQLSTATE class codes on page 284.](#) Informix® ESQL/C also sets **sqlwarn1** of the **sqlca.sqlwarn** structure to **w**.

- Sets the associated indicator variable equal to the size in bytes of the SQL host variable before truncation.

If you do not define an indicator variable, Informix® ESQL/C still sets SQLSTATE and **sqlca.sqlwarn** to signal the truncation. However, your program has no way to determine how much data was truncated.

If the database server returns a value that is not truncated or null, Informix® ESQL/C sets the indicator variable to 0.

An example of using indicator variables

The code segments in [Figure 11: Using indicator variables with EXEC SQL and the colon \(:\) symbol on page 27](#) and [Figure 12: Using indicator variables with the dollar sign \(\\$\) notation on page 27](#) show examples of how to use indicator variables with host variables. Both examples use indicator variables to perform the following tasks:

- Determine if truncation has occurred on a character array

If you define **lname** in the **customer** table with a length that is longer than 15 characters, **nameind** contains the actual length of the **lname** column. The **name** host variable contains the first 15 characters of the **lname** value. (The string **name** must be terminated with a null character.) If the family name of the company representative with **customer_num = 105** is shorter than 15 characters, Informix® ESQL/C truncates only the trailing blanks.

- Check for a null value

If **company** has a null value for this same customer, **compind** has a negative value. The contents of the character array **comp** cannot be predicted.

The following figure shows the Informix® ESQL/C program that uses the EXEC SQL syntax for the SQL statements.

Figure 11. Using indicator variables with EXEC SQL and the colon (:) symbol

```
EXEC SQL BEGIN DECLARE SECTION;
char   name[16];
char   comp[20];
short  nameind;
short  compind;
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL select lname, company
into :name INDICATOR :nameind, :comp INDICATOR :compind
from customer
where customer_num = 105;
```

Figure 11: Using indicator variables with EXEC SQL and the colon (:) symbol on page 27 uses the INDICATOR keyword to associate the main and indicator variables. This method complies with the ANSI standard.

The following figure shows the Informix® ESQL/C program that uses the dollar sign (\$) format for the SQL statements.

Figure 12. Using indicator variables with the dollar sign (\$) notation

```
$char   name[16];
$char   comp[20];
$short  nameind;
$short  compind;
;;

$select lname, company
into $name$nameind, $comp$compind
from customer
where customer_num = 105;
```

ESQL/C header files

When you install HCL Informix® ESQL/C, the installation script stores the header files in the `$INFORMIXDIR/incl/esql` directory on a UNIX™ operating system and in the `%INFORMIXDIR%\incl\esql` directory in a Windows™ environment.

The following table shows the header files provided with the Informix® ESQL/C product.

Table 4. ESQL/C header files

Header file	Contains	Additional information
<code>datetime.h</code>	Definitions of the Informix® ESQL/C datetime and interval structures, which are the host variables for DATETIME and INTERVAL columns	Time data types on page 124
<code>decimal.h</code>	Definition of the Informix® ESQL/C decimal data type, which is the host variable for DECIMAL and MONEY data types	Numeric data types on page 107
<code>gls.h</code>	Function prototypes and data structures for the GLS functionality	<i>HCL® Informix® GLS User's Guide</i>
<code>ifxtypes.h</code>	Correctly maps the Informix® data types int1 , int2 , int4 , mint , mlong , MSHORT , and MCHAR for 32-bit and 64-bit platforms	The integer host variable types on page 108
<code>locator.h</code>	Definition of the Informix® ESQL/C locator structure (ifx_loc_t or loc_t), which is the host variable for byte and text columns	Simple large objects on page 135
<code>sqlca.h</code>	Definition of the structure that ESQL/C uses to store error-status codes The <code>esql</code> preprocessor automatically includes this file when it preprocesses your program.	Exception handling on page 276
<code>sqlda.h</code>	Structure definition for value pointers and descriptions of dynamically defined variables	Determine SQL statements on page 438
<code>sqlhdr.h</code>	This file includes the <code>sqlda.h</code> header file, other header files, and function prototypes. The preprocessor automatically includes this file when it preprocesses your program.	Header files included in your program on page 30
<code>sqliapi.h</code>	Function prototypes for internal library APIs For internal Informix® ESQL/C use only.	None
<code>sqlstype.h</code>	Definitions of constants for SQL statements The DESCRIBE statement uses these constants to describe a dynamically prepared SQL statement.	Determine SQL statements on page 438
<code>sqltypes.h</code>	Defines constants that correspond to ESQL/C and SQL data types ESQL/C uses these constants when your program contains a DESCRIBE statement.	Data type constants on page 82

Table 4. ESQL/C header files (continued)

Header file	Contains	Additional information
sqlxtype.h	Defines constants that correspond to Informix® ESQL/C and SQL data types when you are in X/Open mode ESQL/C uses these constants when your program contains a DESCRIBE statement.	X/Open data type constants on page 85
value.h	Value structures that Informix® ESQL/C uses For internal Informix® ESQL/C use only.	None
varchar.h	Macros that you can use with the VARCHAR data type	Character and string data types on page 93

The following figure shows the Informix® ESQL/C header files specific to HCL Informix®.

Table 5. ESQL/C header files for HCL Informix®

Header file	Contents	Additional information
collect.h	Definitions of data structures for complex types in Informix® ESQL/C	Complex data types on page 203
ifxgls.h	Function prototypes for the GLS application programming interface For internal Informix® ESQL/C use only.	None
int8.h	Definition of the structure that stores the INT8 data type	The int8 data type on page 109

The following table shows the Informix® ESQL/C header files specific to Windows™ environments.

Table 6. ESQL/C header files for Windows™ environments


Header file	Contents	Additional information
sqlproto.h	Function prototypes of all ESQL/C library functions for use with source that is not fully ANSI C compliant	Declare function prototypes on page 30
infxcexp.c	Contains the C code to export the addresses of all C runtime routines that the ESQL client-interface DLL uses	Same runtime routines for version independence on page 77
login.h	The definition of the InetLogin and HostInfoStruct structures, which enable you to customize configuration information for the application	Fields of the InetLogin structure on page 36

Table 6. ESQL/C header files for Windows™ environments (continued)

Header file	Contents	Additional information
	Because this file does not contain ESQL statements, you do not need to include it with the ESQL include directive. Use instead the C #include preprocessor directive.	

Declare function prototypes

IBM® Informix® ESQL/C provides the `sqlproto.h` header file to declare function prototypes for all Informix® ESQL/C library functions. These function prototypes are required in the Informix® ESQL/C source file that you compile with an ANSI C compiler. By default, the `esql` command processor does not include function-prototype declarations. Having the processor include the ANSI-compliant function prototypes for the Informix® ESQL/C functions prevents an ANSI C compiler from generating warnings.

 **Restriction:** Although you can use an ANSI C compiler, the Informix® ESQL/C preprocessor does not fully support ANSI C, so you might not be able to preprocess all programs that follow the ANSI C standards.

Because the `sqlproto.h` file does not contain any Informix® ESQL/C statements, you can include this file in either of the following ways:

- With the Informix® ESQL/C **include** preprocessor directive:

```
EXEC SQL include sqlproto;
```

- With the C **#include** preprocessor directive:

```
#include "sqlproto.h";
```


Header files included in your program

The IBM® Informix® ESQL/C preprocessor automatically includes the following Informix® ESQL/C header files in your program:

- The `sqlhdr.h` file provides cursor-related structures for your Informix® ESQL/C program.

This header file automatically includes the `sqlda.h` and `ifxtypes.h` header files.

- The `sqlca.h` file, which allows your program to check the success or failure of your Informix® ESQL/C statements with the `SQLSTATE` or `SQLCODE` variable

 **Restriction:** Although you can now use an ANSI C compiler, the Informix® ESQL/C preprocessor does not fully support ANSI C, so you might not be able to preprocess all programs that follow the ANSI C standards.


To include any of the other header files in your Informix® ESQL/C program, you must use the **include** preprocessor directive. However, you only need to include the Informix® ESQL/C header file if your program refers to the structures or the definitions

that the header file defines. For example, if your program accesses `datetime` data, you must include the `datetime.h` header file, as follows:

```
EXEC SQL include datetime.h;
```

Make sure to terminate the line of code with a semicolon. Some additional examples follow:

```
EXEC SQL include varchar.h;
EXEC SQL include sqlda;
#include sqlstype;
```

 **Tip:** You do not have to enter the `.h` file extension for the Informix® ESQL/C header file; the `esql` preprocessor assumes a `.h` extension.

ESQL/C preprocessor directives

You can use the following capabilities of the IBM® Informix® ESQL/C preprocessor when you write Informix® ESQL/C code:

- The **include** directive expands Informix® ESQL/C include files within your program.
- The **define** and **undef** directives create compile-time definitions.
- The **ifdef**, **ifndef**, **else**, **elif**, and **endif** directives specify conditional compilation.

As with embedded SQL statements, you can use either of two formats for Informix® ESQL/C preprocessor directives:

- The EXEC SQL keywords:

```
EXEC SQL preprocessor_directive;
```

The EXEC SQL keywords conform to ANSI standards.

- The dollar sign (\$) notation:

```
$preprocessor_directive;
```

In either of these formats, replace *preprocessor_directive* with one of the valid preprocessor directives that the following sections describe. You must terminate these directives with a semicolon (;).

The Informix® ESQL/C preprocessor works in two stages. In stage 1, it acts as a preprocessor for the Informix® ESQL/C code. In stage 2, it converts all of the embedded SQL code to C code.

In stage 1, the Informix® ESQL/C preprocessor incorporates other files in the source file by processing all **include** directives (**\$include** and EXEC SQL **include** statements). Also in stage 1, Informix® ESQL/C creates or removes compile-time definitions by processing all **define** (**\$define** and EXEC SQL **define**) and **undef** (**\$undef** and EXEC SQL **undef**) directives.

The remainder of this section describes each of the Informix® ESQL/C preprocessor directives in more detail.

The include directive

The **include** directive allows you to specify a file to include within your IBM® Informix® ESQL/C program.

The Informix® ESQL/C preprocessor places the contents of the specified file into the Informix® ESQL/C source file. Stage 1 of the Informix® ESQL/C preprocessor reads the contents of *filename* into the current file at the position of the **include** directive.

You can use the **include** preprocessor directive in either of the following two formats:


- **EXEC SQL include** *filename*;
- **\$include** *filename*;

Replace *filename* with the name of the file you want to include in your program. You can specify *filename* with or without quotation marks. If you use a full path name, however, you must enclose the path name in quotation marks.

The following example shows how to use full path names in a Windows™ environment.

```
EXEC SQL include decimal.h;

EXEC SQL include "C:\apps\finances\credits.h";
```

 **Tip:** If you specify the full path name, you must recompile the program if the location of the file changes. Better programming practice specifies search locations with the **esql -I** option and specifies only the file name with the **include** directive.

If you omit the quotation marks around the file name, Informix® ESQL/C changes the file name to lowercase characters. If you omit the path name, the Informix® ESQL/C preprocessor checks the preprocessor search path for the file. For more information about this search path, see [Name the location of include files on page 60](#).

You can use **include** for the following types of files:

- The Informix® ESQL/C header file

You do not have to use the `.h` file extension for the Informix® ESQL/C header file; the compiler assumes that your program refers to a file with a `.h` extension. The following examples show valid statements to include Informix® ESQL/C header files:

```
EXEC SQL include varchar.h;
#include sqlda;
EXEC SQL include sqlstype;
```

- Other user-defined files

You must specify the exact name of the file that you want to include. The compiler does not assume the `.h` extension when you include a header file that is not the Informix® ESQL/C header file.

The following examples show valid statements to include the files `constant_defs` and `typedefs.h` in a UNIX™ environment:

```
EXEC SQL include constant_defs;
EXEC SQL include "constant_defs";
#include typedefs.h;
EXEC SQL include "typedefs.h";
```

You must use the Informix® ESQL/C **include** directive if the file you specify contains embedded SQL statements, or other Informix® ESQL/C statements.

Use the standard C **#include** directive to include system header files. The **#include** of C includes a file after Informix® ESQL/C preprocessing.



Restriction: Embedded INCLUDE statements are not supported within declare sections and can generate misleading errors. For correct usage, see [Exclude statements inside C header files on page 67](#).

The define and undef directives

The IBM® Informix® ESQL/C preprocessor allows you to create simple variables that are available only to the Informix® ESQL/C preprocessor. Informix® calls these variables *definitions*. The Informix® ESQL/C preprocessor manages these definitions with two directives:

define

Creates a name-flag definition. The scope of this definition is from the point where you define it to the end of the Informix® ESQL/C source file.

undef

Removes a name flag that EXEC SQL **define** or **\$define** creates.

The Informix® ESQL/C preprocessor rather than the C preprocessor (which processes **#define** and **#undef**) processes these directives. The Informix® ESQL/C preprocessor creates (**define**) or removes (**undef**) these definitions in stage 1 of preprocessing.

The Informix® ESQL/C **define** directive can create definitions with the following formats:

- The format for Boolean symbols is `define symbolname;`

The following examples show the two ways to define a Boolean symbol that is called TRANS:

```
EXEC SQL define TRANS;
$define TRANS;
```

- The format for integer constants is `define symbolname value;`

The following examples show both formats for two integer constants, MAXROWS (with a value of 25), and USETRANSACTIONS (with a value of 1):

```
EXEC SQL define MAXROWS 25;
$define MAXROWS 25;

EXEC SQL define USETRANSACTIONS 1;
$define USETRANSACTIONS 1;
```



Important: Unlike the C **#define** statement, the **define** directive does not support string constants or macros of statements that receive values at run time.

You can override **define** and **undef** statements in the source program with the esql command-line options, **-ED** and **-EU**. For more information about these options, see [Define and undefine definitions while preprocessing on page 59](#).

The ifdef, ifndef, elif, else, and endif directives

The Informix® ESQL/C preprocessor supports the following directives for conditional compilation:

ifdef

Tests a name and executes subsequent statements if define has created the name.

ifndef

Tests a name and executes subsequent statements if define has not created the name.

elif

Begins an alternative section to an **ifdef** or **ifndef** condition and checks for the presence of another **define**. It is shorthand for else if define.

else

Begins an alternative section to an **ifdef** or **ifndef** condition.

endif

Closes an **ifdef** or **ifndef** condition.

In the following example, the BEGIN WORK statement compiles only if you previously defined the name USETRANSACTIONS with a **define** directive:

```
EXEC SQL ifdef USETRANSACTIONS;
EXEC SQL begin work;
EXEC SQL endif;
```

The following example illustrates the use of the **elif** statement. This sample code will print "USETRANSACTIONS defined."

```
EXEC SQL define USETRANSACTIONS;

:

EXEC SQL ifndef USETRANSACTIONS;
    printf("USETRANSACTIONS not defined");
EXEC SQL elif USETRANSACTIONS;
    printf("USETRANSACTIONS defined");
EXEC SQL endif;
```

The Informix® ESQL/C preprocessor does not support a general **if** directive; it supports only the **ifdef** and **ifndef** statements that test whether a name was defined with **define**.

The Informix® ESQL/C preprocessor processes conditional compilation definitions in stage 1 of the preprocessing.

Set and retrieve environment variables in Windows™ environments

You might change the settings of environment variables or create new variables to increase the flexibility of an application. Instead of assuming a particular environment configuration, you can define the environment at run time.

This option can benefit your application in the following ways:

- The application becomes less dependent on a predefined environment.
- Users can enter their user name and password within an application.
- Users can run two applications with different network parameters on the same client computer.
- The same application can run on client computers with different configurations.

The following Informix® ESQL/C library functions are available for setting and retrieving environment variables.

ifx_putenv()

Modifies or removes an existing environment variable or creates a variable.

ifx_getenv()

Retrieves the value of an environment variable.



Important: The `ifx_putenv()` function sets the value of an environment variable in the **InetLogin** structure, and the `ifx_getenv()` function retrieves the value of an environment variable from **InetLogin**. It is recommended that you use these functions to set and retrieve **InetLogin** field values.

These functions affect only the environment that is local to the current process. The `ifx_putenv()` function cannot modify the command-level environment. The functions operate only on data structures accessible to the Informix® ESQL/C runtime library and not on the environment segment that the operating system creates for the process. When the current process terminates, the environment reverts to the level of the calling process (in most cases, the operating-system level).

The process cannot directly pass on the modified environment to any new processes that `_spawn()`, `_exec()`, or `system()` creates. These new processes do not receive any new variables that `ifx_putenv()` added. You can, however, pass on an environment variable to a new process in the following way:

1. The current process creates an environment variable with the Informix® ESQL/C `ifx_putenv()` function.
2. The current process uses the C `putenv()` function to put the environment variable into the operating-system environment segment.
3. The current process starts a new process.
4. The new process uses the C `getenv()` function to retrieve the environment variable from the operating-system environment segment.
5. The new process uses the Informix® ESQL/C `ifx_getenv()` function to retrieve the variable into the runtime environment segment.

Environment variable guidelines

For environment variable entries, observe the following guidelines:

- If you plan to set any Informix® environment variables with `ifx_putenv()`, have the application set all of them before it calls any other Informix® ESQL/C library routine, including `ifx_getenv()`, or any SQL statement. The first call to any other Informix® ESQL/C library routine or SQL statement requires initialization of the GLS locales. This initialization loads and freezes the values of **CLIENT_LOCALE**, **DB_LOCALE**, and the **DATE**, **TIME**, and **DATETIME** formatting values.
- If Setnet32 sets the Informix® environment variable to a non-null value in the Registry, the `ifx_putenv()` function cannot change the value of the variable to a null string.

If you specify a null string for an environment variable in an `ifx_putenv()` function call, Informix® ESQL/C clears any value set for the environment variable from the runtime environment segment. Then the Registry value for the environment variable is available to the application.

- Do not change an environment variable with **setenv** in the command line or with the C `putenv()` function because a change to the operating-system environment segment has no effect on the ESQL client-interface DLL after application execution begins.

Instead, use `ifx_putenv()` to change an environment variable in the runtime environment segment.

- To modify the return value of `ifx_getenv()` without affecting the environment table, use **_strdup()** or **strcpy()** to make a copy of the string.



Restriction: Never free the pointer to an environment entry that `ifx_getenv()` returns. Also, do not pass `ifx_putenv()` a pointer to a local variable and then exit the function that declares the variable.

The InetLogin structure

The IBM® Informix® ESQL/C client application in a Windows™ environment can use the **InetLogin** structure to set dynamically the configuration information that the application needs.



Important: HCL Informix® supports the **InetLogin** structure for compatibility with earlier versions only. For new development, it is recommended that you use the `ifx_getenv()` and `ifx_putenv()` functions instead.


This section provides the following information about **InetLogin**:

- A description of the **InetLogin** structure, its fields, and header file
- The precedence of configuration information that the client application sends when it establishes a connection
- How to set the **InetLogin** fields directly

Fields of the InetLogin structure

The **InetLogin** structure is a global C structure that the `login.h` header file declares.

To use this structure in your IBM® Informix® ESQL/C program, you must include `login.h` in your source file (`.ec`). For more information about `login.h`, see [Table 6: ESQL/C header files for Windows environments on page 29](#).

 **Tip:** Because `login.h` does not contain Informix® ESQL/C statements, you can include the file with the C `#include` or the Informix® ESQL/C `include` directive.

The following table defines the fields in the **InetLogin** structure.

Table 7. Fields of the InetLogin structure

Inetlogin field	Data type	Purpose
InfxServer	char[19]	Specifies the value for the INFORMIXSERVER environment variable (the default database server)
DbPath	char[129]	Specifies the value for the DBPATH environment variable
DbDate	char[6]	Specifies the value for the DBDATE environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
DbMoney	char[19]	Specifies the value for the DBMONEY environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
DbTime	char[81]	Specifies the value for the DBTIME environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
DbTemp	char[81]	Specifies the value for the DBTEMP environment variable
DbLang	char[19]	Specifies the value for the DBLANG environment variable
DbAnsiWarn	char[1]	Specifies the value for the DBANSIWARN environment variable
Informix®Dir	char[255]	Specifies the value for the INFORMIXDIR environment variable
Client_Loc	char *	Specifies the value for the CLIENT_LOCALE environment variable
DB_Loc	char *	Specifies the value for the DB_LOCALE environment variable
CollChar	char[3]	Specifies the value for the COLLCHAR environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® NLS products
Lang	char[81]	Specifies the value for the LANG environment variable for the database locale

Table 7. Fields of the InetLogin structure (continued)

Inetlogin field	Data type	Purpose
		Provides compatibility for client applications that are based on earlier versions of HCL® Informix® NLS products
Lc_Collate	char[81]	Specifies the value for the LC_COLLATE environment variable for the database locale Provides compatibility for client applications that are based on earlier versions of HCL Informix® NLS products
Lc_CType	char[81]	Specifies the value of the LC_CTYPE environment variable for the database locale Provides compatibility for client applications that are based on earlier versions of HCL Informix® NLS products
Lc_Monetary	char[81]	Specifies the value of the LC_MONETARY environment variable for the database locale Provides compatibility for client applications that are based on earlier versions of HCL® Informix® NLS products
Lc_Numeric	char[81]	Specifies the value of the LC_NUMERIC environment variable for the database locale Provides compatibility for client applications that are based on earlier versions of HCL Informix® NLS products
Lc_Time	char[81]	Specifies the value for the LC_TIME environment variable for the database locale Provides compatibility for client applications that are based on earlier versions of HCL Informix® NLS products
ConRetry	char[4]	Specifies the value of the environment variable INFORMIXCONRETRY
ConTime	char[4]	Specifies the value of the environment variable INFORMIXCONTIME
DelimIdent	char[4]	Specifies the value of the DELIMIDENT environment variable
Host	char[19]	Specifies the value for the HOST network parameter
User	char[19]	Specifies the value for the USER network parameter
Pass	char[19]	Specifies the value for the PASSWORD network parameter

Table 7. Fields of the InetLogin structure (continued)

Inetlogin field	Data type	Purpose
AskPassAtConnect	char[2]	Indicates whether sqlauth() should request a password at connection time; should contain the value for yes or no. AskPassAtConnect is set if the first character is Y or y.
Service	char[19]	Specifies the value for the SERVICE network parameter
Protocol	char[19]	Specifies the value for the PROTOCOL network parameter
Options	char[20]	Reserved for future use
Informix®SqlHosts	char[255]	Specifies the value for the INFORMIXSQLHOSTS environment variable
FetBuffSize	char[6]	Specifies the value for the FET_BUF_SIZE environment variable
CC8BitLevel	char[2]	Specifies the value for the CC8BITLEVEL environment variable
EsqIMF	char[2]	Specifies the value for the ESQLMF environment variable
GLDate	char[129]	Specifies the value for the GL_DATE environment variable
GLDateTime	char[129]	Specifies the value for the GL_DATETIME environment variable
DbAlsBc	char[2]	Specifies the value for the DBALSBC environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
DbApiCode	char[24]	Specifies the value for the DBAPICODE environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
DbAsciiBc	char[2]	Specifies the value for the DBASCIIBC environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
DbCentury	char[2]	Specifies the value for the DBCENTURY environment variable
DbCodeset	char[24]	Specifies the value for the DBCODESET environment variable Provides compatibility for client applications that are based on 4.x versions of HCL Informix® Asian Language Support (ALS) products
DbConnect	char[2]	Specifies the value for the DBCONNECT environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products

Table 7. Fields of the InetLogin structure (continued)

Inetlogin field	Data type	Purpose
DbCsConv	char[9]	Specifies the value for the DBCSCONV environment variable Provides compatibility for client applications that are based on earlier versions of HCL® Informix® products
DbCsOverride	char[2]	Specifies the value for the DBCsoverride environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® Asian Language Support (ALS) products
DbCsWidth	char[12]	Specifies the value for the DBCswidth environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
DbFitMsk	char[4]	Specifies the value for the DBFLTMASK environment variable
DbMoneyScale	char[6]	Specifies the value for the DBMONEYSCALE environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
DbSS2	char[5]	Specifies the value for the DBSS2 environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
DbSS3	char[5]	Specifies the value for the DBSS3 environment variable Provides compatibility for client applications that are based on earlier versions of HCL Informix® products
OptoFC	char[2]	Not used
OptMSG	char[2]	Not used

All fields in the **InetLogin** structure, except **DbAnsiWarn**, **Client_Loc**, and **DB_Loc**, are of data type **char** and are null-terminated strings. The **Client_Loc** and **DB_Loc** fields are character pointers whose data space your Informix® ESQL/C program must allocate.

InetLogin field values

Your application must set **InetLogin** values before it executes the SQL statement or Informix® ESQL/C library function that needs the configuration information. It is recommended that you use the `ifx_putenv()` and `ifx_getenv()` functions to set and retrieve **InetLogin** field values through environment variables, but you can set the values of the **InetLogin** fields directly.

The following figure shows a dialog box that a client application might use to obtain network parameters from an end user. This application takes the account information that the user enters and sets the appropriate network values in the **InetLogin** structure.

Figure 13. User dialog box for login parameters

The following figure shows a code fragment that sets login values in the **InetLogin** structure. The application can obtain these values from the end user through a dialog box (such as the one in [Figure 13: User dialog box for login parameters on page 41](#)).

Figure 14. Code to prompt the user for InetLogin values

```
strcpy(InetLogin.InfxServer, "mainsrvr");

;

case IDOK:
    *szDlgString = '\0';
    GetDlgItemText (hdlg, IDC_HOST, szDlgString, cbSzDlgMax);
    strcpy(InetLogin.Host, szDlgString);

    *szDlgString = '\0';
    GetDlgItemText (hdlg, IDC_USER, szDlgString, cbSzDlgMax);
    strcpy(InetLogin.User, szDlgString);
```

In the previous figure, if the user enters host information, the fragment sets the **InetLogin.Host** and **InetLogin.User** fields for the **mainsrvr** database server to the user-specified names of the host name and user name. If the user does not enter host information, Informix® ESQL/C uses the HOST and USER Registry values from the subkey for the **mainsrvr** database server.

i Tip: For another example of how to set the InetLogin fields, see the ILOGIN demonstration program in the %INFORMIXDIR%\demo\ilogin directory.

Precedence of configuration values

When a client application in a Windows™ environment requires configuration information, IBM® Informix® ESQL/C obtains it from the following locations:

1. The **InetLogin** structure

If the application uses the **InetLogin** structure, Informix® ESQL/C first checks for configuration information in this structure. (To set the value of an environment variable for the application process, the `ifx_putenv()` function changes the value of an **InetLogin** field.)

2. The INFORMIX subkey of the Registry

If the application has not set the configuration information you want in **InetLogin**, Informix® ESQL/C checks for this information in its copy of the Registry information. For more information about how to set the Registry, see the *Informix® Client Products Installation Guide*.

You do not need to define all the values in the **InetLogin** structure. The application uses the configuration information in the Registry for any values it cannot find in **InetLogin**. If you do not set the corresponding Registry value, the application uses its default value.



Important: The first time that the application requires configuration information, Informix® ESQL/C reads this information from the Registry, and stores it in memory. For subsequent references to Registry information, Informix® ESQL/C accesses this in-memory copy and does not reread the Registry.

This hierarchy of configuration information is valuable if, for example, you want the application user to provide a user name and password at run time, or if an application has some configuration information that differs from the general values in the Registry. For example, suppose the application sets the **ConRetry** field of **InetLogin** to 2 but does not set the **ConTime** field, as the following code fragment shows:

```
strcpy(InetLogin.ConRetry, "2");
EXEC SQL connect to 'accnts';
```

When Informix® ESQL/C establishes the connection to the **accnts** database, it tries to establish the connection twice (instead of the default value of once) but it still uses a connection time of 15 seconds (the default value from the in-memory copy of the Registry information). If Setnet32 has modified the connection values, Informix® ESQL/C uses the modified Registry values instead of the default values.



Tip: Use the Setnet32 utility to define configuration information in the Registry. For more information about Setnet32, see the *Informix® Client Products Installation Guide*.

Global ESQL/C variables in a Windows™ environment

In earlier versions of the IBM® Informix® ESQL/C product, Informix® ESQL/C provided several global variables to support different features. The following table describes these global variables.

Table 8. Global ESQL/C variables

Global variable	Description
SQLSTATE	An ANSI-compliant status code as a five-character string (plus null terminator)

Table 8. Global ESQL/C variables (continued)

Global variable	Description
	For more information about SQLSTATE, see Exception handling on page 276 .
SQLCODE sqlca.sqlcode	A status code specific to Informix® as an integer value For more information about SQLCODE, see Exception handling on page 276 .
sqlca structure	Diagnostic information specific to Informix® For more information about this structure, see Exception handling on page 276 .
FetBufSize and BigFetBufSize	The size of the fetch buffer BigFetBufSize is same as FetBufSize except for a higher upper limit value of the cursor buffer For more information about FetBufSize and BigFetBufSize , see Using dynamic SQL on page 399 .
InetLogin structure	Environment information for the client ESQL/C application For more information, see The InetLogin structure on page 36 .

In environments, Informix® ESQL/C implements the global variables in [Table 8: Global ESQL/C variables on page 42](#) as functions, which the `sqlhdr.h` file defines. These functions return values that have the same data types as their global-variable counterparts. Therefore, this change in implementation does not require modification of existing Informix® ESQL/C code. You can still use these functions in the same context as their global-variable counterparts.

A sample Informix® ESQL/C program

The `demo1.ec` program illustrates most of the concepts that this section presents, such as include files, identifiers, host variables, and embedded SQL statements. It demonstrates how to use header files, declare and use host variables, and embed SQL statements.



Important: If you are using UNIX™, you can find an online version of this and other demonstration programs in the `$INFORMIXDIR/demo/esqlc` directory. If you are using Windows™, you can find the demonstration programs in the `%INFORMIXDIR%\demo\esqldemo` directory.

Compile the demo1 program

The following command compiles the **demo1** program: `esql demo1.ec`

On UNIX™, the name of the executable program defaults to **a.out**.

In Windows™ environments, the name of the executable program defaults to **demo.exe**.

You can use the **-o** option to assign a different name to the executable program.

Guide to demo1.ec file

The sample IBM® Informix® ESQL/C program, `demo1.ec`, uses a static `SELECT` statement. This means that at compile time the program can obtain all of the information that it needs to run the `SELECT` statement.

The `demo1.ec` program reads from the **customer** table in the **stores7** database the first and family names of customers whose family name begins with a value less than 'C'. Two host variables (**:fname** and **:lname**) hold the data from the **customer** table. A cursor manages the rows that the database server retrieves from the table. The database server fetches the rows one at a time. The program then prints the names to standard output.

```

1. #include <stdio.h>
2. EXEC SQL define FNAME_LEN 15;
3. EXEC SQL define LNAME_LEN 15;
4. main()
5. {
6. EXEC SQL BEGIN DECLARE SECTION;
7. char fname[ FNAME_LEN + 1 ];
8. char lname[ LNAME_LEN + 1 ];
9. EXEC SQL END DECLARE SECTION;

```

Line 1

The `#include` statement tells the C preprocessor to include the `stdio.h` system header file from the `/usr/include` directory. The `stdio.h` file enables **demo1** to use the standard C language I/O library.

Lines 2 - 3

Informix® ESQL/C processes the **define** directives in stage 1 of preprocessing. The directives define the constants `FNAME_LEN` and `LNAME_LEN`, which the program uses later in host-variable declarations.

Lines 4 - 9

Line 4 begins the `main()` function, the entry point for the program. The EXEC SQL block declares host variables that are local to the `main()` function that receive data from the **fname** and **lname** columns of the **customer** table. The length of each array is 1 byte greater than the length of the character column from which it receives data. The extra byte stores the null terminator.

```

10. printf( "DEM01 Sample ESQL Program running.\n\n");
11. EXEC SQL WHENEVER ERROR STOP;
12. EXEC SQL connect to 'stores7';
13. EXEC SQL DECLARE democursor cursor for
14. select fname, lname
15. into :fname, :lname
16. from customer
17. where lname < 'C';
18. EXEC SQL open democursor;

```


Lines 10 - 12

The `printf()` function shows text to identify the program and to notify the user when the program begins to execute. The `WHENEVER` statement implements a minimum of error handling, causing the program to display an error number and terminate if the database server returns an error after processing an SQL statement. The `CONNECT` statement initiates a connection to the default database server and opens the **stores7** demonstration database. You specify the default database server in the **INFORMIXSERVER** environment variable, which you must set before an application can connect to any database server.

Lines 13 - 17

The `DECLARE` statement creates a cursor that is called **democursor** to manage the rows that the database server reads from the **customer** table. The `SELECT` statement within the `DECLARE` statement determines the type of data that the database server reads from the table. This `SELECT` statement reads the first and family names of those customers whose family name (**lname**) begins with a letter less than 'C'.

Line 18

The `OPEN` statement opens the **democursor** cursor and begins execution of the `SELECT` statement.

```

19. for (;;)
20. {
21. EXEC SQL fetch democursor;
22. if (strncmp(SQLSTATE, "00", 2) != 0)
23. break;
24. printf("%s %s\n", fname, lname);
25. }
26. if (strncmp(SQLSTATE, "02", 2) != 0)
27. printf("SQLSTATE after fetch is %s\n", SQLSTATE);
28. EXEC SQL close democursor;
29. EXEC SQL free democursor;

```

Lines 19 - 25

This section of code executes a `FETCH` statement inside a loop that repeats until `SQLSTATE` is not equal to "00". This condition indicates that either the end-of-data condition or a runtime error has occurred. In each iteration of the loop, the `FETCH` statement uses the cursor **democursor** to retrieve the next row that the `SELECT` statement returns and to put the selected data into the host variables **fname** and **lname**. The database server sets status variable `SQLSTATE` to "00" each time it fetches a row successfully. If the end-of-data condition occurs, the database server sets `SQLSTATE` to "02"; if an error occurs, it sets `SQLSTATE` to a value greater than "02". For more information about error handling and the `SQLSTATE` status variable, see [Opaque data types on page 254](#).

Lines 26 - 27

If the class code in `SQLSTATE` is any value except "02", then the `SQLSTATE` value for the user is displayed by this `printf()`. This output is useful in the event of a runtime error.

Lines 28 - 29

The CLOSE and FREE statements free the resources that the database server had allocated for the cursor. The cursor is no longer usable.

```
30. EXEC SQL disconnect current;
31. printf("\nDEM01 Sample Program over.\n\n");
32. }
```

Lines 30 - 32

The DISCONNECT CURRENT statement closes the database and terminates the current connection to a database server. The final printf() tells the user that the program is over. The right brace (}) on the line 32 marks the end of the main() function and of the program.

Compile programs

These topics contain the following information:

- Compile the IBM® Informix® ESQL/C program
- Using the esql command
- Compiling and linking options of the esql command
- Windows™ environment system processor options available to the esql command
- Accessing the ESQL Client-Interface in Windows™ environments

Compile the Informix® ESQL/C program

You use the esql command to compile your IBM® Informix® ESQL/C program.

The esql command passes your Informix® ESQL/C source file to the Informix® ESQL/C preprocessor and to the C compiler. It passes along options that are specific to both the Informix® ESQL/C preprocessor and the C compiler to preprocess, compile, and link your Informix® ESQL/C program.

The ESQL/C preprocessor

To preprocess, compile, and link a program that contains IBM® Informix® ESQL/C statements, you must pass it through the Informix® ESQL/C preprocessor. You use the esql command to run the preprocessor on your Informix® ESQL/C source file and create an executable file. The esql command follows these steps to carry out the conversion:

- In stage one, the Informix® ESQL/C preprocessor performs the following steps:
 - Incorporates header files into the source file when it processes all **include** directives (**\$include** and EXEC SQL **include** statements)
 - Creates or removes compile-time definitions when it processes all **define** (**\$define** and EXEC SQL **define**) and **undef** (**\$undef** and EXEC SQL **undef**) directives

- In stage two, the Informix® ESQL/C preprocessor processes any conditional compilation directives (**ifdef**, **ifndef**, **else**, **elif**, **endif**) and translates embedded SQL statements to Informix® ESQL/C function calls and special data structures.

Stages 1 and 2 mirror the preprocessor and compiler stages of the C compiler. Successful completion of the preprocessing step yields a C source file (.c extension). For information about command-line options that affect the preprocessing step, see [Options that affect preprocessing on page 57](#).

The esql command processor is installed as part of the Informix® ESQL/C product. Before you use esql, ensure that:

- The file name of the Informix® ESQL/C source file has the .ec or the .ecp.
- The **INFORMIXDIR** and **PATH** environment variables are set correctly.

If the **INFORMIXDIR** environment variable is not set in the command window or in the Windows™ Registry, it is set internally to the location of the HCL® Informix® Client SDK dynamically linked libraries.

If the **INFORMIXDIR** environment variable is not set in UNIX™, an error is returned when compiling any HCL® Informix® Client Software Development Kit (Client SDK) application.

For information about how to set the **INFORMIXDIR** and **PATH** variables, see the *Informix® Client Products Installation Guide* for your operating system.

For a detailed explanation of the syntax of the esql command, see [The esql command on page 49](#).



Important: Always link your Informix® ESQL/C program with the esql program. The lists of libraries that Informix® uses can change between releases. Linking with esql assures that your Informix® ESQL/C program links correctly with Informix® libraries.

The C code that the Informix® ESQL/C preprocessor generates might change from one release of the product to the next. Therefore, do not design Informix® ESQL/C programs that depend on how Informix® implements the functionality and features of the product in the C code that the Informix® ESQL/C preprocessor generates. Instead, develop your programs with the functionality and features of the product that this publication describes.

The C preprocessor and compiler

The esql command does not itself compile and link the IBM® Informix® ESQL/C program. The esql command translates Informix® ESQL/C code to C code and then calls the C compiler to compile and link the C code. The C preprocessor preprocesses the C language preprocessing directives. The C compiler performs the compilation, and it also calls a link editor to link the C object files.

Your Informix® ESQL/C source file contains commands for the C preprocessor (directives of the form **#directive**). When you use the default order of compilation, these C directives have no effect on Informix® ESQL/C statements but take effect in the usual way when the C compiler processes the source file.

If you choose to run the C preprocessor on the Informix® ESQL/C source file before the Informix® ESQL/C preprocessor, you can use the C language **#define** and **typedef** directives to define Informix® ESQL/C host variables.

The C compiler takes the following actions:

- Compiles the C language statements to object code
- Links to Informix® ESQL/C libraries and any other files or libraries you specify
- Creates an executable file


If you use a compiler other than the local C compiler by setting the **INFORMIXC** environment variable to a non-default value, you might need to override the default options of that compiler.

Default compilation order

After you have created the IBM® Informix® ESQL/C program file, you run the `esql` command on that file. By default, the Informix® ESQL/C preprocessor runs first and translates the embedded SQL statements in the program into Informix® ESQL/C function calls that communicate with the database server. The Informix® ESQL/C preprocessor produces a C source file and calls the C compiler. The C compiler then preprocesses and compiles your source file and links any other C source file, object file, or library file the same way as any other C program. If `esql` does not encounter errors in one of these steps, it generates an executable file. You can run the compiled Informix® ESQL/C program as you would any C program. When the program runs, it calls the Informix® ESQL/C library procedures; the library procedures set up communications with the database server to carry out the SQL operations.

The following figure illustrates the process by which the Informix® ESQL/C program becomes an executable program.

Figure 15. Relationship between Informix® ESQL/C and C

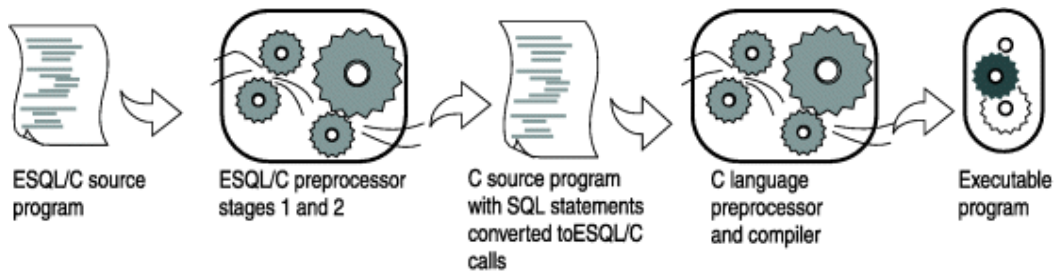

! **Important:** Keep in mind that with the default order of compilation, `esql` handles Informix® ESQL/C preprocessor directives before it calls the C compiler. Therefore, the Informix® ESQL/C directives take effect before the C compiler performs any preprocessing. You cannot access Informix® ESQL/C definitions within C preprocessor directives, nor can you use the C preprocessor to perform conditional compilation of Informix® ESQL/C statements.

Run the C preprocessor first

With IBM® Informix® ESQL/C, you change the default order of processing when you compile your Informix® ESQL/C program. Informix® ESQL/C allows you to run the C preprocessor on the Informix® ESQL/C source file first, and then pass

that file to the Informix® ESQL/C preprocessor. This feature enables your Informix® ESQL/C program to access variables made available by C preprocessor directives.

The esql command

To create an executable C program from IBM® Informix® ESQL/C source files, use the esql command. The HCL® Informix® installation script installs the esql command as part of the Informix® ESQL/C product. This section describes what the esql command can do and how you use it.

The esql command performs the following steps:

1. Converts the embedded SQL statements to C language code.
2. Converts your ESQL/C source files to C language source files.
3. Compiles the files that result with the C compiler to create an object file.
4. Creates the resource compiler and links any resource files (.res) that you specify on the esql command line for Windows™.
5. Links the object file with the Informix® ESQL/C libraries and your own libraries.

Requirements for using the esql command

Before you use esql, make sure that:

- The file names of your Informix® ESQL/C source files have the .ec extension. You can also use the .ecp extension if you want the C preprocessor to run before the Informix® ESQL/C preprocessor.
- You have set the environment variable **INFORMIXDIR** correctly and the **PATH** environment variable includes the path to the bin directory of the **INFORMIXDIR** directory (\$INFORMIXDIR/bin on the UNIX™ operating system and %INFORMIXDIR%\bin in Windows™ environments).

For a complete description of **INFORMIXDIR**, see the *HCL® Informix® Guide to SQL: Reference* or the *Informix® Client Products Installation Guide* for your operating system.

Syntax of the esql command

The following topics describe the syntax of the esql command.

This section organizes the command-line options by the processing phase that they affect:

- Preprocessing options determine how esql translates the embedded SQL statements.
- Compilation options affect the compilation phase, when the C compiler translates the C source to object code.
- Linking options affect the linking phase, when the C compiler links the object code to produce an executable file.

```
(explicit id unique_88_Connect_42_order) unique_88_Connect_42_order(explicit id unique_88_Connect_42_windows) unique_88_Connect_42_windows(explicit
id unique_88_Connect_42_unixonly) unique_88_Connect_42_unixonly
esql [ { | -ansi | -ccargs | -EDname [=value] | -Euname | { -g | {
-G | -nl | -lpathname | -i | -local | -nowarn | source.ec | otherarg } ] [-e] [-loglogfile] [-libs] [-outfile] [-
thread] [-static] [-v] [-version] [ { <UNIX-only arguments> | <Windows-only arguments> } ] [-xopen ]
```

-ansi

Causes esql to warn you if the source file uses Informix® extensions to ANSI-standard SQL syntax. This argument only affects source files to the right of it on the command line. See [Check for ANSI-standard SQL syntax on page 58](#).

-cc ccargs

Passes *ccargs* to the C compiler without interpreting or changing them. The variable *ccargs* represents all of the arguments between the **-cc** and the next occurrence of any of these arguments:

- **-I** (Windows™ only)
- **-r** (Windows™ only)
- **-f** (Windows™ only)
- any file name except those file names that are arguments for an option

See [Pass options to the C compiler on page 70](#).

-e

Preprocesses only, no compiling or linking. The ESQL/C preprocessor produces a C source file with a `.c` extension. See [Preprocess without compiling or linking on page 57](#).

-EDname

Creates a definition for *name*. The effect is the same as if the source file contained an ESQL/C **define** directive for *name*. If *=value* is included, the definition is set to *value*. For details, see [Define and undefine definitions while preprocessing on page 59](#).

-EUname

Undefines the Informix® ESQL/C definition named *name*. The effect is as if the source file included the Informix® ESQL/C **undef** directive for that name. For details, see [Define and undefine definitions while preprocessing on page 59](#).

-g

Reverses the effects of the last **-G** option for source files to the right of this option on the command line. See [Line numbers on page 61](#).

-G

Normally **#line** directives are added to the C source code so that the C compiler can direct you to the correct line in the Informix® ESQL/C file when it detects an error in the C file. The **-G** option turns off this feature for the Informix® ESQL/C source files that follow it on the command line. Use the **-g** argument to turn the feature back on. The **-nl** argument is a synonym for **-G**. See [Line numbers on page 61](#).

-lpathname

Adds *pathname* to the search path for Informix® ESQL/C and C include files. The search path is used when searching for the files named in **include** and **#include** directives. See [Name the location of include files on page 60](#).

-icheck

Tells esql to add code that generates an error if a null value is returned to a host variable that does not have an indicator variable associated with it. This argument only affects source files to the right of it on the command line. See [Check for missing indicator variables on page 60](#).

-local

Specifies that the static cursor names and static statement IDs that you declare in a source file are local to that file. If you do not use the **-local** option, cursor names and statement IDs, by default, are global entities. This argument only affects source files to the right of it on the command line. See [Cursor names and statement IDs on page 61](#).

-log logfile

Sends the error and warning messages generated by the Informix® ESQL/C preprocessor to the specified file instead of to standard output. This option affects only preprocessor errors and warnings. See [Redirect errors and warnings on page 61](#).

-libs

Prevents all compiling and linking and instead shows the names of all the libraries that would be linked based on the other options.

-nl

Synonym for **-G**.

-nowarn

Suppresses warning messages from the preprocessor. Error messages are still issued. This argument only affects the preprocessing of source files to the right of it on the command line. See [Suppress warnings on page 62](#).

-o outfile

Specifies the name of the output file that will be created by the compiler. See [Name the executable file on page 69](#).

otherarg

Any argument that esql does not recognize or deal with directly is passed to the C compiler. This process allows you to include libraries, resource files, C compiler options, and similar arguments on the command line. If an argument that you want to pass to the C compiler conflicts with one of the esql arguments, use the **-cc** option to protect it from esql. See [Pass options to the C compiler on page 70](#).

source.ec

The Informix® ESQL/C source file with the default suffix `.ec`.

-thread

Tells the Informix® ESQL/C preprocessor to create thread-safe code. See [Specify versions of Informix ESQL/C general libraries on page 76](#).

-static

Links Informix® static libraries instead of the default Informix® shared libraries. See [Specify versions of Informix ESQL/C general libraries on page 76](#).

-V

Prints the version information for your Informix® ESQL/C preprocessor then exits. If this argument is given then all other arguments are ignored.

-version

Prints the build and version information for your Informix® ESQL/C preprocessor then exits. If this argument is given then all other arguments are ignored.

-xopen

Generates warning messages for SQL statements that use Informix® extensions to the X/Open standard. It also indicates that dynamic SQL statements use the X/Open set of codes for data types (when using GET DESCRIPTOR and SET DESCRIPTOR statements or an `sqllda` structure). See [The X/Open standards on page 62](#).

UNIX-only arguments

```
“ [ { (explicit id) | source.ecp } ] ”
```

```
“ [ -cp ] ”
```

```
“ [ -glu ] ”
```

```
“ [ -np ] ”
```

```
“ [ -nup ] ”
```

```
“ [ -onlycp ] ”
```

-cp

Causes `esql` to run the C preprocessor before the Informix® ESQL/C preprocessor when processing `source.ec` files. The SQL keywords in the file are protected from interpretation by the C preprocessor and the protection is removed after the C preprocessor runs. This argument only affects source files to the right of it on the command line. See [Run the C preprocessor before the ESQL/C preprocessor on page 63](#).

-glu

Compile such that your application can use GLU (GLS for Unicode). For details, see [Enabling the GLS for Unicode \(GLU\) feature on page 62](#).

-np

Prevents the protecting of SQL statements in source files that are processed by the C preprocessor before being processed by the Informix® ESQL/C preprocessor. This argument only affects source files to the right of it on the command line. See [Run the C preprocessor before the ESQL/C preprocessor on page 63](#).

-nup

No unprotect mode. The SQL keyword protection is not removed after the C preprocessor is run. The compilation stops after the C preprocessor and the results are put in a file with the extension **.icp**. See [Run the C preprocessor before the ESQL/C preprocessor on page 63](#).

-onlycp

This mode is like the **-cp** mode in that it forces the C preprocessor to run first before the Informix® ESQL/C preprocessor. However, the processing stops after the C preprocessor runs, leaving the result in a **.icp** file. See [Run the C preprocessor before the ESQL/C preprocessor on page 63](#).

source.ecp

The Informix® ESQL/C source file with the special suffix **.ecp**. It is treated as a normal Informix® ESQL/C file that was preceded with the **-cp** option. See [Run the C preprocessor before the ESQL/C preprocessor on page 63](#).

(explicit id unique_88_Connect_42_nospace) [unique_88_Connect_42_nospace](#)**Windows-only arguments**

```

“ [ { | -largs | -lw:width | -ts:width } ] ”
“ [ @respfile ] ”
“ [ -dcmdl ] ”
“ [ -filename ] ”
“ [ -mserr ] ”
“ [ -n ] ”
“ [ -p ] ”
“ [ { -mc } ] ”
“ [ { { -cpu: { alpha | i386 | mips } | -pa | -pi | -pm } } ] ”
“ [ { { -runtime: | -rt: } { { libc | s } | { libcmt | m } | { msvcrt | d } } } ] ”
“ [ { { -target: { dll | exe } | -wd | -we } } ] ”
“ [ { { { -subsystem: | -ss: } { { console | c } | { windows | w } } | -sc | -sw } } ] ”

```

@ respfile

Specifies a file containing additional options. For details, see [Create a response file on page 71](#)

-bc

Tells the preprocessor to use the Borland C compiler instead of the Microsoft™ Visual C++ compiler. See [Specify a particular C compiler \(Windows\) on page 70](#).

-cpu:

This argument has no effect if you are using Borland C to compile. This argument tells esql what type of processor you would like the executable program to be optimized for. There are three possible values:

alpha

For processors that are compatible with the Alpha architecture.

i386

For processors that are compatible with the Intel386 architecture. This is the default.

mips

For processors that use the MIPS32 or MIPS64 instructions set architecture (ISA).

-dcmdl

Shows the command line used to start the C compiler. This lets you visually verify the options that are used.

-f filename

Specifies the name of a file that contains the names of additional Informix® ESQL/C source files.

-l largs

Passes *largs* to the linker without interpreting or changing them. The *largs* is all of the arguments between the **-cc** and a **-r** option or the end of the line. See [Pass arguments to the linker on page 76](#).

-lw:width

When the Informix® ESQL/C source file is converted into a C source file this argument causes lines in the C source file to be wrapped at the column position that *width* indicates. This argument only affects source files to the right of it on the command line. See [Line wrapping on page 69](#).

-mc

Tells the preprocessor to use the Microsoft™ Visual C++ compiler to compile and link. See [Specify a particular C compiler \(Windows\) on page 70](#).

-mserr

Provides Microsoft-style messages and warnings.

-n

Prevents esql from printing a version message when it runs.

-p

Synonym for **-e**.

-pa

Synonym for **-cpu:alpha**.

-pi

Synonym for **-cpu:i386**.

-pm

Synonym for **-cpu:mips**.

-rt:

Synonym for **-runtime:**.

-runtime:

Determines what C runtime libraries will be linked with the executable. An indicator of the library type must follow this option with no space in between. The type must be one of the following:

d

Links a multithreaded shared library. This is the default library that is used if **-runtime:** is not given. You can also use the library name in place of **d**. If you are using Microsoft™ Visual C++ to compile, the library name is **msvcrt**. If you are using Borland C, it is **cw32mti**.

m

Links a static multithreaded shared library. You can also use the library name in place of **m**. If you are using Microsoft™ Visual C++ to compile, the library name is **libcmnt**. If you are using Borland C, it is **cw32mt**. Cannot be used with the **-static** option.

s

Links a static single-threaded library. You can also use the library name in place of **s**. If you are using Microsoft™ Visual C++ to compile, the library name is **libc**. If you are using Borland C, it is **cw32**. Cannot be used with the **-static** option.

t

This option can be used only if you are using Borland C. It links the static multithreaded library. You can also use the library name **cw32i** in place of **t**. Cannot be used with the **-static** option.

-Sc

Synonym for **-subsystem:console**.

-ss:

Synonym for **-subsystem:**

-Sw

Synonym for **-subsystem:windows**.

-subsystem:

Determines what subsystem will be linked into the executable. An indicator of the subsystem type must follow this option with no space in between. The type must be one of the following:

console

This is the default type. It creates a console application. This indicator can be abbreviated as **c**.

windows

Creates a Windows™ application. This indicator can be abbreviated as **w**.

The **-subsystem:** option can be abbreviated **-ss:**.

-target:

Determines what type of file will be created. An indicator of the target type must follow this option with no space in between. The indicator must be one of the following:

dll

A Dynamic Load Library (DLL) file will be created.

exe

This is the default type. A regular executable file will be created.

-ts:width

Tells the preprocessor to define tab stops every *width* columns when creating the C source file. By default, the preprocessor sets tab stops every eighth column. See [Set tab stops on page 69](#).

-v

Synonym for **-V**.

-wd

Synonym for **-target:dll**.

-we

Synonym for **-target:exe**.

Options that affect preprocessing

The Informix® ESQL/C program must be preprocessed before a C compiler can compile it. The Informix® ESQL/C preprocessor converts the embedded SQL statements to C language code.

You can use all the preprocessor options that the following topics describe for preprocessing only or for preprocessing, compiling, and linking.

Check the version number

Use the **-V** option to obtain the HCL® Informix® version number and serial number for your Informix® ESQL/C product, as the following example shows:

```
esql -V
```

The **-version** option provides more detailed version information that might be needed when dealing with HCL Informix® technical support.

Associate options with files

Many preprocessor options affect only files that are displayed to the right of the option on the command line. For example in this command line:

```
esql -G source1.ec -ansi source2.ec
```

The **-G** option affects the `source1.ec` file, and both the **-ansi** and the **-G** options affect the `source2.ec` file.

Preprocess without compiling or linking

By default, the `esql` command causes the IBM® Informix® ESQL/C program to be preprocessed, compiled, and linked. The output of the `esql` command is an executable file. You can specify the **-e** option to suppress the compilation and linking of

your Informix® ESQL/C program. With this option, `esql` only causes preprocessing of the code. The output of this command is a C source file (`.c` extension).

For example, to preprocess the program that is in the file `demo1.ec`, you use the following command:

```
esql -e demo1.ec
```

The preceding command would generate a C source file that is called `demo1.c`. The following `esql` command preprocesses `demo1.ec`, checks for Informix® extensions to ANSI-standard syntax, and does not use line numbers:

```
esql -e -ansi -G demo1.ec
```

Generate thread-safe code

You can use the **-thread** option to instruct the preprocessor to generate thread-safe code.

You must use the **THREADLIB** environment variable with this option to specify which thread package to use when you compile your application.

For Windows™ environments, the HCL Informix® general libraries (**libgen**, **libos**, **libgls**, **libafs**, and **libsql**) are shared, thread-safe DLLs. Therefore, the `esql` command links the shared, thread-safe DLLs automatically. You do not set the **THREADLIB** environment variable when you compile multithreaded applications in a Windows™ environment.

Check for ANSI-standard SQL syntax

When you compile the IBM® Informix® ESQL/C program, you can instruct the preprocessor to check for Informix® extensions to ANSI-standard SQL syntax in one of two ways:

- You can set the **DBANSIWARN** environment variable.

After you set the **DBANSIWARN** environment variable, every time you compile or run the Informix® ESQL/C program, Informix® ESQL/C checks for ANSI compatibility. For information about how to set **DBANSIWARN**, see the *HCL® Informix® Guide to SQL: Reference*. For details about how to check for runtime warnings, see [Opaque data types on page 254](#). For details on how to set environment variables, see the *Informix® Client Products Installation Guide* for your operating system.

- You can specify the **-ansi** option at compile time whenever you want to check for ANSI compatibility.

The **-ansi** option does not cause Informix® ESQL/C to check for ANSI compatibility at run time.

With the **-ansi** option, the Informix® ESQL/C preprocessor generates a warning message when it encounters the Informix® extension to ANSI SQL syntax. The following `esql` command preprocesses, compiles, and links the `demo1.ec` program and verifies that it does not contain any Informix® extensions to the ANSI-standard syntax:

```
esql -ansi demo1.ec
```

If you compile a program with both the **-ansi** and **-xopen** options, the Informix® ESQL/C preprocessor generates warning messages for Informix® extensions to both ANSI and X/Open SQL syntax.

Define and undefine definitions while preprocessing

You can use the **-ED** and **-EU** options to create or remove definitions during IBM® Informix® ESQL/C preprocessing.

To create a global definition, use one of the following forms of the **-ED** option:

- Use the **-EDname** syntax to define a Boolean symbol, as follows:

```
esql -EDENABLE_CODE define_ex.ec
```

- Use the **-EDname=value** syntax to define an integer constant, as follows:

```
esql -EDMAXLENGTH=10 demo1.ec
```

The **-EDname** is equivalent to the **define** preprocessor directive (**\$define** or EXEC SQL **define**) with *name* at the top of your Informix® ESQL/C program.

To remove or undefine a definition globally for the entire source file, use the following syntax for the **-EU** option:

```
-EUname
```

The **-EU** option has a global effect over the whole file, regardless of other **define** directives for *name*.



Restriction: Do not put a space between **ED** or **EU** and the symbol name.

As with the **define** and **undef** statements, the Informix® ESQL/C preprocessor processes the **-ED** and **-EU** options in stage 1 of preprocessing (before it preprocesses the code in your source file).

The following figure shows a code fragment that uses conditional compilation (the **ifdef** and **ifndef** directives).

Figure 16. ESQL/C excerpt that uses ifdef, ifndef, and endif

```
/* define_ex.ec */
#include <stdio.h>
EXEC SQL include sqlca;
EXEC SQL define ENABLE_CODE;

main()
{
:

EXEC SQL ifdef ENABLE_CODE;
printf("First block enabled");
EXEC SQL endif ENABLE_CODE;
:

EXEC SQL ifndef ENABLE_CODE;
EXEC SQL define ENABLE_CODE;
EXEC SQL endif ENABLE_CODE;
:

EXEC SQL ifdef ENABLE_CODE;
printf("Second block enabled");
EXEC SQL endif ENABLE_CODE;
}
```

For the code fragment shown in [Figure 16: ESQL/C excerpt that uses ifdef, ifndef, and endif on page 59](#), the following esql command line does not generate code because the command line undefines the ENABLE_CODE definition for the entire source file:

```
esql -EUNABLE_CODE define_ex.ec
```

Check for missing indicator variables

If you include the **-icheck** option, the Informix® ESQL/C preprocessor generates code in your program that returns a runtime error if an SQL statement returns a null value to a host variable that does not have an associated indicator variable. For example, the following command tells the preprocessor to insert code that checks for null values into the `demo1.ec` program:

```
esql -icheck demo1.ec
```

If you do not use the **-icheck** option, Informix® ESQL/C does not generate an error if the database server passes a null value to a host variable without an indicator variable.

Name the location of include files

The **-I** preprocessor option allows you to name a directory where the preprocessor searches for IBM® Informix® ESQL/C and C include files.

This option is valid for both the Informix® ESQL/C and the C preprocessors as follows:

- The Informix® ESQL/C preprocessor (**esql**) processes only Informix® ESQL/C include files.

You specify these include files with the **include** preprocessor directive **\$include** or EXEC SQL **include**.

- The C preprocessor (**cc**) processes only the C include files.

You specify these files with the **#include** preprocessor statement. Because the C preprocessing begins after the Informix® ESQL/C compilation is completed, the C include files are processed after the Informix® ESQL/C include files.

The preprocessor passes the **-I** option to the C compiler for processing of C include files (those files that a **#include** preprocessor statement specifies). The syntax for the **-I** option is as follows:

```
esql -Idirectory esqlcprogram.ec
```

The *directory* can be on a mounted remote file system if the standard C library functions `fopen()`, `fread()`, and `fclose()` can access them.

The following esql command names the UNIX™ directory `/usr/johnd/incls` as a directory to search for Informix® ESQL/C and C include files within the **demo1** program:

```
esql -I/usr/johnd/incls demo1.ec
```

Each **-I** option lists a single directory. To list several directories, you must list multiple **-I** options on the command line.

To search in both the `C:\dorrie\incl` and `C:\johnd\incls` directories in a Windows™ environment, you would need to issue the following command:

```
esql -IC:dorrie\incl -IC:\johnd\incls demo1.ec
```

When the preprocessor reaches an **include** directive, it looks through a search path for the file to include. It searches directories in this sequence:

1. The current directory
2. The directories that **-I** preprocessor options specify (in the order in which you specify them on the command line)
3. The directory `$INFORMIXDIR/include/esql` on a UNIX™ operating system and the `%INFORMIXDIR%\include\esql` in a Windows™ environment (where `$INFORMIXDIR` and `%INFORMIXDIR%` represent the contents of the environment variable of that name)
4. The directory `/usr/include`

Line numbers

By default, the Informix® ESQL/C preprocessor puts **#line** directives in the `.c` file so that if an error is detected by the C compiler it directs you to the line that generated the problem C code in the Informix® ESQL/C source file. If you instead want to be directed to the problem line in the C file itself you can turn off line numbering by using the **-G** option. The **-G** option prevents the generation of **#line** directives in source code files that follow it on the command line. To turn line numbers back on, use the **-g** option. Files that follow the **-g** option will have **#line** directives generated.

Cursor names and statement IDs

By default, Informix® ESQL/C defines cursor names and statement IDs as global entities. If you use the **-local** option, static cursor names and static statement IDs that you declare in a file are local to that file.

To create the local name, Informix® ESQL/C adds a unique tag (two to nine characters long) to the cursor names and statement IDs in the Informix® ESQL/C program. If the combined length of the cursor name (or statement ID) and the unique tag exceeds 128 characters, you receive a warning message.

The **-local** option is provided primarily for compatibility with applications that were created in previous versions of Informix® ESQL/C. Do not use this option when you compile new applications. Do not mix files compiled with and without the **-local** flag. If you mix them, you might receive unpredictable results.

If you use the **-local** option, you must recompile the source files every time you rename them.

Redirect errors and warnings

By default, `esql` directs error and warning messages it generates to standard output. If you want the errors and warnings to be put into a file, use the **-log** option with the file name.

For example, the following `esql` command compiles the program `demo1.ec` and sends the errors to the `err.out` file:

```
esql -log err.out -o demorun demo1.ec
```

This option only affects the error warnings that the Informix® ESQL/C preprocessor generates. The warnings from the compile and link stages still go to the standard error output, which is **stderr** on UNIX™, for example.

Suppress warnings

By default, the preprocessor generates warning messages when it processes the Informix® ESQL/C file. To suppress these warning messages, use the **-nowarn** option. This option has no effect on error messages.

Enabling the GLS for Unicode (GLU) feature

The GLS for Unicode (GLU) is a feature that allows your application to use the International Components for Unicode (ICU) libraries instead of the usual GLS libraries when handling Unicode.

About this task

The main advantage of using the ICU libraries is that they take the locale into account when collating Unicode characters, the GLS libraries do not.

To enable GLU:

1. Compile your application by using the **-glu** option to the `esql` command.
2. Set the **GL_USEGLU** environment variable to `1` in the environment of both client and database server. The `GL_USEGLU` environment variable must be set to a value of 1 (one) before the server is started, and before the database is created.
3. Choose a locale that uses either Unicode or GB18030-2000 as a code set.

The X/Open standards

The **-xopen** option tells the IBM® Informix® ESQL/C preprocessor that your program uses X/Open standards.

When you specify this option, the preprocessor performs the following two tasks:

- It checks for Informix® extensions to X/Open-standard syntax.

If you include Informix® extensions to X/Open-standard syntax in your code, the preprocessor generates warning messages.

- It uses the X/Open set of codes for SQL data types.

Informix® ESQL/C uses these codes in a dynamic management structure (a system-descriptor area or an **sqllda** structure) to indicate column data types. Informix® defines these codes in the `sqlxtype.h` header file.

If you use X/Open SQL in the Informix® ESQL/C program, you must recompile any other source files in the same application with the **-xopen** option.

If you compile a program with both the **-xopen** and **-ansi** options, the Informix® ESQL/C preprocessor generates warning messages for Informix® extensions to both X/Open and ANSI SQL syntax.

Run the C preprocessor before the ESQL/C preprocessor

The compilation of the IBM® Informix® ESQL/C source file can follow either the default order, where the Informix® ESQL/C preprocessor runs first on the source file, or it can allow the C preprocessor to run on the source file before the Informix® ESQL/C preprocessor.

The default sequence of compilation for the Informix® ESQL/C source file is as follows:

1. The Informix® ESQL/C preprocessor performs the following steps to create a `.c` file from the Informix® ESQL/C source file:
 - Incorporates Informix® ESQL/C header files into the source file when it processes all **include** directives (**\$include** and EXEC SQL **include** statements)
 - Creates or removes compile-time definitions when it processes all **define** (**\$define** and EXEC SQL **define**) and **undef** (**\$undef** and EXEC SQL **undef**) directives
 - Processes any conditional compilation directives (**ifdef**, **ifndef**, **else**, **elif**, **endif**) and translates embedded SQL statements to Informix® ESQL/C function calls and special data structures
2. The C preprocessor takes the following actions:
 - Incorporates C header files into the source file when it processes all C **include** directives (**#include**)
 - Creates or removes compile-time definitions when it processes all C language **define** (**#define**) and **undef** (**#undef**) directives
 - Processes C conditional compilation directives (**#ifdef**, **#ifndef**, **#else**, **#elif**, **#endif**)
3. The C compiler, assembler, and linker work in the usual way, as they do for a C source file, translating the C code file into an executable program.

This default order of compilation is restrictive because you cannot use **#defines** or **typedefs** defined in C system header files or custom C header files to define Informix® ESQL/C host variables and constants, nor can you use them for conditional compilation of Informix® ESQL/C code. With the default order of compilation, C header files do not get included into the Informix® ESQL/C source code until after the Informix® ESQL/C preprocessor has run, making these definitions unavailable to the Informix® ESQL/C preprocessor.

Options for running the C preprocessor first

You can make the C preprocessor run on the Informix® ESQL/C source file first, thus expanding any C-dependent **typedefs** or **#defines** inside the Informix® ESQL/C source file before the Informix® ESQL/C preprocessor is run on that source file. You can do this in any of the following ways:

- Pass the **-cp** or the **-onlycp** option to the `esql` command.

Both force the C preprocessor to run first, but in the case of the **-cponly** option, the compilation stops after the C preprocessor is run, and the result is put in a **.icp** file.

- Create the Informix® ESQL/C source file with a `.ecp` extension.

This process triggers the **-cp** option on the file automatically.

- Set the **CPFIRST** environment variables to `TRUE` (uppercase only).
- Use the `eprotect.exe` utility.

The CPFIRST environment variable (UNIX™)

The **CPFIRST** environment variable specifies whether the C preprocessor is to run before the IBM® Informix® ESQL/C preprocessor on all Informix® ESQL/C source files.

Set the environment variable to `TRUE` (uppercase only) to run the C preprocessor on all Informix® ESQL/C source files, irrespective of whether the `-cp` option is passed to the `esql` command, and irrespective of whether the source file has the `.ec` or the `.ecp` extension.

Using the eprotect.exe utility (Windows™)

Windows™ users can use the `eprotect.exe` utility to run the preprocessor on the IBM® Informix® ESQL/C source file.

About this task

The `eprotect.exe` utility protects all of the SQL keywords against interpretation by the C preprocessor. The `eprotect.exe -u` option removes SQL keyword protection.

To change the preprocessor order for the Informix® ESQL/C source file on Windows™:

1. Run the following command:

```
%INFORMIXDIR%\lib\eprotect.exe filename.ec filename.c
```

This command protects all of the SQL keywords against interpretation by the C Preprocessor and writes the result to the file `filename.c`.

2. Run the following command:

```
cl /E filename.c > filename2.c
```

This command runs the C Preprocessor on the source file `filename.c` and writes the result to the file `filename2.c`.

3. Run the following command:

```
%INFORMIXDIR%\lib\eprotect.exe -u filename2.c filename.ec
```

This command removes SQL keyword protection and stores the result in `filename.ec`.

4. Run `esql` on the source file to compile it.

The order of compilation when the C preprocessor runs first

When a user chooses to run the C preprocessor on the IBM® Informix® ESQL/C source file before the Informix® ESQL/C preprocessor, the file undergoes the following order of compilation.

1. The `eprotect` utility runs on the source file to protect all SQL keywords against interpretation by the C preprocessor.
2. The C preprocessor runs on the source file.
3. The `eprotect` utility runs on the output of the C preprocessor with the `-u` mode to remove SQL keyword protection.

4. The Informix® ESQL/C preprocessor runs on the output of the C preprocessor, which no longer has any SQL keyword protection.
5. The output of the Informix® ESQL/C preprocessor undergoes compilation and linking by the C compiler and linker to produce an executable file.

Define host variables based on C #defines and typedefs

When the C preprocessor runs on a source file, it expands the contents of all C header files where they are included within the source file. This expansion makes it possible to use host variables in IBM® Informix® ESQL/C source files based on types and **#define** and **typedef** statements in C header files. The examples given here indicate some of the advantages of sharing header files. In the following example, the same C header file is used by both Informix® ESQL/C and C source files.

Figure 17. ESQL/C and C excerpt that share a C header file

```

/*header file i.h*/
#define LEN 15
typedef struct customer_t{
    int    c_no;
    char   fname[LEN];
    char   lname[LEN];
} CUST_REC;
:

/*cust.ec*/
#include <stdio.h>

EXEC SQL BEGIN DECLARE SECTION;
#include "i.h"
EXEC SQL END DECLARE SECTION;

int main()
{

EXEC SQL BEGIN DECLARE SECTION;
    CUST_REC cust;
EXEC SQL END DECLARE SECTION;
:

}

/*name.c*/
#include "i.h"
int main ()
{...
    CUST_REC cust;
:
}

```

In the following example, the Informix® ESQL/C source file contains a host variable based on a type defined in the `time.h` system-header file.

Figure 18. ESQL/C excerpt that uses a host variable of the type defined in a C system-header file

```

/*time.ec*/

#include <time.h>

main ()
{...
EXEC SQL BEGIN DECLARE SECTION;
    time_t time_hostvar;
EXEC SQL END DECLARE SECTION;
:
}

```

A C header file can be included anywhere inside the Informix® ESQL/C source file. However, to define host variables in Informix® ESQL/C files based on **#defines** and **typedefs** defined in C header files, you must include the C header file within the EXEC SQL declare section.

Contrast the example in [Figure 19: ESQL/C excerpt that defines a host variable based on a c header file included outside the declare section on page 66](#), which leads to error -33051: Syntax error on identifier or symbol 'name_hostvar with the example in [Figure 17: ESQL/C and C excerpt that share a C header file on page 65](#) which does not. The only difference is that in the example in [Figure 17: ESQL/C and C excerpt that share a C header file on page 65](#), the C header file with the **#define** and the **typedef** that is used in the EXEC SQL declare section is included within that declare section.

Figure 19. ESQL/C excerpt that defines a host variable based on a c header file included outside the declare section

```

/*header file i.h*/
#define LEN 15
typedef struct customer_t{
    int    c_no;
    char   fname[LEN];
    char   lname[LEN];
} CUST_REC;
:

/*cust.ec*/
#include "i.h"

int main()
{

EXEC SQL BEGIN DECLARE SECTION;
    CUST_REC cust;
:

}
:

...Leads to error -33051...

```

Allow all valid C declaration syntax inside the EXEC SQL declare section

When the IBM® Informix® ESQL/C preprocessor runs on a file, it expands all the contents of header files inside the Informix® ESQL/C source file where the header file was included in the source file. Therefore, one consequence of including C header files inside the EXEC SQL declare section is that all types of C declaration syntax are included in the EXEC SQL declare section after they pass through the C preprocessor. You can now include all valid C declaration syntax in the EXEC SQL declare section in the EXEC SQL declare section. However, you can only declare host variables based on certain types described in [Host-variable data types on page 12](#).

Exclude statements inside C header files

If the IBM® Informix® ESQL/C preprocessor has problems with certain statements in C header files, you can exclude specific lines from the preprocessing that the Informix® ESQL/C preprocessor performs as shown in the following example.

Figure 20. ESQL/C and C excerpt that uses a common C header file

```

/*header file i.h*/
#ifndef ESBDS /*define empty macros, if included by a C\
    source*/
#define ESBDS
#define ESEDS
#endif
:

ESEDS
statement that you do not want ESQL/C preprocessor to see
ESBDS

/*name.ec*/
#define ESBDS EXEC SQL BEGIN DECLARE SECTION;
#define ESEDS EXEC SQL END DECLARE SECTION
main ()
{...
EXEC SQL BEGIN DECLARE SECTION;
    #include "i.h"
EXEC SQL END DECLARE SECTION;
:
}

```

SQL keyword protection

If the code in the IBM® Informix® ESQL/C files is passed unprotected to the C preprocessor before it is passed to the Informix® ESQL/C preprocessor, certain SQL keywords might be analyzed by the C preprocessor, which causes unintended results. In the following example, the SQL keyword NULL is replaced by the C preprocessor with the value zero, which creates a valid SQL statement, but one which inserts a value into the **orders** table other than the value that the programmer intended:

```
EXEC SQL insert into orders (shipcharge) values (NULL);
```

When a user gives the option to run the C preprocessor before the Informix® ESQL/C preprocessor, the utility **eprotect** runs before the C preprocessor runs on the Informix® ESQL/C source file. The **eprotect** utility adds a prefix to any SQL keyword

that occurs in an SQL statement with the prefix **SQLKEYWORD_**. This prefix is affixed on all SQL keywords inside SQL statements that begin with the EXEC SQL directive and end with a semicolon. When the Informix® ESQL/C source file that contains the select statement mentioned earlier is passed to the C preprocessor, the SELECT statement has the following form:

```
EXEC SQL SQLKEYWORD_insert SQLKEYWORD_into orders (order_num)
SQLKEYWORD_values (SQLKEYWORD_NULL);
```

After the C preprocessor runs on the Informix® ESQL/C source file, the esql command runs the eprotect utility with the **-u** mode, which removes all the **SQLKEYWORD_** prefixes before it runs the Informix® ESQL/C preprocessor on the output of the C preprocessor.

SQL keyword protection and the dollar sign (\$) symbol

All SQL statements within IBM® Informix® ESQL/C source files can either begin with the EXEC SQL key words or with the \$ prefix. All of the following pairs of statements are equivalent:

```
EXEC SQL BEGIN DECLARE SECTION;
$BEGIN DECLARE SECTION;

EXEC SQL connect to 'database9';
$connect to 'database9';

EXEC SQL select fname into :hostvar1 from table1;
$select fname into :hostvar1 from table1;
```

However, the \$ symbol can also occur at the beginning of **typedef** definitions such as in the following example:

```
$int *ip = NULL;
```

In cases such as the preceding **typedef** example, program logic might require that the C preprocessor substitute the value zero in the place of the keyword NULL. Not allowing the C preprocessor to make value substitutions in such cases would lead to errors. Therefore, the eprotect utility does not add a prefix to the **SQLKEYWORD_** prefix on SQL keywords that are displayed in SQL statements that begin with the dollar sign (\$) symbol.



Important: If you want to run the C preprocessor on your Informix® ESQL/C source file before the Informix® ESQL/C preprocessor, and if you do not want the C preprocessor to substitute values for the SQL keywords in SQL statements that occur in your source file, you must begin each SQL statement with the keywords EXEC SQL, and not with the dollar sign (\$) symbol.

Preprocessor options specific to Windows™ environments

The following additional preprocessing options are available to you if you use IBM® Informix® ESQL/C in a Windows™ environment.

Line wrapping

The Informix® ESQL/C preprocessor translates one embedded SQL statement as one C line. Long lines can cause problems for some debuggers and editors. You can use the **-lw** option to tell the preprocessor to wrap output lines at a specific column position. For example, the following esql command tells the preprocessor to wrap lines at column 75:

```
esql -lw:75 demo.ec
```

If you omit the **-lw** option, the preprocessor does not perform line wrapping.

Change error and warning displays

By default, the IBM® Informix® ESQL/C preprocessor generates error and warning messages when it processes the Informix® ESQL/C file. It displays these errors and warnings in the console window. You can change the display of error and warning messages with the following command-line options:

- Use the **-nowarn** option to suppress warning messages. This option has no effect on error messages.
- Use the **-mserr** option to display error and warning messages in Microsoft™ Error Message format. Some text editors understand this format and can use it to go to the line in the Informix® ESQL/C source file that caused the error or warning.

Set tab stops

By default, the IBM® Informix® ESQL/C preprocessor formats the C source file with tab stops at every eighth column position. You can use the **-ts** option to set different tab stops. For example, the following esql command tells the preprocessor to set tab stops every four characters:

```
esql -ts:4 demo.ec
```

Compiling and linking options of the esql command

The following sections describe the compiling and linking options of the esql command.

Name the executable file

You can explicitly specify the name of the executable file with the **-o** option.

For example, the following esql command produces an executable file called **inpt**:

```
esql -o inpt custinpt.ec ordinpt.ec
```

If esql is running on a Windows™ operating system, the name of the target file defaults to the name of the first IBM® Informix® ESQL/C source file on the esql command line. The extension is changed to either `.exe` or `.dll` depending on the type of target being generated.

If esql is running on a UNIX™ operating system, the name of the target file defaults to whatever is the default for your C compiler, usually `a.out`.

Set the type of executable files created (Windows™)

The `esql` command can be used to compile regular executable files and also Dynamic Link Libraries (DLLs). Use the **-target:** option to tell `esql` which type of output you want. The **-target:** option only tells `esql` how to compile your application. If you compile to a DLL, your source code must be written as a DLL or the compile fails

Pass options to the C compiler

The `esql` command processor passes any unrecognized arguments in the command line to the C compiler.

For example, because `esql` does not recognize `/Zi` as an option, the following `esql` command passes the `/Zi` option to the C compiler:

```
esql /Zi demo1.ec
```

If you want to pass C compiler options that have the same names as IBM® Informix® ESQL/C processor options, precede them with the **-cc** option. The `esql` command ignores any options between the **-cc** and the next occurrence of any of these arguments:

- `-l` (Windows™ only)
- `-r` (Windows™ only)
- `-f` (Windows™ only)
- The Informix® ESQL/C source file.

Specify a particular C compiler (Windows™)

ESQL/C in Windows™ environments supports the following C compilers:

- Microsoft™ Visual C++, Version 2.x or later
- Borland C++, Version 5

Either the Microsoft™ C compiler or the Borland C compiler must be on your computer before you can compile the IBM® Informix® ESQL/C program. The default C compiler option, **-mc**, starts the Microsoft™ compiler. To choose the Borland compiler, use the **-bc** option.

Compile without linking

By default, the IBM® Informix® ESQL/C command processor preprocesses, compiles, and links the Informix® ESQL/C program and creates either an executable file or a DLL. To suppress the linking of your Informix® ESQL/C program specify the **-c** option. With this option, `esql` only preprocesses and compiles the code. The output of this command is a C object file (`.obj` extension) for each C source file (`.c`) or Informix® ESQL/C source file (`.ec`).

For example, to preprocess and compile the Informix® ESQL/C source file `demo1.ec`, use the following command:

```
esql -c demo1.ec
```

The preceding command generates a C object file called `demo1.obj`. The following `esql` command preprocesses `demo1.ec`, checks for Informix® extensions to X/Open-standard syntax, and suppresses warning messages:

```
esql -c -xopen -nowarn demo1.ec
```

! **Important:** If you specify the conflicting options **-c** and **-o**, the preprocessor ignores the **-o** option and processes the **-c** option. The preprocessor reports the conflict in an error message.

Special compile options for Windows™ environments

You can give the following additional compile options to the `esql` command if you are running IBM® Informix® ESQL/C in a Windows™ environment.

Specify the name of a project file

The **-f** option enables you to specify the name of a project file at the `esql` command line.

The *filename* that follows **-f** is a project file that contains the names of the IBM® Informix® ESQL/C source (`.ec`) files to compile.

For example, suppose the project file, `project.txt`, contains the following lines:

```
first.ec
second.ec
third.ec
```

In this example, `first.ec`, `second.ec`, and `third.ec` represent the names of Informix® ESQL/C source files that you want to compile.

The following `esql` command uses the **project.txt** project file to specify the three source files to compile and link:

```
esql -f project.txt
```

The preceding `esql` command is the equivalent of the following `esql` command:

```
esql first.ec second.ec third.ec
```

You can accomplish the same task with a response file.

Create a response file

You can specify the command-line arguments for the IBM® Informix® ESQL/C command processor in a *response file* and specify the file name for the Informix® ESQL/C processor.

The Informix® ESQL/C response file is a text file with Informix® ESQL/C command-line options and file names, separated by a space, a new line, a carriage return, a line feed, or a combination of these characters.

The following example shows the syntax that specifies a response file called `resp.esq`:

```
esql @resp.esq
```

The response file, `resp.esq`, might contain the following lines:

```
-we
first.ec
```

```
second.ec
third.ec
-r foo.rc
```

Use of this response file is the equivalent of the following esql command:

```
esql -we -f project.txt -r foo.rc
```

In this example, `project.txt` is a project file that contains the file names `first.ec`, `second.ec`, and `third.ec` on separate lines, as the previous shows.

You might use a response file for the following reasons:

- The command line is limited to 1,024 characters. If your esql options exceed this length, you must use a response file.
- If you use one or more sets of esql options regularly, you can avoid a lot of typing by putting each set in a different response file. Instead of typing the options, you can list the appropriate response file in the esql command.

Implicit options invoked by the esql preprocessor in Windows™ environments

The Informix® ESQL/C command processor implicitly passes compiler and linker flags to the supported C compilers. The following table lists the implicit options that esql passes when you use the indicated esql options. If you choose to create your own build file, use the indicated flags as appropriate for your application.



Important: The esql command does not implicitly pass any options to the resource compiler.

Table 9. Implicitly passed compiler options

Compiler	Module type	esql options	Implicit options	
			Compiler	Linker
Microsoft™ Visual C++, Version 2.x or later	executable	-target:exe -we	-c -I%INFORMIXDIR% \incl\esql\D_systype/D_procty pe/threadtype/DWIN32	-DEF:deffile -OUT:target -MAP -SUBSYSTEM:systype %INFORMIXDIR%\lib\isqlt09a.lib %INFORMIXDIR%\lib\igl4g303.lib %INFORMIXDIR%\lib\iglxg303.lib %INFORMIXDIR%\lib\igo4g303.lib libset
	dll	-target:dll -wd	-c -I%INFORMIXDIR% \incl\esql\D_systype/D_procty pe/threadtype/DWIN32	-DLL -DEF:deffile -OUT:target -MAP -SUBSYSTEM:systype %INFORMIXDIR%\lib\isqlt09a.lib %INFORMIXDIR%\lib\igl4g303.lib %INFORMIXDIR%\lib\iglxg303.lib %INFORMIXDIR%\lib\igo4g303.lib libset

Table 9. Implicitly passed compiler options

(continued)

Compiler	Module type	esql options	Implicit options	
			Compiler	Linker
Borland C++, Version 5	executable	-target:exe -we	-c -I%INFORMIXDIR%\ incl\esql- <i>etarget-subtype-lib</i> log- <i>libtlg</i>	-c -Tpe -M -DEF: <i>deffile-subsystem</i> %INFORMIXDIR%\lib\igl4b303.lib %INFORMIXDIR%\lib\iglx303.lib %INFORMIXDIR%\lib\igo4b303.lib c0f32.obj <i>libset</i>
	dll	-target:dll -wd	-c -I%INFORMIXDIR%\ incl\esql- <i>etarget-subtype-lib</i> tlog- <i>libtlg</i>	-c -Tpd -M -DEF: <i>deffile-subsystem</i> %INFORMIXDIR%\lib\igl4b303.lib %INFORMIXDIR%\lib\iglx303.lib %INFORMIXDIR%\lib\igo4b303.lib c0d32.obj <i>libset</i>

The italicized terms in the compiler and linker options represent the following definitions.

deffile

Name of a .def file (The -DEF option executes only if you specify a .def file on the command line.)

libset

Library set (depends on whether the application is WINDOWS or CONSOLE).

libtlg

-D_RTLDLL for a dynamic library or " " for a shared library

libtlog

-WM for a multithread library or " " for a single-thread library

proctype

Type of processor (X86)

subsystem

ap for a console subsystem or aa for a Windows™ subsystem

subtype

WC for an executable console, W for a Windows™ executable file, WCD for a console DLL, or WD for a Windows™ DLL

systype

Type of subsystem (WINDOWS or CONSOLE)

t

X for a console subsystem and W for a Windows™ subsystem

target

Name of the executable file (name of first .ec file or the name specified by the **-o** command-line option)

threadtype

Type of thread option (ML, MT, MD, depending on the value of the **-runtime** command-line option)

For more information about the **-target**, **-wd**, and **-we** command-line options, see [Syntax of the esql command on page 49](#)

The library set that the linker uses depends on whether you are creating a Windows™ or console application. The following table lists the library sets that the indicated esql options use.

Table 10. Library sets that the linker uses

Compiler	Options for esql	Library sets that the linker uses
Microsoft™ Visual C++, Version 2.x or later	<ul style="list-style-type: none"> • -subsystem:windows • -Sw • -ss:W 	<ul style="list-style-type: none"> • advapi32.lib • wsock32.lib • user32.lib • winmm.lib • gdi32.lib • comdlg32.lib • winspool.lib
	<ul style="list-style-type: none"> • -subsystem:console • -Sc • -ss:C 	<ul style="list-style-type: none"> • netapi32.lib • wsock32.lib • user32.lib • winmm.lib
Borland C++, Version 5	<ul style="list-style-type: none"> • -subsystem:windows • -Sw • -ss:W 	<ul style="list-style-type: none"> • cw32mti.lib • import32.lib

Table 10. Library sets that the linker uses

(continued)

Compiler	Options for esql	Library sets that the linker uses
	<ul style="list-style-type: none"> • -subsystem:console • -Sc • -ss:C 	<ul style="list-style-type: none"> • cw32mti.lib • import32.lib

Linking options

The C compiler performs the linking phase of the IBM® Informix® ESQL/C compile.

This section describes the esql command-line arguments that affect how this linking occurs.

General linking options

The following linking options affect both UNIX™ and Windows™ environments:

- Linking other C source and object files
- Specifying the versions of HCL Informix® general libraries

Linking other C source and object files

You can list the following types of files on the esql command line to indicate that you want the link editor to link to the resulting object file:

- C source files in the form *otherCsrc.c*

If you list files with the *.c* extensions, esql passes them through to the C compiler, which compiles them to object files (*.o* extensions) and links these object files.

- C object files in the form *otherCobj.o* on a UNIX™ operating system or *otherCobj.obj* in a Windows™ environment

If you list files with *.o* or *.obj* extensions, esql passes them through to the C compiler, which links these object files. The link editor links the C object files with the appropriate IBM® Informix® ESQL/C library functions.

- Library files, either your own libraries or system libraries that are compatible with the linker
- Module definitions (*.def*)

- Resource files, either compiled (`.res`) or uncompiled (`.rc`)



Tip: If you specify uncompiled resource files, `esql` passes them to the resource compiler and links the resulting `.res` file to the Informix® ESQL/C application.

The Informix® ESQL/C command preprocessor passes these files directly to the linker. It also links the libraries it needs to support the Informix® ESQL/C function library. You can use the `-libs` option to determine which libraries `esql` automatically links, as follows:

```
esql -libs
```

Specify versions of Informix® ESQL/C general libraries

By default, the `esql` command links the shared libraries for the HCL Informix® general libraries: **libgen**, **libos**, **libgls**, **libafs**, and **libsql**. To use shared libraries, your computer must support shared memory.

You can use the following command-line options to change which versions of the Informix® general libraries the preprocessor links with your program:

- The `-thread` option tells the preprocessor to link the thread-safe versions of the Informix® shared libraries.
- The `-static` option tells the preprocessor to link the static libraries for the Informix® general libraries in a UNIX™ environment. If you use the `-static` option, you cannot set the **IFX_LONGID** environment variable. You must recompile with `libos.a`.

You can combine these options to tell the preprocessor to link in the thread-safe versions of the Informix® static libraries.

Special linking options for Windows™

The following sections give linking options that you can only use in Windows™ environments.

Pass arguments to the linker

On the `esql` command line, you can list linker arguments by prefacing them with the `-l` processor option.

The `esql` command processor passes to the linker all arguments after the `-l` option, up to whichever of the following items it encounters first:

- The `-r` option to specify resource compiler options
- The end of the command line

Pass arguments to the resource compiler

On the `esql` command line, you can list resource compiler arguments by prefacing them with the `-r` processor option.

The IBM® Informix® ESQL/C command processor passes to the resource compiler all arguments after the `-r`, up to the end of the command line. The processor then runs the resource compiler to create a `.res` file, which it then passes to the linker.

If you specify the `-r` option but do not specify an associated `resfile.rc`, `esql` uses the name for the target and appends the `.rc` extension.

ESQL/C dynamic link libraries

For Windows™ environments, the IBM® Informix® ESQL/C product includes the following dynamic link libraries (DLLs):

- The ESQL client-interface DLL (`isqlt09a.dll`) contains the Informix® ESQL/C library functions that the Informix® ESQL/C preprocessor needs to translate embedded SQL statements and other internal functions that are needed at run time.
- The `esqlauth.dll` DLL provides runtime verification of the connection information that the client application sends to the database server. When your application requests a connection, Informix® ESQL/C calls the `sqlauth()` function, which `esqlauth.dll` defines. For more information about `sqlauth()`, see [Connection authentication functionality in a Windows environment on page 324](#).
- The Registry DLL, `iregt07b.dll`, is used by the Setnet32 utility and the HCL Informix® Connect library to set and access configuration information in the Registry.
- The `igl4b304.dll`, `igo4g303.dll`, and `iglxg303.dll` DLLs are required for Global Language Support (GLS). For more information about code-set conversion, see the *HCL® Informix® GLS User's Guide*.

Informix® DLLs are located in the `%INFORMIXDIR%\bin` directory. `%INFORMIXDIR%` is the value of the **INFORMIXDIR** environment variable.

Same runtime routines for version independence

If your application was compiled with a version of Microsoft™ Visual C++ earlier than 4.x, you must export your C runtime library to the ESQL client-interface DLL (`isqlt09a.dll`). The ESQL client-interface DLL uses your runtime routines to make sure all the pieces of your application are compiled with the same runtime version. Any application that is linked to your application and calls IBM® Informix® ESQL/C library routines or SQL statements must also use your C runtime library.

To export a C runtime library, include the following line in your code before the first call to the Informix® ESQL/C library routine or SQL statement:

```
#include "infxcexp.c";
```

The `infxcexp.c` file contains the C code to export the addresses of all C runtime routines that the ESQL client-interface DLL uses. This file is in the `%INFORMIXDIR%\incl\esql` directory, which the `esql` command processor automatically searches when it compiles a program. If you do not use the `esql` command processor, add the `%INFORMIXDIR%\incl\esql` directory to the compiler search path before you compile.

You must include the `infxcexp.c` file only once, in the `main()` routine (once per process), before the first Informix® ESQL/C library call or SQL statement in the program. The code in this file exports your runtime library to the ESQL runtime DLL (`isqlt09a.dll`) so that they use the same C runtime code. Exporting your runtime routines enables the ESQL runtime routines to allocate memory (`malloc()`), return the pointer to a C program, and let the program free the memory (`free()`). It also enables a C program to open a file and to pass the handle (or file pointer) to the ESQL runtime routines for read/write access.

Access the ESQL Client-interface DLL in Windows™ environments

A dynamic link library (DLL) is a collection of functions and resources that can be shared by applications. It is similar to a runtime library in that it stores functions that many applications need. It differs, however, from a runtime library in the way that it is linked to the calling application.

Libraries that are linked at compile time are *static-link libraries*. The libraries such as **libc** and **libcmt** (used with the Microsoft™ Visual C++, Version 2.x) are static-link libraries. Whenever you link one of these Microsoft™ Visual C++ (Version 2.x) libraries to your application, the linker copies the code from the appropriate static-link library to the executable file (.exe) for your application. By contrast, when you link dynamically, no code is copied to the executable file of your application. Instead, your functions are linked at run time.

Static-link libraries are effective in an environment where no multitasking is required. However, they become inefficient when more than one application calls the same functions. For example, if two applications that are running simultaneously in a Windows™ environment call the same static-link function, two copies of the function is in memory. This situation is inefficient.

But if a function is dynamically linked, the Windows™ system first checks memory to see if a copy of the function already is there. If a copy exists, the Windows™ system uses that copy rather than making another copy. If the function does not yet exist in memory, the Windows™ system links or copies the function into memory from the DLL.

The IBM® Informix® ESQL/C library functions, and other internal functions, are contained in the ESQL client-interface DLL. To use these functions in your Informix® ESQL/C application, you must perform the following tasks:

- Access the import library for the ESQL client-interface DLL
- Locate the ESQL client-interface DLL

Access the import library

The import library of the DLL is provided to enable your IBM® Informix® ESQL/C application to access the ESQL client-interface DLL.

The linker uses an import library to locate functions that are contained in the DLL. It contains references that reconcile function names used in an application with the library module that contains the function.

When you link a static library to your application, the linker copies program code from your static-link libraries to the executable file. However, if you link an import library to your application, the linker does not copy the program code when it links the executable file. Instead, the linker stores the information needed to locate the functions in the DLL. When you run your application, this location information serves as a dynamic link to the DLL.

The ESQL client-interface library provides location information for the Informix® ESQL/C function calls. The `esql` command processor automatically links the import and Windows™ libraries for the DLL whenever you use it to compile and link your Informix® ESQL/C program.

Locate a DLL

During the development of your application, the IBM® Informix® ESQL/C software (such as the esql command processor) must be able to access object libraries and import libraries. However, DLLs must be accessible when the application is running. Consequently, Windows™ must be able to locate them on your hard disk.

Search directories for your DLL in the following order:

1. The directory from which you loaded the application
2. The Windows™ environment system directory, **SYSTEM**
3. The current directory (where the executable file exists or the working directory that the Program Item Properties value for the icon specifies)
4. Directories that your **PATH** environment variable lists

For the most recent information about your particular Windows™ operating system, see the Dynamic-Link Library Search Order documentation at <http://www.microsoft.com>.

Build an application DLL

You can tell the IBM® Informix® ESQL/C processor to build the Informix® ESQL/C program as a DLL (.dll file) with the **-target** (or **-wd**) command-line option. Such a program is called an application DLL.

To build the Informix® ESQL/C program as a DLL, follow the guidelines for general-purpose DLLs. For more information, see your system documentation. Compile the Informix® ESQL/C source file with the `-target:dll` (or **-wd**) to create the application DLL.

For an example of how to build an application DLL, see the WDEMO demonstration program in the %INFORMIXDIR%\demo\wdemo directory. The Informix® ESQL/C source file for the sample application DLL is called `wdll.ec`. To compile this DLL, use the following esql command:

```
esql -subsystem:windows -target:dll wdll.ec
```

The source code for the WDEMO executable file is in the `wdemo.exe` file.

Informix® ESQL/C data types

These topics contain information about the correspondence between SQL and C data types and how to handle data types in the IBM® Informix® ESQL/C program.

These topics contain the following information:

- Choosing the appropriate data type for a host variable
- Converting from one data type to another
- Functions for working with nulls and different data types

Choose data types for host variables

When you access a database column in your IBM® Informix® ESQL/C program, you must declare a host variable of the appropriate C or Informix® ESQL/C data type to hold the data. [Table 11: Corresponding SQL and host variable data types on page 80](#) lists the SQL data types of the HCL Informix® and the corresponding Informix® ESQL/C data types that you can declare for host-variables. [Table 12: Corresponding SQL and host variable data types specific to HCL Informix on page 81](#) lists the additional SQL data types available with Informix® and the Informix® ESQL/C data types that you can use as host variables for those types of columns. Both figures include a reference to the section or chapter in this book where you can obtain more information about the host-variable data type. For more information about the SQL data types that you can assign to database columns, see the *HCL® Informix® Guide to SQL: Reference*.

Table 11. Corresponding SQL and host variable data types

SQL data type	ESQL/C predefined data type	C language type	See
BIGINT	BIGINT	8-byte integer	Numeric data types on page 107
BIGSERIAL	BIGINT	8-byte integer	Numeric data types on page 107
BOOLEAN	boolean		Table 18: SQL data types and ESQL/C header files that are specific to HCL Informix on page 87
BYTE	ifx_loc_t or loc_t		Simple large objects on page 135
CHAR(<i>n</i>) CHARACTER(<i>n</i>)	fixchar [<i>n</i>] or string [<i>n+1</i>]	char [<i>n + 1</i>] or char *	Character and string data types on page 93
DATE	date	4-byte integer	Time data types on page 124
DATETIME	datetime or dtime_t		Time data types on page 124
DECIMAL	decimal or dec_t		Numeric data types on page 107
DEC			
NUMERIC			
MONEY			
FLOAT		double	Time data types on page 124
DOUBLE PRECISION			
INT8	int8 or ifx_int8_t		Numeric data types on page 107
INTEGER		4-byte integer	Numeric data types on page 107
INT			

Table 11. Corresponding SQL and host variable data types (continued)

SQL data type	ESQL/C predefined data type	C language type	See
INTERVAL	interval or intrvl_t		Time data types on page 124
LVARCHAR	lvarchar	char [n + 1] or char *	Character and string data types on page 93
NCHAR(n)	fixchar [n] or string [n+1]	char [n + 1] or char *	Character and string data types on page 93
NVARCHAR(m)	varchar[m+1] or string [m+1]	char [m+1]	Character and string data types on page 93
SERIAL		4-byte integer	Numeric data types on page 107
SERIAL8	int8 or ifx_int8_t		Numeric data types on page 107
SMALLFLOAT		float	Numeric data types on page 107
REAL			
SMALLINT		2-byte integer	Numeric data types on page 107
TEXT	loc_t		Simple large objects on page 135
VARCHAR(m,x)	varchar[m+1] or string [m+1]	char d[m+1]	Character and string data types on page 93

Table 12. Corresponding SQL and host variable data types specific to HCL Informix®

SQL data type	ESQL/C predefined data type	See
BLOB	ifx_lo_t	Smart large objects on page 178
CLOB	ifx_lo_t	Smart large objects on page 178
LIST(e)	collection	Smart large objects on page 178
MULTISET(e)	collection	Complex data types on page 203
Opaque data type	lvarchar, fixed binary, or var binary	Opaque data types on page 254
ROW(...)	row	Complex data types on page 203
SET(e)	collection	Complex data types on page 203

Data type constants

The IBM® Informix® ESQL/C `sqltypes.h` header file contains integer constants for both SQL and Informix® ESQL/C data types. Some Informix® ESQL/C library functions require data type constants as arguments. You can also compare these data type constants in dynamic SQL programs to determine the type of column that the DESCRIBE statement described. The Informix® ESQL/C code excerpt in the following figure compares the `sqltype` element of an `sqlvar` structure to a series of SQL data type constants to determine what types of columns a DESCRIBE statement returned.

Figure 21. Code excerpt with SQL data type constants

```
for (col = udesc->sqlvar, i = 0; i < udesc->sqld; col++, i++)
{
    switch(col->sqltype)
    {
        case SQLSMFLOAT:
            col->sqltype = CFLOATTYPE;
            break;

        case SQLFLOAT:
            col->sqltype = CDOUBLETYPE;
            break;

        case SQLMONEY:
        case SQLDECIMAL:
            col->sqltype = CDECIMALTYPE;
            break;

        case SQLCHAR:
            col->sqltype = CCHARTYPE;
            break;

        default:
            /* The program does not handle INTEGER,
             * SMALL INTEGER, DATE, SERIAL or other
             * data types. Do nothing if we see
             * an unsupported type.
             */
            return;
    }
}
```

For more information about the use of data type constants with the DESCRIBE statement, see [Determine SQL statements on page 438](#).

SQL data type constants

[Table 13: Constants for Informix SQL column data types on page 83](#) shows the SQL data type constants for the HCL Informix®. [Table 14: Constants for Informix SQL column data types that are specific to HCL Informix on page 83](#) shows the SQL data type constants for the additional data types that are available with the Informix®.

Table 13. Constants for Informix® SQL column data types

SQL data type	Defined constant	Integer value
CHAR	SQLCHAR	0
SMALLINT	SQLSMINT	1
INTEGER	SQLINT	2
FLOAT	SQLFLOAT	3
SMALLFLOAT	SQLSMFLOAT	4
DECIMAL	SQLDECIMAL	5
SERIAL	SQLSERIAL	6
DATE	SQLDATE	7
MONEY	SQLMONEY	8
DATETIME	SQLDTIME	10
BYTE	SQLBYTES	11
TEXT	SQLTEXT	12
VARCHAR	SQLVCHAR	13
INTERVAL	SQLINTERVAL	14
NCHAR	SQLNCHAR	15
NVARCHAR	SQLNVCHAR	16
INT8	SQLINT8	17
BIGSERIAL	SQLBIGSERIAL	53
LVARCHAR	SQLLVARCHAR	43
BOOLEAN	SQLBOOL	45
BIGINT	SQLINFXBIGINT	52
BIGSERIAL	SQLBIGSERIAL	53

Table 14. Constants for Informix® SQL column data types that are specific to HCL Informix®

SQL data type	Defined constant	Integer value
SET	SQLSET	19
MULTISET	SQLMULTISET	20
LIST	SQLLIST	21

Table 14. Constants for Informix® SQL column data types that are specific to HCL Informix® (continued)

SQL data type	Defined constant	Integer value
ROW	SQLROW	22
Varying-length opaque type	SQLUDTVAR	40
Fixed-length opaque type	SQLUDTFIXED	41
SENDRECV (client-side only)	SQLSENDRECV	44



Important: The SENDRECV data type has an SQL constant but can only be used in the Informix® ESQL/C program. You cannot define a database column as type SENDRECV.

ESQL/C data type constants

You assign the IBM® Informix® ESQL/C data type to a host variable in the Informix® ESQL/C program. The following table shows these constants.

Table 15. Constants for ESQL/C host-variable data types

ESQL/C data type	Constant	Integer value
char	CCHARTYPE	100
short int	CSHORTTYPE	101
int4	CINTTYPE	102
long	CLONGTYPE	103
float	CFLOATTYPE	104
double	CDOUBLETYPE	105
dec_t or decimal	CDECIMALTYPE	107
fixchar	CFIXCHARTYPE	108
string	CSTRINGTYPE	109
date	CDATETYPE	110
dec_t or decimal	CMONEYTYPE	111
datetime or dtime_t	CDTIMETYPE	112
ifx_loc_t or loc_t	CLOCATORTYPE	113
varchar	CVCHARTYPE	114
intrvl_t or interval	CINVTTYPE	115
char	CFILETYPE	116

Table 15. Constants for ESQL/C host-variable data types (continued)

ESQL/C data type	Constant	Integer value
int8	CINT8TYPE	117
collection	CCOLTYPE	118
lvarchar	CLVCHARTYPE	119
fixed binary	CFIXBINTYPE	120
var binary	CVARBINTYPE	121
boolean	CBOOLTYPE	122
row	CROWTYPE	123

You can use these Informix® ESQL/C data types as arguments for some of the functions in the Informix® ESQL/C library. For example, both the `rtpalign()` and `rtpmsize()` functions require data type values as arguments.

X/Open data type constants

If your programs conform to the X/Open standards (compile with the `-xopen` option), you must use the data type values that the following table shows. HCL Informix® defines the constants for these values in the `sqlxtype.h` header file.

Table 16. Constants for Informix® SQL column data types in an X/Open environment

SQL data type	Defined constant	X/Open integer value
CHAR	XSQLCHAR	1
DECIMAL	XSQLDECIMAL	3
INTEGER	XSQLINT	4
SMALLINT	XSQLSMINT	5
FLOAT	XSQLFLOAT	6

Header files for data types

To use an SQL data type, your program must include the appropriate IBM® Informix® ESQL/C header file. [Table 17: SQL data types and ESQL/C header files on page 85](#) shows the relationship between host-variable data types and Informix® ESQL/C header files for all database servers. [Table 18: SQL data types and ESQL/C header files that are specific to HCL Informix on page 87](#) shows the relationship between host-variable data types and Informix® ESQL/C header files that are specific to HCL Informix® with Universal Data Option.

Table 17. SQL data types and ESQL/C header files

SQL data type	ESQL/C or C data type	ESQL/C header file
BLOB	ifx_lo_t	<code>locator.h</code>

Table 17. SQL data types and ESQL/C header files (continued)

SQL data type	ESQL/C or C data type	ESQL/C header file
BOOLEAN	boolean	Defined automatically
BYTE	ifx_loc_t or loc_t	<code>locator.h</code>
CHAR(<i>n</i>)	fixchar array[<i>n</i>] or string array[<i>n</i>+1]	Defined automatically
CHARACTER(<i>n</i>)		
DATE	date	Defined automatically
DATETIME	datetime or dtime_t	<code>datetime.h</code>
DECIMAL	decimal or dec_t	<code>decimal.h</code>
DEC		
NUMERIC		
MONEY		
FLOAT	double	Defined automatically
DOUBLE PRECISION		
INT8	int8	<code>int8.h</code>
INTEGER	4-byte integer	Defined automatically
INT		
INTERVAL	interval or intrvl_t	<code>datetime.h</code>
LVARCHAR	lvarchar array[<i>n</i> + 1] where <i>n</i> is the length of the longest string that might be stored in the LVARCHAR field.	Defined automatically
MULTISET(<i>e</i>)	collection	Defined automatically
NCHAR(<i>n</i>)	fixchar array[<i>n</i>] or string array[<i>n</i>+1]	Defined automatically
NVARCHAR(<i>m</i>)	varchar[<i>m</i>+1] or string array[<i>m</i>+1]	Defined automatically
SERIAL	4-byte integer	Defined automatically
SERIAL8	int8	<code>int8.h</code>
BIGINT	BIGINT	Defined automatically
BIGSERIAL	BIGINT	Defined automatically
SMALLFLOAT	float	Defined automatically

Table 17. SQL data types and ESQL/C header files (continued)

SQL data type	ESQL/C or C data type	ESQL/C header file
REAL		
SMALLINT	short int	Defined automatically
TEXT	loc_t	locator.h
VARCHAR(<i>m,x</i>)	varchar[<i>m+1</i>] or string array[<i>m+1</i>]	Defined automatically

Table 18. SQL data types and ESQL/C header files that are specific to HCL Informix®

SQL data type	ESQL/C or C data type	ESQL/C header file
BLOB	ifx_lo_t	locator.h
CLOB	ifx_lo_t	locator.h
LIST(<i>e</i>)	collection	Defined automatically
Opaque data type	lvarchar or fixed binary or var binary	User-defined header file that contains definition of internal structure for opaque type
ROW(...)	row	Defined automatically
SET(<i>e</i>)	collection	Defined automatically

Data conversion

When a discrepancy exists between the data types of two values, IBM® Informix® ESQL/C attempts to convert one of the data types. The process of converting a value from one data type to another is called data conversion.

The following list names a few common situations in which data conversion can occur:

Comparison

Data conversion can occur if you use a condition that compares two different types of values, such as comparing the contents of a zip-code column to an integer value.

For example, to compare a CHAR value and a numeric value, Informix® ESQL/C converts the CHAR value to a numeric value before it performs the comparison.

Fetching and inserting

Data conversion can occur if you fetch or insert values with host variables and database columns of different data types.

Arithmetic operations

Data conversion can occur if a numeric value of one data type operates on a value of a different data type.

Fetch and insert with host variables

If you try to fetch a value from a database column into a host variable that you do not declare according to the correspondence shown in [Table 11: Corresponding SQL and host variable data types on page 80](#), IBM® Informix® ESQL/C attempts to convert the data types. Similarly, if you try to insert a value from a host variable into a database column, Informix® ESQL/C might need to convert data types if the host variable and database column do not use the correspondences in [Table 11: Corresponding SQL and host variable data types on page 80](#). Informix® ESQL/C converts the data types only if the conversion is meaningful.

This section provides the following information about data conversion for fetching and inserting values with host variables:

- How Informix® ESQL/C converts between numeric and character data
- How Informix® ESQL/C converts floating-point numbers to strings
- How Informix® ESQL/C converts BOOLEAN values to characters
- How Informix® ESQL/C converts DATETIME and INTERVAL values
- How Informix® ESQL/C converts between VARCHAR columns and character data

Convert numbers and strings

Before IBM® Informix® ESQL/C can convert a value from one data type to another, it must determine whether the conversion is meaningful.

The following table shows possible conversions between numeric data types and character data types. In this figure, **N** represents a value with a numeric data type (such as DECIMAL, FLOAT, or SMALLINT) and **C** represents a value with a character data type (such as CHAR or VARCHAR).

If conversion is not possible, either because it makes no sense or because the target variable is too small to accept the converted value, Informix® ESQL/C returns values that the **Results** column in the following table describes.

Table 19. Data conversion problems and results

Conversion	Problem	Results
C C	Does not fit	Informix® ESQL/C truncates the string, sets a warning (sqlca.sqlwarn.sqlwarn1 to w and SQLSTATE to 01004), and sets any indicator variable to the size of the original string.
N C	None	Informix® ESQL/C creates a string for the numeric value; it uses an exponential format for large or small numbers.
N C	Does not fit	Informix® ESQL/C fills the string with asterisks, sets a warning (sqlca.sqlwarn.sqlwarn1 to w and SQLSTATE to 01004), and sets any indicator variable to a positive integer. When the fractional part of a number does not fit in a character variable, Informix® ESQL/C rounds the number. Asterisks are displayed only when the integer part does not fit.

Table 19. Data conversion problems and results (continued)

Conversion	Problem	Results
C N	None	Informix® ESQL/C determines the numeric data type based on the format of the character value; if the character contains a decimal point, Informix® ESQL/C converts the value to a DECIMAL value.
C N	Not a number	The number is undefined; Informix® ESQL/C sets sqlca.sqlcode and SQLSTATE to indicate a runtime error.
C N	Overflow	The number is undefined; Informix® ESQL/C sets sqlca.sqlcode and SQLSTATE to indicate a runtime error.
N N	Does not fit	Informix® ESQL/C attempts to convert the number to the new data type. For information about possible errors, see the <i>HCL® Informix® Guide to SQL: Reference</i> .
N N	Overflow	The number is undefined; Informix® ESQL/C sets sqlca.sqlcode and SQLSTATE to indicate a runtime error.

In [Table 19: Data conversion problems and results on page 88](#), the phrase *Does not fit* means that the size of the data from the source variable or column exceeds the size of the target column or variable.

Convert floating-point numbers to strings

IBM® Informix® ESQL/C can automatically convert floating-point column values (data type of DECIMAL(*n*), FLOAT, or SMALLFLOAT) between database columns and host variables of character type **char**, **varchar**, **string**, or **fixchar**. When Informix® ESQL/C converts a floating-point value to a character string whose buffer is not large enough to hold the full precision, Informix® ESQL/C rounds the value to fit it in the character buffer.

Convert BOOLEAN values to characters

The database server can automatically convert BOOLEAN values between database columns and host variables of the **fixchar** data type.

The following list shows the character representations for the BOOLEAN values.

\01'

'T'

\00'

'F'

Convert DATETIME and INTERVAL values

IBM® Informix® ESQL/C can automatically convert DATETIME and INTERVAL values between database columns and host variables of character type **char**, **string**, or **fixchar**. Informix® ESQL/C converts a DATETIME or INTERVAL value to a character string and then stores it in a host variable.

You can use Informix® ESQL/C library functions to explicitly convert between DATE and DATETIME values.

Convert between VARCHAR and character data types

IBM® Informix® ESQL/C can automatically convert VARCHAR values between database columns and host variables of character type **char**, **string**, or **fixchar**.

Perform arithmetic operations

When IBM® Informix® ESQL/C performs an arithmetic operation on two values, it might need to convert data types if the two values do not have data types that match.

This section provides the following information about data conversion for arithmetic operations:

- How Informix® ESQL/C converts numeric values
- How Informix® ESQL/C handles operations that involve floating-point values

Convert numbers to numbers

If two values of different numeric data types operate on one another, Informix® ESQL/C converts the values to the data type that the following table indicates and then performs the operation.

Table 20. Data types for which ESQL/C carries out numeric operations

Operands	DEC	FLOAT	INT	SERIAL	SMALLFLOAT	SMALLINT
DEC	DEC	DEC	DEC	DEC	DEC	DEC
FLOAT	DEC	FLOAT	FLOAT	FLOAT	FLOAT	FLOAT
INT	DEC	FLOAT	INT	INT	FLOAT	INT
SERIAL	DEC	FLOAT	INT	INT	FLOAT	INT
SMALLFLOAT	DEC	FLOAT	FLOAT	FLOAT	FLOAT	FLOAT
SMALLINT	DEC	FLOAT	INT	INT	FLOAT	INT

[Table 20: Data types for which ESQL/C carries out numeric operations on page 90](#) shows that if Informix® ESQL/C performs an operation between an operand with a data type of FLOAT and a second operand with a data type of DECIMAL (DEC), Informix® ESQL/C generates a result that has a DECIMAL data type.

Operations that involve a decimal value

The following table shows the numeric data types. Database columns use the SQL data types, and IBM® Informix® ESQL/C host variables use the corresponding Informix® ESQL/C data types.

SQL data type	ESQL/C data type
INTEGER	4-byte integer
SMALLINT	short integer
DECIMAL	decimal
MONEY	decimal
FLOAT	double
SMALLFLOAT	float

When Informix® ESQL/C performs arithmetic operations on operands with numeric data types and one of the operands has a decimal value (an SQL data type of DECIMAL or the Informix® ESQL/C data type of **decimal**), Informix® ESQL/C converts each operand and the result to a decimal value.

An SQL DECIMAL data type has the format DECIMAL(*p,s*), where *p* and *s* represent the following parameters:

- The *p* parameter is the precision, which is the total number of significant digits in a real number.
For example, the number 1237.354 has a precision of seven.
- The *s* parameter is the scale, which is the number of digits that represent the fractional part of the real number.
For example, the number 1237.354 has a scale of three. If the DECIMAL data type includes a scale parameter (DECIMAL(*p,s*)), it holds fixed-point decimal numbers. If the DECIMAL data type omits a scale parameter (DECIMAL(*p*)), it holds floating-point decimal numbers.

The Informix® ESQL/C **decimal** data type tracks precision and scale differently from the SQL DECIMAL data type. For simplicity, this section uses the format of the SQL DECIMAL data type to describe how Informix® ESQL/C performs data conversion for arithmetic operations that involve a decimal value. However, this same data-conversion information applies to arithmetic operations that involve the Informix® ESQL/C **decimal** host variable.

Convert the non-decimal numeric operand

IBM® Informix® ESQL/C converts all operands that are not already DECIMAL (or **decimal**) to DECIMAL before it performs the arithmetic operation.

The following list shows the precision and scale that Informix® ESQL/C uses for the non-DECIMAL operand.

Operand type

Convert to

FLOAT

DECIMAL(17)

SMALLFLOAT

DECIMAL(9)

INTEGER

DECIMAL(10,0)

SMALLINT

DECIMAL(5,0)

Informix® ESQL/C does not consider leading or trailing zeros as significant digits. Leading or trailing zeros do not contribute to the determination of precision and scale. If the operation is addition or subtraction, Informix® ESQL/C adds trailing zeros to the operand with the smaller scale until the scales are equal.

Obtain the DECIMAL data type of the arithmetic result

The precision and scale of the arithmetic result depend on the precision and scale of the operands and on whether one of the operands is a floating-point decimal, as follows:

- When one of the operands is a floating-point decimal, the arithmetic result is a floating-point decimal.

For example, for an arithmetic operation between a fixed-point decimal of DECIMAL(8,3) and a FLOAT value, IBM® Informix® ESQL/C converts the FLOAT value to a floating-point decimal of DECIMAL(17). The arithmetic result has a data type of DECIMAL(17).

- When both of the operands are fixed-point decimals, the arithmetic result is also a fixed-point decimal.

The following table summarizes the rules for arithmetic operations on operands with definite scale (fixed-point decimals). In the following table, p_1 and s_1 are the precision and scale of the first operand, and p_2 and s_2 are the precision and scale of the second operand.

Table 21. Precision and scale of fixed-decimal arithmetic results

Operation	Precision and scale of result	
Addition and Subtraction	Precision:	$\text{MIN}(32, \text{MAX}(p_1 - s_1, p_2 - s_2) + \text{MAX}(s_1, s_2) + 1)$
	Scale:	$\text{MAX}(s_1, s_2)$
Multiplication	Precision:	$\text{MIN}(32, p_1 + p_2)$
	Scale:	$s_1 + s_2$;
		If $(s_1 + s_2) >$ precision, the result is a floating-point decimal number (no scale value).
Division	Precision:	32
	Scale:	

Operation	Precision and scale of result
	Result is a floating-point decimal number.
	The sum: $32 - p_1 + s_1 - s_2$ cannot be negative.

If the data type of the result of an arithmetic operation requires the loss of significant digits, Informix® ESQL/C reports an error.

Data-type alignment library functions

The following IBM® Informix® ESQL/C library functions provide machine-independent size and alignment information for different data types and help you work with null database values.

Function name	Description	See
<code>risnull()</code>	Checks whether a C variable is null	The <code>risnull()</code> function on page 770
<code>rsetnull()</code>	Sets a C variable to null	The <code>rsetnull()</code> function on page 777
<code>rtpalign()</code>	Aligns data on correct type boundaries	The <code>rtpalign()</code> function on page 788
<code>rtpmsize()</code>	Gives the byte size of SQL data types	The <code>rtpmsize()</code> function on page 791
<code>rtpname()</code>	Returns the name of a specified SQL data type	The <code>rtpname()</code> function on page 794
<code>rtpwidth()</code>	Returns the minimum number of characters that a character data type needs to avoid truncation	The <code>rtpwidth()</code> function on page 797

When you compile your Informix® ESQL/C program with the `esql` command, `esql` calls on the linker to link these functions to your program.

Character and string data types

These topics explain how to use character data types in the HCL Informix® ESQL/C program.

The topics contain the following information:

- An overview of the character data types
- Some issues to consider when you insert data from character host variables into the database
- The syntax of Informix® ESQL/C library functions that you can use to manipulate the character data type

For information about SQL data types, see the *HCL® Informix® Guide to SQL: Reference*.

Character data types

IBM® Informix® ESQL/C supports five data types that can hold character data that you retrieve from and send to the database.

If you use a character data type (such as the SQL data types CHAR and VARCHAR) for your database column, you can choose any of the following data types for your host variable:

- The C character data type: **char**
- One of the Informix® ESQL/C predefined data types: **fixchar**, **string**, **varchar**
- The **lvarchar** data type

If you use locale-sensitive character data types (NCHAR or NVARCHAR), you have the same choice of character data types for your associated host variables. For more information about how to declare host variables for the NCHAR and NVARCHAR data types, see the *HCL® Informix® GLS User's Guide*.

The following two conditions determine which character data type to use:

- Whether you want Informix® ESQL/C to terminate the character data with the null character
- Whether you want Informix® ESQL/C to pad the character data with trailing blanks

The following table summarizes the attributes of each of the character data types.

Table 22. ESQL/C character data types

ESQL/C character data type	Null terminated	Contains trailing blanks
char	Y	Y
fixchar		Y
string	Y	Returns a trailing blank only if the column contains an empty string.
varchar	Y	Y
lvarchar	Y	

The char data type

The **char** data type is the C data type that holds character data.

When an application reads a value from a CHAR column into a host variable of type **char**, IBM® Informix® ESQL/C pads this value with trailing blanks up to the size of the host variable. It leaves just one place for the null character that terminates the host array. The behavior is the same if an application reads a value from a VARCHAR (or NVARCHAR) column into a host variable of the **char** data type.


Declare a **char** data type with a length of $[n + 1]$ (where n is the size of the column with values that you want read) to allow for the null terminator. Use the following syntax to declare a host variable of the **char** data type:

```
EXEC SQL BEGIN DECLARE SECTION;
char ch_name[n + 1];
EXEC SQL END DECLARE SECTION;
```

The fixchar data type


The **fixchar** data type is the IBM® Informix® ESQL/C data type that holds character data that does not append a null terminator.

When an application reads a value from a CHAR column into a host variable of type **fixchar**, Informix® ESQL/C pads this value with trailing blanks up to the size of the host variable. Informix® ESQL/C does not append any null character. The behavior is the same if an application reads a value from a VARCHAR (or NVARCHAR) column into a host variable of the **fixchar** data type.

 **Restriction:** Do not use the **fixchar** data type with VARCHAR, or NVARCHAR, data. With a **fixchar**, even if the length of the data is shorter than the size of the **fixchar**, the database server stores all *n* characters of the **fixchar**, including any blanks at the end of the string. Unless the blanks have significance, storing them defeats the space savings that the VARCHAR data type provides.

Declare a **fixchar** host variable as an array with *n* components (where *n* is the size of the column with values that you want read). Use the following syntax to declare a host variable of the **fixchar** data type:

```
EXEC SQL BEGIN DECLARE SECTION;
fixchar fch_name[n];
EXEC SQL END DECLARE SECTION;
```

 **Important:** You can copy a null-terminated C string into a **fixchar** variable if space is available for the null character. However, this is not good practice. When the database server inserts this value into a column, it also inserts the null terminator. As a result, later searches of the table might fail to find the value.

The string data type

The **string** data type is the IBM® Informix® ESQL/C data type that holds character data that is null terminated and does not contain trailing blanks.

However, if a string of blanks (that is, ' ') is stored in a database field and selected into a host variable of the **string** data type, the result is a single blank character.

When an application reads a value from a CHAR column into a host variable of the **string** data type, it strips the value of any trailing blanks and appends a null terminator. The behavior is the same if an application reads a value from a VARCHAR column into a host variable of the **string** data type.

The one exception to this rule is that if the **BLANK_STRINGS_NOT_NULL** environment variable is set to 1 or any other value, like 0 or 2, the string host variable stores an empty string as a single blank followed by a null terminator. If this environment variable is not set, string host variables store an empty string as a null string.

```
EXEC SQL BEGIN DECLARE SECTION;
    string buffer[16];
EXEC SQL END DECLARE SECTION;
:

EXEC SQL select lname into :buffer from customer
    where customer_num = 102;
```

Declare the **string** data type with a length of $[n + 1]$ (where n is the size of the column with values that you want read) to allow for the null terminator. In the preceding code fragment, the **lname** column in the **customer** table is 15 bytes so the **buffer** host variable is declared as 16 bytes. Use the following syntax to declare a host variable of the **string** data type:

```
EXEC SQL BEGIN DECLARE SECTION;
    string str_name[n + 1];
EXEC SQL END DECLARE SECTION;
```

The varchar data type

The **varchar** data type is the IBM® Informix® ESQL/C data type that holds character data of varying lengths.

When an application reads a value from a CHAR column into a host variable of type **varchar**, Informix® ESQL/C preserves any trailing blanks and terminates the array with a null character. The behavior is the same if an application reads a value from a VARCHAR column into a host variable of the **varchar** data type.

Declare the **varchar** data type with a length of $[n+1]$ (where n is the maximum size of the column with values that you want read) to allow for the null terminator. Use the following syntax to declare a host variable of the **varchar** data type:

```
EXEC SQL BEGIN DECLARE SECTION;
    varchar varc_name[n + 1];
EXEC SQL END DECLARE SECTION;
```

VARCHAR size macros

HCL Informix® includes the `varchar.h` header file with the Informix® ESQL/C libraries. This file defines the names and macro functions shown in the following table.

Table 23. VARCHAR size macros

Name of Macro	Description
MAXVCLEN	The maximum number of characters that you can store in a VARCHAR column. This value is 255.
VCLENGTH(s)	The length to declare the host variable.
VCMIN(s)	The minimum number of characters that you can store in the VARCHAR column. Can range from 1 to 255 bytes but must be smaller than the maximum size of the VARCHAR.
VCMAX(s)	The maximum number of characters that you can store in the VARCHAR column. Can range from 1 to 255 bytes.
VCSIZ(min, max)	The encoded size value, based on <i>min</i> and <i>max</i> , for the VARCHAR column.

These macros are useful when your program uses dynamic SQL. After a DESCRIBE statement, the macros can manipulate size information that the database server stores in the LENGTH field of the system-descriptor area (or the **sqlen** field of the **sqlda** structure). Your database server stores size information for a VARCHAR column in the **syscolumns** system catalog table.

The `varchar.ec` demonstration program

The `varchar.ec` demonstration program obtains **collength** from the **syscolumns** system catalog table for the **cat_advert** column (of the **stores7** database). It then uses the macros from `varchar.h` to display size information about the column. This sample program is in the `varchar.ec` file in the `demo` directory. The following figure shows the `main()` function for the `varchar.ec` demonstration program.

Figure 22. The varchar.ec demonstration program

```

/*
 * varchar.ec *

The following program illustrates the use of VARCHAR macros to
obtain size information.
*/

EXEC SQL include varchar;

char errmsg[512];

main()
{
    mint vc_code;
    mint max, min;
    mint hv_length;

    EXEC SQL BEGIN DECLARE SECTION;
        mint vc_size;
    EXEC SQL END DECLARE SECTION;

    printf("VARCHAR Sample ESQL Program running.\n\n");

    EXEC SQL connect to 'stores7';
    chk_sqlcode("CONNECT");

    printf("VARCHAR field 'cat_advert':\n");
    EXEC SQL select collength into $vc_size from syscolumns
        where colname = "cat_advert";
    chk_sqlcode("SELECT");
    printf("\tEncoded size of VARCHAR (from syscolumns.collength) = %d\n",
        vc_size);

    max = VCMAX(vc_size);
    printf("\tMaximum number of characters = %d\n", max);

    min = VCMIN(vc_size);
    printf("\tMinimum number of characters = %d\n", min);

    hv_length = VCLENGTH(vc_size);
    printf("\tLength to declare host variable = char(%d)\n", hv_length);

    vc_code = VCSIZ(max, min);
    printf("\tEncoded size of VARCHAR (from VCSIZ macro) = %d\n", vc_code);

    printf("\nVARCHAR Sample Program over.\n\n");
}

```

When the **IFX_PAD_VARCHAR** environment variable is set to 1, the client sends the VARCHAR data type with padded trailing spaces. When this environment is not set (the default), the client sends the VARCHAR data type value without trailing spaces. The **IFX_PAD_VARCHAR** environment variable must be set only at the client side and is supported only with IBM® Informix® ESQL/C Version 9.53 and 2.90 or later and HCL Informix® Version 9.40 or later.

The lvarchar data type

The **lvarchar** data type is the IBM® Informix® ESQL/C data type that holds character data of varying lengths.

The **lvarchar** data type is implemented as a variable length user-defined type that is similar to the **varchar** data type except that it can support strings of greater than 256 bytes and has the following two uses:

- To hold a value for an LVARCHAR column in the database.

When an application reads a value from an LVARCHAR column into a host variable of the **lvarchar** data type, Informix® ESQL/C preserves any trailing blanks and terminates the array with a null character. The behavior is the same if an application reads a value from a VARCHAR column into a host variable of the **lvarchar** data type.

- To represent the string or external format of opaque data types.



Important: You cannot retrieve or store smart large objects (CLOB or BLOB data types) from or to an **lvarchar** host variable.

The lvarchar keyword syntax

To declare an **lvarchar** host variable for a character column (CHAR, VARCHAR, or LVARCHAR), use the **lvarchar** keyword as the variable data type.

The following syntax shows the **lvarchar** keyword as the variable data type.

```
(explicit id) lvarchar { | variable name [variable size] | *variable name } ;
```

Element	Purpose	Restrictions
<i>variable name</i>	Name of an lvarchar variable of a specified size	None
<i>variable size</i>	Number of bytes to allocate for an lvarchar variable of specified size	Integer value can be 1 - 32,768 (32 KB).
* <i>variable name</i>	Name of an lvarchar pointer variable for data of unspecified length	Not equivalent to a C char pointer (char *). Points to an internal ESQL/C representation for this type. You must use the ifx_var() functions to manipulate data.

The following figure shows declarations for three **lvarchar** variables that hold values for LVARCHAR columns.

Figure 23. Sample lvarchar host variables

```
EXEC SQL BEGIN DECLARE SECTION;
  lvarchar *a_polygon;
  lvarchar circle1[CIRCLESZ],      circle2[CIRCLESZ];
EXEC SQL END DECLARE SECTION;
```



Important: To declare a **lvvarchar** host variable for the external format of an opaque data type, use the syntax described in [Declare lvvarchar host variables on page 257](#).

A lvvarchar host variable of a fixed size

If you do not specify the size of a **lvvarchar** host variable, the size is equivalent to a one-byte C-language **char** data type. If you specify a size, the **lvvarchar** host variable is equivalent to a C-language **char** data type of that size. When you specify a fixed-size **lvvarchar** host variable, any data beyond the specified size is truncated when the column is fetched. Use an indicator variable to check for truncation.

Because a **lvvarchar** host variable of a known size is equivalent to a C-language **char** data type, you can use C-language character string operations to manipulate them.

The lvvarchar pointer host variable

When the **lvvarchar** host variable is a pointer, the size of the data that the pointer references can range up to 2 GB. The **lvvarchar** pointer host variable is designed to insert or select user-defined or opaque types that can be represented in a character string format.

You must use the `ifx_var()` functions to manipulate a **lvvarchar** pointer host variable.

Fetch and insert character data types

You can transfer character data between CHAR and VARCHAR columns and character (**char**, **string**, **fixchar**, **vvarchar**, or **lvvarchar**) host variables with either of the following operations:

- A fetch operation transfers character data from a CHAR or VARCHAR column to a character host variable.
- An insert or update operation transfers character data from a character host variable to a CHAR, VARCHAR, or LVARCHAR column.

If you use locale-sensitive character data types (NCHAR or NVARCHAR), you can also transfer character data between NCHAR or NVARCHAR columns and character host variables. For more information about how to declare host variables for the NCHAR and NVARCHAR data types, see the *HCL® Informix® GLS User's Guide*.

Fetch and insert CHAR data

When an application uses a character host variable to fetch or insert a CHAR value, IBM® Informix® ESQL/C must ensure that the character value fits into the host variable or database column.

Fetch CHAR data

An application can fetch data from a database column of type CHAR or VARCHAR into a character (**char**, **string**, **fixchar**, **vvarchar**, or **lvvarchar**) host variable. If the column data does not fit into the character host variable, IBM® Informix® ESQL/C truncates the data. To notify the user of the truncation, Informix® ESQL/C performs the following actions:

- It sets the `sqlca.sqlwarn.sqlwarn1` warning flag to `w` and the `SQLSTATE` variable to `01004`.
- It sets any indicator variable that is associated with the character host variable to the size of the character data in the column.

Insert CHAR data

An application can insert data from a character host variable (**char**, **string**, **fixchar**, **varchar**, or **lvarchar**) into a database column of type CHAR. If the value is shorter than the size of the database column then the database server pads the value with blanks up to the size of the column.

If the value is longer than the size of the column the database server truncates the value if the database is non-ANSI. No warning is generated when this truncation occurs. If the database is ANSI and the value is longer than the column size then the insert fails and this error is returned:

```
-1279: Value exceeds string column length.
```

Although **char**, **varchar**, **lvarchar**, and **string** host variables contain null terminators, Informix® ESQL/C never inserts these characters into a database column. (Host variables of type **fixchar** must never contain null characters.)

If you use the locale-sensitive character data type, NCHAR, you can insert a value from a character host variable into an NCHAR column. Insertion into NCHAR columns follows the same behavior as insertion into CHAR columns. For more information about how to declare host variables for the NCHAR data type, see the *HCL® Informix® GLS User's Guide*.

Do not use the **fixchar** data type for host variables that insert character data into ANSI-compliant databases.

Fetch and insert VARCHAR data

When an application uses a character host variable to fetch or insert a VARCHAR value, Informix® ESQL/C must ensure that the character value fits into the host variable or database column. When Informix® ESQL/C calculates the length of a source item, it does not count trailing spaces. The following sections describe how Informix® ESQL/C performs the conversion of VARCHAR data to and from **char**, **fixchar**, and **string** character data types.

These conversions also apply to NVARCHAR data. For more information about the NVARCHAR data type, see the *HCL® Informix® GLS User's Guide*.

Fetch VARCHAR data

The following table shows the conversion of VARCHAR data when an application fetches it into host variables of **char**, **fixchar**, **lvarchar**, and **string** character data types.

Table 24. Converting the VARCHAR data type to ESQL/C character data types

Source type	Destination type	Result
VARCHAR	char	If the source is longer, truncate and null terminate the value, and set any indicator variable. If the destination is longer, pad the value with trailing spaces and null terminate it.

Table 24. Converting the VARCHAR data type to ESQ/C character data types (continued)

Source type	Destination type	Result
VARCHAR	fixchar	If the source is longer, truncate the value and set any indicator variable. If the destination is longer, pad the value with trailing spaces.
VARCHAR	string	If the source is longer, truncate and null terminate the value, and set any indicator variable. If the destination is longer, null terminate the value.
VARCHAR	lvarchar	If the source is longer, truncate and set any indicator variable. If the destination is longer, null terminate it.

The following table shows examples of conversions from VARCHAR column data to character host variables that IBM® Informix® ESQ/C might perform during a fetch. In this figure, a plus (+) symbol represents a space character and the value in the **Length** column includes any null terminators.

Table 25. Examples of VARCHAR conversion during a fetch

Source type	Contents	Length	Destination type	Contents	Indicator
VARCHAR(9)	Fairfield	9	char(5)	Fair\0	9
VARCHAR(9)	Fairfield	9	char(12)	Fairfield++\0	0
VARCHAR(12)	Fairfield+++	12	char(10)	Fairfield\0	12
VARCHAR(10)	Fairfield+	10	char(4)	Fai\0	10
VARCHAR(11)	Fairfield++	11	char(14)	Fairfield++++\0	0
VARCHAR(9)	Fairfield	9	fixchar(5)	Fairf	9
VARCHAR(9)	Fairfield	9	fixchar(10)	Fairfield+	0
VARCHAR(10)	Fairfield+	10	fixchar(9)	Fairfield	10
VARCHAR(10)	Fairfield+	10	fixchar(6)	Fairfi	10
VARCHAR(10)	Fairfield+	10	fixchar(11)	Fairfield++	0
VARCHAR(9)	Fairfield	9	string(4)	Fai\0	9
VARCHAR(9)	Fairfield	9	string(12)	Fairfield\0	0
VARCHAR(12)	Fairfield+++	12	string(10)	Fairfield\0	12
VARCHAR(11)	Fairfield++	11	string(6)	Fairf\0	11
VARCHAR(10)	Fairfield++	10	string(11)	Fairfield\0	0
VARCHAR(10)	Fairfield+	10	lvarchar(11)	Fairfield+	0
VARCHAR(9)	Fairfield	9	lvarchar(5)	Fair\0	9

Insert VARCHAR data

When an application inserts a value from a **char**, **varchar**, **lvvarchar**, or **string** host variable into a VARCHAR column, IBM® Informix® ESQL/C also inserts any trailing blanks. Informix® ESQL/C does not, however, add trailing blanks.

If the value is longer than the maximum size of the column, the database server truncates the value if the database is non-ANSI. No warning is generated when this truncation occurs. If the database is ANSI and the value is longer than the maximum column size then the insert fails and this error is returned:

```
-1279: Value exceeds string column length.
```

Although **char**, **varchar**, **lvvarchar**, and **string** host variables contain null terminators, Informix® ESQL/C never inserts these characters into a database column. (Host variables of type **fixchar** must never contain null characters.) If an application inserts a **char**, **varchar**, **lvvarchar**, or **string** value into a VARCHAR column, the database server tracks the end of the value internally.

The following table shows the conversion of VARCHAR data when an application inserts it from host variables of **char**, **fixchar**, **lvvarchar**, and **string** character data types.

Table 26. Converting ESQL/C character data types to the VARCHAR data type

Source type	Destination type	Result
char	VARCHAR	If the source is longer than the max VARCHAR, truncate the value and set the indicator variable. If the max VARCHAR is longer than the source, the length of the destination equals the length of the source (not including the null terminator of the source).
fixchar	VARCHAR	If the source is longer than the max VARCHAR, truncate the value and set the indicator variable. If the max VARCHAR is longer than the source, the length of the destination equals the length of the source.
string	VARCHAR	If the source is longer than the max VARCHAR, truncate the value and set the indicator variable. If the max VARCHAR is longer than the source, the length of the destination equals the length of the source (not including the null terminator of the source).
lvvarchar	VARCHAR	If the source is longer than the max VARCHAR, truncate the value and set the indicator variable. If the max VARCHAR is longer than the source, the length of the destination equals the length of the source.

If you use the locale-sensitive character data type, NVARCHAR, you can insert a value from a character host variable into an NVARCHAR column. Insertion into NVARCHAR columns follows the same behavior as insertion into VARCHAR columns. For more information about how to declare host variables for the NVARCHAR data type, see the *HCL® Informix® GLS User's Guide*.

The following table shows examples of conversions from character host variables to VARCHAR column data that Informix® ESQL/C might perform during an insert. In this figure, a plus (+) symbol represents a space character.

Table 27. Examples of VARCHAR conversion during an insert

Source Type	Contents	Length	Destination type	Contents	Length
char(10)	Fairfield\0	10	VARCHAR(4)	Fair	4
char(10)	Fairfield\0	10	VARCHAR(11)	Fairfield	9
char(12)	Fairfield++\0	12	VARCHAR(9)	Fairfield	9
char(13)	Fairfield+++ \0	13	VARCHAR(6)	Fairfi	6
char(11)	Fairfield+\0	11	VARCHAR(11)	Fairfield+	10
fixchar(9)	Fairfield	9	VARCHAR(3)	Fai	3
fixchar(9)	Fairfield	9	VARCHAR(11)	Fairfield	9
fixchar(11)	Fairfield++	11	VARCHAR(9)	Fairfield	9
fixchar(13)	Fairfield++++	13	VARCHAR(7)	Fairfie	7
fixchar(10)	Fairfield+	10	VARCHAR(12)	Fairfield+	10
string(9)	Fairfield\0	9	VARCHAR(4)	Fair	4
string(9)	Fairfield\0	9	VARCHAR(11)	Fairfield	9

Fetch and insert lvarchar data

When an application uses a **lvarchar** host variable to fetch or insert a data value, IBM® Informix® ESQL/C must ensure that the value fits into the host variable or database column.

Fetch lvarchar data

An application can fetch data from a database column of type LVARCHAR into a character (**char**, **string**, **fixchar**, **vchar**, or **lvarchar**) host variable. If the column data does not fit into the host variable, IBM® Informix® ESQL/C truncates the data. To notify the user of the truncation, Informix® ESQL/C performs the following actions:

- It sets the **sqlca.sqlwarn.sqlwarn1** warning flag to **w** and the SQLSTATE variable to **01004**.
- It sets any indicator variable that is associated with the character host variable to the size of the character data in the column.

Insert lvarchar data

An application can insert data from a character host variable (**char**, **string**, **fixchar**, **vchar**, or **lvarchar**) into a database column of type LVARCHAR.

If the value is longer than the maximum size of the column the database server truncates the value if the database is non-ANSI. No warning is generated when this truncation occurs. If the database is ANSI and the value is longer than the maximum column size then the insert fails and this error is returned:

```
-1279: Value exceeds string column length.
```

If the host variable you use for the insert is a **char** or **varchar**, the database server casts the type to **lvvarchar**.

When you write data to an LVARCHAR column, the database server imposes a limit of 32 KB on the column. If the host variable is a **lvvarchar** data type and the data exceeds 32 KB, the database server returns an error. If the column has an input support function, it must use any data beyond 32 KB, if necessary, to prevent the database server from returning the error.

Fetch and insert with an ANSI-compliant database

For an ANSI-compliant database, when you use a character host variable in an INSERT statement or in the WHERE clause of an SQL statement (SELECT, UPDATE, or DELETE), the character value in the host variable must be null terminated. Therefore, use the following data types for character host variables:

- **char**, **string**, or **varchar**
- **lvvarchar**

For example, the following insertion is valid because the first and **last** host variables are of type **char**, which is null terminated:

```
EXEC SQL BEGIN DECLARE SECTION;
    char first[16], last[16];
EXEC SQL END DECLARE SECTION;
;

strcpy("Dexter", first);
strcpy("Haven", last);
EXEC SQL insert into customer (fname, lname)
    values (:first, :last);
```

The strcpy() function copies the null terminator into the host variable and the **char** data type retains the null terminator.

Do not use the **fixchar** data type for host variables because it does not include a null terminator on the string. For an ANSI-compliant database, the database server generates an error under either of the following conditions:

- If you try to insert a string that is not null terminated.
- If you use a string that is not null terminated in a WHERE clause.

Character and string library functions

The IBM® Informix® ESQL/C library contains the following character-manipulation functions. You can use these functions in your C programs to manipulate single characters and strings of bytes and characters, including variable-length expressions of the following data types:

- **varchar**
- fixed-size **lvvarchar**

The internal structure referenced by the **lvarchar** pointer data type is different from the character representation of a fixed-size **lvarchar** variable. You must use the `ifx_var()` functions to manipulate **lvarchar** pointer variables. For more information about the `ifx_var()` functions, see [The lvarchar pointer and var binary library functions on page 275](#).

The functions whose names begin with **by** act on and return fixed-length strings of bytes. The functions whose names begin with **rst** and **st** (except **stchar**) operate on and return null-terminated strings. The `rdownshift()` and `rupshift()` functions also operate on null-terminated strings but do not return values. When you compile your Informix® ESQL/C program with the `esql` preprocessor, it calls on the linker to link these functions to your program. The following list provides brief descriptions of the character and string library functions and refers you to the pages where detailed information for each function is given.

Function name	Description	See
<code>bycmpr()</code>	Compares two groups of contiguous bytes	The bycmpr() function on page 565
<code>bycopy()</code>	Copies bytes from one area to another	The bycopy() function on page 567
<code>byfill()</code>	Fills an area you specify with a character	The byfill() function on page 568
<code>byleng()</code>	Counts the number of bytes in a string	The byleng() function on page 570
<code>ldchar()</code>	Copies a fixed-length string to a null-terminated string	The ldchar() function on page 744
<code>rdownshift()</code>	Converts all letters to lowercase	The rdownshift() function on page 752
<code>rstod()</code>	Converts a string to a double value	The rstod() function on page 780
<code>rstoi()</code>	Converts a string to a short integer value	The rstoi() function on page 781

Function name	Description	See
<code>rstol()</code>	Converts a string to a 4-byte integer value	The <code>rstol()</code> function on page 783
<code>rupshift()</code>	Converts all letters to uppercase	The <code>rupshift()</code> function on page 791
<code>stcat()</code>	Concatenates one string to another	The <code>stcat()</code> function on page 817
<code>stchar()</code>	Copies a null-terminated string to a fixed-length string	The <code>stchar()</code> function on page 819
<code>stcmp()</code>	Compares two strings	The <code>stcmp()</code> function on page 820
<code>stcopy()</code>	Copies one string to another string	The <code>stcopy()</code> function on page 821
<code>stleng()</code>	Counts the number of bytes in a string	The <code>stleng()</code> function on page 822

Numeric data types

HCL Informix® database servers support the following numeric data types:

- Integer data types: `SMALLINT`, `INTEGER`, `INT8`, `SERIAL`, `SERIAL8`
- The Boolean data type
- Fixed-point data types: `DECIMAL` and `MONEY`
- Floating-point data types: `SMALLFLOAT` and `FLOAT`

These topics contain information about working with numeric data types:

- Informix® ESQL/C data types to use as host variables for SQL numeric data types
- Characteristics of Informix® ESQL/C numeric data types
- Formatting masks, which you can use to format numeric data types
- Informix® ESQL/C library functions that you can use to manipulate numeric data types

The integer data types

The database server supports the following data types for integer values.

SQL integer data type	Number of bytes	Range of values
SMALLINT	2	-32767 to 32767
INTEGER, INT, SERIAL	4	-2,147,483,647 to 2,147,483,647
INT8, BIGINT, SERIAL8, BIGSERIAL	8	-9,223,372,036,854,775,807 to 9,223,372,036,854,775,807

The C language supports the **short int** and **long int** data types for integer values.

The storage size of the C **short int** data type depends on the hardware and operating system of the computer that you use.

In ESQL/C, the **long int** data type of C is always treated as 4 bytes, regardless of the platform or hardware. This makes **long int** useful for storing values of the SMALLINT, INTEGER, INT, and SERIAL data types of Informix®.



Important:

Do not, however, attempt to use a **long int** data type to store the 8-byte Informix® integer data types INT8, BIGINT, SERIAL8, or BIGSERIAL. For example, the database server issues this error when your query attempts to select an 8-byte BIGSERIAL value outside the range of -2,147,483,647 through + 2,147,483,647 into an integer C variable whose data type is **long int**:

```
-1215 Value too large to fit in an INTEGER.
```

When you declare an integer host variable, you must ensure that this host variable is large enough for all possible values of the SQL integer data type with which the variable is associated. For 8-byte whole numbers, use host variables of the C data types **bigint** or **int8**. For more information about how to implement integer data types on your system, check with your system administrator or your C documentation.

The integer host variable types

The following data types are provided for specifying integer host variables of specific lengths.

Data type

Length

int1

One-byte integer

int2

Two-byte integer

int4

Four-byte integer

mint

Native integer data type for the machine

mlong

Native **long** integer data type for the machine, the size of which is equal to that of the pointer for the machine.

The **mlong** data type is mapped to the **long** data type on Windows™ 32-bit and UNIX™ and Linux™ 32-bit and 64-bit platforms. It is mapped to the **__int64** data type on Windows™ 64-bit platforms.

MSHORT

Native **short** integer data type for the machine

MCHAR

Native **char** data type for the machine



Restriction: The preceding integer data types are reserved. Your programs must not use typedef or \$typedef statements to define these data types.

The integer host variable data types are defined in the `ifxtypes.h` file, which is automatically included in your program when you compile it with the `esql` script.



Important: Many of the IBM® Informix® ESQL/C library functions have been changed to declare the Informix® integer data types rather than the machine-specific types such as **int**, **short**, and **long**. It is recommended that you use the Informix® integer types when you call Informix® ESQL/C library functions.

The INT8 and SERIAL8 SQL data types

IBM® Informix® ESQL/C supports the SQL INT8 and SERIAL8 data types with the **int8** data type. The **int8** data type is a machine-independent method that represents numbers in the range $-(2^{63}-1)$ to $2^{63}-1$.

For a complete description of the INT8 and SERIAL8 SQL data types, see the *HCL® Informix® Guide to SQL: Reference*. This section describes how to manipulate the Informix® ESQL/C data type, **int8**.

The int8 data type

Use the Informix® ESQL/C **int8** data type to declare host variables for database values of type INT8 and SERIAL8.

The following table shows the fields of the structure **ifx_int8_t**, which represents an INT8 or SERIAL8 value.

Table 28. Fields of the ifx_int8_t structure

Field name	Field type	Purpose
data	<i>unsigned 4-byte integer</i> [INT8SIZE]	An array of integer values that make up the 8-byte integer value. When the INT8SIZE constant is defined as 2, this array contains two unsigned 4-byte integers. The actual data type of an unsigned 4-byte integer can be machine specific.
sign	short integer	A short integer to hold the sign (null, negative, or positive) of the 8-byte integer. The actual data type of a 2-byte integer can be machine specific.

The `int8.h` header file contains the **ifx_int8** structure and a **typedef** called **ifx_int8_t**. Include this file in all C source files that use any **int8** host variables as shown in the following example:

```
EXEC SQL include int8;
```

You can declare an **int8** host variable in either of the following ways:

```
EXEC SQL BEGIN DECLARE SECTION;
int8 int8_var1;
ifx_int8_t int8_var2;
EXEC SQL BEGIN DECLARE SECTION;
```

The int8 library functions

You must perform all operations on **int8** type numbers through the IBM® Informix® ESQL/C library functions for the **int8** data type. Any other operations, modifications, or analyses can produce unpredictable results. The Informix® ESQL/C library provides functions that allow you to manipulate **int8** numbers and convert **int8** type numbers to and from other data types. The following tables describes these functions.

Table 29. Manipulation functions

Function name	Description	See
<code>ifx_getserial8()</code>	Returns an inserted SERIAL8 value	The ifx_int8add() function on page 640
<code>ifx_int8add()</code>	Adds two int8 numbers	The ifx_int8cmp() function on page 642
<code>ifx_int8cmp()</code>	Compares two int8 numbers	The ifx_int8copy() function on page 644
<code>ifx_int8copy()</code>	Copies an int8 number	The ifx_int8cvasc() function on page 646
<code>ifx_int8div()</code>	Divides two int8 numbers	The ifx_int8div() function on page 657

Table 29. Manipulation functions (continued)

Function name	Description	See
<code>ifx_int8mul()</code>	Multiplies two <code>int8</code> numbers	The <code>ifx_int8mul()</code> function on page 659
<code>ifx_int8sub()</code>	Subtracts two <code>int8</code> numbers	The <code>ifx_int8sub()</code> function on page 661

Table 30. Type conversion functions

Function name	Description	See
<code>ifx_int8cvasc()</code>	Converts a C char type value to an <code>int8</code> type value	The <code>ifx_int8cvdbl()</code> function on page 648
<code>ifx_int8cvdbl()</code>	Converts a C double type value to an <code>int8</code> type value	The <code>ifx_int8cvdbl()</code> function on page 648
<code>ifx_int8cvdec()</code>	Converts a C decimal type value to a <code>int8</code> type value	The <code>ifx_int8cvdec()</code> function on page 650
<code>ifx_int8cvflt()</code>	Converts a C <code>float</code> type value to an <code>int8</code> type value	The <code>ifx_int8cvflt()</code> function on page 652
<code>ifx_int8cvint()</code>	Converts a C int type value to an <code>int8</code> type value	The <code>ifx_int8cvint()</code> function on page 654
<code>ifx_int8cvlong()</code>	Converts a C 4-byte integer type value to an <code>int8</code> type value	The <code>ifx_int8cvlong()</code> function on page 656
<code>ifx_int8toasc()</code>	Converts an <code>int8</code> type value to a text string	The <code>ifx_int8toasc()</code> function on page 663
<code>ifx_int8todbl()</code>	Converts an <code>int8</code> type value to a C <code>double</code> type value	The <code>ifx_int8todbl()</code> function on page 666
<code>ifx_int8todec()</code>	Converts an <code>int8</code> type value to a <code>decimal</code> type value	The <code>ifx_int8todec()</code> function on page 668
<code>ifx_int8toflt()</code>	Converts an <code>int8</code> type value to a C <code>float</code> type value	The <code>ifx_int8toflt()</code> function on page 671
<code>ifx_int8toint()</code>	Converts an <code>int8</code> type value to a C <code>int</code> type value	The <code>ifx_int8toint()</code> function on page 674
<code>ifx_int8tolong()</code>	Converts an <code>int8</code> type value to a C 4-byte integer type value	The <code>ifx_int8tolong()</code> function on page 676

The BOOLEAN data type

IBM® Informix® ESQL/C uses the **boolean** data type to support the SQL BOOLEAN data type.

For a complete description of the SQL BOOLEAN data type, see the *HCL® Informix® Guide to SQL: Reference*. This section describes how to manipulate the Informix® ESQL/C **boolean** data type.

You can declare a **boolean** host variable as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
    boolean flag;
EXEC SQL END DECLARE SECTION;
```

In the Informix® ESQL/C program, the following values are the only valid values that you can assign to **boolean** host variables:

TRUE

'1'

FALSE

'0'

NULL

Use the `rsetnull()` function with the `CBOOLTYPE` as the first argument

If you want to assign the character representations of 'T' or 'F' to a BOOLEAN column, you must declare a **fixchar** host variable and initialize it to the desired character value. Use this host variable in an SQL statement such as the INSERT or UPDATE statement. The database server converts the **fixchar** value to the appropriate BOOLEAN value.

The following code fragment inserts two values into a BOOLEAN column called **bool_col** in the **table2** table:

```
EXEC SQL BEGIN DECLARE SECTION;
    boolean flag;
    fixchar my_boolflag;
    int id;
EXEC SQL END DECLARE SECTION;

id = 1;
flag = '\0'; /* valid boolean assignment to FALSE */
EXEC SQL insert into table2 values (:id, :flag); /* inserts FALSE */

id = 2;
rsetnull(CBOOLTYPE, (char *) &flag); /* valid BOOLEAN assignment
                                     * to NULL */
EXEC SQL insert into table2 values (:id, :flag); /* inserts NULL */

id = 3;
my_boolflag = 'T' /* valid character assignment to TRUE */
EXEC SQL insert into table2 values (:id, :my_boolflag); /* inserts TRUE
                                                         */
```

The decimal data type

IBM® Informix® ESQL/C supports the SQL DECIMAL and MONEY data types with the **decimal** data type. The **decimal** data type is a machine-independent method that represents numbers of up to 32 significant digits, with valid values in the range 10^{-129} - 10^{+125} .

The DECIMAL data type can take the following two forms:

- DECIMAL(*p*) floating point

When you define a column with the DECIMAL(*p*) data type, it has a total of *p* ($< = 32$) significant digits. DECIMAL(*p*) has an absolute value range 10^{-130} - 10^{124} .

- DECIMAL(*p,s*) fixed point

When you define a column with the DECIMAL(*p,s*) data type, it has a total of *p* ($< = 32$) significant digits (the precision) and *s* ($< = p$) digits to the right of the decimal point (the scale).

For a complete description of the DECIMAL data type, see the *HCL® Informix® Guide to SQL: Reference*.

The decimal structure

Use the **decimal** data type to declare host variables for database values of type DECIMAL.

A structure of type **decimal** represents a value in a **decimal** host variable, as follows:

```
#define DECSIZE 16

struct decimal
{
    short dec_exp;
    short dec_pos;
    short dec_ndgts;
    char  dec_dgts[DECSIZE];
};

typedef struct decimal dec_t;
```

The `decimal.h` header file contains the **decimal** structure and the **typedef dec_t**. Include this file in all C source files that use any **decimal** host variables with the following **include** directive:

```
EXEC SQL include decimal;
```

The **decimal** structure stores the number in pairs of digits. Each pair is a number in the range 00 - 99. (Therefore, you can think of a pair as a base-100 digit.) The following table shows the four parts of the **decimal** structure.

Table 31. Fields in the decimal structure

Field	Description
dec_exp	The <i>exponent</i> of the normalized decimal type number. The normalized form of this number has the decimal point at the left of the left-most digit. This exponent represents the number of digit

Table 31. Fields in the decimal structure (continued)

Field	Description
	pairs to count from the <i>left</i> to position the decimal point (or as a power of 100 for the number of base-100 numbers).
dec_pos	The <i>sign</i> of the decimal type number. The dec_pos field can assume any one of the following three values: <i>1</i> : when the number is zero or greater <i>0</i> : when the number is less than zero <i>-1</i> : when the value is null
dec_ndgts	The <i>number of digit pairs</i> (number of base-100 significant digits) in the decimal type number. This value is also the number of entries in the dec_dgts array.
dec_dgts[]	A character array that holds the significant digits of the normalized decimal type number, assuming dec_dgts[0] != 0 . Each byte in the array contains the next significant base-100 digit in the decimal type number, proceeding from dec_dgts[0] to dec_dgts[dec_ndgts] .

The following table shows some sample **decimal** values.

Table 32. Sample structure field values for decimal

Value	dec_exp	dec_pos	dec_ndgts	dec_dgts[]
-12345.6789	3	0	5	dec_dgts[0] = 01 dec_dgts[1] = 23 dec_dgts[2] = 45 dec_dgts[3] = 67 dec_dgts[4] = 89
1234.567	2	1	4	dec_dgts[0] = 12 dec_dgts[1] = 34 dec_dgts[2] = 56 dec_dgts[3] = 70
-123.456	2	0	4	dec_dgts[0] = 01 dec_dgts[1] = 23 dec_dgts[2] = 45 dec_dgts[3] = 60

Table 32. Sample structure field values for decimal (continued)

Value	dec_exp	dec_pos	dec_ndgts	dec_dgts[]
480	2	1	2	dec_dgts[0] = 04 dec_dgts[1] = 80
.152	0	1	2	dec_dgts[0] = 15 dec_dgts[1] = 20
-6	1	0	1	dec_dgts[0] = 06

You can use the **deccvasc** demonstration program to experiment with how Informix® ESQL/C stores **decimal** numbers.

The decimal library functions

You must perform all operations on **decimal** type numbers through the following Informix® ESQL/C library functions for the **decimal** data type. Any other operations, modifications, or analyses can produce unpredictable results.

Table 33. Manipulation functions

Function name	Description	See
decadd()	Adds two decimal numbers	The decadd() function on page 571
deccmp()	Compares two decimal numbers	The deccmp() function on page 573
deccopy()	Copies a decimal number	The deccopy() function on page 575
decdiv()	Divides two decimal numbers	The decdiv() function on page 585
decmul()	Multiplies two decimal numbers	The decmul() function on page 591
decround()	Rounds a decimal number	The decround() function on page 593

Table 33. Manipulation functions (continued)

Function name	Description	See
decsb()	Subtracts two decimal numbers	The decsub() function on page 595
detrunc()	Truncates a decimal number	The detrunc() function on page 604

Table 34. Type conversion functions

Function name	Description	See
deccvasc()	Converts a C char type value to a decimal type value	The deccvasc() function on page 576
deccvdbl()	Converts a C double type value to a decimal type value	The deccvdbl() function on page 578
deccvint()	Converts a C int type value to a decimal type value	The deccvint() function on page 582
deccvlong()	Converts a C 4-byte integer type value to a decimal type value	The deccvlong() function on page 583
dececv()	Converts a decimal value to an ASCII string	The dececv() and decfcv() functions on page 587
decfcv()	Converts a decimal value to an ASCII string	The dececv() and decfcv() functions on page 587
dectoasc()	Converts a decimal type value to an ASCII string	The dectoasc() function on page 597
dectodbl()	Converts a decimal type value to a C double type value	The dectodbl() function on page 599

Table 34. Type conversion functions (continued)

Function name	Description	See
dectoint()	Converts a decimal type value to a C int type value	The dectoint() function on page 601
dectolong()	Converts a decimal type value to a C 4-byte integer type value	The dectolong() function on page 603

For information about the function `rfmtdec()`, which allows you to format a decimal number, see [Numeric-formatting functions on page 124](#). For additional information about **decimal** values, see [Operations that involve a decimal value on page 91](#)

The floating-point data types

The database server supports the following data types for floating-point values.

SQL floating-point data type	ESQL/C or C language type	Range of values
SMALLFLOAT, REAL	float	Single-precision values with up to 9 significant digits
FLOAT, DOUBLE PRECISION	double	Double-precision values with up to 17 significant digits
DECIMAL(<i>p</i>)	decimal	Absolute value range 10^{-130} - 10^{124}

Declare float host variables

When you use the C **float** data type (for SMALLFLOAT values), be aware that most C compilers pass **float** to a function as the **double** data type. If you declare the function argument as a **float**, you might receive an incorrect result. For example, in the following excerpt, **:hostvar** might produce an incorrect value in **tab1**, depending on how your C compiler handles the **float** data type when your program passes it as an argument.

```
main()
{
    double dbl_val;

    EXEC SQL connect to 'mydb';
    ins_tab(dbl_val);
};

}

ins_tab(hostvar)
EXEC SQL BEGIN DECLARE SECTION;
    PARAMETER double hostvar;
EXEC SQL END DECLARE SECTION;
{
```

```
EXEC SQL insert into tabl values (:hostvar, ...);
}
```

For more information about the SQL floating point data types, see the *HCL® Informix® Guide to SQL: Reference*

Implicit data conversion

When the IBM® Informix® ESQL/C program fetches a floating-point column value into a character host variable (**char**, **fixchar**, **varchar**, or **string**), it includes only the number of decimal digits that can fit into the character buffer. If the host variable is too small for the full precision of the floating-point number, Informix® ESQL/C rounds the number to the precision that the host variable can hold.

In the following code fragment, the Informix® ESQL/C program retrieves the value `1234.8763512` from a FLOAT column that is called **principal** into the **prncpl_strng** character host variable:

```
EXEC SQL BEGIN DECLARE SECTION;
    char prncpl_strng[15]; /* character host variable */
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL select principal into :prncpl_strng from loan
    where customer_id = 1098;
printf("Value of principal=%s\n", prncpl_strng);
```

Because the **prncpl_strng** host variable is a buffer of 15 characters, Informix® ESQL/C is able to put all decimal digits into the host variable and this code fragment produces the following output:

```
Value of principal=1234.876351200
```

However, if the preceding code fragment declares the **prncpl_strng** host variable as a buffer of 10 characters, Informix® ESQL/C rounds the FLOAT value to fit into **prncpl_strng** and the code fragment produces the following output:

```
Value of principal=1234.8764
```

Informix® ESQL/C assumes a precision of 17 decimal digits for FLOAT or SMALLFLOAT values. For DECIMAL(*n,m*), Informix® ESQL/C assumes *m* decimal digits.

Format numeric strings

A numeric-formatting mask specifies a format to apply to some numeric value.

This mask is a combination of the following formatting characters:

This character fills with asterisks any positions in the display field that would otherwise be blank.

&

This character fills with zeros any positions in the display field that would otherwise be blank.

#

This character changes leading zeros to blanks. Use this character to specify the maximum leftward extent of a field.

<

This character left-justifies the numbers in the display field. It changes leading zeros to a null string.

,

This character indicates the symbol that separates groups of three digits (counting leftward from the units position) in the whole-number part of the value. By default, this symbol is a comma. You can set the symbol with the **DBMONEY** environment variable. In a formatted number, this symbol appears only if the whole-number part of the value has four or more digits.

.

This character indicates the symbol that separates the whole-number part of a money value from the fractional part. By default, this symbol is a period. You can set the symbol with the **DBMONEY** environment variable. You can have only one period in a format string.

-

This character is a literal. It appears as a minus sign when *expr1* is less than zero. When you group several minus signs in a row, a single minus sign floats to the rightmost position that it can occupy; it does not interfere with the number and its currency symbol.

+

This character is a literal. It appears as a plus sign when *expr1* is greater than or equal to zero and as a minus sign when *expr1* is less than zero. When you group several plus signs in a row, a single plus or minus sign floats to the rightmost position that it can occupy; it does not interfere with the number and its currency symbol.

(

This character is a literal. It appears as a left parenthesis to the left of a negative number. It is one of the pair of accounting parentheses that replace a minus sign for a negative number. When you group several in a row, a single left parenthesis floats to the rightmost position that it can occupy; it does not interfere with the number and its currency symbol.

)

This is one of the pair of accounting parentheses that replace a minus sign for a negative value.

\$

This character displays the currency symbol that appears at the front of the numeric value. By default, the currency symbol is the dollar sign (\$). You can set the currency symbol with the **DBMONEY** environment variable. When you group several dollar signs in a row, a single currency symbol floats to the rightmost position that it can occupy; it does not interfere with the number.

Any other characters in the formatting mask are reproduced literally in the result.

When you use the following characters within a formatting mask, the characters *float*; that is, multiple occurrences of the character at the left of the pattern in the mask appear as a single character as far to the right as possible in the formatted number (without removing significant digits):

```
-
+
(
)
$
```

For example, if you apply the mask \$\$\$,\$\$\$.\$## to the number 1234.56, the result is \$1,234.56.

When you use `rfmtdec()`, `rfmtdouble()`, or `rfmtlong()` to format MONEY values, the function uses the currency symbols that the **DBMONEY** environment variable specifies. If you do not set this environment variable, the numeric-formatting functions use the currency symbols that the client locale defines. The default local, U.S. English, defines currency symbols as if you set `DBMONEY` to \$, . . For a discussion of `DBMONEY`, see the *HCL® Informix® Guide to SQL: Reference*. For more information about locales, see the *HCL® Informix® GLS User's Guide*.

Sample format strings for numeric expressions

The following table shows sample format strings for numeric expressions. The character `b` represents a blank or space.

Table 35. Sample format patterns and their results

Formatting mask	Numeric value	Formatted result
"####"	0	bbbb 0000 bbbb\$ ***** (null string)
"&&&&"	0	
"\$\$\$\$"	0	
"*****"	0	
"<<<<"	0	
"##,###?"	12345	12,345 b1,234 bbb123 bbbb12 bbbbb1
"##,###"	1234	bbbbb1 bbbbbb
"##,###"	123	
"##,###"	12	
"##,###"	1	
"##,###"	-1	
"##,###"	0	
"&&, &&&"	12345	12,345
"&&, &&&"	1234	01,234
"&&, &&&"	123	000123
"&&, &&&"	12	000012
"&&, &&&"	1	000001

Table 35. Sample format patterns and their results (continued)

Formatting mask	Numeric value	Formatted result
"&&&&&"	-1	000001
"&&&&&"	0	000000
"\$\$\$\$"	12345	***** (overflow)
"\$\$\$\$"	1234	
"\$\$\$\$"	123	\$1,234 bb\$123 bbb\$12 bbbb\$1 bbbb\$1
"\$\$\$\$"	12	bbbb\$ DM1,234
"\$\$\$\$"	1	
"\$\$\$\$"	-1	
"\$\$\$\$"	0	
"\$\$\$\$"	1234	
(DBMONEY set to DM)		
"**,**"	12345	12,345
"**,**"	1234	*1,234
"**,**"	123	***123
"**,**"	12	****12
"**,**"	1	*****1
"**,**"	0	*****
"###,###.##"	12345.67	12,345.67
"###,###.##"	1234.56	b1,234.56
"###,###.##"	123.45	bbb123.45
"###,###.##"	12.34	bbbb12.34
"###,###.##"	1.23	bbbbb1.23
"###,###.##"	0.12	bbbbbb.12
"###,###.##"	0.01	bbbbbb.01
"###,###.##"	-0.01	bbbbbb.01
"###,###.##"	-1	bbbbbb1.00
"&&&&&&.&&"	.67	000000.67
"&&&&&&.&&"	1234.56	01,234.56
"&&&&&&.&&"	123.45	000123.45
"&&&&&&.&&"	0.01	000000.01
"\$\$\$\$.##"	12345.67	***** (overflow)
"\$\$\$\$.##"	1234.56	
"\$\$\$\$.##"	0.00	\$1,234.56 bbbbb\$.00 \$1,234.00
"\$\$\$\$.##"	1234.00	bbbb\$.00 \$1,234.00

Table 35. Sample format patterns and their results (continued)

Formatting mask	Numeric value	Formatted result
"\$\$,\$\$\$.&&"	0.00	
"\$\$,\$\$\$.&&"	1234.00	
"-##,###.##"	-12345.67	-12,345.67
"-##,###.##"	-123.45	-bbb123.45
"-##,###.##"	-12.34	-bbbb12.34
"-#,###.##"	-12.34	b-bbb12.34
"--,###.##"	-12.34	bb-bb12.34
"--,##.##"	-12.34	bbbb-12.34
"--,-#.##"	-12.34	bbbb-12.34
"-#,###.##"	-1.00	b-bbbb1.00
"--,-#.##"	-1.00	bbbbb-1.00
"-##,###.##"	12345.67	b12,345.67
"-##,###.##"	1234.56	bb1,234.56
"-##,###.##"	123.45	bbbb123.45
"-##,###.##"	12.34	bbbbbb12.34
"-#,###.##"	12.34	bbbbbb12.34
"--,###.##"	12.34	bbbbbb12.34
"--,##.##"	12.34	bbbbbb12.34
"--,--.##"	1.00	bbbbbbb1.00
"--,--."	-0.01	bbbbbbb-.01
"--,--.&&"	-0.01	bbbbbbb-.01
"-\$\$\$,\$\$\$.&&"	-12345.67	-\$12,345.67
"-\$\$\$,\$\$\$.&&"	-1234.56	-b\$1,234.56
"-\$\$\$,\$\$\$.&&"	-123.45	-bbb\$123.45
"-\$,\$\$\$.&&"	-12345.67	-\$12,345.67
"-\$,\$\$\$.&&"	-1234.56	b-\$1,234.56
"-\$,\$\$\$.&&"	-123.45	b-bb\$123.45
"-\$,\$\$\$.&&"	-12.34	b-bbb\$12.34
"-\$,\$\$\$.&&"	-1.23	b-bbbb\$1.23
"---,-\$.&&"	-12345.67	-\$12,345.67
"---,-\$.&&"	-1234.56	b-\$1,234.56
"---,-\$.&&"	-123.45	bbb-\$123.45
"---,-\$.&&"	-12.34	bbbb-\$12.34

Table 35. Sample format patterns and their results (continued)

Formatting mask	Numeric value	Formatted result
"---,-\$.&&"	-1.23	bbbb-\$1.23
"---,-\$.&&"	-1.12	bbbb-\$1.12
"\$***,***.&&"	12345.67	\$*12,345.67
"\$***,***.&&"	1234.56	\$**1,234.56
"\$***,***.&&"	123.45	\$****123.45
"\$***,***.&&"	12.34	\$*****12.34
"\$***,***.&&"	1.23	\$*****1.23
"\$***,***.&&"	0.12	\$*****.12
"(\$\$\$,\$\$\$.&&)"	-12345.67	(\$12,345.67)
"(\$\$\$,\$\$\$.&&)"	-1234.56	(b\$1,234.56)
"(\$\$\$,\$\$\$.&&)"	-123.45	(bbb\$123.45)
"((\$\$\$,\$\$\$.&&)"	-12345.67	(\$12,345.67)
"((\$\$\$,\$\$\$.&&)"	-1234.56	b(\$1,234.56)
"((\$\$\$,\$\$\$.&&)"	-123.45	b(bb\$123.45)
"((\$\$\$,\$\$\$.&&)"	-12.34	b(bbb\$12.34)
"((\$\$\$,\$\$\$.&&)"	-1.23	b(bbbb\$1.23)
"(((((\$.&&)"	-12345.67	(\$12,345.67)
"(((((\$.&&)"	-1234.56	b(\$1,234.56)
"(((((\$.&&)"	-123.45	bbb(\$123.45)
"(((((\$.&&)"	-12.34	bbbb(\$12.34)
"(((((\$.&&)"	-1.23	bbbbb(\$1.23)
"(((((\$.&&)"	-1.12	bbbbbb(\$1.12)
"(\$\$\$,\$\$\$.&&)"	12345.67	b\$12,345.67
"(\$\$\$,\$\$\$.&&)"	1234.56	bb\$1,234.56
"(\$\$\$,\$\$\$.&&)"	123.45	bbbb\$123.45
"((\$\$\$,\$\$\$.&&)?	12345.67	b\$12,345.67
"((\$\$\$,\$\$\$.&&)"	1234.56	bb\$1,234.56
"((\$\$\$,\$\$\$.&&)"	123.45	bbbb\$123.45
"((\$\$\$,\$\$\$.&&)"	12.34	bbbbb\$12.34
"((\$\$\$,\$\$\$.&&)"	1.23	bbbbbb\$1.23
"(((((\$.&&)"	12345.67	b\$12,345.67
"(((((\$.&&)"	1234.56	bb\$1,234.56
"(((((\$.&&)"	123.45	bbbb\$123.45

Table 35. Sample format patterns and their results (continued)

Formatting mask	Numeric value	Formatted result
"(((,((\$.&&)"	12.34	bbbbbb\$12.34
"(((,((\$.&&)"	1.23	bbbbbb\$1.23
"(((,((\$.&&)"	0.12	bbbbbb\$0.12
"<<<,<<<"	12345	12,345
"<<<,<<<"	1234	1,234
"<<<,<<<"	123	123
"<<<,<<<"	12	12

Numeric-formatting functions

Special functions are provided, which allow you to format numeric expressions for display.

These formatting functions apply a given formatting mask to a numeric value to allow you to line up decimal points, right or left align the number, enclose a negative number in parentheses, and other formatting features. The Informix® ESQL/C library includes the following functions that support formatting masks for numeric values.

Function name	Description	See
rfmtdec()	Converts a decimal value to a string	The rfmtdec() function on page 758
rfmtdouble()	Converts a double value to a string	The rfmtdouble() function on page 761
rfmtlong()	Converts a 4-byte integer value to a string	The rfmtlong() function on page 763

Time data types

These topics explain how to use **date**, **datetime**, and **interval** data types in the HCL Informix® ESQL/C program.

This section contains the following information:

- An overview of the Informix® ESQL/C **date** data type
- The syntax of the Informix® ESQL/C library functions that you can use to manipulate the **date** data type
- An overview of the Informix® ESQL/C **datetime** and **interval** data types and how to use them
- The syntax of Informix® ESQL/C library functions that you can use to manipulate the **datetime** and **interval** data types

For information about SQL data types, see the *HCL® Informix® Guide to SQL: Reference*.

The SQL DATE data type

IBM® Informix® ESQL/C supports the SQL DATE data type with the Informix® ESQL/C **date** data type for host variables. The **date** data type stores internal DATE values. It is implemented as a 4-byte integer whose value is the number of days since December 31, 1899. Dates before December 31, 1899, are negative numbers, while dates after December 31, 1899, are positive numbers. For a complete description of the SQL DATE data type, see the *HCL® Informix® Guide to SQL: Reference*.

Format date strings

A date-formatting mask specifies a format to apply to some date value.

This mask is a combination of the following formats.

dd

Day of the month as a two-digit number (01 - 31)

ddd

Day of the week as a three-letter abbreviation (Sun - Sat)

mm

Month as a two-digit number (01 - 12)

mmm

Month as a three-letter abbreviation (Jan - Dec)

yy

Year as a two-digit number (00 - 99)

yyyy

Year as a four-digit number (0001 - 9999)

ww

Day of the week as a two-digit number (00 for Sunday, 01 for Monday, 02 for Tuesday 06 for Saturday)

Any other characters in the formatting mask are reproduced literally in the result.

When you use a nondefault locale whose dates contain eras, you can use extended-format strings in a numeric-formatting mask.

When you use `rfmtdate()` or `rdefmtdate()` to format DATE values, the function uses the date end-user formats that the **GLDATE** or **DBDATE** environment variable specifies. If neither of these environment variables is set, these date-formatting functions use the date end-user formats for the locale. The default locale, U.S. English, uses the format `mm/dd/yyyy`. For a discussion of **GLDATE** and **DBDATE** environment variables, see the *HCL® Informix® GLS User's Guide*.

DATE library functions

The following date-manipulation functions are in the Informix® ESQL/C library. They convert dates between a string format and the internal DATE format.

Function name	Description	See
<code>rdatestr()</code>	Converts an internal DATE to a character string format	The <code>rdatestr()</code> function on page 745
<code>rdayofweek()</code>	Returns the day of the week of a date in internal format	The <code>rdayofweek()</code> function on page 747
<code>rdefmtdate()</code>	Converts a specified string format to an internal DATE	The <code>rdefmtdate()</code> function on page 749
<code>rfmtdate()</code>	Converts an internal DATE to a specified string format	The <code>rfmtdate()</code> function on page 754
<code>rjulmdy()</code>	Returns month, day, and year from a specified DATE	The <code>rjulmdy()</code> function on page 772
<code>rleapyear()</code>	Determines whether specified year is a leap year	The <code>rleapyear()</code> function on page 774
<code>rmdyjul()</code>	Returns an internal DATE from month, day, and year	The <code>rmdyjul()</code> function on page 776
<code>rstrdate()</code>	Converts a character string format to an internal DATE	The <code>rstrdate()</code> function on page 785
<code>rtoday()</code>	Returns a system date as an internal DATE	The <code>rtoday()</code> function on page 787

When you compile your Informix® ESQL/C program with the `esql` command, `esql` automatically links these functions into your program.

The SQL DATETIME and INTERVAL data types

Informix® ESQL/C supports two data types that can hold information about time values:

- The **datetime** data type, which encodes an instant in time as a calendar date and a time of day.
- The **interval** data type, which encodes a span of time.

The following table summarizes these two time data types.

Table 36. ESQL/C time data types

SQL data type	ESQL/C data type	C typedef name	Sample declaration
DATETIME	datetime	<code>dtime_t</code>	EXEC SQL BEGIN DECLARE SECTION; datetime year to day sale;

Table 36. ESQL/C time data types (continued)

SQL data type	ESQL/C data type	C typedef name	Sample declaration
			EXEC SQL END DECLARE SECTION;
INTERVAL	interval	intrvl_t	EXEC SQL BEGIN DECLARE SECTION; interval hour to second test_num; EXEC SQL END DECLARE SECTION;

The header file `datetime.h` contains the **dttime_t** and **intrvl_t** structures, along with a number of macro definitions that you can use to compose qualifier values. Include this file in all C source files that use any **datetime** or **interval** host variables:

```
EXEC SQL include datetime;
```

The `decimal.h` header file defines the type **dec_t**, which is a component of the **dttime_t** and **intrvl_t** structures.

Because of the multiword nature of these data types, it is not possible to declare an uninitialized **datetime** or **interval** host variable named **year**, **month**, **day**, **hour**, **minute**, **second**, or **fraction**. Avoid the following declarations:

```
EXEC SQL BEGIN DECLARE SECTION;
  datetime year;           /* will cause an error */
  datetime year to day year, today; /* ambiguous */
EXEC SQL END DECLARE SECTION;
```

A **datetime** or **interval** data type is stored as a decimal number with a scale factor of zero and a precision equal to the number of digits that its qualifier implies. When you know the precision and scale, you know the storage format. For example, if you define a table column as `DATETIME YEAR TO DAY`, it contains four digits for year, two digits for month, and two digits for day, for a total of eight digits. It is thus stored as **decimal(8,0)**.

If the default precision of the underlying decimal value is not appropriate, you can specify a different precision. For example, if you have a host variable of type **interval**, with the qualifier **day to day**, the default precision of the underlying decimal value is two digits. If you have intervals of one hundred or more days, this precision is not adequate. You can specify a precision of three digits as follows:

```
interval day(3) to day;
```

For more information about the `DATETIME` and `INTERVAL` data types, see the *HCL® Informix® Guide to SQL: Reference*.

The datetime data type

Use the **datetime** data type to declare host variables for database values of type `DATETIME`. You specify the accuracy of the **datetime** data type with a qualifier.

For example, the qualifier in the following declaration is **year to day**:

```
datetime year to day sale;
```

As a host variable, a **dttime_t** structure represents a **datetime** value:

```
typedef struct dttime {
    short dt_qual;
    dec_t dt_dec;
} dttime_t;
```

The **dttime** structure and **dttime_t** typedef have two parts. The following table lists these parts.

Table 37. Fields in the dttime structure

Field	Description
dt_qual	Qualifier of the datetime value
dt_dec	Digits of the fields of the datetime value This field is a decimal value.

Declare a host variable for a DATETIME column with the **datetime** data type followed by an optional qualifier, as the following example shows:

```
EXEC SQL include datetime;
;;

EXEC SQL BEGIN DECLARE SECTION;
    datetime year to day holidays[10];
    datetime hour to second wins, places, shows;
    datetime column6;
EXEC SQL END DECLARE SECTION;
```

If you omit the qualifier from the declaration of the **datetime** host variable, as in the last example, your program must explicitly initialize the qualifier with the macros shown in [Table 39: Qualifier macros for datetime and interval data types on page 129](#).

The interval data type

Use the **interval** data type to declare host variables for database values of type INTERVAL.

You specify the accuracy of the **interval** data type with a qualifier. The qualifier in the following declaration is **hour to second**:

```
interval hour to second test_run;
```

As a host variable, an **intrvl_t** represents an **interval** value:

```
typedef struct intrvl {
    short in_qual;
    dec_t in_dec;
} intrvl_t;
```

The **intrvl** structure and **intrvl_t** typedef have two parts. The following table lists these parts.

Table 38. Fields in the intrvl structure

Field	Description
in_qual	Qualifier of the interval value
in_dec	Digits of the fields of the interval value This field is a decimal value.

To declare a host variable for an INTERVAL column, use the **interval** data type followed by an optional qualifier, as shown in the following example:

```
EXEC SQL BEGIN DECLARE SECTION;
    interval day(3) to day accrued_leave, leave_taken;
    interval hour to second race_length;
    interval scheduled;
EXEC SQL END DECLARE SECTION;
```

If you omit the qualifier from the declaration of the **interval** host variable, as in the last example, your program must explicitly initialize the qualifier with the macros described in the following section.

Macros for datetime and interval data types

In addition to the **datetime** and **interval** data structures, the `datetime.h` file defines the macro functions shown in the following table for working directly with qualifiers in binary form.

Table 39. Qualifier macros for datetime and interval data types

Name of Macro	Description
TU_YEAR	Time unit for the YEAR qualifier field
TU_MONTH	Time unit for the MONTH qualifier field
TU_DAY	Time unit for the DAY qualifier field
TU_HOUR	Time unit for the HOUR qualifier field
TU_MINUTE	Time unit for the MINUTE qualifier field
TU_SECOND	Time unit for the SECOND qualifier field
TU_FRAC	Time unit for the leading qualifier field of FRACTION
TU_Fn	Names for datetime ending fields of FRACTION(<i>n</i>), for <i>n</i> from 1 - 5
TU_START(<i>q</i>)	Returns the leading field number from qualifier <i>q</i>
TU_END(<i>q</i>)	Returns the trailing field number from qualifier <i>q</i>
TU_LEN(<i>q</i>)	Returns the length in digits of the qualifier <i>q</i>
TU_FLEN(<i>f</i>)	Returns the length in digits of the first field, <i>f</i> , of an interval qualifier
TU_ENCODE(<i>p,f,t</i>)	Creates a qualifier from the first field number <i>f</i> with precision <i>p</i> and trailing field number <i>t</i>
TU_DTENCODE(<i>f,t</i>)	Creates a datetime qualifier from the first field number <i>f</i> and trailing field number <i>t</i>
TU_IENCODE(<i>p,f,t</i>)	Creates an interval qualifier from the first field number <i>f</i> with precision <i>p</i> and trailing field number <i>t</i>

For example, if your program does not provide an **interval** qualifier in the host-variable declaration, you need to use the **interval** qualifier macros to initialize and set the **interval** host variable. In the following example, the **interval** variable gets a **day to second** qualifier. The precision of the largest field in the qualifier, **day**, is set to 2:

```
/* declare a host variable without a qualifier */
EXEC SQL BEGIN DECLARE SECTION;
    interval inv1;
EXEC SQL END DECLARE SECTION;
;;

/* set the interval qualifier for the host variable */
inv1.in_qual = TU_IENCODE(2, TU_DAY, TU_SECOND);
;;

/* assign values to the host variable */
incvasc ("5 2:10:02", &inv1);
```

Fetch and insert DATETIME and INTERVAL values

When an application fetches or inserts a DATETIME or INTERVAL value, IBM® Informix® ESQL/C must ensure that the qualifier field of the host variable is valid:

- When an application fetches a DATETIME value into a **datetime** host variable or inserts a DATETIME value from a **datetime** host variable, it must ensure that the **dt_qual** field of the **dttime_t** structure is valid.
- When an application fetches an INTERVAL value into an **interval** host variable or inserts an INTERVAL value from an **interval** host variable, it must ensure that the **in_qual** field of the **intrvl_t** structure is valid.

Fetch and insert into datetime host variables

When an application uses a **datetime** host variable to fetch or insert a DATETIME value, IBM® Informix® ESQL/C must find a valid qualifier in the **datetime** host variable. Informix® ESQL/C takes one of the following actions, based on the value of the **dt_qual** field in the **dttime_t** structure that is associated with the host variable:

- When the **dt_qual** field contains a valid qualifier, Informix® ESQL/C extends the column value to match the **dt_qual** qualifier.

Extending is the operation of adding or dropping fields of a DATETIME value to make it match a given qualifier. You can explicitly extend DATETIME values with the SQL EXTEND function and the Informix® ESQL/C **dtextend()** function.

- When the **dt_qual** field does not contain a valid qualifier, Informix® ESQL/C takes different actions for a fetch and an insert:
 - For a fetch, Informix® ESQL/C uses the DATETIME column value and its qualifier to initialize the **datetime** host variable.

Zero (0) is an invalid qualifier. Therefore, if you set the **dt_qual** field to zero, you can ensure that Informix® ESQL/C uses the qualifier of the DATETIME column.

- For an insert, Informix® ESQL/C cannot perform the insert or update operation.

Informix® ESQL/C sets the SQLSTATE status variable to an error-class code (and SQLCODE to a negative value) and the update or insert operation on the DATETIME column fails.

Fetch and insert into interval host variables

When an application uses an **interval** host variable to fetch or insert an INTERVAL value, IBM® Informix® ESQL/C must find a valid qualifier in the **interval** host variable. Informix® ESQL/C takes one of the following actions, based on the value of the **in_qual** field of the **intrvl_t** structure that is associated with the host variable:

- When the **in_qual** field contains a valid qualifier, Informix® ESQL/C checks it for compatibility with the qualifier from the INTERVAL column value.

The two qualifiers are compatible if they belong to the same interval class: either **year to month** or **day to fraction**. If the qualifiers are incompatible, Informix® ESQL/C sets the SQLSTATE status variable to an error-class code (and SQLCODE is set to a negative value) and the select, update, or insert operation fails.

If the qualifiers are compatible but not the same, Informix® ESQL/C extends the column value to match the **in_qual** qualifier. Extending is the operation of adding or dropping fields within one of the interval classes of an INTERVAL value to make it match a given qualifier. You can explicitly extend INTERVAL values with the Informix® ESQL/C **invextend()** function.

- When the **in_qual** field does not contain a valid qualifier, Informix® ESQL/C takes different actions for a fetch and an insert:
 - For a fetch, if the **in_qual** field contains zero or is not a valid qualifier, Informix® ESQL/C uses the INTERVAL column value and its qualifier to initialize the **interval** host variable.
 - For an insert, if the **in_qual** field is not compatible with the INTERVAL column or if it does not contain a valid value, Informix® ESQL/C cannot perform the insert or update operation.

Informix® ESQL/C sets the SQLSTATE status variable to an error-class code (and SQLCODE is set to a negative value) and the update or insert operation on the INTERVAL column fails.

Implicit data conversion

You can fetch a DATETIME or INTERVAL column value into a character (**char**, **string**, or **fixchar**) host variable. IBM® Informix® ESQL/C converts the DATETIME or INTERVAL column value to a character string before it stores it in the character host variable. This character string conforms to the ANSI SQL standards for DATETIME and INTERVAL values. If the host variable is too short, Informix® ESQL/C sets **sqlca.sqlwarn.sqlwarn1** to **w**, fills the host variable with asterisk (*****) characters, and sets any indicator variable to the length of the untruncated character string.

You can also insert a DATETIME or INTERVAL column value from a character (**char**, **string**, **fixchar**, or **varchar**) host variable. Informix® ESQL/C uses the data type and qualifiers of the column value to convert the character value to a DATETIME or INTERVAL value. It expects the character string to contain a DATETIME or INTERVAL value that conforms to ANSI SQL standards.

If the conversion fails, Informix® ESQL/C sets the SQLSTATE status variable to an error-class code (and SQLCODE status variable to a negative value) and the update or insert operation fails.

! **Important:** HCL Informix® products do not support automatic data conversion from DATETIME and INTERVAL column values to numeric (**double**, **int**, and so on) host variables. Nor do HCL Informix® products support automatic data conversion from numeric (**double**, **int**, and so on) or **date** host variables to DATETIME and INTERVAL column values.

ANSI SQL standards for DATETIME and INTERVAL values

The ANSI SQL standards specify qualifiers and formats for character representations of DATETIME and INTERVAL values. The standard qualifier for a DATETIME value is YEAR TO SECOND, and the standard format is as follows:

```
YYYY-MM-DD HH:MM:SS
```

The standards for an INTERVAL value specify the following two classes of intervals:

- The YEAR TO MONTH class has the format: `YYYY-MM`

A subset of this format is also valid: for example, just a month interval.

- The DAY TO FRACTION class has the format: `DD HH:MM:SS.F`

Any subset of contiguous fields is also valid: for example, MINUTE TO FRACTION.

Converting data for datetime values

You can use the Informix® ESQL/C library functions `dtcvasc()`, `dtcvfmtasc()`, `dttoasc()`, and `dttofmtasc()` to explicitly convert between DATETIME column values and character strings.

About this task

For example, you can perform conversions between the DATETIME and DATE data types with Informix® ESQL/C library functions and intermediate strings.

To convert a DATETIME value to a DATE value:

1. Use the `dttextend()` function to adjust the DATETIME qualifier to `year to day`.
2. Apply the `dttoasc()` function to create a character string in the form `yyyy-mm-dd`.
3. Use The `rdfmtdate()` function with a pattern argument of `yyyy-mm-dd` to convert the string to a DATE value.

Converting data for interval values

You can use the Informix® ESQL/C library functions `incvasc()`, `incvfmtasc()`, `intoasc()`, and `intofmtasc()` to explicitly convert between INTERVAL column values and character strings.

About this task

For example, you can perform conversions between the DATETIME and DATE data types with Informix® ESQL/C library functions and intermediate strings.

To convert a DATE value to a DATETIME value:

1. Declare a host variable with a qualifier of `year to day` (or initialize the qualifier with the value that the `TU_DTENCODE(TU_YEAR,TU_DAY)` macro returns).
2. Use the `rfmtdate()` function with a pattern of `yyyy-mm-dd` to convert the DATE value to a character string.
3. Use the `dtcvasc()` function to convert the character string to a value in the prepared DATETIME variable.
4. If necessary, use the `dtextend()` function to adjust the DATETIME qualifier.

Support of non-ANSI DATETIME formats

IBM® Informix® ESQL/C supports conversions from a data-time string in a non-ANSI format to the DATETIME data type. This conversion makes it easier to upgrade from Asian Language Support (ALS) client/server products to Global Language Support (GLS) client/server products.

The USE_DTENV environment variable

To support compatibility with earlier versions, IBM® Informix® ESQL/C uses the **USE_DTENV** environment variable to activate support for non-ANSI date-time formats.

When the **USE_DTENV** environment variable is enabled, the following order or precedence is used:

1. DBTIME
2. GL_DATETIME
3. CLIENT_LOCALE
4. LC_TIME
5. LANG (if LC_TIME is not set)
6. ANSI format

When enabled, the **USE_DTENV** environment variable is passed from the ESQL/C program to the database server. Enabling it for the database server only has no effect. You must set it for the ESQL/C client program, which then passes it to the database server.

If the database server does not support non-ANSI date-time formats, do not set the **USE_DTENV** environment variable for the ESQL/C client program.

You must set this environment variable to display localized DATETIME values correctly in a database that uses a non-default locale, and for which the **GL_DATETIME** environment variable has a non-default setting.

DATETIME and INTERVAL library functions

You must use the following IBM® Informix® ESQL/C library functions for the **datetime** and **interval** data types to perform all operations on those types of values. The following C functions are available in Informix® ESQL/C to handle **datetime** and **interval** host variables.

Function name	Description	See
dtaddinv()	Adds an interval value to a datetime value	The dtaddinv() function on page 606
dtcurrent()	Gets the current date and time	The dtcurrent() function on page 608
dtcvasc()	Converts an ANSI-compliant character string to a datetime value	The dtcvasc() function on page 609
dtcvfmtasc()	Converts a character string with a specified format to a datetime value	The dtcvfmtasc() function on page 612
dtextend()	Changes the qualifier of a datetime value	The dtextend() function on page 615
dtsub()	Subtracts one datetime value from another	The dtsub() function on page 616
dtsubinv()	Subtracts an interval value from a datetime value	The dtsubinv() function on page 619
dttoasc()	Converts a datetime value to an ANSI-compliant character string	The dttoasc() function on page 620
dttofmtasc()	Converts a datetime value to a character string with a specified format	The dttofmtasc() function on page 622
incvasc()	Converts an ANSI-compliant character string to an interval value	The incvasc() function on page 726

Function name	Description	See
<code>incvfmtasc()</code>	Converts a character string with a specified format to an interval value	The <code>incvfmtasc()</code> function on page 729
<code>intoasc()</code>	Converts an interval value to an ANSI-compliant character string	The <code>intoasc()</code> function on page 731
<code>intofmtasc()</code>	Converts an interval value to a character string with a specified format	The <code>intoasc()</code> function on page 731
<code>invdivdbl()</code>	Divides an interval value by a numeric value	The <code>intofmtasc()</code> function on page 733
<code>invdivinv()</code>	Divides an interval value by another interval value	The <code>invdivdbl()</code> function on page 736
<code>invextend()</code>	Extends an interval value to a different interval qualifier	The <code>invdivinv()</code> function on page 738
<code>invmuldbl()</code>	Multiplies an interval value by a numeric value	The <code>invextend()</code> function on page 740

For more information about operations on the SQL DATETIME and INTERVAL data types, see the *HCL® Informix® Guide to SQL: Reference*.

Simple large objects

A simple large object is a large object that is stored in a blob space on disk and is not recoverable.

Simple large objects include the TEXT and BYTE data types. The TEXT data type stores any text data. The BYTE data type can store any binary data in an undifferentiated byte stream.

These topics describe the following information about simple large objects:

- Choosing whether to use a simple large object or a smart large object in your IBM® Informix® ESQL/C application
- Programming with simple large objects, including how to declare host variables and how to use the locator structure
- Locating simple large objects in memory
- Locating simple large objects in files, both open files and named files
- Locating simple large objects at a user-defined location
- Reading and writing simple large objects to optical disc

The end of this section presents an annotated example program called **dispcat_pic**. The **dispcat_pic** sample program demonstrates how to read and display the **cat_descr** and **cat_picture** simple-large-object columns from the **catalog** table of the **stores7** demonstration database.

For information about the TEXT and BYTE data types, as well as other SQL data types, see the *HCL® Informix® Guide to SQL: Reference*.

Choose a large-object data type

If you use HCL Informix® as your database server, you can choose between using simple large objects or smart large objects.

Informix® supports simple large objects primarily for compatibility with earlier versions of Informix® applications. When you write new applications that need to access large objects, use smart large objects to hold character (CLOB) and binary (BLOB) data.

The following table summarizes the advantages that smart large objects present over simple large objects:

Large-object feature	Simple large objects	Smart large objects
Maximum size of data	2 GB	4 TB
Data accessibility	No random access to data	Random access to data
Reading the large object	The database server reads a simple large object on an all or nothing basis.	Library functions provide access that is similar to accessing an operating-system file. You can access specified portions of the smart large object.
Writing the large object	The database server updates a simple large object on an all or nothing basis.	The database server can rewrite only a portion of a smart large object.
Data logging	Data logging is always on.	Data logging can be turned on and off.

Programming with simple large objects

IBM® Informix® ESQL/C supports SQL simple large objects and the data types TEXT and BYTE with the **loc_t** data type.



Tip: You cannot use literal values in an INSERT or UPDATE statement to put simple-large-object data into a TEXT or BYTE column. To insert values into a simple large object, you can use the LOAD statement from DB-Access or **loc_t** host variables from the Informix® ESQL/C client application.

Because of the potentially huge size of simple-large-object data, the Informix® ESQL/C program does not store the data directly in a **loc_t** host variable. Instead, the **loc_t** structure is a *locator structure*. It does not contain the actual data; it contains information about the size and location of the simple-large-object data. You choose whether to store the data in memory, an operating-system file, or even user-defined locations.

To use simple-large-object variables in the Informix® ESQL/C program, take the following actions:

- Declare a host variable with the **loc_t** data type
- Access the fields of the **loc_t** locator structure


Declare a host variable for a simple large object

Use the **loc_t** data type to declare host variables for database values of type TEXT or BYTE. You declare a host variable for a simple-large-object column with the data type **loc_t**, as shown in the following example:

```
EXEC SQL include locator;
;;

EXEC SQL BEGIN DECLARE SECTION;
    loc_t text_lob;
    loc_t byte_lob;
EXEC SQL END DECLARE SECTION;
```

A locator variable with a TEXT data type has the **loc_type** field of the locator structure set to SQLTEXT. For a BYTE variable, **loc_type** is SQLBYTE.

 **Tip:** The `sqltypes.h` header file defines both SQLTEXT and SQLBYTE. Therefore, make sure that you include `sqltypes.h` before you use these constants.

From the Informix® ESQL/C program, you can both select and insert simple-large-object data into **loc_t** host variables. You can also select only portions of a simple-large-object variable with subscripts on the simple-large-object column name. These subscripts can be coded into the statement as shown in the following example:

```
EXEC SQL declare catcurs cursor for
    select catalog_num, cat_descr[1,10]
    from catalog
    where manu_code = 'HSK';
EXEC SQL open catcurs;
while (1)
{
    EXEC SQL fetch catcurs into :cat_num, :cat_descr;
}
;;
```

Subscripts can also be passed as input parameters as the following code fragment shows:

```
EXEC SQL prepare slct_id from
    'select catalog_num, cat_descr[?,?] from catalog \
    where catalog_num = ?'
EXEC SQL execute slct_id into :cat_num, :cat_descr
    using :n, :x, :cat_num;
```

Access the locator structure

In the IBM® Informix® ESQL/C program, you use a *locator structure* to access simple-large-object values.

The locator structure is the host variable for TEXT and BYTE columns when they are stored in or retrieved from the database. This structure describes the location of a simple-large-object value for the following two database operations:

- When the program inserts the simple large object into the database, the locator structure identifies the source of the simple-large-object data to insert.

It is recommended that you initialize the data structure before using it, as in the following example:

```
byfill(&blob1, sizeof(loc_t), 0);
where blob1 is declared as --
EXEC SQL BEGIN DECLARE SECTION;
loc_t blob1;
EXEC SQL END DECLARE SECTION;
```

This ensures that all variables of the data structure have been initialized and will avoid inconsistencies

- When the program selects the simple large object from the database, the locator structure identifies the destination of the simple-large-object data.

The `locator.h` header file defines the locator structure, called **loc_t**. The following figure shows the definition of the **loc_t** locator structure from the `locator.h` file.

Figure 24. Declaration of `loc_t` in the `locator.h` header file

```

typedef struct tag_loc_t
{
  int2 loc_loctype;          /* USER: type of locator - see below      */
  union                      /* variant on 'loc'                       */
  {
    struct                    /* case LOCMEMORY                         */
    {
      int4 lc_bufsize;        /* USER: buffer size                     */
      char *lc_buffer;        /* USER: memory buffer to use            */
      char *lc_currdata_p;    /* INTERNAL: current memory buffer       */
      mint lc_mflags;         /* USER/INTERNAL: memory flags          */
                                /* (see below)                           */
    } lc_mem;

    struct                    /* cases L0CFNAME & LOCFILE              */
    {
      char *lc_fname;         /* USER: file name                       */
      mint lc_mode;           /* USER: perm. bits used if creating     */
      mint lc_fd;             /* USER: os file descriptor              */
      int4 lc_position;       /* INTERNAL: seek position                */
    } lc_file;
  } lc_union;

  int4 loc_indicator;        /* USER/SYSTEM: indicator                 */
  int4 loc_type;             /* SYSTEM: type of blob                   */
  int4 loc_size;             /* USER/SYSTEM: num bytes in blob or -1  */
  mint loc_status;          /* SYSTEM: status return of locator ops   */
  char *loc_user_env;        /* USER: for the user's PRIVATE use      */
  int4 loc_xfercount;        /* INTERNAL/SYSTEM: Transfer count        */
                                /* USER: open function                    */
  mint (*loc_open)(struct tag_loc_t *loc, mint flag, mint bsize);
; /* USER: close function                 */
  mint (*loc_close)(struct tag_loc_t *loc)
; /* USER: read function                   */
  mint (*loc_read)(struct tag_loc_t *loc, char *buffer, mint buflen)
; /* USER: write function                  */
  mint (*loc_write)(struct tag_loc_t *loc, char *buffer, mint buflen)
                                /* USER/INTERNAL: see flag definitions below */
  mint loc_oflags;
} loc_t;

```

In Figure 24: Declaration of `loc_t` in the `locator.h` header file on page 139, the following comments in the `locator.h` file indicate how the fields are used in the locator structure.

USER

The Informix® ESQL/C program sets the field, and the Informix® ESQL/C libraries inspect the field.

SYSTEM

The Informix® ESQL/C libraries set the field, and the Informix® ESQL/C program inspects the field.

INTERNAL

The field is a work area for the Informix® ESQL/C libraries, and the Informix® ESQL/C program does *not* need to examine the field.

Informix® ESQL/C does not automatically include the `locator.h` header file in the Informix® ESQL/C program. You must include the `locator.h` header file in any Informix® ESQL/C program that defines simple-large-object variables.

```
EXEC SQL include locator;
```

The fields of the locator structure

The locator structure has the following parts:

- The **loc_loctype** field identifies the location of the simple-large-object data. It also indicates the variant type of the **lc_union** structure.

For more information about **loc_loctype**, see [Locations for simple-large-object data on page 141](#).

- The **lc_union** structure is a **union** (overlapping variant structures) structure.

The variant in use depends on where Informix® ESQL/C can expect to find the simple large object at run time. For more information about this structure, see [Locate simple large objects in memory on page 142](#) and [Locate simple large objects in files on page 148](#).

- Several fields are common to all types of simple-large-object variables.

The lists the fields in the locator structure common to all simple-large-object locations.

Table 40. Fields in locator structure common to all simple-large-object data locations

Field	Data type	Description
loc_indicator	4-byte integer	<p>A value of <code>-1</code> in the loc_indicator field indicates a null simple-large-object value. The IBM® Informix® ESQL/C program can set the field to indicate insertion of a null value; Informix® ESQL/C libraries set it on a select or fetch.</p> <p>For consistent behavior on various platforms, it is advised to set the value of the indicator to 0 or -1. If indicator is not set you can experience inconsistent behavior. The value set in the indicator field takes the higher precedence when set.</p> <p>You can also use the loc_indicator field to indicate an error when your program selects into memory. If the simple large object to be retrieved does not fit in the space provided, the loc_indicator field contains the actual size of the simple large object.</p>
loc_size	4-byte integer	<p>Contains the size of the simple-large-object data in bytes. This field indicates the amount of simple-large-object data that the Informix® ESQL/C libraries read or write. The Informix® ESQL/C program sets loc_size when it inserts a simple large object in the database; the Informix® ESQL/C libraries set loc_size after it selects or fetches a simple large object.</p>

Table 40. Fields in locator structure common to all simple-large-object data locations (continued)

Field	Data type	Description
loc_status	mint	Indicates the status of the last locator operation. The Informix® ESQL/C libraries set loc_status to zero when a locator operation is successful and to a negative value when an error occurs. The SQLCODE variable also contains this status value.
loc_type	4-byte integer	Specifies whether the data type of the variable is TEXT (SQLTEXT) or BYTE (SQLBYTES). The <code>sqltypes.h</code> header file defines SQLTEXT and SQLBYTES.

Locations for simple-large-object data

Before your Informix® ESQL/C program accesses a simple-large-object column, it must determine where the simple-large-object data is located.

To specify whether the simple large object is located in memory or in a file, specify the contents of the **loc_loctype** field of the locator structure. The following table shows the possible locations for simple-large-object data.

Table 41. Possible locations for simple-large-object data

Value of loc_loctype field	Location of simple-large-object data	See
LOCMEMORY	In memory	Locate simple large objects in memory on page 142
LOCFILE	In an open file	Locate simple large objects in open files on page 149
LOCFNAME	In a named file	Locate simple large objects in named files on page 153
LOCUSER	At a user-defined location	User-defined simple-large-object locations on page 158

Set **loc_loctype** after you declare the locator variable and before this declared variable receives a simple-large-object value.

The `locator.h` header file defines the `LOCMEMORY`, `LOCFILE`, `LOCFNAME`, and `LOCUSER` location constants. In your IBM® Informix® ESQL/C program, use these constant names rather than their constant values when you assign values to **loc_loctype**.

In a client-server environment, Informix® ESQL/C locates the simple large object on the client computer (the computer on which the application runs).

Locate simple large objects in memory

To have IBM® Informix® ESQL/C locate the TEXT or BYTE data in primary memory, set the **loc_loctype** field of the locator structure to `LOCMEMORY` as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
    loc_t my_simple_lo;
EXEC SQL END DECLARE SECTION;
;

my_simole_lo.loc_loctype = LOCMEMORY;
```

When you use memory as a simple-large-object location, a locator structure uses the **lc_mem** structure of the **lc_union** structure. The following table summarizes the **lc_union.lc_mem** fields.

Table 42. Fields in `lc_union.lc_mem` structure used for simple large objects located in memory

Field	Data type	Description
lc_bufsize	4-byte integer	The size, in bytes, of the buffer to which the lc_buffer field points.
lc_buffer	char *	The address of the buffer to hold the simple large-object value. Your Informix® ESQL/C program must allocate the space for this buffer and store its address here in lc_buffer .
lc_currdata_p	char *	The address of the system buffer. This is an internal field and must not be modified by the Informix® ESQL/C program.
lc_mflags	mint	The flags to use when you allocate memory.

The `locator.h` file provides the following macro shortcuts to use when you access fields in **lc_union.lc_mem**:

```
#define loc_bufsize      lc_union.lc_mem.lc_bufsize
#define loc_buffer      lc_union.lc_mem.lc_buffer
#define loc_currdata_p  lc_union.lc_mem.lc_currdata_p
#define loc_mflags      lc_union.lc_mem.lc_mflags
```



Tip: It is recommended that you use these shortcut names when you access the locator structure. The shortcut names improve code readability and reduce coding errors. This publication uses these shortcut names when it refers to the **lc_bufsize**, **lc_buffer**, **lc_currdata_p**, and **lc_mflags** fields of the **lc_union.lc_mem** structure.

The `demo` directory contains the following two sample Informix® ESQL/C programs that demonstrate how to handle simple-large-object data located in memory:

- The `getcd_me.ec` program selects a simple large object into memory.
- The `updcdd_me.ec` program inserts a simple large object from memory.

These programs assume the **stores7** database as the default database for the simple-large-object data. The user can specify another database (on the default database server) as a command-line argument.

```
getcd_me mystores
```

The **getcd_me** and **updcdd_me** programs are briefly explained in [Select a simple large object into memory on page 144](#) and [Insert a simple large object from memory on page 146](#).

Allocate the memory buffer

When your program selects simple-large-object data into memory, IBM® Informix® ESQL/C uses a memory buffer.

Before your program fetches TEXT or BYTE data, you must set the **loc_bufsize** (`lc_union.lc_mem.lc_bufsize`) field as follows to indicate how Informix® ESQL/C allocates this memory buffer:

- If you set the **loc_bufsize** to `-1`, Informix® ESQL/C allocates the memory buffer to hold the simple-large-object data.
- If you set the **loc_bufsize** to a value that is not `-1`, Informix® ESQL/C assumes that the program handles memory-buffer allocation and deallocation.



Important: When you locate simple large objects in memory, you must always set **loc_mflags** (`lc_union.lc_mem.lc_mflags`) and **loc_oflags** to 0 initially.

A memory buffer that the ESQL/C libraries allocate

When you set **loc_bufsize** to `-1`, IBM® Informix® ESQL/C allocates the memory buffer on a fetch or select. Informix® ESQL/C uses the `malloc()` system call to allocate the memory buffer to hold a single simple-large-object value. (If it cannot allocate the buffer, Informix® ESQL/C sets the **loc_status** field to `-465` to indicate an error.) When the select (or the first fetch) completes, Informix® ESQL/C sets **loc_buffer** to the address of the buffer and both **loc_bufsize** and **loc_size** to the size of the fetched simple large object to update the locator structure.

To fetch subsequent simple-large-objects whose data is of larger or smaller size, set **loc_mflags** to the `LOC_ALLOC` constant (that `locator.h` defines) to request that Informix® ESQL/C reallocate a new memory buffer. Leave **loc_bufsize** to the size of the currently allocated buffer.

If you do not set **loc_mflags** to `LOC_ALLOC` after the initial fetch, Informix® ESQL/C does not release the memory it has allocated for the **loc_buffer** buffer. Instead, it allocates a new buffer for subsequent fetches. This situation can cause your program size to grow for each fetch unless you explicitly free the memory allocated to each **loc_buffer** buffer. If your application runs on a Windows™ operating system and uses the multithreaded library then use the `SqlFreeMem()` Informix® ESQL/C function to free it. Otherwise use the `free()` system call.

When you set **loc_mflags** to `LOC_ALLOC`, Informix® ESQL/C handles memory allocation as follows:

- If the size of the simple-large-object data increases, Informix® ESQL/C frees the existing buffer and allocates the necessary memory.

If this reallocation occurs, Informix® ESQL/C alters the memory address at which it stores simple-large-object data. Therefore, if you reference the address in your programs, your program logic must account for the address change. Informix® ESQL/C also updates the **loc_bufsize** and **loc_size** field to the size of the fetched simple large object.

- If the size of the data decreases, Informix® ESQL/C does not need to reallocate the buffer.

After the fetch, the **loc_size** field indicates the size of the fetched simple large object while the **loc_bufsize** field still contains the size of the allocated buffer.

Informix® ESQL/C frees the allocated memory when it fetches the next simple-large-object value. Therefore, Informix® ESQL/C does not explicitly free the last simple-large-object value fetched until your program disconnects from the database server.

For an example in which **loc_bufsize** is set to `-1`, see [Select a simple large object into memory on page 144](#).

A memory buffer that the program allocates

If you want to handle your own memory allocation for simple large objects, use the `malloc()` system call to allocate the memory and then set the following fields in the locator structure:

- Before a select or fetch of a TEXT or BYTE column, set the **loc_buffer** field to the address of the allocated memory buffer, and set the **loc_bufsize** field to the size of the memory buffer.
- Before an insert of a TEXT or BYTE column, set the same fields as for a select or fetch. In addition, set **loc_size** to the size of the data to be inserted in the database.

If the fetched data does not fit in the allocated buffer, the IBM® Informix® ESQL/C libraries set **loc_status** (and `SQLCODE`) to a negative value (`-451`) and put the actual size of the data in **loc_indicator**. If the fetched data does fit, Informix® ESQL/C sets **loc_size** to the size of the fetched data.



Important: When you allocate your own memory buffer, also free the memory when you are finished selecting or inserting simple large objects. Informix® ESQL/C does not free this memory because it has no way to determine when you are finished with the memory. Because you have allocated the memory with `malloc()`, you can use the `free()` system call to free the memory.

Select a simple large object into memory

The `getcd_me` sample program from the `demo` directory shows how to select a simple large object from the database into memory.

The following figure shows a code excerpt that selects the `cat_descr` TEXT column of the `catalog` table into memory and then displays it.

Figure 25. Code excerpt from the `getcd_me` sample program

```

cat_descr.loc_loctype = LOCMEMORY;      /* set loctype for in memory */
cat_descr.loc_bufsize = -1;            /* let db get buffer */
cat_descr.loc_oflags = 0;              /* clear loc_oflags */
cat_descr.loc_mflags = 0;              /* set loc_mflags to 0 */
EXEC SQL select catalog_num, cat_descr /* look up catalog number */
  into :cat_num, :cat_descr from catalog
  where catalog_num = :cat_num;
if((ret = exp_chk2("SELECT", WARNNOTIFY)) == 100) /* if not found */
{
  printf("\nCatalog number %ld not found in catalog table\n",
    cat_num);
  if(!more_to_do()) /* More to do? */
    break; /* no, terminate loop */
  else
    continue; /* yes */
}
if(ret < 0)
{
  printf("\nSelect for catalog number %ld failed\n", cat_num);
  EXEC SQL disconnect current;
  printf("GETCD_ME Sample Program over.\n\n");
  exit(1);
}
prdesc(); /* if found, print cat_descr */

```

The program sets the `cat_descr` locator structure fields as follows:

- The `loc_loctype` field is set to `LOCMEMORY` so that Informix® ESQL/C returns the `cat_descr` text in a memory buffer.
- The `loc_bufsize` field is set to `-1` to have Informix® ESQL/C allocate the memory for the buffer. For more information, see [A memory buffer that the ESQL/C libraries allocate on page 143](#).
- The `loc_oflags` field is set to `0` because the program does not use a file for the simple large object.
- You must always set the `loc_mflags` field to `0` when you locate a simple large object in memory.

After the `SELECT` or `FETCH` statement, the locator structure contains the following information:

- The `loc_buffer` field contains the address of the memory buffer.
- The `loc_bufsize` field contains the size of the `loc_buffer` buffer. This is the total amount of memory allocated for simple-large-object storage.
- The `loc_size` field contains the number of bytes of simple-large-object data in `loc_buffer`.
- The `loc_indicator` field contains `-1` if the selected simple-large-object value is null.
- The `loc_status` field contains the status of the operation: `0` for success and a negative value if an error has occurred. For information about possible errors, see [Allocate the memory buffer on page 143](#).

The program excerpt in [Figure 25: Code excerpt from the `getcd_me` sample program on page 145](#) calls `prdesc()` to display the text that the `SELECT` statement returned. For a description of the `prdesc()` function, see [Guide to the `prdesc.c` file on page 175](#). If this program selects a second simple large object, it would need to set the `loc_mflags` to the `LOC_ALLOC` constant before the second `SELECT` statement to prevent memory leaks.

The excerpt also displays the **cat_descr** column for a catalog number that the user enters. The following figure shows the user input and the output from the **cat_descr** column of the **stores7** demonstration database.

Figure 26. Sample output from the getcd_me sample program

```
GETCD_ME Sample ESQL Program running.

Connected to stores7

This program requires you to enter a catalog number from the catalog
table. For example: '10001'. It then displays the content of the
cat_descr column for that catalog row. The cat_descr value is stored
in memory.

Enter a catalog number: 10004
Description for 10004:

Jackie Robinson signature glove. Highest professional quality,
used by National League.

**** More? (y/n)
```

Insert a simple large object from memory

The **updc_d_me** sample program from the `demo` directory shows how to insert a simple large object from memory into the database.

The program updates the **cat_descr** TEXT column of the **catalog** table from a memory buffer that contains text that the user enters. The following figure shows sample output as the user updates the **cat_descr** column of the **stores7** database.

Figure 27. Sample output from the updc_d_me sample program

```
Enter catalog number: 10004
Description for 10004:

Jackie Robinson signature ball. Highest professional quality,
used by National League.

Update this description? (y/n) y

Enter description (max 255 chars):and press RETURN
Jackie Robinson home run ball, signed, 1955.

*** Update complete.
**** More?(y/n)... n
```

The following figure shows a code excerpt that illustrates how the **updc_d_me** program uses the locator structure to update the **cat_descr** column from the text that is stored in memory.

Figure 28. Code excerpt from the updc_d_me sample program

```

/* Update? */
ans[0] = ' ';
while((ans[0] = LCASE(ans[0])) != 'y' && ans[0] != 'n')
{
    printf("\nUpdate this description? (y/n) ");
    getans(ans, 1);
}
if(ans[0] == 'y')                /* if yes */
{
    printf("Enter description (max of %d chars) and press RETURN\n",
        BUFFSZ - 1);
    /* Enter description */
    getans(ans, BUFFSZ - 1);
    cat_descr.loc_loctype = LOCMEMORY; /* set loctype for in memory */
    cat_descr.loc_buffer = ans;       /* set buffer addr */
    cat_descr.loc_bufsize = BUFFSZ;  /* set buffer size */
    /* set size of data */
    cat_descr.loc_size = strlen(ans);
    /* Update */
    EXEC SQL update catalog
        set cat_descr =:cat_descr
        where catalog_num = :cat_num;
;
}

```

The program sets the **cat_descr** locator structure fields as follows:

- The **loc_loctype** field is set to LOCMEMORY so that IBM® Informix® ESQL/C reads the **cat_descr** text from a memory buffer.
- The **loc_buffer** field is set to **ans**, the address of the memory buffer that holds the simple-large-object value to be inserted.
- The **loc_bufsize** field is set to BUFFSZ, the size of the allocated **ans** memory buffer.
- The **loc_size** field is set to **strlen(ans) + 1**, the number of bytes in the memory buffer that currently holds the new simple-large-object value.

If you insert a null simple-large-object value, your program also needs to set the **loc_indicator** field to **-1**.

The following figure shows a code excerpt that illustrates how to use a locator structure in an INSERT statement.

Figure 29. Sample INSERT operation from primary memory

```

char photo_buf[BUFFSZ];

EXEC SQL BEGIN DECLARE SECTION;
  char name[20];
  loc_t photo;
EXEC SQL END DECLARE SECTION;

photo.loc_loctype = LOCMEMORY; /* Photo resides in memory */
photo.loc_buffer = photo_buf; /* pointer to where it is */
photo.loc_size = BUFFSZ - 1;      /* length of image*/

EXEC SQL insert into employee (name, badge_pic)
  values (:name, :photo);

```

After the UPDATE or INSERT statement, Informix® ESQL/C updates the **loc_size** field with the number of bytes read from the memory buffer and sent to the database server. It also sets the **loc_status** field to indicate the status of the operation: 0 for success and a negative value if an error has occurred. For information about possible errors, see [Allocate the memory buffer on page 143](#).

Locate simple large objects in files

You can locate simple-large-object data in the open or named types of files.

- An open file is one that has already been opened before the program accesses the simple-large-object data. The program provides a file descriptor as the location of the simple-large-object data.
- A named file is one that your program has not yet opened. The program provides a file name as the location of the simple-large-object data.

When you use a file as a simple-large-object location, a locator structure uses the **lc_file** structure for the **lc_union** structure. The following table summarizes the **lc_union.lc_file** fields.

Table 43. Fields in lc_union.lc_file structure used for simple large objects located in files

Field	Data type	Description
lc_fname	char *	The address of the path name string that contains the file for the simple-large-object data. The program sets this field when it uses named files for simple-large-object locations.
lc_mode	int	The permission bits to use to create a file. This value is the third argument passed to the system open() function. For valid values of lc_mode , see your system documentation.
lc_fd	int	The file descriptor of the file that contains the simple-large-object data. The program sets this field when it uses open files.
lc_position	4-byte integer	The current seek position in the opened file. This is an internal field and must not be modified by the ESQL/C program.

The `locator.h` file provides the following macro shortcuts to use when you access simple large objects stored in files:

```
#define loc_fname      lc_union.lc_file.lc_fname
#define loc_fd        lc_union.lc_file.lc_fd
#define loc_position  lc_union.lc_file.lc_position
```

i Tip: It is recommended that you use these shortcut names when you access the locator structure. The shortcut names improve code readability and reduce coding errors. This publication uses these shortcut names when it refers to the `lc_fname`, `lc_fd`, and `lc_position` fields of the `lc_union.lc_file` structure.

File-open mode flags

When you use files for simple-large-object data, also set the `loc_oflags` field of the locator structure. The `loc_oflags` field is of type **integer** and it contains the host-system file-open mode flags.

These flags determine how the file is to be accessed once it is opened:

- `LOC_RDONLY` is a mask for read-only mode. Use this value when you insert a simple large object into a file.
- `LOC_WRONLY` is a mask for write-only mode. Use this value when you select a simple large object into a file and you want each selected simple large object to write over any existing data.
- `LOC_APPEND` is a mask for write mode. Use this value when you select a simple large object into a file and you want to append the value to the end of the file.

Error returns in `loc_status`

One of these flags is passed to the `loc_open()` function when IBM® Informix® ESQL/C opens the file. Informix® ESQL/C reads the data and writes it to the current location (which the `loc_position` field indicates) in the file. If Informix® ESQL/C is unable to read or write to a file, it sets the `loc_status` field of the locator structure to `-463` or `-464`. If Informix® ESQL/C is unable to close a file, it sets `loc_status` to `-462`. Informix® ESQL/C updates the `SQLCODE` variable with this same value.

Locate simple large objects in open files

To have IBM® Informix® ESQL/C locate the TEXT or BYTE data in an open file, set the `loc_loctype` field of the locator structure to `LOCFILE`.

```
EXEC SQL BEGIN DECLARE SECTION;
    loc_t my_simple_lo;
EXEC SQL END DECLARE SECTION;
;

my_simple_lo.loc_loctype = LOCFILE;
```

To use an open file as a simple-large-object location, your Informix® ESQL/C program must open the desired file before it accesses the simple-large-object data. It must then store its file descriptor in the `loc_fd` field of the locator structure to specify this file as the simple-large-object location. The `loc_oflags` field should also contain a file-open mode flag to tell Informix® ESQL/C how to access the file when it opens it.

The `demo` directory contains the following two sample Informix® ESQL/C programs that demonstrate how to handle simple-large-object data located in an open file:

- The `getcd_of.ec` program selects a simple large object into an open file.
- The `updc_d_of.ec` program inserts a simple large object from an open file.

These programs assume the **stores7** database as the default database for the simple-large-object data. The user can specify another database (on the default database server) as a command-line argument:

```
getcd_of mystores
```

Select a simple large object into an open file

The `getcd_of` sample program from the `demo` directory shows how to select a simple large object from the database into an open file. The following figure shows a code excerpt that selects the **cat_descr** column into a file that the user specifies.

Figure 30. Code excerpt from the `getcd_of` sample program

```
EXEC SQL BEGIN DECLARE SECTION;
    char db_name[30];
    mlong cat_num;
    loc_t cat_descr;
EXEC SQL END DECLARE SECTION;
;;

if((fd = open(descfl, O_WRONLY)) < 0)
{
    printf("\nCan't open file: %s, errno: %d\n", descfl, errno);
    EXEC SQL disconnect current;
    printf("GETCD_OF Sample Program over.\n\n");
    exit(1);
}

/*
 * Prepare locator structure for select of cat_descr
 */
cat_descr.loc_loctype = LOCFILE;          /* set loctype for open file */
cat_descr.loc_fd = fd;                   /* load the file descriptor */
cat_descr.loc_oflags = LOC_APPEND;       /* set loc_oflags to append */
EXEC SQL select catalog_num, cat_descr   /* verify catalog number */
    into :cat_num, :cat_descr from catalog
    where catalog_num = :cat_num;
if(exp_chk2("SELECT", WARNNOTIFY) != 100) /* if not found */
    printf("\nCatalog number %ld not found in catalog table\n",
        cat_num);
else
{
    if(ret < 0)
    {

;;

        exit(1);
    }
}
}
```

To prepare the locator structure for the SELECT statement, the `getcd_of` program sets the `cat_descr` locator structure fields as follows:

- The `loc_loctype` field is set to `LOCFILE` to tell IBM® Informix® ESQL/C to place the text for the `cat_descr` column in the open file.
- The `loc_fd` field is set to the `fd` file descriptor to identify the open file.
- The `loc_oflags` field is set to `LOC_APPEND` to specify that the data is to be appended to any data that exists in the file.

To access the file descriptor (`loc_fd`) field of the locator structure, the `getcd_of` program uses the name `cat_descr.loc_fd`. However, the actual name of this field in the locator structure is as follows:

```
cat_descr.lc_union.lc_file.lc_fd
```

The shortcut name of `loc_fd` is defined as a macro in the `locator.h` file.

After Informix® ESQL/C writes data to an open file, it sets the following fields of the locator structure:

- The `loc_size` field contains the number of bytes written to the open file.
- The `loc_indicator` field contains `-1` if the selected simple-large-object value is null.
- The `loc_status` field contains the status of the operation: `0` for success and a negative value if an error has occurred. For possible causes of the error, see [Error returns in loc_status on page 149](#).

Insert a simple large object from an open file

The `upddc_of` sample program from the `demo` directory shows how to insert a simple large object from an open file into the database. The program updates the `cat_descr` TEXT column of the `catalog` table from an open file that contains a series of records; each consists of a catalog number and the text to update the corresponding `cat_descr` column. The program assumes that this input file has the following format:

```
\10001\  
Dark brown leather first baseman's mitt. Specify right-handed or  
left-handed.  
  
\10002\  
Babe Ruth signature glove. Black leather. Infield/outfield style.  
Specify right- or left-handed.  
::
```

The following figure shows a code excerpt that illustrates how to use the locator structure to update the `cat_descr` column of the `catalog` table from an open file.

Figure 31. Code excerpt from the updc_d_of sample program

```

EXEC SQL BEGIN DECLARE SECTION;
    mlong cat_num;
    loc_t cat_descr;
EXEC SQL END DECLARE SECTION;
;

if ((fd = open(descfl, O_RDONLY)) < 0) /* open input file */
{
;

}
while(getcat_num(fd, line, sizeof(line))) /* get cat_num line from file */
{
;

printf("\nReading catalog number %ld from file...\n", cat_num);
flpos = lseek(fd, 0L, 1);
length = getdesc_len(fd);
flpos = lseek(fd, flpos, 0);

/* lookup cat_num in catalog table */
EXEC SQL select catalog_num
    into :cat_num from catalog
    where catalog_num = :cat_num;
if((ret = exp_chk2("SELECT", WARNNOTIFY)) == 100) /* if not found */
{
    printf("\nCatalog number %ld not found in catalog table.",
        cat_num);
;

}
/*if found */
cat_descr.loc_loctype = LOCFILE;          /* update from open file */
cat_descr.loc_fd = fd;                   /* load file descriptor */
cat_descr.loc_oflags = LOC_RDONLY;       /* set file-open mode (read) */
cat_descr.loc_size = length;             /* set size of simple large obj */

/* update cat_descr column of catalog table */
EXEC SQL update catalog set cat_descr = :cat_descr
    where catalog_num = :cat_num;
if(exp_chk2("UPDATE", WARNNOTIFY) < 0)
{
    EXEC SQL disconnect current;
    printf("UPDCD_OF Sample Program over.\n\n");
    exit(1);
}
printf("Update complete.\n");
}

```

The **updc_d_of** program opens the input file (**descfl**) that the user specified in response to a prompt, calls the `getcat_num()` function to read a catalog number from the file, and then calls the `getdesc_len()` function to determine the length of the text

for the update to the **cat_descr** column. The program performs a SELECT statement to verify that the catalog number exists in the **catalog** table.

If this number exists, the **updc_d_of** program prepares the locator structure as follows to update **cat_descr** from the text in the open file:

- The **loc_loctype** field is set to LOCFILE to tell IBM® Informix® ESQL/C that the **cat_descr** column is to be updated from an open file.
- The **loc_fd** field is set to **fd**, the file descriptor for the open-input file.
- The **loc_oflags** field is set to LOC_RDONLY, the file-open mode flag for read-only mode.
- The **loc_size** field is set to **length**, the length of the incoming text for **cat_descr**.

If you insert a null simple-large-object value, your program also needs to set the **loc_indicator** field to **-1**.

The **updc_d_of** program is then able to perform the database update. After Informix® ESQL/C reads data from the open file and sends it to the database server, Informix® ESQL/C updates the **loc_size** field with the number of bytes read from the open file and sent to the database server. Informix® ESQL/C also sets the **loc_status** field to indicate the status of the operation: **0** for success and a negative value if an error has occurred. For possible causes of the error, see [Error returns in loc_status on page 149](#).

Locate simple large objects in named files

To have IBM® Informix® ESQL/C locate the TEXT or BYTE data in a named file, set the **loc_loctype** field of the locator structure to LOCFNAME, as shown in the following example:

```
EXEC SQL BEGIN DECLARE SECTION;
    loc_t my_simple_lo;
EXEC SQL END DECLARE SECTION;
;

my_simple_lo.loc_loctype = LOCFNAME;
```

To use a named file as a simple-large-object location, your Informix® ESQL/C program must specify a pointer to the file name in the **loc_fname** field of the locator structure. You must also set the **loc_oflags** field with a file-open mode flag to tell Informix® ESQL/C how to access the file when it opens it.

To open a named file, Informix® ESQL/C opens the file named in the **loc_fname** field with the mode flags that the **loc_oflags** field specifies. If this file does not exist, Informix® ESQL/C creates it. Informix® ESQL/C then puts the file descriptor of the open file in the **loc_fd** field and proceeds as if your program opened the file. If Informix® ESQL/C cannot open this file, it sets the **loc_status** field (and SQLCODE) to **-461**. When the transfer is complete, Informix® ESQL/C closes the file, which releases the file descriptor in the **loc_fd** field.

The **demo** directory contains the following two sample Informix® ESQL/C programs that demonstrate how to handle simple-large-object data located in a named file:

- The **getcd_nf.ec** program selects a simple large object into a named file.
- The **updc_d_nf.ec** program inserts a simple large object from a named file.

These programs assume the **stores7** database as the default database for the simple-large-object data. The user can specify another database (on the default database server) as a command-line argument as follows:

```
getcd_of mystores
```

Select a simple large object into a named file

The **getcd_nf** sample program from the `demo` directory shows how to select a simple large object from the database into a named file. The following code excerpt prompts the user to enter a catalog number for the **catalog** table and the name of the file to which the program writes the contents of the **cat_descr** column for that row. The program stores the name of the file in the **descfl** array. It then executes a `SELECT` statement to read the **cat_descr** TEXT column from the **catalog** table and write it to a file that the user specifies in response to a prompt.

The following figure shows a code excerpt from the **getcd_nf** sample program.

Figure 32. Code excerpt from the `getcd_nf` sample program

```

EXEC SQL BEGIN DECLARE SECTION;
char db_name[30];
mlong cat_num;
loc_t cat_descr;
EXEC SQL END DECLARE SECTION;
;

printf("\nEnter a catalog number: "); /* prompt for catalog number */
getans(ans, 6);
if(rstol(ans, &cat_num) /* cat_num string too long */
{
printf("\tCannot convert catalog number '%s' to integer\n", ans);
continue;
}
while(1)
{
printf("Enter the name of the file to receive the description: ");
if(!getans(ans, 15))
continue;
break;
}
strcpy(descfl, ans);
break;
}

/*
* Prepare locator structure for select of cat_descr
*/
cat_descr.loc_loctype = LOCFNAME; /* set loctype for in memory */
cat_descr.loc_fname = descfl; /* load the addr of file name */
cat_descr.loc_oflags = LOC_APPEND; /* set loc_oflags to append */
EXEC SQL select catalog_num, cat_descr /* verify catalog number */
into :cat_num, :cat_descr from catalog
where catalog_num = :cat_num;
if(exp_chk2("SELECT", WARNNOTIFY) != 0) /* if error, display and quit */
printf("\nSelect for catalog number %ld failed\n", cat_num);

EXEC SQL disconnect current;
printf("\nGETCD_NF Sample Program over.\n\n");
}

```

The program sets the `cat_descr` locator structure fields as follows:

- The `loc_loctype` field contains `LOCFNAME` to tell Informix® ESQL/C to place the text for the `cat_descr` column in a named file.
- The `loc_fname` field is the address of the `descfl` array to tell Informix® ESQL/C to write the contents of the `cat_descr` column to the file named in `descfl`.
- The `loc_oflags` field, the file-open mode flags, is set to `LOC_APPEND` to tell Informix® ESQL/C to append selected data to the existing file.

The `getcd_nf` program then executes the `SELECT` statement to retrieve the row. After Informix® ESQL/C writes data to the named file, it sets the following fields of the locator structure:

- The **loc_size** field contains the number of bytes written to the file. If the Informix® ESQL/C program fetches a null (or empty) simple-large-object column into a named file that exists, it truncates the file.
- The **loc_indicator** field contains `-1` if the selected simple-large-object value is null.
- The **loc_status** field contains the status of the operation: `0` for success and a negative value if an error has occurred. For possible causes of the error, see [Error returns in loc_status on page 149](#).

Insert a simple large object from a named file

The **updcn_f** sample program from the `demo` directory shows how to insert a simple large object from a named file into the database. The program updates the **cat_desc** TEXT column from a named input file. The program assumes that this input file has the following format:

```
Babe Ruth signature glove. Black leather. Infield/outfield
style. Specify right- or left-handed.
```

The following figure shows a code excerpt that updates the **cat_desc** column in the **catalog** table from text in a named file.

Figure 33. Code excerpt from the updcd_nf sample program

```

EXEC SQL BEGIN DECLARE SECTION;
  mlong cat_num;
  loc_t cat_descr;
EXEC SQL END DECLARE SECTION;
;;

cat_descr.loc_loctype = LOCMEMORY;          /* set loctype for in memory */
cat_descr.loc_bufsize = -1;                /* let server get memory */
EXEC SQL select catalog_num, cat_descr     /* verify catalog number */
  into :cat_num, :cat_descr from catalog
  where catalog_num = :cat_num;

/* if error, display and quit */
if ((ret = exp_chk2("SELECT", WARNNOTIFY)) == 100)
{
  printf("\nCatalog number %ld not found in catalog table\n",
    cat_num);
  EXEC SQL disconnect current;
  printf("UPDCD_NF Sample Program over.\n\n");
  exit(1);
}
if(ret<0)
{
  EXEC SQL disconnect current;
  printf("UPDCD_NF Sample Program over.\n\n");
  exit(1);
}
prdesc();                                /* print current cat_descr */

/* Update? */
ans[0] = ' ';
while((ans[0] = LCASE(ans[0])) != 'y' && ans[0] != 'n')
{
  printf("Update this description? (y/n) ");
  scanf("%1s", ans);
}
if(ans[0] == 'y')
{
  cat_descr.loc_loctype = LOCFNAME;        /* set type to named file */
  cat_descr.loc_fname = descfl;           /* supply file name */
  cat_descr.loc_oflags = LOC_RDONLY;      /* set file-open mode (read) */
  cat_descr.loc_size = -1;                /* set size to size of file */
  EXEC SQL update catalog
    set cat_descr = :cat_descr            /* update cat_descr column */
    where catalog_num = :cat_num;
  if(exp_chk2("UPDATE", WARNNOTIFY) < 0) /* check status */
  {
    EXEC SQL disconnect current;
    printf("UPDCD_NF Sample Program over.\n\n");
    exit(1);
  }
  printf("Update complete.\n");
}

```

The **updcn_nf** program in [Figure 33: Code excerpt from the updcn_nf sample program on page 157](#) first performs a SELECT statement on the **catalog** table for a catalog number that the user enters in response to a prompt. The SELECT statement returns the **catalog_num** and **cat_descr** columns. The `prdesc()` function ([Guide to the prdesc.c file on page 175](#)) displays the current content of **cat_descr**.

The program then asks whether the user wants to update this description. If the user answers yes (`ans[0] == 'y'`), the **updcn_nf** program prepares the locator structure as follows to update the **cat_descr** column from text in a file that the user has specified:

- The **cat_descr.loc_loctype** field is set to `LOCfname` to indicate that the source of the update text is a named file.
- The **cat_descr.loc_fname** field is set to `descfl`, the name of the file that contains the simple-large-object data.
- The **cat_descr.loc_oflags** field is set to `LOC_RDONLY` to tell IBM® Informix® ESQL/C to open the file in read-only mode.
- The **cat_descr.loc_size** field is set to `-1` to tell Informix® ESQL/C to transfer the simple large object all at once, not to transfer it in smaller pieces, one piece at a time. You can also set the **loc_oflags** field to the `LOC_USEALL` mask to perform this operation.

If you insert a null simple-large-object value, your program also needs to set the **loc_indicator** field to `-1`.

After Informix® ESQL/C reads data from the named file and sends it to the database server, Informix® ESQL/C updates the **loc_size** field with the number of bytes read from the named file and sent to the database server. Informix® ESQL/C also sets the **loc_status** field to indicate the status of the operation: `0` for success and a negative value if an error has occurred. For possible causes of the error, see [Error returns in loc_status on page 149](#).

User-defined simple-large-object locations

You can create your own versions of the `loc_open()`, `loc_read()`, `loc_write()`, and `loc_close()` functions to define your own location for simple-large-object data.

A typical use for user-defined location functions is when the data needs to be translated in some manner before the application can use it. For example, if the data is compressed, the application must uncompress it before this data can be sent to the database. The application might even have a number of different translation functions that you can choose at run time; it simply sets the appropriate function pointer to the desired translation function.

To have Informix® ESQL/C use your own C functions to define the TEXT or BYTE data location, set the **loc_loctype** field of the locator structure to `LOCUSER` as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
    ifx_loc_t my_simple_lo;
EXEC SQL END DECLARE SECTION;
;;

my_simple_lo.loc_loctype = LOCUSER;
```

With a user-defined simple-large-object location, a locator structure uses the fields that the following table summarizes.

Table 44. Fields in the locator structure used to create user-defined location functions

Field	Data type	Description
loc_open	mint (*)()	A pointer to a user-defined open function that returns an integer value.
loc_read	mint (*)()	A pointer to a user-defined read function that returns an integer value.
loc_write	mint (*)()	A pointer to a user-defined write function that returns an integer value.
loc_close	mint (*)()	A pointer to a user-defined close function that returns an integer value.
loc_user_env	char *	The address of the buffer to hold data that a user-defined location function needs. For example, you can set <code>loc_user_env</code> to the address of a common work area.
loc_xfercount	4-byte integer	The number of bytes that the last transfer operation for the simple large object transferred.

With a user-defined simple-large-object location, a locator structure can use either the **lc_mem** structure or the **lc_file** structure of the **lc_union** structure. [Table 42: Fields in lc_union.lc_mem structure used for simple large objects located in memory on page 142](#) and [Table 43: Fields in lc_union.lc_file structure used for simple large objects located in files on page 148](#) summarize fields of the **lc_union.lc_mem** structure and **lc_union.lc_file** structure.

Select a simple large object into a user-defined location

When your program selects a simple-large-object value, the IBM® Informix® ESQL/C libraries must receive the data from the database server and transfer it to the Informix® ESQL/C program. To do this, Informix® ESQL/C performs the following steps:

1. Before the transfer, Informix® ESQL/C calls the user-defined open function to initialize the user-defined location. The *oflags* argument of this open function is set to `LOC_WONLY`.
2. Informix® ESQL/C receives the simple-large-object value from the database server and puts it into a program buffer.
3. Informix® ESQL/C calls the user-defined write function to transfer the simple-large-object data from the program buffer to the user-defined location.

Informix® ESQL/C repeats [steps 2 on page 159](#) and [3 on page 159](#) as many times as needed to transfer the entire simple-large-object value from the database server to the user-defined location.

4. After the transfer, Informix® ESQL/C performs the clean-up operations that the user-defined close function specifies.

To select a simple large object into a user-defined location, set **loc_loctype** to `LOCUSER` and set the **loc_open**, **loc_write**, and **loc_close** fields so they contain the addresses of appropriate user-defined open, write, and close functions.

Insert a simple large object into a user-defined location

When your program inserts a simple-large-object value, the IBM® Informix® ESQL/C libraries must transfer the data from the Informix® ESQL/C program to the database server. To do this, Informix® ESQL/C performs the following steps:

1. Before the transfer, Informix® ESQL/C calls the user-defined open function to initialize the user-defined location. The *oflags* argument of this open function is set to LOC_RDONLY.
2. Informix® ESQL/C calls the user-defined read function to transfer the simple-large-object data from the user-defined location to the program buffer.
3. Informix® ESQL/C sends the value in the program buffer to the database server.

Informix® ESQL/C repeats steps [2 on page 160](#) and [3 on page 160](#) as many times as needed to transfer the entire simple-large-object value from the user-defined location to the database server.

4. After the transfer, Informix® ESQL/C performs the clean-up operations specified in the user-defined close function.

To insert a simple large object that is stored in a user-defined location, set **loc_loctype** to LOCUSER and set the **loc_open**, **loc_read**, and **loc_close** fields so that they contain the addresses of appropriate user-defined open, read, and close functions. If the simple large object to be inserted is null, set the **loc_indicator** field to `-1`.

Set the **loc_size** field to the length of the simple-large-object data that you insert. A **loc_size** value of `-1` tells Informix® ESQL/C to send the entire user-defined simple-large-object data in a single operation. If the program sets **loc_size** to `-1`, the database server reads in data until the read function returns an end-of-file (EOF) signal. When the count is not equal to the number of bytes requested, the database server assumes an EOF signal.

User-defined simple-large-object functions

IBM® Informix® ESQL/C provides four transfer functions that you can redefine to handle a user-defined simple-large-object location.

The **loc_open**, **loc_read**, **loc_write**, and **loc_close** fields contain pointers to these user-defined location functions. Each of the functions receives the address of the **ifx_loc_t** structure as its first (or only) parameter. You can use the **loc_user_env** field to hold data that a user-defined location function needs. In addition, the **loc_xfercount** and all the fields of the **lc_union** substructure are available for these functions.

The user-defined open function

To define how to prepare the user-defined location for a transfer operation (read or write), you create a C function called a user-defined open function.

Before you begin a transfer of simple-large-object data to or from the database server, IBM® Informix® ESQL/C calls the open function supplied in the **loc_open** field of the locator structure.

This user-defined open function must receive the following two arguments:

- The address of the locator structure, **ifx_loc_t *loc_struct**, where *loc_struct* is the name of a locator structure that your user-defined open function declares
- The open-mode flags, **int oflags**, where *oflags* is a variable that contains the open-mode flag

This flag contains LOC_RDONLY if Informix® ESQL/C calls the open function to send the simple large object to the database, or LOC_WONLY if Informix® ESQL/C calls the function to receive data from the database.

The user-defined open function must return the success code for the open operations as follows:

0

The initialization was successful.

-1

The initialization failed. This return code generates a **loc_status** (and SQLCODE) error of -452.

The following figure shows a skeleton function of a user-defined open function.

Figure 34. A sample user-defined open function

```
open_simple_lo(adloc, oflags)
ifx_loc_t *adloc;
int oflags;
{
    adloc->loc_status = 0;
    adloc->loc_xfercount = 0L;
    if (0 == (oflags & adloc->loc_oflags))
        return(-1);
    if (oflags & LOC_RDONLY)
        /** prepare for store to db **/
    else
        /** prepare for fetch to program **/
    return(0);
}
```

The user-defined read function

To define how to read the user-defined location, you create a C function called a user-defined read function.

When IBM® Informix® ESQL/C sends data to the database server, it reads this data from a character buffer. To transfer the data from a user-defined location to the buffer, Informix® ESQL/C calls the user-defined read function. Your Informix® ESQL/C program must supply the address of your user-defined read function in the **loc_read** field of the locator structure.

This user-defined read function must receive the following three arguments:

- The address of the locator structure, **ifx_loc_t *loc_struct**, where *loc_struct* is a locator structure that your user-defined read function uses
- The address of the buffer to send data to the database server, **char *buffer**, where *buffer* is the buffer that your program allocates
- The number of bytes to be read from the user-defined location, **int nread**, where *nread* is a variable that contains the number of bytes

This function must transfer the data from the user-defined location to the character buffer that *buffer* indicates. Informix® ESQL/C might call the function more than once to read a single simple-large-object value from the user-defined location. Each call receives the address and length of a segment of data. Track the current seek position of the user-defined location in your user-defined read function. You might want to use the **loc_position** or **loc_currdata_p** fields for this purpose. You can also use the **loc_xfercount** field to track the amount of data that was read.

The user-defined read function must return the success code for the read operation as follows:

>0

The read operation was successful. The return value indicates the number of bytes actually read from the locator structure.

-1

The read operation failed. This return code generates a **loc_status** (and SQLCODE) error of `-454`.

The following figure shows a skeleton function of a user-defined read function.

Figure 35. A sample user-defined read function

```
read_simple_lo(adloc, bufp, ntoread)
ifx_loc_t *adloc;
char *bufp;
int ntoread;
{
    int ntoxfer;

    ntoxfer = ntoread;
    if (adloc->loc_size != -1)
        ntoxfer = min(ntoread,
            adloc->loc_size - adloc->loc_xfercount);

    /** transfer "ntoread" bytes to *bufp ***/

    adloc->loc_xfercount += ntoxfer;
    return(ntoxfer);
}
```

The user-defined write function

To define how to write to the user-defined location, you create a C function called a user-defined write function.

When IBM® Informix® ESQL/C receives data from the database server, it stores this data in a character buffer. To transfer the data from the buffer to a user-defined location, Informix® ESQL/C calls the user-defined write function. Your Informix® ESQL/C program must supply the address of your user-defined write function in the **loc_write** field of the locator structure.

This user-defined write function must receive the following three arguments:

- The address of the locator structure, **ifx_loc_t *loc_struct**, where *loc_struct* is a locator structure that your user-defined write function uses
- The address of the buffer to receive the data from the database server, **char *buffer**, where *buffer* is the buffer that your program allocates
- The number of bytes to be written to the user-defined location, **int nwrite**, where *nwrite* is a variable that contains the number of bytes

The user-defined write function must transfer the data from the character buffer that *buffer* indicates to the user-defined location. Informix® ESQL/C might call the function more than once to write a single simple-large-object value to the user-

defined location. Each call receives the address and length of a segment of data. Track the current seek position of the user-defined location in your user-defined write function. You might want to use the **loc_position** or **loc_currdata_p** field for this purpose. You can also use the **loc_xfercount** field to track the amount of data that was written.

The user-defined write function must return the success code for the write operation as follows:

>0

The write operation was successful. The return value indicates the number of bytes written to the user-defined location

-1

The write operation failed. This return code generates a **loc_status** (and SQLCODE) error of `-455`.

The following figure shows a skeleton function of a user-defined write function.

Figure 36. A Sample User-Defined Write Function

```
write_simple_lo(adloc, bufp, ntowrite)
ifx_loc_t *adloc;
char *bufp;
int ntowrite;
{
    int xtofer;

    ntowrite = ntowrite;
    if (adloc->loc_size != -1)
        ntowrite = min(ntowrite,
            (adloc->loc_size) - (adloc->loc_xfercount));

    /** transfer "ntowrite" bytes from *bufp ***/

    adloc->loc_xfercount += ntowrite;
    return(ntowrite);
}
```

The user-defined close function

To define how to perform clean-up tasks for the user-defined location, you create a C function called a user-defined close function.

When a transfer to or from the database server is complete, IBM® Informix® ESQL/C calls the close function that the **loc_close** field of the locator structure supplies. Cleanup tasks include closing files or deallocating memory that the user-defined location uses.

This function must receive one argument: the address of the locator structure, **ifx_loc_t *loc_struct**, where *loc_struct* is a locator structure that your user-defined close function uses. The user-defined close function must return the success code for the close operation as follows:

0

The cleanup was successful.

-1

The cleanup failed. This return code generates a **loc_status** (and SQLCODE) error of -453.

The following figure shows a skeleton function of a user-defined close function.

Figure 37. A sample user-defined close function

```
close_simple_lo (adloc)
ifx_loc_t      *adloc;
{
    adloc->loc_status = 0;
    if (adloc->loc_oflags & LOC_WONLY) /* if fetching */
    {
        adloc->loc_indicator = 0; /* clear indicator */
        adloc->loc_size = adloc->loc_xfercount;
    }
    return(0);
}
```

Read and write simple large objects to an optical disc (UNIX™)

In a table, columns of type simple-large-object do not include the simple-large-object data in the table itself. Instead, the simple-large-object column contains a 56-byte simple-large-object descriptor that includes a forward pointer (rowid) to the location where the first segment of simple-large-object data is stored. The descriptor can point to a dbspace blobpage, a blobspace blobpage, or a platter in an optical storage subsystem. For details, see your *HCL® Informix® Administrator's Guide* and the *Informix® Optical Subsystem Guide*.

When a simple large object is stored on a write-once-read-many (WORM) optical-storage subsystem, you can have a single physical simple large object in more than one table to conserve storage space on the WORM optical disc. The LOC_DESCRIPTOR flag enables you to migrate a simple-large-object descriptor, rather than the simple large object itself, from one table to another.

When you read or write a simple-large-object column that is stored on a WORM optical disc, you can manipulate only the simple-large-object descriptor if you set the **loc_oflags** field of the locator structure to LOC_DESCRIPTOR.



Important: Only use LOC_DESCRIPTOR with simple large objects that are stored on WORM optical media.

The following figure shows a code fragment that selects the **stock_num**, **manu_code**, **cat_descr**, and **cat_picture** columns from the **catalog** table of the named database. The program uses the DESCR() SQL function expression to retrieve the simple-large-object descriptor, rather than to retrieve the simple large object itself, for the **cat_picture** column. The program then sets the **loc_oflags** field of the **cat_picture** locator structure to LOC_DESCRIPTOR to signal that the simple-large-object descriptor, rather than the simple large object, is to be inserted into the **cat_picture** column of the **pictures** table. The result is that the **cat_picture** columns in both the **catalog** and **pictures** tables refer to a single set of physical simple large objects.

Figure 38. Code fragment to retrieve the simple-large-object descriptor

```

#include <stdio.h>
EXEC SQL include locator;

char errmsg[400];

EXEC SQL BEGIN DECLARE SECTION;
    mlong cat_num;
    int2 stock_num;
    char manu_code[4];
    ifx_loc_t cat_descr;
    ifx_loc_t cat_picture;
EXEC SQL END DECLARE SECTION;

main(argc, argv)
mint argc;
char *argv[];
{
    EXEC SQL BEGIN DECLARE SECTION;
        char db_name[250];
    EXEC SQL END DECLARE SECTION;

    if (argc > 2)                                /* correct no. of args? */
    {
        printf("\nUsage: %s [database]\nIncorrect no. of argument(s)\n",
            argv[0]);
        exit(1);
    }
    strcpy(db_name, "stores7");
    if(argc == 2)
        strcpy(db_name, argv[1]);
    EXEC SQL connect to :db_name;
    sprintf(db_msg, "CONNECT TO %s",db_name);
    err_chk(db_msg);
    EXEC SQL declare catcurs cursor for          /* setup cursor for select */
        select stock_num, manu_code, cat_descr, DESCR(cat_picture)
        from catalog
        where cat_picture is not null;
    /*
    * Prepare locator structures cat_descr(TEXT) and
    * cat_picture (BYTE that is the simple-large-object descriptor).
    */
    cat_descr.loc_loctype = LOCMEMORY;          /* set loctype for in memory */
    cat_picture.loc_loctype = LOCMEMORY;       /* set loctype for in memory */
    while(1)
    {
        /*
        * Let server get buffers and set loc_buffer (buffer for
        * simple-large-object descriptor) and loc_bufsize (size of buffer)
        */
        cat_descr.loc_bufsize = -1;
        cat_picture.loc_bufsize = -1;
        /*
        * Select row from catalog table (descr() returns TEXT descriptor
        * for cat_picture. For cat_descr, the actual simple LO is returned.
        */
        EXEC SQL fetch catcurs into :stock_num, :manu_code, :cat_descr,
            :cat_picture;
        if(err_chk("FETCH") == SQLNOTFOUND)     /* end of data */
            break;
        /*
        * Set LOC_DESCRIPTOR in loc_oflags to indicate simple-large-object
        * descriptor is being inserted rather than simple-large-object data.
        */

```

You can also use the SQL DESCR() function to achieve the same result without a **loc_oflags** value of LOC_DESCRIPTOR. The SQL statement shown in the following figure accomplishes the same task as the locator structure in the preceding example.

Figure 39. Using DESCR() to access a simple- large-object descriptor

```
EXEC SQL insert into pictures (stock_num, manu_code, cat_descr, cat_picture)
select stock_num, manu_code, cat_descr, DESCR(cat_picture)
from catalog
where cat_picture is not null;
```

The dispcat_pic program

The **dispcat_pic** program uses the IBM® Informix® ESQL/C **ifx_loc_t** locator structure to retrieve two simple-large-object columns. The program retrieves the **cat_descr** TEXT simple-large-object column and the **cat_picture** BYTE column from the **catalog** table of the **stores7** demonstration database.

The **dispcat_pic** program allows you to select a database from the command line in case you created the **stores7** database under a different name. If no database name is given, **dispcat_pic** opens the **stores7** database. For example, the following command runs the **dispcat_pic** executable and specifies the **mystores** database:

```
dispcat_pic mystores
```

The program prompts the user for a **catalog_num** value and performs a SELECT statement to read the **description** column from the **stock** table and the **catalog_num**, **cat_descr**, and **cat_picture** columns from the **catalog** table. If the database server finds the catalog number and the **cat_picture** column is not null, it writes the **cat_picture** column to a **.gif** file.

If the SELECT statement succeeds, the program displays the **catalog_num**, **cat_descr**, and **description** columns. Since these columns store text, they can be displayed on any Informix® ESQL/C platform. The program also allows the user to enter another **catalog_num** value or terminate the program.

Preparing to run the dispcat_pic program

About this task

To prepare to run the **dispcat_pic** program:

1. Load the simple-large-object images into the **catalog** table with the blobload utility.
2. Compile the **dispcat_pic.ec** file into an executable program.

Load the simple-large-object images

When the **catalog** table is created as part of the **stores7** demonstration database, the **cat_picture** column for all rows is set to null. The IBM® Informix® ESQL/C demonstration directory provides five graphic images. Use the blobload utility to load simple-large-object images into the **cat_picture** column of the **catalog** table.

To display these simple-large-object images from the **dispcat_pic** program, you must load the images to the **catalog** table.

Choose the image files

The five **cat_picture** images are provided in the Graphics Interchange Format files, which have the **.gif** file extension.

IBM® Informix® ESQL/C provides the images in `.gif` files to provide them in a standard format that can be displayed on all platforms or translated into other formats with filter programs that other vendors supply. The right column of the following table shows the names of the `.gif` files for the simple-large-object images.

Table 45. Image files for simple-large-object demo

Image	Graphics Interchange Format (.gif files)
Baseball glove	<code>cn_10001.gif</code>
Bicycle crankset	<code>cn_10027.gif</code>
Bicycle helmet	<code>cn_10031.gif</code>
Golf balls	<code>cn_10046.gif</code>
Running shoe	<code>cn_10049.gif</code>

The numeric portion of the image file name is the **catalog_num** value for the row of the **catalog** table to which the image is to be updated. For example, `cn_10027.gif` should be updated to the **cat_picture** column of the row where `10027` is the value of **catalog_num**.

Loading the simple-large-object images with the blobload utility

The blobload utility is the IBM® Informix® ESQL/C program that is provided as part of the Informix® ESQL/C demonstration files. It uses a command-line syntax to load a byte image into a specified table and column of a database.

To load the simple-large-object images with blobload:

1. Compile the `blobload.ec` program with the following command:

```
esql -o blobload blobload.ec
```

2. Enter `blobload` on the UNIX™ command line without any arguments.

The following figure shows the output of this command that describes the command-line arguments that blobload expects.

Figure 40. Sample output from the blobload utility

```

Sorry, you left out a required parameter.

Usage: blobload {-i | -u}          -- choose insert or update
      -f filename                 -- file containing the blob data
      -d database_name            -- database to open
      -t table_name               -- table to modify
      -b blob_column              -- name of target column
      -k key_column key_value     -- name of key column and a value
      -v                          -- verbose documentary output

All parameters except -v are required.

Parameters may be given in any order.

As many as 8 -k parameter pairs may be specified.

```

3. Run the blobload program to load each image to its proper **cat_picture** column.

The **-u** option of blobload updates a specified column with a simple-large-object image. To identify which column to update, you must also use the **-f**, **-d**, **-t**, **-b**, and **-k** options of blobload.

You must run the blobload program once for each image file that you want to update. For example, the following command loads the contents of the **cn_10027.gif** file into the **cat_picture** column of the row for **catalog_num 10027**. The **catalog_num** column is the key column in the **catalog** table.

```

blobload -u -f cn_10027.gif -d stores7 -t catalog -b cat_picture -k
catalog_num 10027

```

Use the same command to update each of the four remaining image files, substituting the file name (**-f** option) and corresponding **catalog_num** value (**-k** option) of the image file that you want to load.

Guide to the dispcat_pic.ec File

```

=====
1. /*
2.  * dispcat_pic.ec *
3.The following program prompts the user for a catalog number,
4. selects the cat_picture column, if it is not null, from the
5. catalog table of the demonstration database and saves the
6. image into a .gif file.
7. */
8. #include <stdio.h>
9. #include <ctype.h>
10. EXEC SQL include sqltypes;
11. EXEC SQL include locator;
12. #define WARNNOTIFY    1
13.#define NOWARNNOTIFY  0
14. #define LCASE(c) (isupper(c) ? tolower(c) : (c))
15. #define BUFFSZ 256
16. extern errno;
17. EXEC SQL BEGIN DECLARE SECTION;
18.     mlong cat_num;
19.     ifx_loc_t cat_descr;

```

```

20.     ifx_loc_t cat_picture;
21. EXEC SQL END DECLARE SECTION;
22. char cpfl[18]; /* file to which the .gif will be copied */
=====

```

Lines 8 - 11

The **#include <stdio.h>** statement includes the `stdio.h` header file from the `/usr/include` directory on UNIX™ and from the **include** subdirectory for Microsoft™ Visual C++ on Windows™. The `stdio.h` file enables **dispcat_pic** to use the standard C I/O library. The program also includes the Informix® ESQL/C header files `sqltypes.h` and `locator.h` (lines 10 and 11). The `locator.h` file contains the definition of the locator structure and the constants that you need to work with this structure.

Lines 12 - 16

Use the `WARNNOTIFY` and `NOWARNNOTIFY` constants (lines 12 and 13) with the `exp_chk2()` exception-handling function. Calls to `exp_chk2()` specify one of these constants as the second argument to indicate whether to display `SQLSTATE` and `SQLCODE` information for warnings (`WARNNOTIFY` or `NOWARNNOTIFY`). See lines 171 - 177 for more information about the `exp_chk2()` function.

The program uses `BUFFSZ` (line 15) to specify the size of arrays that store input from the user. Line 16 defines **errno**, an external integer where system calls store an error number.

Lines 17 - 21

These lines define global host variables needed for the program. The **cat_num** variable holds the **catalog_num** column value of the **catalog** table. Lines 19 and 20 specify the locator structure as the data type for host variables that receive data for the **cat_descr** and **cat_picture** simple-large-object columns of the **catalog** table. The locator structure is the host variable for a simple-large-object column that is retrieved from or stored to the database. The locator structure has a **ifx_loc_t** typedef. The program uses the locator structure to specify simple-large-object size and location.

Line 22

Line 22 defines a single global C variable. The **cpfl** character array stores the name of a file. This named file is the location for the simple-large-object `.gif` image of **cat_picture** that the database server writes.

```

=====
23. main(argc, argv)
24. mint argc;
25. char *argv[];
26. {
27.     char ans[BUFFSZ];
28.     int4 ret, exp_chk2();
29.     char db_msg[ BUFFSZ + 1 ];
30. EXEC SQL BEGIN DECLARE SECTION;
31.     char db_name[20];
32.     char description[16];
33. EXEC SQL END DECLARE SECTION;
=====

```

Lines 23 - 26

The `main()` function is the point at which program execution begins. The first argument, `argc`, is an integer that gives the number of arguments submitted on the command line. The second argument, `argv[]`, is a pointer to an array of character strings that contain the command-line arguments. The `dispcat_pic` program expects only the `argv[1]` argument, which is optional, to specify the name of the database to access. If `argv[1]` is not present, the program opens the `stores7` database.

Lines 27 - 29

Lines 27 - 29 define the C variables that are local in scope to the `main()` function. The `ans[BUFFSZ]` array is the buffer that receives input from the user, namely the catalog number for the associated `cat_picture` column. Line 28 defines a 4-byte integer (`ret`) for the value that `exp_chk2()` returns and declares `exp_chk2()` as a function that returns a `long`. The `db_msg[BUFFSZ + 1]` character array holds the form of the `CONNECT` statement used to open the database. If an error occurs while the `CONNECT` executes, the string in `db_msg` is passed into the `exp_chk2()` function to identify the cause of the error.

Lines 30 - 33

Lines 30 - 33 define the IBM® Informix® ESQL/C host variables that are local to the `main()` function. A host variable receives data that is fetched from a table and supplies data that is written to a table. The `db_name[20]` character array is a host variable that stores the database name if the user specifies one on the command line. The `description` variable holds the value that the user entered, which is to be stored in the column of the `stock` table.

```

=====
34.     printf("DISPCAT_PIC Sample ESQL Program running.\n\n");
35.     if (argc > 2)           /* correct no. of args? */
36.     {
37.         printf("\nUsage: %s [database]\nIncorrect no. of
argument(s)\n",
38.             argv[0]);
39.         printf("DISPCAT_PIC Sample Program over.\n\n");
40.         exit(1);
41.     }
42.     strcpy(db_name, "stores7");
43.     if(argc == 2)
44.         strcpy(db_name, argv[1]);
45.     EXEC SQL connect to :db_name;
46.     sprintf(db_msg, "CONNECT TO %s", db_name);
47.     if(exp_chk2(db_msg, NOWARNNOTIFY) < 0)
48.     {
49.         printf("DISPCAT_PIC Sample Program over.\n\n");
50.         exit(1);
51.     }
52.     if(sqlca.sqlwarn.sqlwarn3 != 'W')
53.     {
54.         printf("\nThis program does not work with Informix SE. ");
55.         EXEC SQL disconnect current;
56.         printf("\nDISPCAT_PIC Sample Program over.\n\n");
57.         exit(1);
58.     }
59.     printf("Connected to %s\n", db_name);

```

```
60.    ++argv;
=====
```

Lines 34 - 51

These lines interpret the command-line arguments and open the database. Line 35 checks whether more than two arguments are entered on the command line. If so, **dispcat_pic** displays a message to show the arguments that it expects and then it terminates. Line 42 assigns the default database name of **stores7** to the **db_name** host variable. The program opens this database if the user does not enter a command-line argument.

The program then tests whether the number of command-line arguments is equal to 2. If so, **dispcat_pic** assumes that the second argument, **argv[1]**, is the name of the database that the user wants to open. Line 44 uses the **strcpy()** function to copy the name of the database from the **argv[1]** command line into the **db_name** host variable. The program then executes the CONNECT statement (line 45) to establish a connection to the default database server and open the specified database (in **db_name**).

The program reproduces the CONNECT statement in the **db_msg[]** array (line 46). It does so for the sake of the **exp_chk2()** call on line 47, which takes as its argument the name of a statement. Line 47 calls the **exp_chk2()** function to check on the outcome. This call to **exp_chk2()** specifies the **NOWARNNOTIFY** argument to prevent the display of warnings that CONNECT generates.

Lines 52 - 60

After CONNECT successfully opens the database, it stores information about the database server in the **sqlca.sqlwarn** array. Because the **dispcat_pic** program handles simple-large-object data types that are not supported on older version of the server, line 52 checks the type of database server. If the **sqlwarn3** element of **sqlca.sqlwarn** is set to **w**, the database server is the program continues. Otherwise, the program notifies the user that it cannot continue and exits. The program has established the validity of the database server and now displays the name of the database that is opened (line 59).

```
=====
61.  while(1)
62.    {
63.    printf("\nEnter catalog number: "); /* prompt for cat.
                                   * number */
64.    if(!getans(ans, 6))
65.        continue;
66.    printf("\n");
67.    if(rstol(ans, &cat_num)) /* cat_num string to long */
68.        {
69.        printf("** Cannot convert catalog number '%s' to long
integer\n",
        ans);
70.        EXEC SQL disconnect current;
71.        printf("\nDISPCAT_PIC Sample Program over.\n\n");
72.        exit(1);
73.        }
74.    ret=sprintf(cpfl, "pic_%s.gif", ans);
75.    /*
76.    * Prepare locator structure for select of cat_descr
77.    */
78.    cat_descr.loc_loctype = LOCMEMORY; /* set for 'in memory' */
```

```

79.    cat_descr.loc_bufsize = -1;          /* let db get buffer */
80.    cat_descr.loc_mflags = 0; /* clear memory-deallocation
      * feature */
81.    cat_descr.loc_oflags = 0;          /* clear loc_oflags */
82.    /*
83.     * Prepare locator structure for select of cat_picture
84.     */
85.    cat_picture.loc_loctype = LOCFNAME; /* type = named file */
86.    cat_picture.loc_fname = cpfl;      /* supply file name */
87.    cat_picture.loc_oflags = LOC_WONLY; /* file-open mode = write
      * */
88.    cat_picture.loc_size = -1; /* size = size of file */
=====

```

Lines 61 - 74

The **while(1)** on line 61 begins the main processing loop in **dispcat_pic**. Line 63 prompts the user to enter a catalog number for the **cat_picture** column that the user wants to see. Line 64 calls `getans()` to receive the catalog number that the user inputs. The arguments for `getans()` are the address in which the input is stored, **ans[]**, and the maximum length of the input that is expected, including the null terminator. If the input is unacceptable, `getans()` returns `0` and line 65 returns control to the **while** at the top of the loop in line 61, which causes the prompt for the catalog number to be displayed again. For a more detailed explanation of `getans()`, see [Guide to the `inpfuncs.c` file on page 176](#). Line 67 calls the Informix® ESQL/C library function `rstol()` to convert the character input string to a **long** data type to match the data type of the **catalog_num** column. If `rstol()` returns a nonzero value, the conversion fails and lines 69 - 72 display a message to the user, close the connection, and exit. Line 74 creates the name of the `.gif` file to which the program writes the simple-large-object image. The file name consists of the constant **pic_**, the catalog number that the user entered, and the extension `.gif`. The file is created in the directory from which the program is run.

Lines 75 - 81

These lines define the simple-large-object location for the TEXT **cat_descr** column of the **catalog** table, as follows:

- Line 78 sets **loc_loctype** in the **cat_descr** locator structure to `LOCMEMORY` to tell Informix® ESQL/C to select the data for **cat_descr** into memory.
- Line 79 sets **loc_bufsize** to `-1` so that Informix® ESQL/C allocates a memory buffer to receive the data for **cat_descr**.
- Line 80 sets **loc_mflags** to `0` to disable the memory-deallocation feature (see Line 149) of Informix® ESQL/C.

If the select is successful, Informix® ESQL/C returns the address of the allocated buffer in **loc_buffer**. Line 81 sets the **loc_oflags** file-open mode flags to `0` because the program retrieves the simple-large-object information into memory rather than a file.

Lines 82 - 88

These lines prepare the locator structure to retrieve the BYTE column **cat_picture** of the **catalog** table. Line 85 moves `LOCFNAME` to **loc_loctype** to tell Informix® ESQL/C to locate the data for **cat_descr** in a named file. Line 86 moves the address of the **cpfl** file name into **loc_fname**. Line 87 moves the `LOC_WONLY` value into the **loc_oflags** file-open mode flags to tell Informix® ESQL/C to open the file in write-only mode. Finally, line 88 sets **loc_size** to `-1` to tell Informix® ESQL/C to send the BYTE data in a single transfer rather than break the value into smaller pieces and use multiple transfers.


```

=====
89.    /* Look up catalog number */
90.    EXEC SQL select description, catalog_num, cat_descr, cat_picture
91.        into :description, :cat_num, :cat_descr, :cat_picture
92.        from stock, catalog
93.        where catalog_num = :cat_num and
94.        catalog.stock_num = stock.stock_num and
95.        catalog.manu_code = stock.manu_code;
96.    if((ret = exp_chk2("SELECT", WARNNOTIFY)) == 100) /* if not
        * found */
97.        {
98.        printf("** Catalog number %ld not found in ", cat_num);
99.        printf("catalog table.\n");
100.        printf("\t OR item not found in stock table.\n");
101.        if(!more_to_do())
102.            break;
103.        continue;
104.        }
105.    if (ret < 0)
106.        {
107.        EXEC SQL disconnect current;
108.        printf("\nDISPCAT_PIC Sample Program over.\n\n");
109.        exit(1);
110.        }
111.    if(cat_picture.loc_indicator == -1)
112.        printf("\tNo picture available for catalog number %ld\n\n",
113.            cat_num);
114.    else
115.        {
116.        printf("Stock Item for %ld: %s\n", cat_num, description);
117.        printf("\nThe cat_picture column has been written to the
file:
118.            %s\n",    cpfl);
119.        printf("Use an image display tool or a Web browser ");
120.        printf("to open %s for viewing.\n\n", cpfl);
121.        }
122.    prdesc();    /* display catalog.cat_descr */
=====

```

Lines 89 - 95

These lines define a SELECT statement to retrieve the **catalog_num**, **cat_descr**, and **cat_picture** columns from the **catalog** table and the **description** column from the **stock** table for the catalog number that the user entered. The INTO clause of the SELECT statement identifies the host variables that contain the selected values. The two **ifx_loc_t** host variables, **cat_descr** and **cat_picture**, are listed in this clause for the TEXT and BYTE values.

Lines 96 - 104

The `exp_chk2()` function checks whether the SELECT statement was able to find the **stock_num** and **manu_code** for the selected row in the **catalog** table and in the **stock** table. The **catalog** table does not contain a row that does not have a corresponding row in the **stock** table. Lines 98 - 103 handle a NOT FOUND condition. If the `exp_chk2()` function returns 100, the row was not found; lines 98 - 100 display a message to that effect. The `more_to_do()` function (line 101) asks whether the user wants to continue. If the user answers **n** for no, a **break** terminates the main processing loop and control transfers to line 131 to close the database before the program terminates.

Lines 105 - 110

If a runtime error occurs during the select, the program closes the current connection, notifies the user, and exits with a status of 1.

Lines 111 - 113

If `cat_picture.loc_indicator` contains -1 (line 111), the `cat_picture` column contains a null and the program informs the user (line 112). Execution then continues to line 113 to display the other returned column values.

Lines 114 - 122

These lines display the other columns that the SELECT statement returned. Line 116 displays the catalog number that is being processed and the **description** column from the **stock** table. Line 122 calls `prdesc()` to display the `cat_descr` column. For a detailed description of `prdesc()`, see [Guide to the `prdesc.c` file on page 175](#).

```

=====
123.  if(!more_to_do()) /* More to do? */
124.      break;        /* no, terminate loop */
125.      /* If user chooses to display more catalog rows, enable the
126.       * memory-deallocation feature so that ESQL/C deallocates old
127.       * cat_desc buffer before it allocates a new one.
128.       */
129.      cat_descr.loc_mflags = 0; /* clear memory-deallocation feature
                               */
130.  }
131.  EXEC SQL disconnect current;
132.  printf("\nDISPCAT_PIC Sample Program over.\n\n");
133.  } /* end main */
134.  /* prdesc() prints cat_desc for a row in the catalog table */
135.  #include "prdesc.c"
=====

```

Lines 123 - 130

The `more_to_do()` function then asks whether the user wants to enter more catalog numbers. If not, `more_to_do()` returns 0 and the program performs a **break** to terminate the main processing loop, close the database, and terminate the program.

The closing brace on line 130 terminates the main processing loop, which began with the **while(1)** on line 61. If the user wants to enter another catalog number, control returns to line 61.

Line 131 - 133

When a **break** statement (line 124) terminates the main processing loop that the **while(1)** on line 61 began, control transfers to line 131, which closes the database and the connection to the default database server. The closing brace on line 133 terminates the `main()` function on line 23 and terminates the program.

Lines 134 and 135

Several of the Informix® ESQL/C simple-large-object demonstration programs call the `prdesc()` function. To avoid having the function in each program, the function is put in its own source file. Each program that calls `prdesc()` includes the `prdesc.c`

source file. Since `prdesc()` does not contain any Informix® ESQL/C statements, the program can include it with the C **#include** preprocessor statement (instead of the Informix® ESQL/C **include** directive). For a description of this function, see [Guide to the `prdesc.c` file on page 175](#).

```

=====
136. /*
137. * The inpfuncs.c file contains the following functions used in this
138. * program:
139. *   more_to_do() - asks the user to enter 'y' or 'n' to indicate
140. *                 whether to run the main program loop again.
141. *
142. *   getans(ans, len) - accepts user input, up to 'len' number of
143. *                   characters and puts it in 'ans'
144. */
145. #include "inpfuncs.c"
146. /*
147. * The exp_chk.ec file contains the exception handling functions to
148. * check the SQLSTATE status variable to see if an error has
149. * occurred
150. * following an SQL statement. If a warning or an error has
151. * occurred, exp_chk2() executes the GET DIAGNOSTICS statement and
152. * displays the detail for each exception that is returned.
153. */
153. EXEC SQL include exp_chk.ec;
=====

```

Lines 136 and 145

Several of the Informix® ESQL/C demonstration programs also call the `more_to_do()` and `getans()` functions. These functions are also broken out into a separate C source file and included in the appropriate demonstration program. Neither of these functions contain Informix® ESQL/C, so the program can use the C **#include** preprocessor statement to include the files. For a description of these functions, see [Guide to the `inpfuncs.c` file on page 176](#).

Line 146 - 153

The `exp_chk2()` function examines the `SQLSTATE` status variable to determine the outcome of an SQL statement. Because many demonstration programs use exception checking, the `exp_chk2()` function and its supporting functions are broken out into a separate `exp_chk.ec` source file. The **dispcat_pic** program must use the Informix® ESQL/C **include** directive to include this file because the exception-handling functions use Informix® ESQL/C statements. For a description of the `exp_chk.ec` source file, see [Guide to the `exp_chk.ec` file on page 309](#).



Tip: In a production environment, functions such as `prdesc()`, `more_to_do()`, `getans()`, and `exp_chk2()` would be put into C libraries and included on the command line of the Informix® ESQL/C program at compile time.

Guide to the `prdesc.c` file

The `prdesc.c` file contains the `prdesc()` function. This function sets the pointer **p** to the address that is provided in the **loc_buffer** field of the locator structure to access the simple large object. The function then reads the text from the buffer 80

bytes at a time up to the size specified in **loc_size**. This function is used in several of the simple-large-object demonstration programs so it is in a separate file and included in the appropriate source files.

```

=====
1. /* prdesc() prints cat_desc for a row in the catalog table */
2. prdesc()
3. {
4.     int4 size;
5.     char shdesc[81], *p;
6.     size = cat_descr.loc_size; /* get size of data */
7.     printf("Description for %ld:\n", cat_num);
8.     p = cat_descr.loc_buffer; /* set p to buffer addr */
9.     /* print buffer 80 characters at a time */
10.    while(size >= 80)
11.    {
12.        ldchar(p, 80, shdesc); /* mv from buffer to shdesc */
13.        printf("\n%80s", shdesc); /* display it */
14.        size -= 80; /* decrement length */
15.        p += 80; /* bump p by 80 */
16.    }
17.    strncpy(shdesc, p, size);
18.    shdesc[size] = '\0';
19.    printf("%-s\n", shdesc); /* display last segment */
20. }
=====

```

Lines 1 - 20

Lines 2 - 20 make up the main() function, which displays the **cat_descr** column of the **catalog** table. Line 4 defines **size**, a long integer that main() initializes with the value in **cat_descr.loc_size**. Line 5 defines **shdesc[81]**, an array into which main() temporarily moves 80-byte chunks of the **cat_descr** text for output. Line 5 also defines ***p**, a pointer that marks the current position in the buffer as it is being displayed.

In **loc_size**, the database server returns the size of the buffer that it allocates for a simple large object. Line 6 moves **cat_descr.loc_size** to **size**. Line 7 displays the string "Description for:" as a header for the **cat_descr** text. Line 8 sets the **p** pointer to the buffer address that the database server returned in **cat_descr.loc_size**.

Line 10 begins the loop that displays the **cat_descr** text to the user. The while() repeats the loop until **size** is less than 80. Line 11 begins the body of the loop. The Informix® ESQL/C ldchar() library function copies 80 bytes from the current position in the buffer, which **p** addresses, to **shdesc[]** and removes any trailing blanks. Line 13 prints the contents of **shdesc[]**. Line 14 subtracts 80 from **size** to account for the portion of the buffer that was printed. Line 15, the last in the loop, adds 80 to **p** to move it past the portion of the buffer that was displayed.

The process of displaying **cat_descr.loc_size** 80 bytes at a time continues until fewer than 80 characters are left to be displayed (**size < 80**). Line 17 copies the remainder of the buffer into **shdesc[]** for the length of **size**. Line 18 appends a null to **shdesc[size]** to mark the end of the array and line 19 displays **shdesc[]**.

Guide to the inpfuncs.c file

The `inpfuncs.c` file contains the `getans()` and `more_to_do()` functions.

Because these functions are used in several IBM® Informix® ESQL/C demonstration programs, they are in a separate file and included in the appropriate demonstration source files.

```

=====
1. /* The inpfuns.c file contains functions useful in character-based
2.    input for a C program.
3.   */
4. #include <ctype.h>
5. #ifndef LCASE
6. #define LCASE(c) (isupper(c) ? tolower(c) : (c))
7. #endif
8. /*
9.    Accepts user input, up to 'len' number of characters and returns
10   it in 'ans'
11.  */
12. #define BUFSIZE 512
13. getans(ans, len)
14. char *ans;
15. mint len;
16. {
17.     char buf[BUFSIZE + 1];
18.     mint c, n = 0;
19.     while((c = getchar()) != ';' && n < BUFSIZE)
20.         buf[n++] = c;
21.     buf[n] = '\0';
22.     if(n > 1 && n >= len)
23.     {
24.         printf("Input exceeds maximum length");
25.         return 0;
26.     }
27.     if(len <= 1)
28.         *ans = buf[0];
29.     else
30.         strncpy(ans, buf, len);
31.     return 1;
32. }
=====

```

Lines 1 - 7

Line 4 includes the UNIX™ `ctype.h` header file. This header file provides the definitions of the `islower()` and `tolower()` macros used in the definition of the `LCASE()` macro (defined on line 6). The program only defines the `LCASE` macro if it has not yet been defined in the program.

Lines 8 - 32

The `BUFSIZE` constant (line 12) defines the size of the character buffer used in the `getans()` function. Lines 13 - 32 constitute the `getans()` function. The `getans()` function uses the `getchar()` standard library function to accept input from the user. Lines 14 and 15 define the arguments for `getans()`, the address of the buffer (**ans**) where it copies the input, and the maximum number of characters (**len**) that the calling function expects. Line 17 defines **buf[]**, an input buffer array. The **int** variable **c** (line 18) receives the character that `getchar()` returned. The second integer defined on line 18, **n**, is used to subscript the **buf[]** input buffer.

Line 19 calls `getchar()` to receive input from the user until a `\n` newline character is encountered or until the maximum input is received; that is, `n` is not less than `BUFSZ`. Line 20 moves the input character `c` into the current position in `buf[]`. Line 21 places a null terminator at the end of the input, `buf[n]`.

Lines 22 - 26 check whether the number of characters received, `n`, is less than the number of characters expected, `len`. If not, line 24 displays a message to the user and line 25 returns `0` to the calling function to indicate that an error occurred. Line 27 checks whether one or more characters were entered. If the expected number of characters, `len`, is less than or equal to `1`, line 28 moves only a single character to the address that the `ans` calling function gives. If only one character is expected, `getans()` does not append a null terminator to the input. If the length of the input is greater than `1`, line 30 copies the input of the user to the address that the calling function (`ans`) supplies. Line 31 returns `1` to the calling function to indicate successful completion.

```

=====
33. /*
34.  * Ask user if there is more to do
35.  */
36. more_to_do()
37. {
38.     char ans;
39.     do
40.     {
41.         printf("\n*** More? (y/n) ");
42.         getans(&ans, 1);
43.     } while((ans = LCASE(ans)) != 'y' && ans != 'n');
44.     return (ans == 'n') ? 0 : 1;
45. }
=====

```

Lines 33 - 45

The `more_to_do()` function displays `"More? (y/n)..."` to ask whether the user wants to continue program execution. The `more_to_do()` function does not have any input arguments. Line 38 defines a one-character field, `ans`, to receive the response from the user. The condition expressed on line 43 causes the question to be displayed again until the user answers `y` (yes) or `n` (no). The `LCASE` macro converts the answer of the user to lowercase letters for the comparison. Line 42 calls `getans()` to accept the input from the user. After the user answers yes or no, control passes to line 44, which returns `1` for yes and `0` for no to the calling function.

Smart large objects

A smart large object is a data type that stores large, non-relational data objects such as images, sound clips, documents, graphics, maps and other large objects, and allows you to perform read, write, and seek operations on those objects.

Smart large objects consist of the CLOB (character large object) and BLOB (binary large object) data types. The CLOB data type stores large objects of text data. The BLOB data type stores large objects of binary data in an undifferentiated byte stream. A smart large object is stored in a particular type of database space called an sbspace. For information about creating and administering sbspaces, see your *HCL® Informix® Administrator's Guide*.

The end of this section presents an example program called **create_clob**. The **create_clob** sample program demonstrates how to create a new smart large object from the Informix® ESQL/C program, insert data into a CLOB column of the **stores7** database, and then select the smart-large-object data back from this column.

For more information about the CLOB and BLOB data types, as well as other SQL data types, see the *HCL® Informix® Guide to SQL: Reference*.

The information in these topics apply only if you are using HCL Informix® as your database server.

These topics describe the following information about programming with smart large objects:

- Data structures for smart large objects
- Creating a smart large object
- Accessing a smart large object
- Obtaining the status of a smart large object
- Altering a smart-large-object column
- Reading and writing smart large objects on an optical disc
- The Informix® ESQL/C API for smart large objects

Data structures for smart large objects

Informix® ESQL/C supports the SQL data types CLOB and BLOB with the **ifx_lo_t** data type. Because of the potentially huge size of smart-large-object data, the Informix® ESQL/C program does not store the data directly in a host variable. Instead, the client application accesses the data as a file-like structure. To use smart-large-object variables in the Informix® ESQL/C program, take the following actions:

- Declare a host variable with the **ifx_lo_t** data type.

For more information, see [Declare a host variable on page 180](#).

- Access the smart large object with a combination of the following three data structures:
 - The LO-specification structure, **ifx_lo_create_spec_t**

For more information, see [The LO-specification structure on page 180](#) and [Obtain storage characteristics on page 184](#).

- The LO-pointer structure, **ifx_lo_t**

For more information, see [Deallocate the LO-specification structure on page 187](#).

- An integer LO file descriptor

For more information, see [Open a smart large object on page 192](#).



Important: The structures that ESQL/C uses to access smart large objects begin with the LO prefix. This prefix is an acronym for large object. Currently, the database server uses **large object** to refer to both smart large objects and



simple large objects. However, use of this prefix in the ESQL/C structures that access smart large objects is retained for legacy purposes.

Declare a host variable

Declare IBM® Informix® ESQL/C host variables for database columns of type CLOB or BLOB as a **fixed binary** host variable with the **ifx_lo_t** structure (called an **ifx_lo_t** data type) as follows:

```
EXEC SQL include locator;
:

EXEC SQL BEGIN DECLARE SECTION;
    fixed binary 'clob' ifx_lo_t clob_loptr;
    fixed binary 'blob' ifx_lo_t blob_loptr;
EXEC SQL END DECLARE SECTION;
:

EXEC SQL select blobcol into :blob_loptr from tab1;
```



Tip: For more information about the **fixed binary** Informix® ESQL/C data type, see [Access a fixed-length opaque type on page 264](#).

To access smart large objects, you must include the `locator.h` header file in your Informix® ESQL/C program. This header file contains definitions of data structures and constants that your program needs to work with smart large objects.

The LO-specification structure

Before you create a new smart large object, you must allocate an LO-specification structure with the `ifx_lo_def_create_spec()` function.

The `ifx_lo_def_create_spec()` function performs the following tasks:

1. It allocates a new LO-specification structure, whose pointer you provide as an argument.
2. It initializes all fields of the LO-specification structure: disk-storage information and create-time flags to the appropriate null values.

The `ifx_lo_create_spec_t` structure

The LO-specification structure, `ifx_lo_create_spec_t`, stores the storage characteristics for a smart large object in the IBM® Informix® ESQL/C program.

The `locator.h` header file defines the LO-specification structure, so you must include the `locator.h` file in your Informix® ESQL/C programs that access this structure.



Important: The LO-specification structure, `ifx_lo_create_spec_t`, is an opaque structure to Informix® ESQL/C programs. Do not access its internal structure directly. The internal structure of `ifx_lo_create_spec_t` might change



in future releases. Therefore, to create portable code, always use the Informix® ESQL/C access functions for this structure to obtain and store values in the LO-specification structure.

For a list of these access functions, see [Table 46: Disk-storage information in the LO-specification structure on page 181](#) and [Table 47: Create-time flags in the LO-specification structure on page 182](#).

The LO-specification structure stores the following storage characteristics for a smart large object:

- Disk-storage information
- Create-time flags

Disk-storage information

The LO-specification structure stores disk-storage information, which helps the database server determine how to store the smart large object most efficiently on disk.

The following table shows the disk-storage information along with the corresponding IBM® Informix® ESQL/C access functions.

Table 46. Disk-storage information in the LO-specification structure

Disk-storage information	Description	ESQL/C accessor functions
Estimated number of bytes	An estimate of the final size, in bytes, of the smart large object. The database server uses this value to determine the extents in which to store the smart large object. This value provides optimization information. If the value is grossly incorrect, it does not cause incorrect behavior. However, it does mean that the database server might not necessarily choose optimal extent sizes for the smart large object.	ifx_lo_specget_estbytes() ifx_lo_specset_estbytes()
Maximum number of bytes	The maximum size, in bytes, for the smart large object. The database server does not allow the smart large object to grow beyond this size.	ifx_lo_specget_maxbytes() ifx_lo_specset_maxbytes()
Allocation extent size	The allocation extent size is specified in kilobytes. Optimally, the allocation extent is the single extent in a chunk that holds all the data for the smart large object. The database server performs storage allocations for smart large objects in increments of the allocation extent size. It tries to allocate an allocation extent as a single extent in a chunk. However, if no single	ifx_lo_sepcget_extsz(), ifx_lo_specset_extsz()

Table 46. Disk-storage information in the LO-specification structure (continued)

Disk-storage information	Description	ESQL/C accessor functions
	extent is large enough, the database server must use multiple extents as necessary to satisfy the request.	
Name of the sbspace	The name of the sbspace that contains the smart large object. The sbspace name can be at most 18 characters long. This name must be null terminated.	ifx_lo_specget_sbspace() ifx_lo_specset_sbspace()

For most applications, it is recommended that you use the values for the disk-storage information that the database server determines.

Create-time flags

The LO-specification structure stores create-time flags, which tell the database server what options to assign to the smart large object.

The following table shows the create-time flags along with the corresponding Informix® ESQL/C access functions.

Table 47. Create-time flags in the LO-specification structure

Type of indicator	Create-time flag	Description
Logging	LO_LOG	Tells the database server to log changes to the smart large object in the system log file. Consider carefully whether to use the LO_LOG flag value. The database server incurs considerable overhead to log smart large objects. You must also ensure that the system log file is large enough to hold the value of the smart large object. For more information, see your <i>HCL® Informix® Administrator's Guide</i> .
	LO_NOLOG	Tells the database server to turn off logging for all operations that involve the associated smart large object.
Last access-time	LO_KEEP_LASTACCESS_TIME	Tells the database server to save the last access time for the smart large object. This access time is the time of the last read or write operation. Consider carefully whether to use the LO_KEEP_LASTACCESS_TIME flag value. The database

Table 47. Create-time flags in the LO-specification structure (continued)

Type of indicator	Create-time flag	Description
		server incurs considerable overhead to maintain last access times for smart large objects.
	LO_NOKEEP_LASTACCESS_TIME	Tells the database server not to maintain the last access time for the smart large object.

The `locator.h` header file defines the `LO_LOG`, `LO_NOLOG`, `LO_KEEP_LASTACCESS_TIME`, and `LO_NOKEEP_LASTACCESS_TIME` create-time constants. The two groups of create-time flags, logging indicators and the last access-time indicators, are stored in the LO-specification structure as a single flag value. To set a flag from each group, use the C-language OR operator to mask the two flag values together. However, masking mutually exclusive flags results in an error.

The `ifx_lo_specset_flags()` function sets the create-time flags to a new value. The `ifx_lo_specget_flags()` function retrieves the current value of the create-time flag.

If you do not specify a value for one of the flag groups, the database server uses the inheritance hierarchy to determine this information. For more information about the inheritance hierarchy, see [Obtain storage characteristics on page 184](#).

ESQL/C functions that use the LO-specification structure

The following table shows the IBM® Informix® ESQL/C library functions that access the LO-specification structure.

ESQL/C library function	Purpose	See
<code>ifx_lo_col_info()</code>	Updates the LO-specification structure with the column-level storage characteristics	The <code>ifx_lo_col_info()</code> function on page 680
<code>ifx_lo_create()</code>	Reads an LO-specification structure to obtain storage characteristics for a new smart large object that it creates	The <code>ifx_lo_create()</code> function on page 684
<code>ifx_lo_def_create_spec()</code>	Allocates and initializes an LO-specification structure	The <code>ifx_lo_def_create_spec()</code> function on page 685
<code>ifx_lo_spec_free()</code>	Frees the resources of the LO-specification structure	The <code>ifx_lo_spec_free()</code> function on page 695
<code>ifx_lo_specget_estbytes()</code>	Gets the estimated number of bytes from the LO-specification structure	The <code>ifx_lo_specget_estbytes()</code> function on page 696
<code>ifx_lo_specget_extsz()</code>	Gets the allocation extent size from the LO-specification structure	The <code>ifx_lo_specget_extsz()</code> function on page 697


ESQL/C library function	Purpose	See
<code>ifx_lo_specget_flags()</code>	Gets the create-time flags from the LO-specification structure	The <code>ifx_lo_specget_flags()</code> function on page 698
<code>ifx_lo_specget_maxbytes()</code>	Gets the maximum number of bytes from the LO-specification structure	The <code>ifx_lo_specget_maxbytes()</code> function on page 699
<code>ifx_lo_specget_sbspace()</code>	Gets the name of the sbspace from the LO-specification structure	The <code>ifx_lo_specget_sbspace()</code> function on page 699
<code>ifx_lo_specset_estbytes()</code>	Sets the estimated number of bytes from the LO-specification structure	The <code>ifx_lo_specset_estbytes()</code> function on page 701
<code>ifx_lo_specset_extsz()</code>	Sets the allocation extent size in the LO-specification structure	The <code>ifx_lo_specset_extsz()</code> function on page 702
<code>ifx_lo_specset_flags()</code>	Sets the create-time flags in the LO-specification structure	The <code>ifx_lo_specset_flags()</code> function on page 703
<code>ifx_lo_specset_maxbytes()</code>	Sets the maximum number of bytes in the LO-specification structure	The <code>ifx_lo_specset_maxbytes()</code> function on page 703
<code>ifx_lo_specset_sbspace()</code>	Sets the name of the sbspace in the LO-specification structure	The <code>ifx_lo_specset_sbspace()</code> function on page 704
<code>ifx_lo_stat_cspec()</code>	Returns the storage characteristics into the LO-specification structure for a specified smart large object	The <code>ifx_lo_stat_cspec()</code> function on page 706

Obtain storage characteristics

After you have allocated an LO-specification structure with the `ifx_lo_def_create_spec()` function, you must ensure that this structure contains the appropriate storage characteristics when you create a smart large object.

HCL Informix® uses an inheritance hierarchy to obtain storage characteristics. The following figure shows the inheritance hierarchy for smart-large-object storage characteristics.

Figure 41. Inheritance hierarchy for storage characteristics

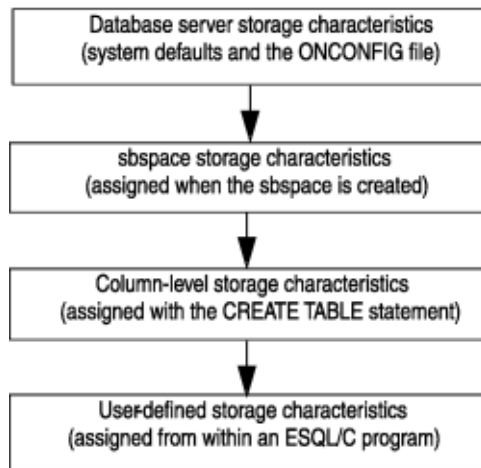

The system-specified storage characteristics

HCL Informix® uses one of the following sets of storage characteristics as the system-specified storage characteristics:

- If the sbspace in which the smart large object is stored has specified a value for a particular storage characteristic, the database server uses the sbspace value as the system-specified storage characteristic.

The database administrator (DBA) defines storage characteristics for an sbspace with the `onspaces` utility.

- If the sbspace in which the smart large object is stored has not specified a value for a particular storage characteristic, the database server uses the system default as the system-specified storage characteristic.

The database server defines the system defaults for storage characteristics internally. However, you can specify a default sbspace name with the `SBSPACENAME` configuration parameter of the `onconfig` file. Also, an application call to `ifx_lo_col_info()` or `ifx_lo_specset_sbspace()` can supply the target sbspace in the LO-specification structure.

! **Important:** An error occurs if you do not specify the `sbspacename` configuration parameter and the LO-specification structure does not contain the name of the target sbspace.

It is recommended that you use the values for the system-specified disk-storage information. Most applications do not need to change these system-specified storage characteristics. For more information about database server and sbspace storage characteristics, see the description of the `onspaces` utility in your *HCL® Informix® Administrator's Guide*.

To use the system-specified storage characteristics for a new smart large object, follow these steps:

1. Use the `ifx_lo_def_create_spec()` function to allocate an LO-specification structure and to initialize this structure to null values.
2. Pass this LO-specification structure to the **`ifx_lo_create_function`** function to create the instance of the smart large object.

The `ifx_lo_create()` function creates a smart-large-object instance with the storage characteristics in the LO-specification structure that it receives as an argument. Because the previous call to `ifx_lo_def_create_spec()` stored null values in this structure, the database server assigns the system-specified characteristics to the new instance of the smart large object.

The column-level storage characteristics

The database administrator (DBA) assigns column-level storage characteristics with the CREATE TABLE statement. The PUT clause of CREATE TABLE specifies storage characteristics for a particular smart-large-object (CLOB or BLOB) column. (For more information, see the description of the CREATE TABLE statement in the *HCL® Informix® Guide to SQL: Syntax*.) The **syscolattribs** system catalog table stores column-level storage characteristics.

The `ifx_lo_col_info()` function obtains column-level storage characteristics for a smart-large-object column. To use the column-level storage characteristics for a new smart-large-object instance, follow these steps:

1. Use the `ifx_lo_def_create_spec()` function to allocate an LO-specification structure and initialize this structure to null values.
2. Pass this LO-specification structure to the `ifx_lo_col_info()` function and specify the desired column and table name as arguments.

The function stores the column-level storage characteristics into the specified LO-specification structure.

3. Pass this same LO-specification structure to the `ifx_lo_create()` function to create the instance of the smart large object.

When the `ifx_lo_create()` function receives the LO-specification structure as an argument, this structure contains the column-level storage characteristics that the previous call to `ifx_lo_col_info()` stored. Therefore, the database server assigns these column-level characteristics to the new instance of the smart large object.

When you use the column-level storage characteristics, you do not usually need to provide the name of the sbspace for the smart large object. The sbspace name is specified in the PUT clause of the CREATE TABLE statement or by the SBSPACENAME parameter in the ONCONFIG file.

The user-defined storage characteristics

The IBM® Informix® ESQL/C application program can define a unique set of storage characteristics for a new smart large object, as follows:

- For smart large objects that are to be stored in a column, you can override some storage characteristics for the column when it creates an instance of a smart large object.

If the application does not override some or all of these characteristics, the smart large object uses the column-level storage characteristics.

- You can specify a wider set of characteristics for each smart large object since the smart large object is not constrained by table column properties.

If the application programmer does not override some or all of these characteristics, the smart large object inherits the system-specified storage characteristics.

To specify user-defined storage characteristics, use the appropriate Informix® ESQL/C accessor functions for the LO-specification structure. For more information about these accessor functions, see [The LO-specification structure on page 180](#).

Deallocate the LO-specification structure

After you are finished with an LO-specification structure, deallocate the resources assigned to it with the `ifx_lo_spec_free()` function. When the resources are freed, they can be reallocated to other structures that your program needs.

The LO-pointer structure

To open a smart large object for read and write operations, the IBM® Informix® ESQL/C program must have an *LO-pointer structure* for the smart large object. This structure contains the disk address and a unique hexadecimal identifier for a smart large object.

To create an LO-pointer structure for a new smart large object, use the `ifx_lo_copy_to_file()` function. The `ifx_lo_copy_to_file()` function performs the following tasks:

1. It initializes an LO-pointer structure, whose pointer you provide as an argument, for the new smart large object.

This new smart large object has the storage characteristics that the LO-specification structure you provide specifies.

2. It opens the new smart large object in the specified access mode and returns an LO file descriptor that is needed for subsequent operations on the smart large object.

You must call `ifx_lo_def_create_spec()` before you call the `ifx_lo_create()` function to create a new smart large object.


Store a smart large object

The IBM® Informix® ESQL/C program accesses a smart large object through an LO-pointer structure. The Informix® ESQL/C library functions in the table from [ESQL/C functions that use the LO-pointer structure on page 189](#) accept an LO-pointer structure as an argument. Through the LO-pointer structure, these functions allow you to create and manipulate a smart large object without binding it to a database row.

An INSERT or UPDATE statement does not perform the actual input of the smart-large-object data. It does, however, provide a means for the application program to identify which smart-large-object data to associate with the column. A CLOB or BLOB column in a database table stores the LO-pointer structure for a smart large object. Therefore, when you store a CLOB or BLOB column, you provide an LO-pointer structure for the column in an `ifx_lo_t` host variable to the INSERT or UPDATE statement. For this reason, you declare host variables for CLOB and BLOB values as LO-pointer structures.

The following figure shows how the Informix® ESQL/C client application transfers the data of a smart large object to the database server.

Figure 42. Transferring smart- large-object data from client application to database server

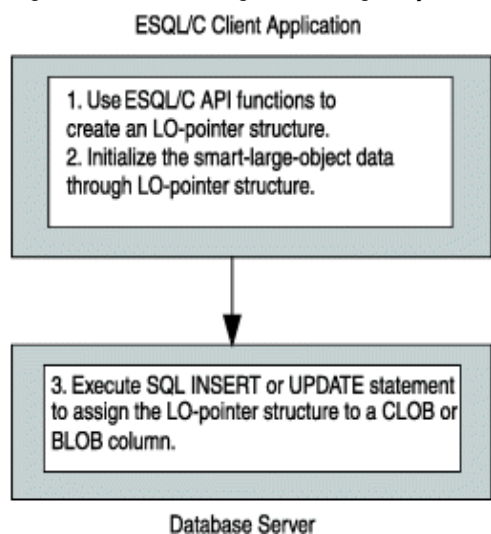

The smart large object that an LO-pointer structure identifies exists as long as its LO-pointer structure exists. When you store an LO-pointer structure in the database, the database server can ensure that the smart large objects are deallocated when appropriate.

When you retrieve a row and then update a smart large object which that row contains, the database server exclusively locks the row for the time that it updates the smart large object. Moreover, long updates for smart large objects (whether logging is enabled and whether they are associated with a table row) create the potential for a long transaction condition if the smart large object takes a long time to update or create.

For an example of code that stores a new smart large object into a database column, see [The create_clob.ec program on page 825](#). For information about how to select a smart large object from the database, see [Select a smart large object on page 191](#).

The ifx_lo_t structure

The LO-pointer structure, `ifx_lo_t`, serves as a reference to a smart large object. It provides security-related information and holds information about the actual disk location of the smart large object.

The `locator.h` header file defines the LO-pointer structure so you must include the `locator.h` file in your IBM® Informix® ESQL/C programs that access this structure.

! **Important:** The LO-pointer structure, `ifx_lo_t`, is an opaque structure to Informix® ESQL/C programs. That is, you do not access its internal structure directly. The internal structure of `ifx_lo_t` might change. Therefore, to create portable code, use the correct Informix® ESQL/C library function to use this structure.

The LO-pointer structure, not the CLOB or BLOB data itself, is stored in a CLOB or BLOB column in the database. Therefore, SQL statements such as INSERT and SELECT accept an LO-pointer structure as the column value for a smart-large-object column. You declare the Informix® ESQL/C host variable to hold the value of a smart large object as an `ifx_lo_t` structure.

ESQL/C functions that use the LO-pointer structure

The following table shows the IBM® Informix® ESQL/C library functions that access the LO-pointer structure and how they access it.

ESQL/C library function	Purpose	See
<code>ifx_lo_copy_to_file()</code>	Copies the smart large object that the LO-pointer structure identifies to an operating-system file.	The <code>ifx_lo_copy_to_file()</code> function on page 681
<code>ifx_lo_create()</code>	Initializes an LO-pointer structure for a new smart large object that it creates and returns an LO file descriptor for this smart large object.	The <code>ifx_lo_create()</code> function on page 684
<code>ifx_lo_filename()</code>	Returns the name of the file where the <code>ifx_lo_copy_to_file()</code> function would store the smart large object that the LO-pointer structure identifies.	The <code>ifx_lo_filename()</code> function on page 686
<code>ifx_lo_from_buffer()</code>	Copies a specified number of bytes from a user-defined buffer into the smart large object that the LO-pointer structure references.	The <code>ifx_lo_from_buffer()</code> function on page 687
<code>ifx_lo_release()</code>	Tells the database server to release the resources associated with the temporary smart large object that the LO-pointer structure references.	The <code>ifx_lo_from_buffer()</code> function on page 687
<code>ifx_lo_to_buffer()</code>	Copies a specified number of bytes from the smart large object referenced by the LO-pointer structure into a user-defined buffer.	The <code>ifx_lo_to_buffer()</code> function on page 710

The LO file descriptor

The LO file descriptor is an integer value that identifies an open smart large object.

An LO file descriptor is similar to the file descriptors for operating-system files. It serves as an I/O handle to the data of the smart large object in the server. The LO file descriptors start with a seek position of 0. Use the LO file descriptor in one of the IBM® Informix® ESQL/C library functions that accepts LO file descriptors.

ESQL/C library functions that use an LO file descriptor

The following table shows the IBM® Informix® ESQL/C library functions that access the LO file descriptor.

ESQL/C library function	Purpose	See
<code>ifx_lo_close()</code>	Closes the smart large object that the LO file descriptor identifies and deallocates the LO file descriptor	The <code>ifx_lo_close()</code> function on page 680
<code>ifx_lo_copy_to_lo()</code>	Copies an operating-system file to an open smart large object that the LO file descriptor identifies	The <code>ifx_lo_copy_to_lo()</code> function on page 683
<code>ifx_lo_create()</code>	Creates and opens a new smart large object and returns an LO file descriptor	The <code>ifx_lo_create()</code> function on page 684
<code>ifx_lo_open()</code>	Opens a smart large object and returns an LO file descriptor	The <code>ifx_lo_open()</code> function on page 689
<code>ifx_lo_read()</code>	Reads data from the open smart large object that the LO file descriptor identifies	The <code>ifx_lo_read()</code> function on page 691
<code>ifx_lo_readwithseek()</code>	Seeks a specified file position in the open smart large object that the LO file descriptor identifies and then reads data from this position	The <code>ifx_lo_readwithseek()</code> function on page 692
<code>ifx_lo_seek()</code>	Moves the file position in the open smart large object that the LO file descriptor identifies	The <code>ifx_lo_seek()</code> function on page 694
<code>ifx_lo_stat()</code>	Obtains status information for the open smart large object that the LO file descriptor identifies	The <code>ifx_lo_stat()</code> function on page 705
<code>ifx_lo_tell()</code>	Determines the current file position in the open smart large object that the LO file descriptor identifies	The <code>ifx_lo_tell()</code> function on page 710
<code>ifx_lo_truncate()</code>	Truncates at a specified offset the open smart large object that the LO file descriptor identifies	The <code>ifx_lo_truncate()</code> function on page 711
<code>ifx_lo_write()</code>	Writes data to the open smart large object that the LO file descriptor identifies	The <code>ifx_lo_write()</code> function on page 713

ESQL/C library function	Purpose	See
<code>ifx_lo_writewithseek()</code>	Seeks a specified file position in the open smart large object that the LO file descriptor identifies and then writes data to this position	The <code>ifx_lo_writewithseek()</code> function on page 714

Creating a smart large object

About this task

Perform the following steps to create a smart large object:

1. Allocate an LO-specification structure with the `ifx_lo_def_create_spec()` function.
2. Ensure that the LO-specification structure contains the desired storage characteristics for the new smart large object.
3. Create an LO-pointer structure for the new smart large object and open the smart large object with the `ifx_lo_create()` function.
4. Write the data for the new smart large object to the open smart large object with the `ifx_lo_write()` or `ifx_lo_writewithseek()` function.
5. Save the new smart large object in a column of the database.
6. Deallocate the LO-specification structure with the `ifx_lo_spec_free()` function.

Accessing a smart large object

About this task

To access a smart large object, take the following steps:

1. Select the smart large object from the database into an **`ifx_lo_t`** host variable with the SELECT statement.
2. Open the smart large object with the `ifx_lo_open()` function.
3. Perform the appropriate read or write operations to update the data of the smart large object.
4. Close the smart large object with the `ifx_lo_close()` function.


Select a smart large object

A SELECT statement does not perform the actual output for the smart-large-object data. It does, however, establish a means for the application program to identify a smart large object so that it can then issue IBM® Informix® ESQL/C library functions to open, read, write, or perform other operations on the smart large object.

A CLOB or BLOB column in a database table contains the LO-pointer structure for a smart large object. Therefore, when you select a CLOB or BLOB column into an **`ifx_lo_t`** host variable, the SELECT statement returns an LO-pointer structure. For this reason, you declare host variables for CLOB and BLOB values as LO-pointer structures.

The following figure shows how the database server transfers the data of a smart large object to the Informix® ESQL/C client application.

Figure 43. Transferring smart- large-object data from database server to client application

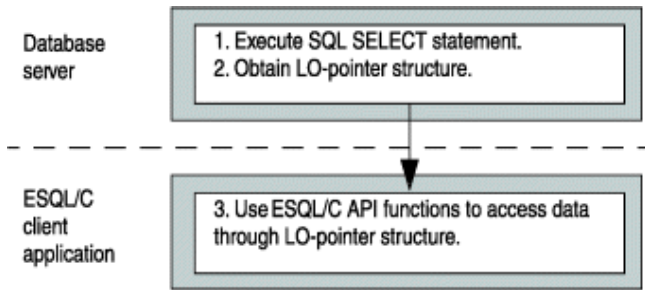

For an example of code that selects a smart large object from a database column, see [The create_clob.ec program on page 825](#). For information about how to store a smart large object in the database, see [Store a smart large object on page 187](#).

Open a smart large object

When you open a smart large object, you obtain an LO file descriptor for the smart large object. Through the LO file descriptor, you can access the data of a smart large object as if it were in an operating-system file.

Access modes

When you open a smart large object, you specify the access mode for the data.

The access mode determines which read and write operations are valid on the open smart large object. You specify an access mode with one of the access-mode constants that the `locator.h` file defines.

The following table shows the access modes and their corresponding defined constants that the `ifx_lo_open()` and `ifx_lo_create()` functions support.

Table 48. Access-mode flags for smart large objects

Access mode	Purpose	Access-mode constant
Read-only mode	Only read operations are valid on the data.	LO_RDONLY
Dirty-read mode	For <code>ifx_open()</code> only, allows you to read uncommitted data pages for the smart large object. You cannot write to a smart large object after you set the mode to <code>LO_DIRTY_READ</code> . When you set this flag, you reset the current transaction isolation mode to dirty read for the smart large object. Do not base updates on data that you obtain from a smart large object in dirty-read mode.	LO_DIRTY_READ
Write-only mode	Only write operations are valid on the data.	LO_WRONLY
Append mode	Intended for use with <code>LO_WRONLY</code> or <code>LO_RDWR</code> . Sets the location pointer to the end of the object immediately before each write. Appends any data	LO_APPEND

Table 48. Access-mode flags for smart large objects (continued)

Access mode	Purpose	Access-mode constant
	you write to the end of the smart large object. If LO_APPEND is used alone, the object is opened for reading only.	
Read/write mode	Both read and write operations are valid on the data.	LO_RDWR
Buffered access	Use standard database server buffer pool.	LO_BUFFER
Lightweight I/O	Use private buffers from the session pool of the database server.	LO_NOBUFFER
Lock all	Specify that locking will occur for an entire smart large object.	LO_LOCKALL
Lock byte range	Specify that locking will occur for a range of bytes, which will be specified through the <code>ifx_lo_lock()</code> function when the lock is placed.	LO_LOCKRANGE

 **Tip:** These access-mode flags for a smart large object are patterned after the UNIX™ System V access modes.

Set dirty read access mode

To set dirty read isolation mode for a smart large object, set it for the transaction with the SET ISOLATION statement, or set the LO_DIRTY_READ access mode when you open the smart large object. Setting the LO_DIRTY_READ access mode when you open the smart large object affects the read mode only for the smart large object and not for the entire transaction. In other words, if your transaction is executing in committed-read mode, you can use the LO_DIRTY_READ access mode to open the smart large object in dirty-read mode, without changing the isolation mode for the transaction.

For more information about dirty read isolation mode, see the SET ISOLATION statement in the *HCL® Informix® Guide to SQL: Syntax*.

The LO_APPEND flag

When you open a smart large object with LO_APPEND only, the smart large object is opened as read-only. Seek operations move the file pointer but write operations to the smart large object fail and the file pointer is not moved from its position just before the write. Read operations occur from where the file pointer is positioned and then the file pointer is moved.

You can mask the LO_APPEND flag with another access mode. In any of these OR combinations, the seek operation remains unaffected. The following table shows the effect on the read and write operations that each of the OR combinations has.

OR operation	Read operations	Write operations
LO_RDONLY LO_APPEND	Occur at the file position and then move the file position to the end of the data that was read	Fail and do not move the file position.

OR operation	Read operations	Write operations
LO_WRONLY LO_APPEND	Fail and do not move the file position	Move the file position to the end of the smart large object and then write the data; file position is at the end of the data after the write.
LO_RDWR LO_APPEND	Occur at the file position and then move the file position to the end of the data that was read	Move the file position to the end of the smart large object and then write the data; file position is at the end of the data after the write.

Lightweight I/O

When the database server accesses smart large objects, it uses buffers from the buffer pool for buffered access. Unbuffered access is called *lightweight I/O*. Lightweight I/O uses private buffers instead of the buffer pool to hold smart large objects. These private buffers are allocated out of the database server session pool.

Lightweight I/O allows you to bypass the overhead of the least-recently-used (LRU) queues that the database server uses to manage the buffer pool. For more information about LRUs, see your .

You can specify lightweight I/O by setting the flags parameter to LO_NOBUFFER when you create a smart large object with the `ifx_lo_create()` function or when you open a particular smart large object with the `ifx_lo_open()` function. To specify buffered access, which is the default, use the LO_BUFFER flag.



Important: Keep in mind the following issues when you use lightweight I/O:

- Close smart large objects with `ifx_lo_close()` when you are finished with them to free memory allocated to the private buffers.
- All opens that use lightweight I/O for a particular smart large object share the same private buffers. Consequently, one operation can cause the pages in the buffer to be flushed while other operations expect the object to be present in the buffer.

The database server imposes the following restrictions on switching from lightweight I/O to buffered I/O:

- You can use the `ifx_lo_alter()` function to switch a smart large object from lightweight I/O (LO_NOBUFFER) to buffered I/O (LO_BUFFER) if the smart large object is not open. However, `ifx_lo_alter()` generates an error if you try to change a smart large object that uses buffered I/O to one that uses lightweight I/O.
- Unless you first use `ifx_lo_alter()` to change the access mode to buffered access (LO_BUFFER), you can only open a smart large object that was created with lightweight I/O with the LO_NOBUFFER access-mode flag. If an open specifies LO_BUFFER, the database server ignores the flag.
- You can open a smart large object that was created with buffered access (LO_BUFFER) with the LO_NOBUFFER flag only if you open the object in read-only mode. If you attempt to write to the object, the database server returns an error. To write to the smart large object, you must close it then reopen it with the LO_BUFFER flag and an access flag that allows write operations.

You can use the database server utility `onspaces` to specify lightweight I/O for all smart large objects in an sbspace. For more information about the `onspaces` utility, see your *HCL® Informix® Administrator's Guide*.

Smart-large-object locks

When you open a smart large object the database server locks either the entire smart large object or a range of bytes that you specify to prevent simultaneous access to smart-large-object data. Locks on smart large objects are different from row locks. If you retrieve a smart large object from a row, the database server might hold a row lock as well as a smart-large-object lock. The database server locks smart-large-object data because many columns can contain the same smart-large-object data. You use the access-mode flags, `LO_RDONLY`, `LO_DIRTY_READ`, `LO_APPEND`, `LO_WRONLY`, `LO_RDWR`, and `LO_TRUNC` to specify the lock mode of a smart large object. You pass these flags to the `ifx_lo_open()` and `ifx_lo_create()` functions. When you specify `LO_RDONLY`, the database server places a share lock on the smart large object. When you specify `LO_DIRTY_READ`, the database server does not place a lock on the smart large object. If you specify any other access-mode flag, the database server obtains an update lock, which it promotes to an exclusive lock on first write or other update operation.

Share and update locks (read-only mode, or write mode before an update operation occurs) are held until your program takes one of the following actions:

- Closes the smart large object
- Commits the transaction or rolls it back

Exclusive locks are held until the end of a transaction even if you close the smart large object.



Important: You lose the lock at the end of a transaction, even if the smart large object remains open. When the database server detects that a smart large object has no active lock, it automatically obtains a new lock when the first access occurs to the smart large object. The lock it obtains is based on the original open mode of the smart large object.

Range of a lock

When you place a lock on a smart large object you can lock either the entire smart large object or you can lock a *byte range*. A byte range lock allows you to lock only the range of bytes that you will affect within the smart large object.

Two access-mode flags, `LO_LOCKALL` and `LO_LOCKRANGE`, enable you to designate the default type of lock that will be used for the smart large object. You can set them with `ifx_lo_specset_flags()` and retrieve them with `ifx_specget_flags()`. The `LO_LOCKALL` flag specifies that the entire smart large object will be locked; the `LO_LOCKRANGE` flag specifies that you will use byte-range locks for the smart large object. For more information, see [The `ifx_lo_specget_flags\(\)` function on page 698](#) and [The `ifx_lo_specset_flags\(\)` function on page 703](#).

You can use the `ifx_lo_alter()` function to change the default range from one type to the other. You can also override the default range by setting either the `LO_LOCKALL` or the `LO_LOCKRANGE` flag in the access-mode flags for `ifx_lo_open()`. For more information, see [Open a smart large object on page 192](#) and [The `ifx_lo_open\(\)` function on page 689](#).

The `ifx_lo_lock()` function allows you to lock a range of bytes that you want to access for a smart large object and the `ifx_lo_unlock()` function allows you to unlock the bytes when you are finished. For more information, see [The `ifx_lo_lock\(\)` function on page 688](#) and [The `ifx_lo_unlock\(\)` function on page 712](#).

Duration of an open on a smart large object

After you open a smart large object with the `ifx_lo_create()` function or the `ifx_lo_open()` function, it remains open until one of the following events occurs:

- The `ifx_lo_close()` function closes the smart large object.
- The session ends.

The end of the current transaction does not close a smart large object. It does, however, release any lock on a smart large object. Have your applications close smart large objects as soon as they finish with them. Leaving smart large objects open unnecessarily consumes system memory. Leaving a sufficient number of smart large objects open can eventually produce an out-of-memory condition.

Delete a smart large object

A smart large object is not deleted until the current transaction commits and the smart large object is closed, if the application opened the smart large object.

Modifying a smart large object

About this task

You can modify the data of the smart large object with the following steps:

1. Read and write the data in the open smart large object until the data is ready to save.
2. Store the LO-pointer for the smart large object in the database with the UPDATE or INSERT statement.

Read data from a smart large object

The `ifx_lo_read()` and `ifx_lo_readwithseek()` IBM® Informix® ESQL/C library functions read data from an open smart large object.

They both read a specified number of bytes from the open smart large object into the user-defined character buffer. The `ifx_lo_read()` function begins the read operation at the current file position. You can specify the starting file position of the read with the `ifx_lo_seek()` function, and you can obtain the current file position with the `ifx_lo_tell()` function. The `ifx_lo_readwithseek()` function performs the seek and read operations with a single function call.

The `ifx_lo_read()` and `ifx_lo_readwithseek()` functions require a valid LO file descriptor to identify the smart large object to be read. You obtain an LO file descriptor with the `ifx_lo_open()` or `ifx_lo_create()` function.

Write data to a smart large object

The `ifx_lo_write()` and `ifx_lo_writewithseek()` Informix® ESQL/C library functions write data to an open smart large object. They both write a specified number of bytes from a user-defined character buffer to the open smart large object. The `ifx_lo_write()` function begins the write operation at the current file position. You can specify the starting file position of the write with the `ifx_lo_seek()` function, and you can obtain the current file position with the `ifx_lo_tell()` function. The `ifx_lo_writewithseek()` function performs the seek and write operations with a single function call.

The `ifx_lo_write()` and `ifx_lo_writewithseek()` functions require a valid LO file descriptor to identify the smart large object to write. You obtain an LO file descriptor with the `ifx_lo_open()` or `ifx_lo_create()` function.

Close a smart large object

After you have finished the read and write operations on the smart large object, deallocate the resources assigned to it with the `ifx_lo_close()` function. When the resources are freed, they can be reallocated to other structures that your program needs. In addition, the LO file descriptor can be reallocated to other smart large objects.

Obtaining the status of a smart large object

About this task

To obtain status information for a smart large object, take the following steps:

1. Obtain a valid LO-pointer structure to the smart large object for which you want status.
2. Allocate and fill an LO-status structure with the `ifx_lo_stat()` function
3. Use the appropriate IBM® Informix® ESQL/C accessor function to obtain the status information you need.
4. Deallocate the LO-status structure.

Obtaining a valid LO-pointer structure

About this task

You can obtain status information for any smart large object for which you have a valid LO-pointer structure. You can perform either of the following steps to obtain an LO-pointer structure:

- Select a CLOB or BLOB column from a database table.
- Create a new smart large object.

Allocate and access an LO-status structure

The LO-status structure stores status information for a smart large object. This section describes how to allocate and access an LO-status structure.

Allocate an LO-status structure

The `ifx_lo_stat()` function performs the following tasks:

- It allocates a new LO-status structure, whose pointer you provide as an argument.
- It initializes the LO-status structure with all status information for the smart large object that the LO file descriptor, which you provide, identifies.

Access the LO-status structure

The LO-status structure, `ifx_lo_stat_t`, stores the status information for a smart large object in the IBM® Informix® ESQL/C program. The `locator.h` header file defines the LO-status structure so you must include the `locator.h` file in your Informix® ESQL/C programs that access this structure.

! **Important:** The LO-status structure, `ifx_lo_stat_t`, is opaque to Informix® ESQL/C programs. Do not access its internal structure directly. The internal structure of `ifx_lo_stat_t` might change in future releases. Therefore, to create portable code, always use the Informix® ESQL/C accessor functions for this structure to obtain and store values in the LO-status structure.

The following table shows the status information along with the corresponding Informix® ESQL/C accessor functions.

Table 49. Status information in the LO-status structure

Disk-storage information	Description	ESQL/C accessor functions
Last access time	The time, in seconds, that the smart large object was last accessed. This value is available only if the <code>LO_KEEP_LASTACCESS_TIME</code> flag is set for this smart large object.	<code>ifx_lo_stat_atime()</code>
Storage characteristics	The storage characteristics for the smart large object. These characteristics are stored in an LO-specification structure (see The LO-specification structure on page 180). Use the Informix® ESQL/C accessor functions for an LO-specification structure (see Table 46: Disk-storage information in the LO-specification structure on page 181 and Table 47: Create-time flags in the LO-specification structure on page 182) to obtain this information.	<code>ifx_lo_stat_cspec()</code>
Last change in status	The time, in seconds, of the last status change for the smart large object. A change in status includes updates, changes in ownership, and changes to the number of references.	<code>ifx_lo_stat_ctime()</code>
Last modification time (seconds)	The time, in seconds, that the smart large object was last modified.	<code>ifx_lo_stat_mtime_sec()</code>

Table 49. Status information in the LO-status structure (continued)

Disk-storage information	Description	ESQL/C accessor functions
Reference count	A count of the number of references to the smart large object.	ifx_lo_stat_refcnt()
Size	The size, in bytes, of the smart large object.	ifx_lo_stat_size()

The time values (such as last access time and last change time) might differ slightly from the system time. This difference is due to the algorithm that the database server uses to obtain the time from the operating system.

Deallocate the LO-status structure

After you have finished with an LO-status structure, deallocate the resources assigned to it with the `ifx_lo_stat_free()` function. When the resources are freed, they can be reallocated to other structures that your program needs.

Alter a smart-large-object column

You can use the `PUT` clause of the `ALTER TABLE` statement to change the storage location and the storage characteristics of a CLOB or BLOB column. You can change the `sbspace` where the column is stored and also implement round-robin fragmentation, which causes the smart large objects in the CLOB or BLOB column to be distributed among a series of specified `sbspaces`. For example, the `ALTER TABLE` statement in the following example changes the original storage location of the **advert.picture** column from **s9_sbspc** to the `sbspaces` **s10_sbspc** and **s11_sbspc**. The `ALTER TABLE` statement also changes the characteristics of the column:

```
advert      ROW (picture BLOB, caption VARCHAR(255, 65)),
;

PUT advert IN (s9_sbspc)
  (EXTENT SIZE 100)

ALTER TABLE catalog
  PUT advert IN (s10_sbspc, s11_sbspc)
  (extent size 50, NO KEEP ACCESS TIME);
```

When you change the storage location or storage characteristics of a smart-large-object column, the changes apply only to new instances created for the column. The storage location and storage characteristics of existing smart large objects for the column are not affected.

For a description of the **catalog** table that the preceding example references, see the [Examples for smart-large-object functions on page 823](#).

For more information about the `ALTER TABLE` statement, see the *HCL® Informix® Guide to SQL: Syntax*.

Migrate simple large objects

To migrate simple large objects to smart large objects, cast `TEXT` data to `CLOB` data and `BYTE` data to `BLOB` data. You can use the cast syntax (`bytecol1blobcol1`, for example) to migrate a simple large object to a smart large object. The following

example migrates the BYTE column **cat_picture** from the **catalog** table in the **stores7** database to the BLOB field **picture** in the **advert** row type in the alternate **catalog** table that is described in [Examples for smart-large-object functions on page 823](#):

```
update catalog set advert = ROW ((SELECT cat_picture::blob
  FROM stores7:catalog WHERE catalog_num = 10027), pwd
  advert.caption)
WHERE catalog_num = 10027
```

For a description of the **stores7** table, see *HCL® Informix® Guide to SQL: Reference*.

You can also use the MODIFY clause of the ALTER TABLE statement to change a TEXT or BYTE column to a CLOB or BLOB column. When you use the MODIFY clause of the ALTER TABLE statement, the database server implicitly casts the old data type to the new data type to create the CLOB or BLOB column.

For example, if you want to change the **cat_descr** column from a TEXT column to a BYTE column in the **catalog** table of the **stores7** database, you can use a construction similar to the following statement:

```
ALTER TABLE catalog modify cat_descr CLOB,
  PUT cat_descr in (sbspc);
```

For more information about the ALTER TABLE statement, see the *HCL® Informix® Guide to SQL: Syntax*

For more information about casting, see the *HCL® Informix® Guide to SQL: Syntax* and the *HCL® Informix® Guide to SQL: Tutorial*.

Read and write smart large objects on an optical disc (UNIX™)

Within a table, rows that include smart-large-object data do not include the smart-large-object data in the row itself. Instead, the smart-large-object column contains the LO-pointer structure. The LO-pointer structure can point to an sbpage in an sbospace or to a platter in an optical storage subsystem.

However, you can store smart large objects on optical disc only if this media is mounted as a UNIX™ file system and is write many (WORM). The optical disc must contain the sbospaces for the smart large objects. Your application can use the IBM® Informix® ESQL/C API for smart large objects to access the smart large objects on the mounted optical disc.

The database server does not provide support for a write-once-read-many (WORM) optical-storage subsystem as a location for smart large objects. However, it does support access to simple large objects (BYTE and TEXT) on WORM media.

For details about the optical subsystem, see your *HCL® Informix® Administrator's Guide* and the *Informix® Optical Subsystem Guide*.

The ESQL/C API for smart large objects

The IBM® Informix® ESQL/C API for smart large objects allows an application program to access a smart large object much like an operating-system file.

A smart large object that does not fit into memory does not have to be read into a file and then accessed from a file; it can be accessed one piece at a time. The Informix® ESQL/C application program accesses smart large objects through the Informix® ESQL/C library functions in the following table.

ESQL/C function	Description	See
<code>ifx_lo_alter()</code>	Alters the storage characteristics of an existing smart large object	The <code>ifx_lo_alter()</code> function on page 679
<code>ifx_lo_close()</code>	Closes an open smart large object	The <code>ifx_lo_close()</code> function on page 680
<code>ifx_lo_col_info()</code>	Retrieves column-level storage characteristics in an LO-specification structure	The <code>ifx_lo_col_info()</code> function on page 680
<code>ifx_lo_copy_to_file()</code>	Copies a smart large object into an operating-system file	The <code>ifx_lo_copy_to_file()</code> function on page 681
<code>ifx_lo_copy_to_lo()</code>	Copies an operating-system file into an open smart large object	The <code>ifx_lo_copy_to_lo()</code> function on page 683
<code>ifx_lo_create()</code>	Creates an LO-pointer structure for a smart large object	The <code>ifx_lo_create()</code> function on page 684
<code>ifx_lo_def_create_spec()</code>	Allocates an LO-specification structure and initializes its fields to null values	The <code>ifx_lo_def_create_spec()</code> function on page 685
<code>ifx_lo_filename()</code>	Returns the generated file name, given an LO-pointer structure and a file specification	The <code>ifx_lo_filename()</code> function on page 686
<code>ifx_lo_from_buffer()</code>	Copies a specified number of bytes from a user-defined buffer into a smart large object	The <code>ifx_lo_from_buffer()</code> function on page 687
<code>ifx_lo_open()</code>	Opens an existing smart large object	The <code>ifx_lo_open()</code> function on page 689
<code>ifx_lo_read()</code>	Reads a specified number of bytes from an open smart large object	The <code>ifx_lo_read()</code> function on page 691
<code>ifx_lo_readwithseek()</code>	Seeks to a specified position in an open smart large object and reads a specified number of bytes	The <code>ifx_lo_readwithseek()</code> function on page 692
<code>ifx_lo_release()</code>	Releases resources committed to a temporary smart large object	The <code>ifx_lo_release()</code> function on page 693

ESQL/C function	Description	See
<code>ifx_lo_seek()</code>	Sets the seek position for the next read or write on an open smart large object	The <code>ifx_lo_seek()</code> function on page 694
<code>ifx_lo_spec_free()</code>	Frees the resources allocated to an LO-specification structure	The <code>ifx_lo_spec_free()</code> function on page 695
<code>ifx_lo_specget_estbytes()</code>	Gets the estimated size, in bytes, of the smart large object	The <code>ifx_lo_specget_estbytes()</code> function on page 696
<code>ifx_lo_specget_extsz()</code>	Gets the allocation extent size for the smart large object	The <code>ifx_lo_specget_extsz()</code> function on page 697
<code>ifx_lo_specget_flags()</code>	Gets the create-time flags for the smart large object	The <code>ifx_lo_specget_flags()</code> function on page 698
<code>ifx_lo_specget_maxbytes()</code>	Gets the maximum size for the smart large object	The <code>ifx_lo_specget_maxbytes()</code> function on page 699
<code>ifx_lo_specset_sbspace()</code>	Gets the sbspace name for the smart large object	The <code>ifx_lo_specget_sbspace()</code> function on page 699
<code>ifx_lo_specset_estbytes()</code>	Sets the estimated size, in bytes, of the smart large object	The <code>ifx_lo_specset_estbytes()</code> function on page 701
<code>ifx_lo_specset_extsz()</code>	Sets the allocation extent size for the smart large object	The <code>ifx_lo_specset_extsz()</code> function on page 702
<code>ifx_lo_specset_flags()</code>	Sets the create-time flags for the smart large object	The <code>ifx_lo_specset_flags()</code> function on page 703
<code>ifx_lo_specset_maxbytes()</code>	Sets the maximum size for the smart large object	The <code>ifx_lo_specset_maxbytes()</code> function on page 703
<code>ifx_lo_specset_sbspace()</code>	Sets the sbspace name for the smart large object	The <code>ifx_lo_specset_sbspace()</code> function on page 704
<code>ifx_lo_stat()</code>	Obtains status information for an open smart large object	The <code>ifx_lo_stat()</code> function on page 705
<code>ifx_lo_stat_atime()</code>	Returns the last access time for a smart large object	The <code>ifx_lo_stat_atime()</code> function on page 705
<code>ifx_lo_stat_cspeg()</code>	Returns the storage characteristics for a smart large object	The <code>ifx_lo_stat_cspeg()</code> function on page 706
<code>ifx_lo_stat_ctime()</code>	Returns the last change-in-status time for the smart large object	The <code>ifx_lo_stat_ctime()</code> function on page 707

ESQL/C function	Description	See
<code>ifx_lo_stat_free()</code>	Frees the resources allocated to an LO-status structure	The <code>ifx_lo_stat_free()</code> function on page 707
<code>ifx_lo_stat_mtime_sec()</code>	Returns the last modification time, in seconds, for the smart large object	The <code>ifx_lo_stat_mtime_sec()</code> function on page 708
<code>ifx_lo_stat_refcnt()</code>	Returns the reference count for the smart large object	The <code>ifx_lo_stat_refcnt()</code> function on page 708
<code>ifx_lo_stat_size()</code>	Returns the size of the smart large object	The <code>ifx_lo_stat_size()</code> function on page 709
<code>ifx_lo_tell()</code>	Returns the current seek position of an open smart large object	The <code>ifx_lo_tell()</code> function on page 710
<code>ifx_lo_to_buffer()</code>	Copies a specified number of bytes from a smart large object into a user-defined buffer	The <code>ifx_lo_to_buffer()</code> function on page 710
<code>ifx_lo_truncate()</code>	Truncates a smart large object to a specific offset	The <code>ifx_lo_truncate()</code> function on page 711
<code>ifx_lo_write()</code>	Writes a specified number of bytes to an open smart large object	The <code>ifx_lo_write()</code> function on page 713
<code>ifx_lo_writewithseek()</code>	Seeks to a specified position in an open smart large object and writes a specified number of bytes	The <code>ifx_lo_writewithseek()</code> function on page 714

Complex data types

These topics explain how to use **collection** and **row** data types in the IBM® Informix® ESQL/C program.

The information in these topics apply only if you are using HCL Informix® as your database server.

These Informix® ESQL/C data types access the complex data types, as the following table shows.

Data type	ESQL/C host variable
Collection types: LIST, MULTISSET, SET	Typed collection host variable
	Untyped collection host variable
Row types: named and unnamed	Typed row host variable
	Untyped row host variable

For information about SQL complex data types, see the *HCL® Informix® Guide to SQL: Reference*.

Access a collection

HCL Informix® supports the following kinds of collections:

- The SET data type stores a collection of elements that are unique values and have no ordered positions.
- The MULTiset data type stores a collection of elements that can be duplicate values and have no ordered positions.
- The LIST data type stores a collection of elements that can be duplicate values and have ordered positions.

Both SQL and Informix® ESQL/C enable you to use the SQL *collection derived table* clause to access the elements of a collection as if they were rows in a table. In Informix® ESQL/C, the collection derived table takes the form of a *collection variable*. The collection variable is a host variable into which you retrieve the collection. After you have retrieved the collection into a collection variable, you can perform select, insert, update, and delete operations on it, with restrictions.



Important: When the SQL statement references a collection variable, Informix® ESQL/C and not the database server, processes the statement.

SQL allows you to perform read-only (SELECT) operations on a collection by implementing the collection derived table as a virtual table.

Access a collection derived table

When the SELECT statement for a collection does not reference the IBM® Informix® ESQL/C collection variable, the database server performs the query.

Consider, for example, the following schema:

```
create row type person(name char(255), id int);
create table parents(name char(255), id int,
  children list(person not null));
```

You can select the names of children and IDs from the table **parent** by using the following SELECT statement:

```
select name, id from table(select children from parents
  where parents.id = 1001) c_table(name, id);
```

To execute the query, the database server creates a virtual table (**c_table**) from the list **children** in the row of the **parents** table where **parents.id** equals `1001`.

Advantage of a collection derived table

The advantage of querying a collection as a virtual table as opposed to querying it through a collection variable is that the virtual table provides more efficient access.

By contrast, if you were to use collection variables, you might be required to allocate multiple variables and multiple cursors. For example, consider the following schema:


```
EXEC SQL create row type parent_type(name char(255), id int,
  children list(person not null));
EXEC SQL create grade12_parents(class_id int,
  parents set(parent_type not null));
```

You can query the collection derived table as a virtual table as shown in the following SELECT statement:

```
EXEC SQL select name into :host_var1
  from table((select children from table((select parents
  from grade12_parents where class_id = 1))
  p_table where p_table.id = 1001)) c_table
  where c_table.name like 'Mer%';
```

To perform the same query with collection variables, you need to execute the following statements:

```
EXEC SQL client collection hv1;
EXEC SQL client collection hv2;
EXEC SQL int parent_id;

EXEC SQL char host_var1[256];
:

EXEC SQL allocate collection hv1;
EXEC SQL allocate collection hv2;

EXEC SQL select parents into :hv1 from grade12_parents
  where class_id = 1;
EXEC SQL declare cur1 cursor for select id, children
  from table(:hv1);
EXEC SQL open cur1;
for(;;)
{
  EXEC SQL fetch cur1 into :parent_id, :hv2;
  if(parent_id = 1001)
    break;
}
EXEC SQL declare cur2 cursor for select name from
  table(:hv2));
EXEC SQL open cur2;
for(;;)
{
  EXEC SQL fetch cur2 into :host_var1;
  /* user needs to implement 'like' function */
  if(like_function(host_var1, "Mer%"))
    break;
}
```

Restrictions on a collection derived table

The following restrictions apply to querying a collection derived table that is a virtual table:

- It cannot be the target of INSERT, DELETE, or UPDATE statements.
- It cannot be the underlying table of any cursors or views that can be updated.
- It does not support ordinality. For example, it does not support the following statement:

```
select name, order_in_list from table(select children
    from parents where parents.id = 1001)
    with ordinality(order_in_list);
```

- It is an error if the underlying collection expression of the collection derived table evaluates to a null value.
- It cannot reference columns of tables that are referenced in the same FROM clause. For example, it does not support the following statement because the collection derived table **table(parents.children)** refers to the table **parents**, which is referenced in the FROM clause:

```
select count(distinct c_id) from parents,
    table(parents.children) c_table(c_name, c_id)
    where parents.id = 1001
```

- The database server must be able to statically determine the type of the underlying collection expression. For example, the database server cannot support: `TABLE(?)`
- The database server cannot support a reference to a host variable without casting it to a known collection type. For example, rather than specifying `TABLE(:hostvar)`, you must cast the host variable:

```
TABLE(CAST(:hostvar AS type))
TABLE(CAST(? AS type))
```

- It will not preserve the order of rows in the list if the underlying collection is a list.

Declaring collection variables

About this task

To access the elements of a column that has a collection type (LIST, MULTISSET, or SET) as its data type, perform the following steps:

1. Declare a **collection** host variable, either typed or untyped.
2. Allocate memory for the **collection** host variable.
3. Perform any select, insert, update, or delete operations on the **collection** host variable.
4. Save the contents of the **collection** host variable into the collection column.

Syntax of the collection data type

Use the **collection** data type to declare host variables for columns of collection data types (SET, MULTISSET, or LIST).

As the following syntax diagram illustrates, you must use the **collection** keyword as the data type for a **collection** host variable.

```
(explicit id) client collection [ { set | multiset | list } (element type not null) ] variable name ;
```

Element	Purpose	Restrictions	SQL Syntax
element type	Data type of the elements in the collection variable	Can be any data type except SERIAL, SERIAL8, BIGSERIAL, TEXT, or BYTE	Data Type segment in the <i>HCL@ Informix@ Guide to SQL: Syntax</i>

Element	Purpose	Restrictions	SQL Syntax
<i>variable name</i>	Name of the Informix® ESQL/C variable to declare as a collection variable		Name must conform to language-specific rules for variable names.

A **collection** variable can be any SQL collection type: LIST, MULTISSET, or SET.



Important: You must specify the **client** keyword when you declare **collection** variables.

Typed and untyped collection variables

Informix® ESQL/C supports the following two **collection** variables:

- A typed **collection** variable specifies the data type of the elements in the collection and the collection itself.
- An untyped **collection** variable does not specify the collection type or the element type.

The typed collection variable

A typed **collection** variable provides an exact description of the collection. This declaration specifies the data type of the collection (SET, MULTISSET, or LIST) and the element type for the **collection** variable.

The following figure shows declarations for three typed **collection** variables.

Figure 44. Sample typed collection variables

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection list(smallint not null)
    list1;
  client collection set(row(
    x char(20),
    y set(integer not null),
    z decimal(10,2)) not null) row_set;
  client collection multiset(set(smallint
    not null)
    not null) collection3;
EXEC SQL END DECLARE SECTION;
```

Typed **collection** variables can contain elements with the following data types:

- Any built-in data type (such as INTEGER, CHAR, BOOLEAN, and FLOAT) except BYTE, TEXT, SERIAL, or SERIAL8.
- Collection data types, such as SET and LIST, to create a nested collection
- Unnamed row types (named row types are not valid)
- Opaque data types

When you specify the element type of the **collection** variable, use the SQL data types, not the IBM® Informix® ESQL/C data types. For example, as the declaration for the **list1** variable in [Figure 44: Sample typed collection variables on page 207](#) illustrates, use the SQL SMALLINT data type, not the Informix® ESQL/C **short** data type, to declare a LIST variable whose

elements are small integers. Similarly, use the SQL syntax for a CHAR column to declare a SET variable whose elements are character strings, as the following example illustrates:

```
client collection set(char(20) not null) set_var;
```



Important: You must specify the not-null constraint on the element type of a **collection** variable.

A named row type is not valid as the element type of a **collection** variable. However, you can specify an element type of unnamed row type, whose fields match those fields of the named row type.

For example, suppose your database has the named row type, **myrow**, and the database table, **mytable**, that are defined as follows:

```
CREATE ROW TYPE myrow
(
  a int,
  b float
);
CREATE TABLE mytable
(
  col1 int8,
  col2 set(myrow not null)
);
```

You can define a **collection** variable for the **col2** column of **mytable** as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection set(row(a int, b float) not null)
  my_collection;
EXEC SQL END DECLARE SECTION;
```

You can declare a typed **collection** variable whose element type is different from that of the collection column as long as the two data types are compatible. If the database server is able to convert between the two element types, it automatically performs this conversion when it returns the fetched collection.

Suppose you create the **tab1** table as follows:

```
CREATE TABLE tab1 (col1 SET(INTEGER NOT NULL))
```

You can declare a typed **collection** variable whose element type matches (**set_int**) or one whose element type is compatible (**set_float**), as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection set(float not null) set_float;
  client collection set(integer not null) set_int;
EXEC SQL END DECLARE SECTION;

EXEC SQL declare cur1 cursor for select * from tab1;
EXEC SQL open cur1;
EXEC SQL fetch cur1 into:set_float;
EXEC SQL fetch cur1 into :set_int;
```


When it executes the first FETCH statement, the Informix® ESQL/C client program automatically converts the integer elements in the column to the float values in the **set_float** host variable. The Informix® ESQL/C program only generates a

type-mismatch error if you change the host variable after the first fetch. In the preceding code fragment, the second FETCH statement generates a type-mismatch error because the initial fetch has already defined the element type as float.

Use a typed **collection** variable in the following cases:

- When you insert into a derived table (Informix® ESQL/C needs to know what the type is)
- When you update an element in a derived table (Informix® ESQL/C needs to know what the type is)
- When you want the server to perform a cast. (The Informix® ESQL/C client sends the type information to the database server, which attempts to perform the requested cast operation. If it is not possible, the database server returns an error.)

Match the declaration of a typed **collection** variable exactly with the data type of the collection column. You can then use this **collection** variable directly in SQL statements such as INSERT, DELETE, or UPDATE, or in the collection-derived table clause.

 **Tip:** If you do not know the exact data type of the collection column you want to access, use an untyped **collection** variable.

In a single declaration line, you can declare several **collection** variables for the same typed collection, as the following declaration shows:

```
EXEC SQL BEGIN DECLARE SECTION;
    client collection multiset(integer not null) mset1, mset2;
EXEC SQL END DECLARE SECTION;
```

You cannot declare **collection** variables for different collection types in a single declaration line.


The untyped collection variable

An untyped **collection** variable provides a general description of a collection. This declaration includes only the **collection** keyword and the variable name.

The following lines declare three untyped **collection** variables:

```
EXEC SQL BEGIN DECLARE SECTION;
    client collection collection1, collection2;
    client collection grades;
EXEC SQL END DECLARE SECTION;
```

The advantage of an untyped **collection** host variable is that it provides more flexibility in collection definition. For an untyped **collection** variable, you do not have to know the definition of the collection column at compile time. Instead, you obtain, at run time, a description of the collection from a collection column with the SELECT statement.

 **Tip:** If you know the exact data type of the collection column you want to access, use a typed **collection** variable.

To obtain the description of a collection column, execute a SELECT statement to retrieve the column into the untyped **collection** variable. The database server returns the column description (the collection type and the element type) with the column data. IBM® Informix® ESQL/C assigns this definition of the collection column to the untyped **collection** variable.

For example, suppose the **a_coll** host variable is declared as an untyped **collection** variable, as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection a_coll;
EXEC SQL END DECLARE SECTION;
```

The following code fragment uses a SELECT statement to initialize the **a_coll** variable with the definition of the **list_col** collection column (which [Figure 45: Sample tables with collection columns on page 214](#) defines) before it uses the **collection** variable in an INSERT statement:

```
EXEC SQL allocate collection :a_coll;

/* select LIST column into the untyped collection variable
 * to obtain the data-type information */
EXEC SQL select list_col into :a_coll from tab_list;

/* Insert an element at the end of the LIST in the untyped
 * collection variable */
EXEC SQL insert into table(:a_coll) values (7);
```

To obtain the description of a collection column, your application must verify that a collection column has data in it before it selects the column. If the table has no rows in it, the SELECT statement does not return column data or the column description and Informix® ESQL/C cannot assign the column description to the untyped **collection** variable.

You can use an untyped **collection** variable to store collections with different column definitions, as long as you select the associated collection column description into the **collection** variable before you use the variable in an SQL statement.



Important: You must obtain the definition of a collection column for an untyped **collection** variable *before* you use the variable in an SQL statement. Before the **collection** variable can hold any values, you must use a SELECT statement to obtain a description of the collection data type from a collection column in the database. Therefore, you cannot insert or select values directly into an untyped **collection** variable.

Client collections

The IBM® Informix® ESQL/C application declares the **collection** variable name, allocates the memory for it with the ALLOCATE COLLECTION statement, and performs operations on the **collection** data.

To access the elements of a collection variable, specify the variable in the Collection Derived Table clause of a SELECT, INSERT, UPDATE, or DELETE statement. Informix® ESQL/C performs the select, insert, update, or delete operation. Informix® ESQL/C does not send these statements to the database server when they include a client **collection** variable in the collection-derived table clause.

For example, Informix® ESQL/C performs the following INSERT operation on the **a_multiset** collection variable:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection multiset(integer not null) a_multiset;
EXEC SQL END DECLARE SECTION;
EXEC SQL insert into table(:a_multiset) values (6);
```

When an SQL statement includes a **collection** variable, it has the following syntax restrictions:

- You can only access elements of a client-side collection with the collection-derived table clause and a SELECT, INSERT, UPDATE, or DELETE statement.
- An INSERT statement cannot have a SELECT, an EXECUTE FUNCTION, or an EXECUTE PROCEDURE statement in the VALUES clause.
- You cannot include a WHERE clause
- You cannot include an expression
- You cannot use scroll cursors

Manage memory for collections

IBM® Informix® ESQL/C does not automatically allocate or deallocate memory for **collection** variables. You must explicitly manage the memory that is allocated to a **collection** variable.

Use the following SQL statements to manage memory for both typed and untyped **collection** host variables:

- The ALLOCATE COLLECTION statement allocates memory for the specified **collection** variable.

This **collection** variable can be a typed or untyped collection. The ALLOCATE COLLECTION statement sets **SQLCODE** (**sqlca.sqlcode**) to zero if the memory allocation was successful and a negative error code if the allocation failed.

- The DEALLOCATE COLLECTION statement deallocates memory for a specified **collection** variable.

After you free the **collection** variable with the DEALLOCATE COLLECTION statement, you can reuse the **collection** variable.



Important: You must explicitly deallocate memory allocated to a **collection** variable. Use the DEALLOCATE COLLECTION statement to deallocate the memory.

The following code fragment declares the **a_set** host variable as a typed collection, allocates memory for this variable, then deallocates memory for this variable:

```
EXEC SQL BEGIN DECLARE SECTION;
    client collection set(integer not null) a_set;
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL allocate collection :a_set;
;;


EXEC SQL deallocate collection :a_set;
```

The ALLOCATE COLLECTION statement allocates memory for the **collection** variable and the collection data.

When DEALLOCATE COLLECTION fails because a cursor on the collection is still open, an error message is returned. Before this, the error is not trapped.

Operate on a collection variable

HCL Informix® supports access to a collection column as a whole through the SELECT, UPDATE, INSERT, and DELETE statements. For example, the SELECT statement can retrieve all elements of a collection, and the UPDATE statement can update all elements in a collection to a single value.

 **Tip:** Informix® can only access the contents of collection columns directly with the IN predicate in the WHERE clause of a SELECT statement and this IN predicate works only with simple collections (collections whose element types are not complex types).

The SELECT, INSERT, UPDATE, and DELETE statements cannot access elements of a collection column in a table. To access elements in a collection column, the Informix® ESQL/C application constructs a subtable, called a collection-derived table, in the collection host variable. From collection-derived table, the Informix® ESQL/C application to access the elements of the collection variable as rows of a table.

This section discusses the following topics on how to use a collection-derived table in the Informix® ESQL/C application to access a collection column:

- Using the collection-derived table clause in SQL statements to access a **collection** host variable
- Initializing a **collection** host variable with a collection column
- Inserting elements into a **collection** host variable
- Selecting elements from a **collection** host variable
- Updating elements in a **collection** host variable
- Specifying element values for a **collection** host variable
- Deleting elements from a **collection** host variable
- Accessing a nested collection with **collection** host variables

The collection-derived table clause on collections

The collection-derived table clause allows you to specify a **collection** host variable as a table name.

This clause has the following syntax:

```
TABLE (: coll_var)
```

In this example, *coll_var* is a **collection** host variable. It can be either a typed or untyped **collection** host variable, but it must be declared and have memory allocated in the IBM® Informix® ESQL/C application before it appears in a collection-derived table clause.

For more information about the syntax of the collection-derived table clause, see the description of the collection-derived table segment in the *HCL® Informix® Guide to SQL: Syntax*.

Access a collection variable

In SQL statements, the IBM® Informix® ESQL/C application specifies a collection-derived table in place of a table name to perform the following operations on the **collection** host variable:

- You can *insert* an element into the **collection** host variable with the collection-derived table clause after the INTO keyword of an INSERT, or with the PUT statement.

For more information, see [Insert elements into a collection variable on page 215](#).

- You can *select* an element from a **collection** host variable with the collection-derived table clause in the FROM clause of the SELECT statement.

For more information, see [Select from a collection variable on page 221](#).

- You can *update* all or some elements in the **collection** host variable with the collection-derived table clause (instead of a table name) after the UPDATE keyword in an UPDATE statement.

For more information, see [Update a collection variable on page 224](#).

- You can *delete* all or some elements from the **collection** host variable with the collection-derived table clause after the FROM keyword in the DELETE statement.

For more information, see [Delete elements from a collection variable on page 228](#).



Tip: If you only need to insert or update a collection column with literal values, you do not need to use a **collection** host variable. Instead, you can explicitly list the literal-collection value in either the INTO clause of the INSERT statement or the SET clause of the UPDATE statement.

For more information, see [Insert into and update a collection column on page 234](#).

After the **collection** host variable contains valid elements, you update the collection column with the contents of the host variable. For more information, see [Operate on a collection column on page 233](#). For more information about the syntax of the collection-derived table clause, see the description of the collection-derived table segment in the *HCL® Informix® Guide to SQL: Syntax*.

Distinguish between columns and collection variables

When you use the collection-derived table clause with a collection host variable in an SQL statement (such as SELECT, INSERT, or UPDATE), the statement is not sent to the database server for processing. Instead, IBM® Informix® ESQL/C processes the statement. Consequently, some of the syntax checking that the database server performs is not done on SQL statements that include the collection-derived table clause.

In particular, the Informix® ESQL/C preprocessor cannot distinguish between column names and host variables. Therefore, when you use the collection-derived table clause with an UPDATE or INSERT statement, you must use valid host-variable syntax in:

- The SET clause of an UPDATE statement
- The VALUES clause of an INSERT statement

Initialize a collection variable

You must always initialize an untyped **collection** variable by selecting a collection column into it. You must execute a SELECT statement, regardless of the operation you want to perform on the untyped **collection** variable.

! **Important:** Selecting the collection column into the untyped **collection** variable provides IBM® Informix® ESQL/C with a description of the collection declaration.

You can initialize a **collection** variable by selecting a collection column into the **collection** variable, constructing the SELECT statement as follows:

- Specify the name of the collection column in the select list.
- Specify the **collection** host variable in the INTO clause.
- Specify the table or view name (not the collection-derived table clause) in the FROM clause.

You can initialize a typed collection variable by executing an INSERT statement that uses the collection derived table syntax. You do not need to initialize a typed collection variable before an INSERT or UPDATE because Informix® ESQL/C has a description of the collection variable.

Suppose, for example, that you create the **tab_list** and **tab_set** tables with the statements in the following figure.

Figure 45. Sample tables with collection columns

```
EXEC SQL create table tab_list
  (list_col list(smallint not null));
EXEC SQL create table tab_set
  (
    id_col integer,
    set_col set(integer not null)
  );
```

The following code fragment accesses the **set_col** column with a typed **collection** host variable called **a_set**:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection set(integer not null) a_set;
EXEC SQL END DECLARE SECTION;

EXEC SQL allocate collection :a_set;
EXEC SQL select set_col into :a_set from tab_set
  where id_col = 1234;
```

When you use a typed **collection** host variable, the description of the collection column (the collection type and the element type) is compatible with the corresponding description of the typed **collection** host variable. If the data types do not match, the database server will do a cast if it can. The SELECT statement in the preceding code fragment successfully retrieves the **set_col** column because the **a_set** host variable has the same collection type (SET) and element type (INTEGER) as the **set_col** column.

The following SELECT statement succeeds because the database server casts **list_col** column to a set in **a_set** host variable and discards any duplicates:

```
/* This SELECT generates an error */
EXEC SQL select list_col into :a_set from tab_list;
```

You can select any type of collection into an untyped **collection** host variable. The following code fragment uses an untyped **collection** host variable to access the **list_col** and **set_col** columns that [Figure 45: Sample tables with collection columns on page 214](#) defines:

```
EXEC SQL BEGIN DECLARE SECTION;
    client collection a_collection;
EXEC SQL END DECLARE SECTION;

EXEC SQL allocate collection :a_collection;
EXEC SQL select set_col into :a_collection
    from tab_set
    where id_col = 1234;
;

EXEC SQL select list_col into :a_collection
    from tab_list
    where list{6} in (list_col);
```

Both SELECT statements in this code fragment can successfully retrieve collection columns into the **a_collection** host variable.

After you have initialized the **collection** host variable, you can use the collection-derived table clause to select, update, or delete existing elements in the collection or to insert additional elements into the collection.

Insert elements into a collection variable

To insert one or more elements into a **collection** variable, use the INSERT statement with the collection-derived table clause after the INTO keyword. The collection-derived table clause identifies the **collection** variable in which to insert the elements. Associate the INSERT statement and the collection-derived table clause with a cursor to insert more than one element into a collection variable.




Restriction: You cannot use expressions in the VALUES clause and you cannot use a WHERE clause.

Insert one element

The INSERT statement and the collection-derived table clause allow you to insert one element into a collection.

IBM® Informix® ESQL/C inserts the values that the VALUES clause specifies into the **collection** variable that the collection-derived table clause specifies.

 **Tip:** When you insert elements into a client-side **collection** variable, you cannot specify a SELECT, an EXECUTE FUNCTION, or an EXECUTE PROCEDURE statement in the VALUES clause of the INSERT.

Insert elements into SET and MULTISET collections

For SET and MULTISET collections, the position of the new element is undefined, because the elements of these collections do not have ordered positions. Suppose the table **readings** has the following declaration:

```
CREATE TABLE readings
(
  dataset_id          INT8,
  time_dataset MULTISET(INT8 NOT NULL)
);
```

To access the **time_dataset** column, the typed IBM® Informix® ESQL/C host variable **time_vals** has the following declaration:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection multiset(int8 not null) time_vals;
  ifx_int8_t an_int8;
EXEC SQL END DECLARE SECTION;
```

The following INSERT statement adds a new MULTISET element of `1,423,231` to **time_vals**:

```
EXEC SQL allocate collection :time_vals;
EXEC SQL select time_dataset into :time_vals
  from readings
  where dataset_id = 1356;
ifx_int8cvint(1423231, &an_int8);
EXEC SQL insert into table(:time_vals) values (:an_int8);
```

For more information about the `ifx_int8cvint()` function and the INT8 data type, see [Numeric data types on page 107](#).

Insert elements into LIST collections

LIST collections have elements that have ordered positions. If the collection is of type LIST, you can use the AT clause of the INSERT statement to specify the position in the list at which you want to add the new element. Suppose the table **rankings** has the following declaration:

```
CREATE TABLE rankings
(
  item_id          INT8,
  item_rankings   LIST(INTEGER NOT NULL)
);
```

To access the **item_rankings** column, the typed IBM® Informix® ESQL/C host variable **rankings** has the following declaration:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection list(integer not null) rankings;
  int an_int;
EXEC SQL END DECLARE SECTION;
```

The following INSERT statement adds a new list element of 9 as the new third element of **rankings**:

```
EXEC SQL allocate collection :rankings;
EXEC SQL select rank_col into :rankings from results;
an_int = 9;
EXEC SQL insert at 3 into table(:rankings) values (:an_int);
```

Suppose that before this insert, **rankings** contained the elements {1, 8, 4, 5, 2}. After this insert, this variable contains the elements {1, 8, 9, 4, 5, 2}.

If you do not specify the AT clause, INSERT adds new elements at the end of a LIST collection. For more information about the AT clause, see the description of the INSERT statement in the *HCL® Informix® Guide to SQL: Syntax*.

Inserting more than one element

An insert cursor that includes an INSERT statement with the collection-derived table clause allows you to insert many elements into a **collection** variable.

About this task

To insert elements, follow these steps:

1. Create a client **collection** variable in your IBM® Informix® ESQL/C program.

For more information, see [Declaring collection variables on page 206](#) and [Manage memory for collections on page 211](#).

2. Declare the insert cursor for the **collection** variable with the DECLARE statement and open the cursor with the OPEN statement.
3. Put the element or elements into the **collection** variable with the PUT statement and the FROM clause.
4. Close the insert cursor with the CLOSE statement, and if you no longer need the cursor, free it with the FREE statement.
5. After the **collection** variable contains all the elements, you then use the UPDATE statement or the INSERT statement on a table name to save the contents of the **collection** variable in a collection column (SET, MULTISET, or LIST).

For more information, see [Operate on a collection column on page 233](#).

Results



Tip: Instead of an insert cursor, you can use an INSERT statement to insert elements one at a time into a **collection** variable. However, an insert cursor is more efficient for large insertions.

For more information, see [Insert one element on page 215](#).

For sample code that inserts several elements into a collection variable, see [Figure 46: Insertion of many elements into a collection host variable on page 220](#).

Declare an insert cursor for a collection variable

An insert cursor allows you to insert one or more elements in the collection.

To declare an insert cursor for a **collection** variable, include the collection-derived table clause in the INSERT statement that you associate with the cursor. The insert cursor for a collection variable has the following restrictions:

- It must be a sequential cursor; the DECLARE statement cannot specify the SCROLL keyword.
- It cannot be a hold cursor; the DECLARE statement cannot specify the WITH HOLD cursor characteristic.

If you need to use input parameters, you must prepare the INSERT statement and specify the prepared statement identifier in the DECLARE statement.

You can use input parameters to specify the values in the VALUES clause of the INSERT statement.

The following DECLARE statement declares the **list_curs** insert cursor for the **a_list** variable:

```
EXEC SQL prepare ins_stmt from
  'insert into table values';
EXEC SQL declare list_curs cursor for ins_stmt;
EXEC SQL open list_curs using :a_list;
```

You can then use the PUT statement to specify the values to insert. For a code fragment that includes this statement, see [Figure 46: Insertion of many elements into a collection host variable on page 220](#).



Important: Whenever you use a question mark (?) in a PREPARE statement for a collection host variable in a collection-derived table, if you execute a DESCRIBE statement you must execute it after an OPEN statement. Until the OPEN statement, IBM® Informix® ESQL/C does not know what the collection row looks like.

- The name of the collection variable in the collection-derived table clause

The following DECLARE statement declares the **list_curs2** insert cursor for the **a_list** variable:

```
EXEC SQL prepare ins_stmt2 from
  'insert into table values';
EXEC SQL declare list_curs2 cursor for ins_stmt2;
EXEC SQL open list_curs2 using :a_list;
while (1)
  {
    EXEC SQL put list_curs2 from :an_element;
  }
  ;
}
```

The USING clause of the OPEN statement specifies the name of the **collection** variable. You can then use the PUT statement to specify the values to insert.

After you declare the insert cursor, you can open it with the OPEN statement. You can insert elements into the **collection** variable once the associated insert cursor is open.

Put elements into the insert cursor

To put elements, one at a time, into the insert cursor, use the PUT statement and the FROM clause.

The PUT statement identifies the insert cursor that is associated with the **collection** variable. The FROM clause identifies the element value to be inserted into the cursor. The data type of any host variable in the FROM clause must be compatible with the element type of the collection.

To indicate that the collection element is to be provided later by the FROM clause of the PUT statement, use an input parameter in the VALUES clause of the INSERT statement. You can use the PUT statement with an insert cursor following either a static DECLARE statement or the PREPARE statement. The following example uses a PUT following a static DECLARE statement.

```
EXEC SQL DECLARE list_curs cursor FOR INSERT INTO table
(:alist);
EXEC SQL open list_curs;
EXEC SQL PUT list_curs from :asmint;
```

No input parameters can appear in the DECLARE statement.

The following figure contains a code fragment that demonstrates how to insert elements into the **collection** variable **a_list** and then to update the **list_col** column of the **tab_list** table (which [Figure 45: Sample tables with collection columns on page 214](#) defines) with this new collection.

Figure 46. Insertion of many elements into a collection host variable

```

EXEC SQL BEGIN DECLARE SECTION;
    client collection list(smallint not null) a_list;
    int a_smint;
EXEC SQL END DECLARE SECTION;
:

EXEC SQL allocate collection :a_list;

/* Step 1: declare the insert cursor on the collection variable */
EXEC SQL prepare ins_stmt from
    'insert into table values';
EXEC SQL declare list_curs cursor for ins_stmt;
EXEC SQL open list_curs using :a_list;

/* Step 2: put the LIST elements into the insert cursor */
for (a_smint=0; a_smint<10; a_smint++)
{
    EXEC SQL put list_curs from :a_smint;
};
/* Step 3: save the insert cursor into the collection variable
EXEC SQL close list_curs;

/* Step 4: save the collection variable into the LIST column */
EXEC SQL insert into tab_list values (:a_list);

/* Step 5: clean up */
EXEC SQL deallocate collection :a_list;
EXEC SQL free ins_stmt;
EXEC SQL free list_curs;

```

In [Figure 46: Insertion of many elements into a collection host variable on page 220](#), the first statement that accesses the **a_list** variable is the OPEN statement. Therefore, in the code, IBM® Informix® ESQL/C must be able to determine the data type of the **a_list** variable. Because the **a_list** host variable is a typed **collection** variable, Informix® ESQL/C can determine the data type from the variable declaration. However, if **a_list** was declared an untyped **collection** variable, you would need a SELECT statement before the DECLARE statement executes to return the definition of the associated collection column.

Informix® ESQL/C automatically saves the contents of the insert cursor into the **collection** variable when you put them into the insert cursor with the PUT statement.

Free cursor resources

The CLOSE statement explicitly frees resources assigned to the insert cursor. However, the cursor ID still exists, so you can reopen the cursor with the OPEN statement. The FREE statement explicitly frees the cursor ID. To reuse the cursor, you must declare the cursor again with the DECLARE statement.

The FLUSH statement does not effect an insert cursor that is associated with a collection variable. For the syntax of the CLOSE statement, see the *HCL® Informix® Guide to SQL: Syntax*.

Select from a collection variable

The SELECT statement with the collection-derived table clause allows you to select elements from a **collection** variable.

The collection-derived table clause identifies the **collection** variable from which to select the elements. The SELECT statement on a client **collection** variable (one that has the collection-derived table clause) has the following restrictions:

- The select list of the SELECT cannot contain expressions.
- The select list must be an asterisk (*).
- Column names in the select list must be simple column names.

These columns cannot use the *database@server:table.column* syntax.

- The following SELECT clauses and options are not allowed: GROUP BY, HAVING, INTO TEMP, ORDER BY, WHERE, WITH REOPTIMIZATION.
- The FROM clause has no provisions to do a join.

The SELECT statement and the collection-derived table clause allow you to perform the following operations on a **collection** variable:

- Select one element from the collection

Use the SELECT statement with the collection-derived table clause.

- Select one row element from the collection.

Use the SELECT statement with the collection-derived table clause and a row variable.

- Select one or more elements into the collection

Associate the SELECT statement and the collection-derived table clause with a cursor to declare a select cursor for the **collection** variable.

Select one element

The SELECT statement and the collection-derived table clause allow you to select one element into a collection.

The INTO clause identifies the variable in which to store the element value that is selected from the **collection** variable. The data type of the host variable in the INTO clause must be compatible with the element type of the collection.

The following code fragment selects only one element from the **set_col** column (see [Figure 45: Sample tables with collection columns on page 214](#)) with a typed **collection** host variable called **a_set**:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection set(integer not null) a_set;
  int an_element, set_size;
EXEC SQL END DECLARE SECTION;

EXEC SQL allocate collection :a_set;
EXEC SQL select set_col, cardinality(set_col)
  into :a_set, :set_size from tab_set
  where id_col = 3;
```

```
if (set_size == 1)
  EXEC SQL select * into :an_element from table(:a_set);
```



Important: Use this form of the SELECT statement when you are sure that the SELECT returns only one element. IBM® Informix® ESQL/C returns an error if the SELECT returns more than one element. If you do not know the number of elements in the set or if you know that the set contains more than one element, use a select cursor to access the elements.

For more information about how to use a select cursor, see [Selecting more than one element on page 222](#).

If the element of the collection is itself a complex type (collection or row type), the collection is a nested collection. For information about how to use a cursor to select elements from a nested collection, see [Select values from a nested collection on page 230](#). The following section describes how to use a **row** variable to select a row element from a collection.

Select one row element

You can select an entire row element from a collection into a **row** type host variable.

The INTO clause identifies a **row** variable in which to store the row element that is selected from the **collection** variable.

The following code fragment selects one row from the **set_col** column into the row type host variable **a_row**:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection set(row(a integer) not null) a_set;
  row (a integer) a_row;
EXEC SQL END DECLARE SECTION;

EXEC SQL select set_col into :a_set from tabl
  where id_col = 17;
EXEC SQL select * into :a_row from table(:a_set);
```

Selecting more than one element

A select cursor that includes a SELECT statement with the collection-derived table clause allows you to select many elements from a **collection** variable.

About this task

To select elements, follow these steps:

1. Create a client **collection** variable in your IBM® Informix® ESQL/C program.

For more information, see [Declaring collection variables on page 206](#) and [Manage memory for collections on page 211](#).

2. Declare the select cursor for the **collection** variable with the DECLARE statement and open this cursor with the OPEN statement.
3. Fetch the element or elements from the **collection** variable with the FETCH statement and the INTO clause.

4. If necessary, perform any updates or deletes on the fetched data and save the modified **collection** variable in the collection column.

For more information, see [Operate on a collection column on page 233](#).

5. Close the select cursor with the CLOSE statement, and if you no longer need the cursor, free it with the FREE statement.

Declare a select cursor for a collection variable

To declare a select cursor for a **collection** variable, include the collection-derived table clause with the SELECT statement that you associate with the cursor. The DECLARE for this select cursor has the following restrictions:

- The select cursor is an update cursor.

The DECLARE statement cannot include the FOR READ ONLY clause that specifies the read-only cursor mode.

- The select cursor must be a sequential cursor.

The DECLARE statement cannot specify the SCROLL or WITH HOLD cursor characteristics.

When you declare a select cursor for a **collection** variable, the collection-derived table clause of the SELECT statement must contain the name of the **collection** variable. For example, the following DECLARE statement declares a select cursor for the **collection** variable, **a_set**:

```
EXEC SQL BEGIN DECLARE SECTION;
    client collection set(integer not null) a_set;
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL declare set_curs cursor for
    select * from table(:a_set);
```

To select the element or elements from the **collection** variable, use the FETCH statement with the INTO clause.

If you want to modify the elements of the **collection** variable, declare the select cursor as an update cursor with the FOR UPDATE keywords. You can then use the WHERE CURRENT OF clause of the DELETE and UPDATE statements to delete or update elements of the collection.

Fetch elements from the select cursor

To fetch elements, one at a time, from a **collection** variable, use the FETCH statement and the INTO clause.

The FETCH statement identifies the select cursor that is associated with the **collection** variable. The INTO clause identifies the host variable for the element value that is fetched from the **collection** variable. The data type of the host variable in the INTO clause must be compatible with the element type of the collection.

The following figure contains a code fragment that selects all elements from the **set_col** column (see [Figure 45: Sample tables with collection columns on page 214](#)) into the typed **collection** host variable called **a_set** then fetches these elements, one at a time, from the **a_set collection** variable.

Figure 47. Selection of many elements from a collection host variable

```

EXEC SQL BEGIN DECLARE SECTION;
    client collection set(integer not null) a_set;
    int an_element, set_size;
EXEC SQL END DECLARE SECTION;
int an_int
:

EXEC SQL allocate collection :a_set;
EXEC SQL select set_col, cardinality(set_col)
    into :a_set from tab_set
    from tab_set where id_col = 3;

/* Step 1: declare the select cursor on the host variable */
EXEC SQL declare set_curs cursor for
    select * from table(:a_set);
EXEC SQL open set_curs;

/* Step 2: fetch the SET elements from the select cursor */
for (an_int=0; an_int<set_size; an_int++)
{
    EXEC SQL fetch set_curs into :an_element;

:

};
EXEC SQL close set_curs;

/* Step 3: update the SET column with the host variable */
EXEC SQL update tab_list SET set_col = :a_set
    where id_col = 3

EXEC SQL deallocate collection :a_set;
EXEC SQL free set_curs;

```

Update a collection variable

After you have initialized a **collection** host variable with a collection column, you can use the UPDATE statement with the collection-derived table clause to update the elements in the collection. The collection-derived table clause identifies the **collection** variable whose elements are to be updated.

The UPDATE statement and the collection-derived table clause allow you to perform the following operations on a **collection** variable:

- Update all elements in the collection to the same value.

Use the UPDATE statement (without the WHERE CURRENT OF clause) and specify a derived column name in the SET clause.

- Update a particular element in the collection.

You must declare an update cursor for the **collection** variable and use UPDATE with the WHERE CURRENT OF clause.

Neither form of the UPDATE statement can include a WHERE clause.

Update all elements

You cannot include a WHERE clause on an UPDATE statement with a collection-derived table clause. Therefore, an UPDATE statement on a **collection** variable sets all elements in the collection to the value you specify in the SET clause. No update cursor is required to update all elements of a collection.

For example, the following UPDATE changes all elements in the **a_list** IBM® Informix® ESQL/C **collection** variable to a value of 16:

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection list(smallint not null) a_list;
  int an_int;
EXEC SQL END DECLARE SECTION;
;

EXEC SQL update table(:a_list) (list_elt)
  set list_elt = 16;
```

In this example, the derived column **list_elt** provides an alias to identify an element of the collection in the SET clause.

Updating one element

To update a particular element in a collection, declare an update cursor for the **collection** host variable.

About this task

An update cursor for a **collection** variable is a select cursor that was declared with the FOR UPDATE keywords. The update cursor allows you to sequentially scroll through the elements of the collection and update the current element with the UPDATE...WHERE CURRENT OF statement.

To update elements, follow these steps:

1. Create a client **collection** variable in your IBM® Informix® ESQL/C program.

For more information, see [Declaring collection variables on page 206](#) and [Manage memory for collections on page 211](#).

2. Declare the update cursor for the **collection** variable with the DECLARE statement and the FOR UPDATE clause; open this cursor with the OPEN statement.

By default, a select cursor on a **collection** variable supports updates. For more information about how to declare a select cursor, see [Declare a select cursor for a collection variable on page 223](#).

3. Fetch the element or elements from the **collection** variable with the FETCH statement and the INTO clause.

For more information, see [Selecting more than one element on page 222](#).

4. Update the fetched data with the UPDATE statement and the WHERE CURRENT OF clause.
5. Save the modified **collection** variable in the collection column.

For more information, see [Operate on a collection column on page 233](#).

6. Close the update cursor with the CLOSE statement, and if you no longer need the cursor, free it with the FREE statement.

Results

The application must position the update cursor on the element to be updated and then use UPDATE...WHERE CURRENT OF to update this value.

The Informix® ESQL/C program in the following figure uses an update cursor to update an element in the **collection** variable, **a_set**, and then to update the **set_col** column of the **tab_set** table (see [Figure 45: Sample tables with collection columns on page 214](#)).

Figure 48. Updating one element in a collection host variable

```
EXEC SQL BEGIN DECLARE SECTION;
    int an_element;
    client collection set(integer not null) a_set;
EXEC SQL END DECLARE SECTION;

EXEC SQL allocate collection :a_set;
EXEC SQL select set_col into :a_set from tab_set
    where id_col = 6;

EXEC SQL declare set_curs cursor for
    select * from table(:a_set)
    for update;

EXEC SQL open set_curs;
while (SQLCODE != SQLNOTFOUND)
{
    EXEC SQL fetch set_curs into :an_element;
    if (an_element = 4)
    {
        EXEC SQL update table(:a_set)(x)
            set x = 10
            where current of set_curs;
        break;
    }
}

EXEC SQL close set_curs;

EXEC SQL update tab_set set set_col = :a_set
    where id_col = 6;

EXEC SQL deallocate collection :a_set;
EXEC SQL free set_curs;
```

Specify element values

You can specify any of the following values as elements in a **collection** variable:

- A literal value

You can also specify literal values directly for a collection column without first using a **collection** variable. For more information, see [Insert into and update a collection column on page 234](#).

- The Informix® ESQL/C host variable

The host variable must contain a value whose data type is compatible with the element type of the collection.

You cannot include complex expressions directly to specify values.

For information about how to insert elements into a **collection** variable, see [Insert elements into a collection variable on page 215](#). For information about how to update elements in a **collection** variable, see [Update a collection variable on page 224](#). The following sections describe the values you can assign to an element in a **collection** variable.

Literal values as elements

You can use a literal value to specify an element of a **collection** variable. The literal values must have a data type that is compatible with the element type of the collection.

For example, the following INSERT statement inserts a literal integer into a SET(INTEGER NOT NULL) host variable called **a_set**:

```
EXEC SQL insert into table(:a_set) values (6);
```

The following UPDATE statement uses a derived column name (**an_element**) to update all elements of the **a_set** collection variable with the literal value of 19:

```
EXEC SQL update table(:a_set) (an_element)
set an_element = 19;
```

The following INSERT statement inserts a quoted string into a LIST(CHAR(5)) host variable called **a_set2**:

```
EXEC SQL insert into table(:a_set2) values ('abcde');
```

The following INSERT statement inserts a literal collection into a SET(LIST(INTEGER NOT NULL)) host variable called **nested_coll**:


```
EXEC SQL insert into table(:nested_coll)
values (list{1,2,3});
```



Tip: The syntax of a literal collection for a **collection** variable is different from the syntax of a literal collection for a collection column. A **collection** variable does not need to be a quoted string.

The following UPDATE statement updates the **nested_coll** collection variable with a new literal collection value:

```
EXEC SQL update table(:nested_coll) (a_list)
set a_list = list{1,2,3};
```

 **Tip:** If you only need to insert or update the collection column with literal values, you do not need to use a **collection** host variable. Instead, you can explicitly list the literal values as a literal collection in either the INTO clause of the INSERT statement or the SET clause of the UPDATE statement.

ESQL/C host variables as elements

You can use the IBM® Informix® ESQL/C host variable to specify an element of a **collection** variable.

The host variable must be declared with a data type that is compatible with the element type of the collection and must contain a value that is also compatible. For example, the following INSERT statement uses a host variable to insert a single value into the same **a_set** variable as in the preceding example:

```
an_int = 6;
EXEC SQL insert into table(:a_set) values (:an_int);
```

To insert multiple values into a **collection** variable, you can use an INSERT statement for each value or you can declare an insert cursor and use the PUT statement.

The following UPDATE statement uses a host variable to update all elements in the **a_set** collection to a value of 4:

```
an_int = 4;
EXEC SQL update table(:a_set) (an_element)
set an_element = :an_int;
```

To update multiple values into a **collection** variable, you can declare an update cursor and use the WHERE CURRENT OF clause of the UPDATE statement.

Delete elements from a collection variable

After you have initialized a **collection** host variable with a collection column, you can use the DELETE statement and the collection-derived table clause to delete an element of a **collection** variable. The collection-derived table clause identifies the **collection** variable in which to delete the elements.

The DELETE statement and the collection-derived table clause allow you to perform the following operations on a **collection** variable:

- Delete all elements in the collection.

Use the DELETE statement (without the WHERE CURRENT OF clause).

- Delete a particular element in the collection.

You must declare an update cursor for the **collection** variable and use DELETE with the WHERE CURRENT OF clause.

Neither form of the DELETE statement can include a WHERE clause.

Delete all elements

You cannot include a WHERE clause on a DELETE statement with a collection-derived table clause. Therefore, a DELETE statement on a **collection** variable deletes all elements from the collection. No update cursor is required to delete all elements of a collection.

For example, the following DELETE removes all elements in the **a_list** IBM® Informix® ESQL/C **collection** variable:

```
EXEC SQL BEGIN DECLARE SECTION;
    client collection list(smallint not null) a_list;
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL delete from table(:a_list);
```

Delete one element

To delete a particular element in a collection, declare an update cursor for the **collection** host variable. An update cursor for a **collection** variable is a select cursor that was declared with the FOR UPDATE keywords. The update cursor allows you to sequentially scroll through the elements of the collection and delete the current element with the DELETE...WHERE CURRENT OF statement.

To delete particular elements, follow the same steps for how to update particular elements (see [Updating one element on page 225](#)). In these steps, you replace the use of the UPDATE...WHERE CURRENT OF statement with the DELETE...WHERE CURRENT OF statement.

The application must position the update cursor on the element to be deleted and then use DELETE...WHERE CURRENT OF to delete this value. The following IBM® Informix® ESQL/C code fragment uses an update cursor and a DELETE statement with a WHERE CURRENT OF clause to delete the element from the **set_col** column of **tab_set** (see [Figure 45: Sample tables with collection columns on page 214](#)).

```
EXEC SQL BEGIN DECLARE SECTION;
    client collection set(integer not null) a_set;
    int an_int, set_size;
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL allocate collection :a_set;
EXEC SQL select set_col, cardinality(set_col)
    into :a_set, :set_size
    from tab_set
    where id_col = 6;

EXEC SQL declare set_curs cursor for
    select * from table(:a_set)
    for update;

EXEC SQL open set_curs;
while (i < set_size)
{
    EXEC SQL fetch set_curs into :an_int;
    if (an_int == 4)
    {
```

```

EXEC SQL delete from table(:a_set)
    where current of set_curs;
break;
}
i++;
}
EXEC SQL close set_curs;
EXEC SQL free set_curs;

EXEC SQL update tab_set set set_col = :a_set
    where id_col = 6;

EXEC SQL deallocate collection :a_set;

```

Suppose that in the row with an **id_col** value of 6, the **set_col** column contains the values {1,8,4,5,2} before this code fragment executes. After the DELETE...WHERE CURRENT OF statement, this **collection** variable contains the elements {1,8,5,2}. The UPDATE statement at the end of this code fragment saves the modified collection into the **set_col** column of the database. Without this UPDATE statement, the collection column never has element 4 deleted.

Access a nested collection

HCL Informix® supports nested collections as a column type. A nested collection is a **collection** column whose element type is another collection. For example, the code fragment in the following figure creates the **tab_setlist** table whose column is a nested collection.

Figure 49. Sample column with nested collection

```

EXEC SQL create table tab_setlist
    ( setlist_col set(list(integer not null));

```

The **setlist_col** column is a set, each element of which is a list. This nested collection resembles a two-dimensional array with a y-axis of set elements and an x-axis of list elements.

Select values from a nested collection

To select values from a nested collection, you must declare a **collection** variable and a select cursor for each level of collection.

The following code fragment uses the nested **collection** variable, **nested_coll** and the **collection** variable **list_coll** to select the lowest-level elements in the nested-collection column, **setlist_col**.

```

EXEC SQL BEGIN DECLARE SECTION;
    client collection set(list(integer not null) not null) nested_coll;
    client collection list(integer not null) list_coll;
    int an_element;
EXEC SQL END DECLARE SECTION;
int num_elements = 1;
int an_int;
int keep_fetching = 1;
:

EXEC SQL allocate collection :nested_coll;
EXEC SQL allocate collection :list_coll;

```

```

/* Step 1: declare the select cursor on the SET collection variable */
EXEC SQL declare set_curs2 cursor for
    select * from table(:nested_coll);

/* Step 2: declare the select cursor on the LIST collection variable */
EXEC SQL declare list_curs2 cursor for
    select * from table(:list_coll);

/* Step 3: open the SET cursor */
EXEC SQL open set_curs2;

while (keep_fetching)
{

/* Step 4: fetch the SET elements into the SET insert cursor */
EXEC SQL fetch set_curs2 into :list_coll;

/* Open the LIST cursor */
EXEC SQL open list_curs2;

/* Step 5: put the LIST elements into the LIST insert cursor */
for (an_int=0; an_int<10; an_int++)
{
    EXEC SQL fetch list_curs2 into :an_element;
:

};
EXEC SQL close list_curs2;
num_elements++;

if (done_fetching(num_elements))
{
    EXEC SQL close set_curs2;
    keep_fetching = 0;
}
};
EXEC SQL free set_curs2;
EXEC SQL free list_curs2;

EXEC SQL deallocate collection :nested_coll;
EXEC SQL deallocate collection :list_coll;

```

Insert values into a nested collection

To insert literal values into a **collection** variable for a nested column, you specify the literal collection for the element type.

You do not need to specify the constructor keyword for the actual collection type. The following typed **collection** host variable can access the **setlist_col** column of the **tab_setlist** table:

```

EXEC SQL BEGIN DECLARE SECTION;
    client collection set(list(integer not null) not null)
        nested_coll;
EXEC SQL END DECLARE SECTION;

```

```
EXEC SQL allocate collection nested_coll;
```

The following code fragment inserts literal values into the **nested_coll** collection variable and then updates the **setlist_col** column (which [Figure 49: Sample column with nested collection on page 230](#) defines):

```
EXEC SQL insert into table(:nested_coll)
  values (list{1,2,3,4});
EXEC SQL insert into tab_setlist values (:nested_coll);
```

To insert non-literal values into a nested collection, you must declare a **collection** variable and an insert cursor for each level of collection. For example, the following code fragment uses the nested **collection** variable, **nested_coll**, to insert new elements into the nested-collection column, **setlist_col**.

```
EXEC SQL BEGIN DECLARE SECTION;
  client collection set(list(integer not null) not null) nested_coll;
  client collection list(integer not null) list_coll;
  int an_element;
EXEC SQL END DECLARE SECTION;
int num_elements = 1;
int keep_adding = 1;
int an_int;
:

EXEC SQL allocate collection :nested_coll;
EXEC SQL allocate collection :list_coll;

/* Step 1: declare the insert cursor on the SET collection variable */
EXEC SQL declare set_curs cursor for
  insert into table(:nested_coll) values;

/* Step 2: declare the insert cursor on the LIST collection variable */
EXEC SQL declare list_curs cursor for
  insert into table(:list_coll) values;

/* Step 3: open the SET cursor */
EXEC SQL open set_curs;

while (keep_adding)
  {

/* Step 4: open the LIST cursor */
  SQL open list_curs;

/* Step 5: put the LIST elements into the LIST insert cursor */
  for (an_int=0; an_int<10; an_int++)
    {
      an_element = an_int * num_elements;
      EXEC SQL put list_curs from :an_element;
    }
  :

  };
EXEC SQL close list_curs;
num_elements++;
```

```

/* Step 6: put the SET elements into the SET insert cursor */
EXEC SQL put set_curs from :list_coll;
if (done_adding(num_elements)
    {
    EXEC SQL close set_curs;
    keep_adding = 0;
    }
};
EXEC SQL free set_curs;
EXEC SQL free list_curs;

/* Step 7: insert the nested SET column with the host variable */
EXEC SQL insert into tab_setlist values (:nested_coll);

EXEC SQL deallocate collection :nested_coll;
EXEC SQL deallocate collection :list_coll;

```

Operate on a collection column

The **collection** variable stores the elements of the collection. However, it has no intrinsic connection with a database column. You must use an INSERT or UPDATE statement to explicitly save the contents of the collection variable into the collection column.

You can use the SELECT, UPDATE, INSERT, and DELETE statements to access a collection column (SET, MULTISSET, or LIST), as follows:

- The SELECT statement fetches all elements from a collection column.
- The INSERT statement inserts a new collection into a collection column.

Use the INSERT statement on a table or view name and specify the **collection** variable in the VALUES clause.

[Figure 46: Insertion of many elements into a collection host variable on page 220](#) shows an INSERT statement that saves the contents of a collection variable in a collection column.

- The UPDATE statement updates the entire collection in a collection column with new values.

Use an UPDATE statement on a table or view name and specify the **collection** variable in the SET clause.

[Figure 48: Updating one element in a collection host variable on page 226](#) shows an UPDATE statement that saves the contents of a collection variable in a collection column.

For more information about how to use these statements with collection columns, see the *HCL® Informix® Guide to SQL: Tutorial*.

Select from a collection column

To select all elements in a collection column, specify the collection column in the select list of the SELECT statement. If you put a **collection** host variable in the INTO clause of the SELECT statement, you can access these elements from the IBM® Informix® ESQL/C application. For more information, see [Initialize a collection variable on page 214](#). For an example that uses a collection variable to select and display the elements of a collection, see [The collect.ec program on page 419](#).

Insert into and update a collection column

The INSERT and UPDATE statements support collection columns as follows:

- To insert a collection of elements into an empty collection column, specify the new elements in the VALUES clause of the INSERT statement.
- To update the entire collection in a collection column, specify the new elements in the SET clause of the UPDATE statement. The UPDATE statement must also specify a derived column name to create an identifier for the element. You then use this derived column name in the SET clause to identify where to assign the new element values.

In the VALUES clause of an INSERT statement or the SET clause of an UPDATE statement, the element values can be in any of the following formats:

- The IBM® Informix® ESQL/C **collection** host variable
- A literal collection value

To represent literal values for a collection column, you specify a literal-collection value. You create a literal-collection value, introduce the value with the SET, MULTISSET, or LIST keyword and provide the field values in a comma-separated list that is enclosed in braces. You surround the entire literal-collection value with quotes (double or single). The following INSERT statement inserts the literal collection of SET {7, 12, 59, 4} into the **set_col** column in the **tab_set** table (that [Initialize a collection variable on page 214](#) defines):

```
EXEC SQL insert into tab_set values
(
  5, 'set{7, 12, 59, 4}'
);
```

The UPDATE statement in the following figure overwrites the SET values that the previous INSERT added to the **tab_set** table.

Figure 50. Updating a collection column

```
EXEC SQL update tab_set
  set set_col = ("list{1,2,3,4}")
  where id_col = 5;
```



Important: If you omit the WHERE clause, the UPDATE statement in [Figure 50: Updating a collection column on page 234](#) updates the **set_col** column in all rows of the **tab_set** table.

If any character value appears in this literal-collection value, it too must be enclosed in quotes; this condition creates nested quotes. For example, for column **col1** of type SET(CHAR(5)), a literal value can be expressed as follows:

```
'SET{"abcde"}'
```

To specify nested quotes in an SQL statement in the Informix® ESQL/C program, you must escape every double quotation mark when it appears in a quotation mark string. The following INSERT statement shows how to use escape characters for inner double quotation marks:

```
EXEC SQL insert into (col1) tab1
  values ('SET{\\"abcde\\"}');
```

When you embed a double-quoted string inside another double-quoted string, you do not need to escape the inner-most quotation marks, as the following INSERT statement shows:

```
EXEC SQL insert into tabx
  values (1, "set{""row(12345)""}");
```

For more information about the syntax of literal values for **collection** variables, see [Literal values as elements on page 227](#). For more information about the syntax of literal-collection values for collection columns, see the Literal Collection segment in the *HCL® Informix® Guide to SQL: Syntax*.

If the collection or row type is nested, that is, if it contains another collection or row type as a member, the inner collection or row does not need to be enclosed in quotes. For example, for column **col2** whose data type is LIST(ROW(a INTEGER, b SMALLINT) NOT NULL), you can express the literal value as follows:

```
'LIST{ROW(80, 3)}'
```

Delete an entire collection

To delete the entire collection in a collection column you can use the UPDATE statement to set the collection to empty.

The UPDATE statement in the following example effectively deletes the entire collection in the **set_col** column of the **tab_set** table for the row in which **id_col** equals 5.

```
EXEC SQL create table tab_set
(
  id_col integer,
  set_col set(integer not null)
);
EXEC SQL update tab_set set set_col = set{}
  where id_col = 5;
```

The same UPDATE statement without the WHERE clause, as shown in the following example, would set the **set_col** column to empty for all rows in the **tab_set** table.

```
EXEC SQL update tab_set set set_col = set{};
```

Access row types

IBM® Informix® ESQL/C supports the SQL row types with the Informix® ESQL/C **row** type host variable. A row type is a complex data type that contains one or more members called fields. Each field has a name and a data type associated with it.

HCL Informix® supports the following two kinds of row types:

- A named row type has a unique name that identifies to a group of fields.

The named row type is a template for a row definition. You create a named row type with the CREATE ROW TYPE statement. You can then use a named row type as follows:

- In a column definition of a CREATE TABLE statement to assign the data type for a column in the database
- In the OF TYPE clause of the CREATE TABLE statement to create a typed table

- An unnamed row type uses the ROW constructor to define fields.

You can use a particular unnamed row type as the data type of one column in the database. You create an unnamed row type with the ROW constructor in the column definition of a CREATE TABLE statement.

For more information about row types, see the CREATE ROW TYPE statement in the *HCL® Informix® Guide to SQL: Syntax* and the *HCL® Informix® Guide to SQL: Reference*.

To access a column in a table that has a row type as its data type, perform the following steps:

1. Declare a **row** host variable.
2. Allocate memory for the **row** host variable with the ALLOCATE ROW statement.
3. Perform any select or update operations on the **row** host variable.
4. Save the contents of the **row** host variable in the row-type column.

Declare row variables

To declare a **row** host variable, use the following syntax.

```
(explicit id) row [ 'named row type' ] [ ( field name field type ) ] variable name ;
```

Element	Purpose	Restrictions	SQL syntax
field name	Name of a field in the row variable	Must match the corresponding field name in any associated row-type column.	Identifier segment in the <i>HCL® Informix® Guide to SQL: Syntax</i>
field type	Data type of the field name field in the row variable	Can be any data type except SERIAL, SERIAL8, BIGSERIAL, TEXT, or BYTE.	Data Type segment in the <i>HCL® Informix® Guide to SQL: Syntax</i>
named row type	Name of the named row type to assign to the row variable	Named row type must be defined in the database.	Identifier segment in the <i>HCL® Informix® Guide to SQL: Syntax</i>
variable name	Name of the ESQL/C variable to declare as a row variable		Name must conform to language-specific rules for variable names.

Typed and untyped row variables

IBM® Informix® ESQL/C supports the following two **row** variables:

- A typed **row** variable specifies the names and data types of the fields in the row.
- An untyped **row** variable does not specify the field names or the field types for the row.

Informix® ESQL/C handles **row** variables as client-side **collection** variables.

The typed row variable

A typed **row** variable specifies a field list, which contains the name and data type of each field in the row.

The following figure shows declarations for three typed **row** variables.

Figure 51. Sample typed row variables

```
EXEC SQL BEGIN DECLARE SECTION;
  row (circle_vals circle_t, circle_id integer) mycircle;
  row (a char(20),
       b set(integer not null),
       c decimal(10,2)) row2;
  row (x integer,
       y integer,
       length integer,
       width integer) myrect;
EXEC SQL END DECLARE SECTION;
```

Typed **row** variables can contain fields with the following data types:

- Any built-in data type (such as INTEGER, CHAR, BOOLEAN, and FLOAT) *except* BYTE, TEXT, SERIAL, or SERIAL8.
- Collection data types, such as SET and LIST
- Row types, named or unnamed
- Opaque data types

When you specify the type of a field in the **row** variable, use SQL data types, not IBM® Informix® ESQL/C data types. For example, to declare a **row** variable with a field that holds small integers, use the SQL SMALLINT data type, not the Informix® ESQL/C **int** data type. Similarly, to declare a field whose values are character strings, use the SQL syntax for a CHAR column, not the C syntax for **char** variables. For example, the following declaration of the **row_var** host variable contains a field of small integers and a character field:

```
row (
  smint_fld smallint,
  char_fld char(20)
) row_var;
```

Use a typed **row** variable when you know the exact data type of the row-type column that you store in the **row** variable. Match the declaration of a typed **row** variable exactly with the data type of the row-type column. You can use this **row** variable directly in SQL statements such as INSERT, DELETE, or UPDATE. You can also use it in the collection-derived table clause.

You can declare several **row** variables in a single declaration line. However, all variables must have the same field types, as the following declaration shows:

```
EXEC SQL BEGIN DECLARE SECTION;
  row (x integer, y integer) typed_row1, typed_row2;
EXEC SQL END DECLARE SECTION;
```

If you do not know the exact data type of the row-type column you want to access, use an untyped **row** variable.

The untyped row variable

The definition of an untyped **row** variable specifies only the **row** keyword and a name. The following lines declare three untyped **row** variables:

```
EXEC SQL BEGIN DECLARE SECTION;
    row row1, row2;
    row rectangle1;
EXEC SQL END DECLARE SECTION;
```

The advantage of an untyped **row** host variable is that it provides more flexibility in row definition. For an untyped **row** variable, you do not have to know the definition of the row-type column at compile time. Instead, you obtain, at run time, a description of the row from a row-type column.

To obtain this description at run time, execute a SELECT statement that retrieves the row-type column into the untyped **row** variable. When the database server executes the SELECT statement, it returns the data type information for the row-type column (the types of the fields in the row) to the client application.

For example, suppose the **a_row** host variable is declared as an untyped **row** variable, as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
    row a_row;
EXEC SQL END DECLARE SECTION;
```

The following code fragment uses a SELECT statement to initialize the **a_row** variable with data type information before it uses the **row** variable in an UPDATE statement:

```
EXEC SQL allocate row :a_row;

/* obtain the data-type information */
EXEC SQL select row_col into :a_row from tab_row;

/* update row values in the untyped row variable */
EXEC SQL update table(:a_row) set fld1 = 3;
```

The field name **fld1**, which refers to a field of **:a_row**, comes from the definition of the row column in the **tab_row** table.

For more information about the ALLOCATE ROW statement, see [Manage memory for rows on page 241](#).

You can use the same untyped **row** variable to successively store different row types, but you must select the associated row-type column into the **row** variable for each new row type.

Named row types

A named row type associates a name with the row structure. For a database, you create a named row type with the CREATE ROW TYPE statement.

If the database contains more than one row type with the same structure but with distinctly different names, the database server cannot properly enforce structural equivalence when it compares named row types. To resolve this ambiguity, specify a row-type name in the declaration of the **row** variable.

A named IBM® Informix® ESQL/C **row** variable can be typed or untyped.

The Informix® ESQL/C preprocessor does not check the validity of a row-type name and Informix® ESQL/C does not use this name at run time. Informix® ESQL/C just sends this name to the database server to provide information for type resolution. Therefore, Informix® ESQL/C treats the **a_row** variable in the following declaration as an untyped **row** variable even though a row-type name is specified:

```
EXEC SQL BEGIN DECLARE SECTION;
  row 'address_t' a_row;
EXEC SQL END DECLARE SECTION;
```

If you specify both the row-type name and a row structure in the declaration (a typed named **row** variable), the row-type name overrides the structure. For example, suppose the database contains the following definition of the **address_t** named row type:

```
CREATE ROW TYPE address_t
(
  line1      char(20),
  line2      char(20),
  city       char(20),
  state      char(2),
  zipcode    integer
);
```

In the following declaration, the **another_row** host variable has **line1** and **line2** fields of type CHAR(20) (from the **address_t** row type:), not CHAR(10) as the declaration specifies

```
EXEC SQL BEGIN DECLARE SECTION;
  row 'address_t' (line1 char(10), line2 char(10),
    city char(20), state char(2), zipcode integer) another_row;
EXEC SQL END DECLARE SECTION;
```

In a collection-derived table

You cannot specify a named row type to declare a row variable that you use in a collection-derived table. IBM® Informix® ESQL/C does not have information about the named row type, only the database server does. For example, suppose your database has a named row type, **r1**, and a table, **tab1**, that are defined as follows:

```
CREATE ROW TYPE r1 (i integer);

CREATE TABLE tab1
(
  nt_col INTEGER,
  row_col r1
);
```

To access this column, suppose you declare two row variables, as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
  row (i integer) row1;
  row (j r1) row2;
EXEC SQL END DECLARE SECTION;
```

With these declarations, the following statement succeeds because Informix® ESQL/C has the information it needs about the structure of **row1**:

```
EXEC SQL update table(:row1) set i = 31;
checksql("UPDATE Collection Derived Table 1");
```

The following statement fails; however, because Informix® ESQL/C does not have the necessary information to determine the correct storage structure of the **row2** row variable.

```
EXEC SQL update table(:row2) set j = :row1;
checksql("UPDATE Collection Derived Table 2");
```

Similarly, the following statement also fails. In this case, Informix® ESQL/C treats **r1** as a user-defined type instead of a named row type.

```
EXEC SQL insert into tab1 values (:row2);
checksql("INSERT row variable");
```

You can get around this restriction in either of the following ways:

- Use the actual data types in the row-variable declarations, as the following example shows:

```
EXEC SQL BEGIN DECLARE SECTION;
row (i integer) row1;
row (j row(i integer)) row2;
EXEC SQL END DECLARE SECTION;
```

- Declare an untyped row variable and perform a select so that Informix® ESQL/C obtains the data type information from the database server.

```
EXEC SQL BEGIN DECLARE SECTION;
row (i integer) row1;
row row2_untyped;
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL select row_col into :row2_untyped from tab1;
```

For this method to work, at least one row must exist in table **tab1**.

An UPDATE statement that uses either the **row2** or **row2_untyped** row variable in its collection-derived table clause can now execute successfully.

Client-side rows

A **row** variable is sometimes called a client-side row. When you declare a **row** variable, you must declare the **row** variable name, allocate memory, and perform operations on the row.

To access the elements of a **row** variable, you specify the variable in the collection-derived table clause of a SELECT or UPDATE statement. When either of these statements contains a collection-derived table clause, IBM® Informix® ESQL/C performs the select or update operation on the **row** variable; it does not send these statements to the database server for execution. For example, Informix® ESQL/C executes the update operation on the **row** variable, **a_row**, that the following UPDATE statement specifies:

```
EXEC SQL update table(:a_row) set fld1 = 6;
```

To access fields of a row type, you must use the SELECT or UPDATE statements with the collection-derived table clause.

For more information about the collection-derived table clause, see [Access a collection on page 204](#).

Manage memory for rows

After you declare a **row** variable, IBM® Informix® ESQL/C recognizes the variable name. For typed **row** variables, Informix® ESQL/C also recognizes the associated data type. However, Informix® ESQL/C does not automatically allocate or deallocate memory for **row** variables. You must explicitly manage memory that is allocated to a **row** variable. To manage memory for both typed and untyped **row** host variables, use the following SQL statements:

- The ALLOCATE ROW statement allocates memory for the specified **row** variable.

This **row** variable can be a typed or untyped row. The ALLOCATE ROW statement sets **SQLCODE** (`sqlca.sqlcode`) to zero if the memory allocation was successful and a negative error code if the allocation failed.

- The DEALLOCATE ROW statement deallocates or frees memory for a specified **row** variable.

After you free the **row** variable with the DEALLOCATE ROW statement, you can reuse the **row** variable but you must allocate memory for it again. You might, for example, use an untyped row variable to store different row types in succession.



Important: Informix® ESQL/C does not implicitly deallocate memory that you allocate with the ALLOCATE ROW statement. You must explicitly perform memory deallocation with the DEALLOCATE ROW statement.

The following code fragment declares the **a_name** host variable as a typed row, allocates memory for this variable, then deallocates memory for this variable:

```
EXEC SQL BEGIN DECLARE SECTION;
  row (
    fname char(15),
    mi char(2)
    lname char(15)
  ) a_name;
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL allocate row :a_name;
;;

EXEC SQL deallocate row :a_name;
```

For syntax information for the ALLOCATE ROW and DEALLOCATE ROW statements, see their descriptions in the *HCL® Informix® Guide to SQL: Syntax*.

Operate on a row variable

The SELECT, and UPDATE statements allow you to access a row-type column as a whole.

The IBM® Informix® ESQL/C client application can access individual fields as follows:

- Use SQL statements and dot notation to directly select, insert, update, or delete fields in row-type columns of the database with SQL statements, as long as these operations involve literal values.

Unlike collection columns, the SELECT statement can access individual members of row-type columns. Therefore, the Informix® ESQL/C client application can directly select or update fields in row-type columns of the database.

- Use a **row** host variable to perform operations on the row as a whole or on individual fields.



Restriction: You cannot use dot notation in a SELECT statement to access the fields of a nested row in a **row** variable.

With a **row** host variable, you access a row-type column as a *collection-derived table*. The collection-derived table contains a single row in which each column is a field. A collection-derived table allows you to decompose a row into its fields and then access the fields individually.

The application first performs the operations on the fields through the **row** host variable. After modifications are complete, the application can save the contents of the **row** variable into a row-type column of the database.

This section discusses the following topics on how to use a collection-derived table in the Informix® ESQL/C application to access a row-type column:

- How to use the collection-derived table clause in SQL statements to access a **row** host variable
- How to initialize a **row** host variable with a row-type column
- How to select fields from a **row** host variable
- How to update field values in a **row** host variable

The collection-derived table clause on row types

The collection-derived table clause allows you to create a collection-derived table from a row-type column.

This clause has the following syntax:

```
TABLE (:row_var)
```

The variable *row_var* is a **row** host variable. It can be either a typed or untyped **row** host variable but you must declare it beforehand.

For more information about the syntax of the collection-derived table clause, see the description of the collection-derived table segment in the *HCL® Informix® Guide to SQL: Syntax*.

Access a row variable

You can perform the following operations on the **row** host variable with the collection-derived table clause:


- You can select a field or fields from a **row** host variable with the collection-derived table clause in the FROM clause of SELECT statement.

For more information, see [Select from a row variable on page 245](#).

- You can update all or some fields in the **row** host variable collection-derived table clause after the UPDATE keyword in an UPDATE statement.

For more information, see [Update a row variable on page 247](#).

The insert and delete operations are not supported on **row** variables. For more information, see [Insert into a row variable on page 245](#) and [Delete from a row variable on page 247](#).

 **Tip:** If you only need to insert or update a row-type column with literal values, you do not need to use a **row** host variable. Instead, you can explicitly list the literal-row value in either the INTO clause of the INSERT statement or the SET clause of the UPDATE statement.

For more information, see [Insert into and update row-type columns on page 252](#).

When the **row** host variable contains the values you want, update the row-type column with the contents of the host variable. For more information, see [Access a typed table on page 250](#). For more information about the syntax of the collection-derived table clause, see the description of the collection-derived table segment in the *HCL® Informix® Guide to SQL: Syntax*.

Distinguish between columns and row variables

When you use the collection-derived table clause with a SELECT or UPDATE statement, IBM® Informix® ESQL/C processes the statement. It does not send it to the database server. Therefore, some of the syntax checking that the database server performs is not done on SQL statements that include the collection-derived table clause.

In particular, the Informix® ESQL/C preprocessor cannot distinguish between column names and host variables. Therefore, when you use the collection-derived table clause with an UPDATE statement to modify a **row** host variable, the preprocessor does not check that you correctly specify host variables. You must ensure that you use valid host-variable syntax.

If you omit the host-variable symbol (colon (:)) or dollar sign (\$), the preprocessor assumes that the name is a column name. For example, the following UPDATE statement omits the colon for the **clob_ins** host variable in the SET clause:

```
EXEC SQL update table(:named_row1)
  set (int_fld, clob_fld, dollar_fld) =
    (10000000, clob_ins, 110.02);
```

Initialize a row variable

To perform operations on existing fields in a row-type column, you must first initialize the **row** variable with the field values.

To perform this initialization, select the existing fields of the row-type column into a **row** variable with the SELECT statement, as follows:

- Specify the row-column name in the select list of the SELECT statement.
- Specify the **row** host variable in the INTO clause of the SELECT statement.
- Specify the table or view name, not the collection-derived table clause, in the FROM clause of the SELECT statement.

Suppose you create the **tab_unmrow** and **tab_nmrow** tables with the statements in the following figure.

Figure 52. Sample tables with row-type columns

```
EXEC SQL create table tab_unmrow
(
  area integer,
  rectangle row(
    x integer,
    y integer,
    length integer,
    width integer)
);

EXEC SQL create row type full_name
(
  fname char(15),
  mi char(2),
  lname char(15)
);

EXEC SQL create table tab_nmrow
(
  emp_num integer,
  emp_name full_name
);
```

The following code fragment initializes a typed **row** host variable called **a_rect** with the contents of the **rectangle** column in the row whose **area** column is 1234:

```
EXEC SQL BEGIN DECLARE SECTION;
  row (
    x integer,
    y integer,
    length integer,
    width integer
  ) a_rect;
EXEC SQL END DECLARE SECTION;

EXEC SQL allocate row :a_rect;
EXEC SQL select rectangle into :a_rect from tab_unmrow
  where area = 1234;
```

When you use a typed **row** host variable, the data types of the row-type column (the field types) must be compatible with the corresponding data types of the typed **row** host variable. The SELECT statement in the preceding code fragment successfully retrieves the **rectangle** column because the **a_rect** host variable has the same field types as the **rectangle** column.

The following SELECT statement fails because the data types of the fields in the **emp_name** column and the **a_rect** host variable do not match:

```
/* This SELECT generates an error */
EXEC SQL select emp_name into :a_rect from tab_nmrow;
```


You can select any row into an untyped **row** host variable. The following code fragment uses an untyped **row** host variable to access the **emp_name** and **rectangle** columns that [Figure 52: Sample tables with row-type columns on page 244](#) defines:

```
EXEC SQL BEGIN DECLARE SECTION;
    row an_untyped_row;
EXEC SQL END DECLARE SECTION;

EXEC SQL allocate row :an_untyped_row;
EXEC SQL select rectangle into :an_untyped_row
    from tab_unmrow
    where area = 64;
:

EXEC SQL select emp_name into :an_untyped_row
    from tab_nmrow
    where row{'Tashi'} in (emp_name.fname);
```

Both SELECT statements in this code fragment can successfully retrieve row-type columns into the **an_untyped_row** host variable. However, IBM® Informix® ESQL/C does not perform type checking on an untyped **row** host variable because its elements do not have a predefined data type.

After you have initialized the **row** host variable, you can use the collection-derived table clause to select or update existing fields in the row. For more information, see the following sections.

Insert into a row variable

You cannot insert to a **row** variable by using an INSERT statement. The **row** variable represents a single table row in the form of a collection-derived table. Each field in the row type is like a column in this virtual table. Informix® ESQL/C returns an error if you attempt to insert to a **row** variable.

You can, however, use the UPDATE statement to insert new field values into a **row** variable.

Select from a row variable

The SELECT statement and the collection-derived table clause allow you to select a particular field or group of fields in the **row** variable.

The INTO clause identifies the host variables that hold the field values selected from the row-type variable. The data type of the host variable in the INTO clause must be compatible with the field type.

For example, the following figure contains a code fragment that puts the value of the **width** field (in the **row** variable **myrect**) into the **rect_width** host variable.

Figure 53. Selecting from a row variable

```
EXEC SQL BEGIN DECLARE SECTION;
    row (x int, y int, length float, width float) myrect;
    double rect_width;
EXEC SQL END DECLARE SECTION;
:

EXEC SQL select rect into :myrect from rectangles
    where area = 200;
EXEC SQL select width into :rect_width
    from table(:myrect);
```

The SELECT statement on a **row** variable (one that contains a collection-derived table clause) has the following restrictions:

- No expressions are allowed in the select list.
- The select list must be an asterisk (*) if the row contains elements of opaque, distinct, or built-in data types.
- Column names in the select list must be simple column names.

These columns cannot use the *database@server.table.column* syntax.

- The select list cannot use dot notation to access fields of the row.
- The following SELECT clauses are not allowed: GROUP BY, HAVING, INTO TEMP, ORDER BY, and WHERE.
- The FROM clause has no provisions to do a join.
- Row-type columns cannot be specified in a comparison condition in a WHERE clause.

If the **row** variable is a nested row, a SELECT statement cannot use dot notation to access the fields of the inner row. Instead, you must declare a **row** variable for each row type. The code fragment in the following figure shows how to access the fields of the inner row in the **nested_row** host variable.

Figure 54. Sample nested- row variable

```
EXEC SQL BEGIN DECLARE SECTION;
    row (a int, b row(x int, y int)) nested_row;
    row (x int, y int) inner_row;
    integer x_var, y_var;
EXEC SQL END DECLARE SECTION;

EXEC SQL select row_col into :nested_row from tab_row
    where a = 7;
EXEC SQL select b into :inner_row
    from table(:nested_row);
EXEC SQL select x, y into :x_var, :y_var
    from table(:inner_row);
```

The following SELECT statement is not valid to access the **x** and **y** fields of the **nested_row** variable because it uses dot notation:

```
EXEC SQL select row_col into :nested_row from tab_row
EXEC SQL select b.x, b.y /* invalid syntax */
    into :x_var, :y_var from table(:nested_row);
```

The IBM® Informix® ESQL/C application can use dot notation to access fields of a nested row when a SELECT statement accesses a database column. For more information, see [Select fields of a row column on page 252](#).

Update a row variable

The UPDATE statement and the collection-derived table clause allow you to update a particular field or group of fields in the **row** variable.

You specify the new field values in the SET clause. An UPDATE of a field or fields in a **row** variable cannot include a WHERE clause.

For example, the following UPDATE changes the **x** and **y** fields in the **myrect** Informix® ESQL/C **row** variable:

```
EXEC SQL BEGIN DECLARE SECTION;
    row (x int, y int, length float, width float) myrect;
    int new_y;
EXEC SQL END DECLARE SECTION;
;;

new_y = 4;
EXEC SQL update table(:myrect)
    set x=3, y=:new_y;
```

You cannot use a **row** variable in the collection-derived table clause of an INSERT statement. However, you can use the UPDATE statement and the collection-derived table clause to insert new field values into a **row** host variable, as long as you specify a value for every field in the row. For example, the following code fragment inserts new field values into the **row** variable **myrect** and then inserts this **row** variable into the database:

```
EXEC SQL update table(:myrect)
    set x=3, y=4, length=12, width=6;
EXEC SQL insert into rectangles
    values (72, :myrect);
```

Delete from a row variable

A delete operation does not apply to a **row** variable because a delete normally removes a row from a table. The **row** variable represents the row-type value as a single table row in the collection-derived table. Each field in the row type is a column in this table. You cannot remove this single table row from the collection-derived table. Therefore, the DELETE statement does not support a **row** variable in the collection-derived table clause. IBM® Informix® ESQL/C returns an error if you attempt to perform a DELETE operation on a **row** variable.

However, you can use the UPDATE statement to delete existing field values in a **row** variable.

Specify field names

IBM® Informix® ESQL/C is not case sensitive regarding the field names of a **row** variable. In a SELECT or UPDATE statement, Informix® ESQL/C always interprets field names of a **row** variable as lowercase. For example, in the following SELECT statement, Informix® ESQL/C interprets the fields to select as **x** and **y**, even though the SELECT statement specifies them in uppercase:

```
EXEC SQL select X, Y from table(:myrect);
```

This behavior is consistent with how the database server handles identifier names in SQL statements. To maintain the case of a field name, specify the field name as a delimited identifier. That is, surround the field name in double quotation marks and enable the **DELIMIDENT** environment variable before you compile the program.

Informix® ESQL/C interprets the fields to select as **X** and **Y** (uppercase) in the following SELECT statement (assuming the **DELIMIDENT** environment variable is enabled):

```
EXEC SQL select "X", "Y" from table(:myrect);
```

For more information about delimited identifiers and the **DELIMIDENT** environment variable, see [SQL identifiers on page 15](#).

Host variable field names

If the field names of the row column and the row variable are different, you must specify the field names of the row host variable. For example, if the last SELECT statement in the following example referenced field names **x** and **y** instead of the field names of **a_row**, it would generate a runtime error.

```
EXEC SQL BEGIN DECLARE SECTION;
    row (a integer, b float) a_row;
    int i;
    double f;
EXEC SQL END DECLARE SECTION;

EXEC SQL create table tab (row_fld(x integer, y float));
EXEC SQL insert into tab values ('row(9, 3.34e7)');
EXEC SQL select * into a_row from tab;
EXEC SQL select a, b into :i, :f from table(:a_row);
```

Specify field values

You can specify any of the following values for fields in a **row** variable:

- A literal value

You can also specify literal values directly for a row-type column without first using a **row** variable.

- A constructed row

You cannot include complex expressions directly to specify field values. However, a constructed row provides support for expressions as field values.

- An Informix® ESQL/C host variable

Literal values as field values

You can use a literal value to specify a field value for a **row** variable. The literal values must have a data type that is compatible with the field type.

For example, the following UPDATE statement specifies a literal integer as a field value for the **length** field of the **myrect** variable. See [Update a row variable on page 247](#) for a description of **myrect**.

```
EXEC SQL update table(:myrect) set length = 6;
```

The following UPDATE statement updates the x- and y-coordinate fields of the **myrect** variable:

```
EXEC SQL update table(:myrect)
  set (x = 14, y = 6);
```

The following UPDATE statement updates a ROW(a INTEGER, b CHAR(5)) host variable called **a_row2** with a quoted string:

```
EXEC SQL update table(:a_row2) set b = 'abcde';
```

The following UPDATE statement updates the **nested_row** host variable (which [Figure 54: Sample nested- row variable on page 246](#) defines) with a literal row:

```
EXEC SQL insert into table(:nested_row)
  values (1, row(2,3));
```



Important: The syntax of a literal row for a **row** variable is different from the syntax of a literal row for a row-type column. A **row** variable does not need to be a quoted string.

If you only need to insert or update the row-type column with literal values, you can list the literal values as a literal-row value in the INTO clause of the INSERT statement or the SET clause of the UPDATE statement.

Constructed rows

You can use a constructed row to specify an expression as a field value for a **row** variable. The constructed expression must use a row constructor and evaluate to a data type that is compatible with the field type of the field.

Suppose you have a nested-row variable that is declared as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
  row (fld1 integer, fld2 row(x smallint, y char(5))) a_nested_row;
EXEC SQL END DECLARE SECTION;
```

The following UPDATE statement uses the ROW constructor to specify expressions in the value for the **fld2** field of the **a_nested_row** variable:

```
EXEC SQL update table(:a_nested_row)
  set fld2 = row(:an_int, a_func(:a_strng));
```

For more information about the syntax of a row constructor, see the Expression segment in the *HCL® Informix® Guide to SQL: Syntax*.

ESQL/C host variables as field values

You can use the IBM® Informix® ESQL/C host variable to specify a field value for a **row** variable.

The host variable must be declared with a data type that is compatible with the data type of the field and must contain a value that is also compatible. For example, the following UPDATE statement uses a host variable to update a single value into the **a_row** variable.

```
an_int = 6;
EXEC SQL update table(:a_row) set fld1 = :an_int;
```

To insert multiple values into a **row** variable, you can use an UPDATE statement for each value or you can specify all field values in a single UPDATE statement:

```
one_fld = 469;
second_fld = 'dog';
EXEC SQL update table(:a_row)
  set fld1 = :one_fld, fld2 = :second_fld;
```

The following variation of the UPDATE statement performs the same task as the preceding UPDATE statement:

```
EXEC SQL update table(:a_row) set (fld1, fld2) =
  (:one_fld, :second_fld);
```

The following UPDATE statement updates the **nested_row** variable with a literal field value and a host variable:

```
EXEC SQL update table(:nested_row)
  set b = row(7, :i);
```

Access a typed table

You can use a **row** variable to access the columns of a *typed table*. A typed table is a table that was created with the OF TYPE clause of the CREATE TABLE statement. This table obtains the information for its columns from a named row type.

Suppose you create a typed table called **names** from the **full_name** named row type that [Figure 52: Sample tables with row-type columns on page 244](#) defines:

```
EXEC SQL create table names of type full_name;
```

You can access a row of the **names** typed table with a **row** variable. The following code fragment declares **a_name** as a typed **row** variable and selects a row of the **names** table into this **row** variable:

```
EXEC SQL BEGIN DECLARE SECTION;
  row (
    fname char(15),
    mi char(2)
    lname char(15)
  ) a_name;
  char last_name[16];
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL allocate row :a_name;
EXEC SQL select name_row into :a_name
  from names name_row
  where lname = 'Haven'
  and fname = 'C. K.'
  and mi = 'D';
EXEC SQL select lname into :last_name from table(:a_name);
```

The last SELECT statement accesses the **lname** field value of the **:a_name** row variable. For more information about typed tables, see the CREATE TABLE statement in the *HCL® Informix® Guide to SQL: Syntax* and the *HCL® Informix® Guide to SQL: Tutorial*.

The following example illustrates how you can also use an untyped **row** variable to access a row of an untyped table:

```
EXEC SQL BEGIN DECLARE SECTION;
row untyped_row;
int i;
char s[21];
EXEC SQL END DECLARE SECTION;

EXEC SQL create table tab_untyped(a integer, b char(20));
EXEC SQL insert into tab_untyped(1, "junk");
EXEC SQL select tab_untyped into :untyped_row
    from tab_untyped;
EXEC SQL select a, b into :i, :s from table(:untyped);
```

Operate on a row-type column

The **row** variable stores the fields of the row type. The **row** variable, however, has no intrinsic connection with a database column. You must use an INSERT or UPDATE statement to explicitly save the contents of the variable into the row type column.

You can use the SELECT, UPDATE, INSERT, and DELETE statements to access a row-type column (named or unnamed), as follows:

- The SELECT statement fetches all fields or a particular field from a row-type column.
- The INSERT statement inserts a new row into a row-type column.
- The UPDATE statement updates the entire row in a row-type column with new values.

Use an UPDATE statement on a table or view name and specify the **row** name in the values clause.

- The DELETE statement deletes from a table a row that contains a row-type column, thus deleting all field values from the row-type column.

For more information about how to use these statements with row-type columns, see the *HCL® Informix® Guide to SQL: Tutorial*.

Select from a row-type column

The SELECT statement allows you to access a row-type column in the following ways:

- Selecting all fields in the row-type column
- Selecting particular fields in the row-type column

Select the entire row-type column

To select all fields in a row-type column, specify the row-type column in the select list of the SELECT statement. To access these fields from the Informix® ESQL/C application, specify a **row** host variable in the INTO clause of the SELECT statement. For more information, see [Initialize a row variable on page 243](#).

Select fields of a row column

You can access an individual field in a row-type column with *dot notation*. Dot notation allows you to qualify an SQL identifier with another SQL identifier. You separate the identifiers with the period (.) symbol. The following SELECT statement performs the same task as the two SELECT statements in [Figure 53: Selecting from a row variable on page 246](#):

```
EXEC SQL select rect.width into :rect_width from rectangles;
```

For more information about dot notation, see the Column Expression section of the Expression segment in the *HCL® Informix® Guide to SQL: Syntax*.

Insert into and update row-type columns

The INSERT and UPDATE statements support row-type columns as follows:

- To insert a new row into a row-type column, specify the new values in the VALUES clause of the INSERT statement.
- To update the entire row-type column, specify the new field values in the SET clause of the UPDATE statement.

In the VALUES clause of an INSERT statement or the SET clause of an UPDATE statement, the field values can be in any of the following formats:

- The IBM® Informix® ESQL/C **row** host variable

For more information, see [Access a typed table on page 250](#).

- A constructed row

Constructed rows are described with respect to **row** variables in [Constructed rows on page 249](#). For information about the syntax of a constructed row, see the Constructed Row segment in the *HCL® Informix® Guide to SQL: Syntax*.

- A literal-row value

For more information about the syntax of a literal-row value, see the Literal Row segment in the *HCL® Informix® Guide to SQL: Syntax*.

To represent literal values for a row-type column, you specify a literal-row value. You create a literal-row value or a named or unnamed row type, introduce the value with the ROW keyword and provide the field values in a comma-separated list that is enclosed in parentheses. You surround the entire literal-row value with quotes (double or single). The following INSERT statement inserts the literal row of ROW(0, 0, 4, 5) into the **rectangle** column in the **tab_unmrow** table (that [Figure 52: Sample tables with row-type columns on page 244](#) defines):

```
EXEC SQL insert into tab_unmrow values
(
  20, "row(0, 0, 4, 5)"
);
```

The UPDATE statement in the following figure overwrites the SET values that the previous INSERT added to the **tab_unmrow** table.

Figure 55. Updating a row-type column

```
EXEC SQL update tab_unmrow
  set rectangle = ("row(1, 3, 4, 5)")
  where area = 20;
```



Important: If you omit the WHERE clause, the preceding UPDATE statement updates the **rectangle** column in all rows of the **tab_unmrow** table.

If any character value appears in this literal-row value, it too must be enclosed in quotes; this condition creates nested quotes. For example, a literal value for column **row1** of row type ROW(id INTEGER, name CHAR(5)), would be:

```
'ROW(6, "dexter")'
```

To specify nested quotes in an SQL statement in the Informix® ESQL/C program, you must escape every double quotation mark when it appears in a quotation mark string. The following two INSERT statements show how to use escape characters for inner quotes:

```
EXEC SQL insert into (row1) tab1
  values ('ROW(6, \"dexter\")');

EXEC SQL insert into (row2) tab1
  values ('ROW(1, \"SET{80, 81, 82, 83}\")');
```

When you embed a double-quoted string inside another double-quoted string, you do not need to escape the inner-most quotation marks:

```
EXEC SQL insert into tabx
  values (1, "row(\"row(12345)\")");
```

For more information about the syntax of literal values for **row** variables, see [Literal values as field values on page 248](#). For more information about the syntax of literal-row values, see the Literal Row segment in the *HCL® Informix® Guide to SQL: Syntax*.

If the row type contains a row type or a collection as a member, the inner row does not need quotes. For example, for column **col2** whose data type is ROW(a INTEGER, b SET (INTEGER)), a literal value would be:

```
'ROW(1, SET{80, 81, 82, 83})'
```

Delete an entire row type

To delete all fields in a row-type column, specify the table, view, or synonym name after the FROM keyword of the DELETE statement and use the WHERE clause to identify the table row or rows that you want to delete.

The following DELETE statement deletes the row in the **tab_unmrow** table that contains the row type that the UPDATE statement in [Figure 55: Updating a row-type column on page 253](#) saves:

```
EXEC SQL delete from tab_unmrow
  where area = 20;
```

Opaque data types

These topics explain how to use the **lvvarchar**, **fixed binary**, and **var binary** data types to access an opaque data type from the IBM® Informix® ESQL/C program. Use these Informix® ESQL/C data types to represent an opaque data type as it is transferred to and from Informix®.

The information in these topics apply only if you are using HCL Informix® as your database server.

For information about SQL complex data types, see the *HCL® Informix® Guide to SQL: Reference*.

The SQL opaque data type

An opaque data type is a user-defined data type that can be used in the same way as the HCL Informix® built-in data types. The opaque data type allows you to define new data types for your database applications.

An opaque data type is fully encapsulated; the database server does not know about the internal format of an opaque data type. Therefore, the database server cannot make assumptions about how to access a column having an opaque data type. The database developer defines a data structure that holds the opaque-type information and support functions that tell the database server how to access this data structure.

For more information about how to create an opaque data type, see the description of the CREATE OPAQUE TYPE statement in the *HCL® Informix® Guide to SQL: Syntax* and in *HCL® Informix® User-Defined Routines and Data Types Developer's Guide*.

You can access the value of an opaque data type from the Informix® ESQL/C application in one of two ways:

- In the external format, as a character string

Transfer of the external format between the client application and database server is supported by the database server through the input and output support functions of the opaque data type.

- In the internal format, as a data structure in an external programming language (such as C)

Transfer of the internal format between the client application and database server is supported by the database server through the receive and send support functions of the opaque data type.

The following list shows the Informix® ESQL/C data types you can use to access an opaque data type.

Informix® data type

ESQL/C host variable

External format of an opaque data type

lvvarchar host variable

Internal format of an opaque data type

fixed binary host variable

var binary host variable

This section uses an opaque data type called **circle** to demonstrate how Informix® ESQL/C **lvarchar** and **fixed binary** host variables access an opaque data type. This data type includes an x,y coordinate, to represent the center of the circle, and a radius value. The following figure shows the internal data structures for the **circle** data type.

Figure 56. Internal data structures for the circle opaque data type

```
typedef struct
{
    double    x;
    double    y;
} point_t;

typedef struct
{
    point_t    center;
    double     radius;
} circle_t;
```

The following figure shows the SQL statements that register the **circle** data type and its input, output, send, and receive support functions in the database.

Figure 57. Registering the circle opaque data type

```
CREATE OPAQUE TYPE circle (INTERNALLENGTH = 24,
    ALIGNMENT = 4);

CREATE FUNCTION circle_in(c_in lvarchar) RETURNS circle
    EXTERNAL NAME '/usr/lib/circle.so(circle_input)'
    LANGUAGE C;
CREATE IMPLICIT CAST (lvarchar AS circle WITH circle_in);

CREATE FUNCTION circle_out(c_out circle) RETURNS lvarchar
    EXTERNAL NAME '/usr/lib/circle.so(circle_output)'
    LANGUAGE C;
CREATE IMPLICIT CAST (circle AS lvarchar WITH circle_out);


CREATE FUNCTION circle_rcv(c_rcv sendrcv) RETURNS circle
    EXTERNAL NAME '/usr/lib/circle.so(circle_receive)'
    LANGUAGE C;
CREATE IMPLICIT CAST (sendrcv AS circle WITH circle_rcv);

CREATE FUNCTION circle_snd(c_snd circle) RETURNS sendrcv
    EXTERNAL NAME '/usr/lib/circle.so(circle_send)'
    LANGUAGE C;
CREATE IMPLICIT CAST (circle AS sendrcv WITH circle_snd);

CREATE FUNCTION radius(circle) RETURNS FLOAT
    EXTERNAL NAME '/usr/lib/circle.so'
    LANGUAGE C;
```

Suppose the input and output functions of the **circle** data type define the following external format that the following figure shows.

Figure 58. External Format of the circle Opaque data type

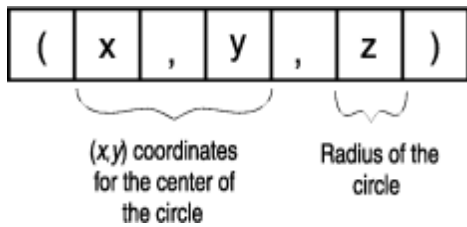

The following figure shows the SQL statements that create and insert several rows into a table called **circle_tab**, which has a column of type **circle**.

Figure 59. Creating a column of the circle opaque data type

```
CREATE TABLE circle_tab (circle_col circle);
INSERT INTO circle_tab VALUES ('(12.00, 16.00, 13.00)');
INSERT INTO circle_tab VALUES ('(6.5, 8.0, 9.0)');
```

Access the external format of an opaque type

Use the **lvvarchar** data type for operations on an opaque-type column that has an external representation of a character string.

To use the external format of an opaque type in an SQL statement, the opaque data type must have input and output support functions defined. When the client application uses an **lvvarchar** host variable to transfer data to or from an opaque-type column, the database server invokes the following support functions of the opaque data type:

- The input support function describes how to transfer the opaque-type data from the **lvvarchar** host variable into the opaque-type column.

The database server invokes the input support function for operations such as INSERT and UPDATE statements that send the external format of an opaque type to the database server.

- The output support function describes how to transfer the opaque-type data from the opaque-type column to the **lvvarchar** host variable.

The database server invokes the output support function for operations such as SELECT and FETCH statements that send the external format of an opaque type to the client application.



Important: If the CREATE OPAQUE TYPE statement specifies a maxlength limit, that value is the maximum length the database server stores for the column, regardless of the size of the data sent by the client application. If the length of the data is more than the maxlength limit, the database server truncates the data and notifies the application.

Follow these steps to transfer the external format of an opaque-type column between the database server and the IBM® Informix® ESQL/C application:

1. Declare an **lvvarchar** host variable
2. Use the **lvvarchar** host variable in an SQL statement to perform any select, insert, update or delete operations on the external format of the opaque-type column.

Declare lvarchar host variables

Use the **lvarchar** data type to declare a host variable for the external format of an opaque data type.

The following diagram illustrates the syntax to declare an **lvarchar** host variable. To declare, use the **lvarchar** keyword as the variable data type, as the following syntax shows.

```
(explicit id) lvarchar [ 'opaque type ' ] { | variable name [ variable size ] | *variable name } ;
```

Element	Purpose	Restrictions	SQL syntax
<i>opaque type</i>	Name of the opaque data type whose external format is to be stored in the lvarchar variable	Must already be defined in the database	Identifier segment in the <i>HCL@ Informix@ Guide to SQL: Syntax</i>
<i>variable name</i>	Name of the IBM® Informix® ESQL/C variable to declare as an lvarchar variable		Name must conform to language-specific rules for variable names.
<i>*variable name</i>	Name of an lvarchar pointer variable for data of unspecified length	Not equivalent to a C char pointer (char *). Points to an internal ESQL/C representation for this type. You must use the <code>ifx_var()</code> functions to manipulate data. For more information, see The lvarchar pointer and var binary library functions on page 275 .	Name must conform to language-specific rules for variable names.
<i>variable size</i>	Number of bytes to allocate for the lvarchar variable	Integer value can be 1 - 32,000 bytes (32 KB).	



Tip: To declare an **lvarchar** host variable for an LVARCHAR column, use the syntax that [The lvarchar data type on page 99](#) shows.

The following figure shows declarations for four **lvarchar** variables that hold the external formats of opaque-type columns.

Figure 60. Sample lvarchar host variables for opaque data type

```
#define CIRCLESZ 20

EXEC SQL BEGIN DECLARE SECTION;
  lvarchar 'shape' a_polygon[100];
  lvarchar 'circle' circle1[CIRCLESZ],
          circle2[CIRCLESZ];
  lvarchar 'circle' *a_crc1_ptr;
EXEC SQL END DECLARE SECTION;
```

You can declare several **lvarchar** variables in a single declaration line. However, all variables must have the same opaque type, as the declarations for **circle1** and **circle2** in [Figure 60: Sample lvarchar host variables for opaque data type on](#)

page 257 show. [Figure 60: Sample lvarchar host variables for opaque data type on page 257](#) also shows the declaration of an **lvarchar** pointer for the **a_crcl_ptr** host variable.

An lvarchar host variable of a fixed size

If you do not specify the size of an **lvarchar** host variable, the size is equivalent to a one-byte C-language **char** data type. If you specify a size, the **lvarchar** host variable is equivalent to a C-language **char** data type of that size. When you specify a fixed-size **lvarchar** host variable, any data beyond the specified size is truncated when the column is fetched. Use an indicator variable to check for truncation.

Because an **lvarchar** host variable of a fixed size is equivalent to a C-language **char** data type, you can use C-language character string operations to manipulate them.

The lvarchar pointer host variable

The **lvarchar** pointer host variable is designed for inserting or selecting user-defined or opaque types that can be represented in a character-string format.

The size of the character-string representation for opaque type columns can vary for each row so that the size of the data is unknown until the column is fetched into a host variable. The size of the data that an **lvarchar** pointer host variable references can range up to 2 GB.

The **lvarchar** pointer type is not equivalent to a C-language **char** pointer. Informix® ESQL/C maintains its own internal representation for the **lvarchar** pointer type. You must use the `ifx_var()` functions to manipulate an **lvarchar** pointer host variable. The `ifx_var()` functions can only be used for **lvarchar** variables declared as pointers and for **var binary** variables, but not for **lvarchar** variables of a fixed size. For a list of the functions that you can use with **lvarchar** and **var binary** variables, see [The lvarchar pointer and var binary library functions on page 275](#).

Because the size of the data in opaque type columns can vary from one row in the table to another, you can not know the maximum size of the data that the database server will return. When you use an **lvarchar** pointer host variable, you can either let Informix® ESQL/C allocate memory to hold the data, based on the size of the data coming from the database server, or you can allocate the memory yourself. Use the `ifx_var_flag()` function to specify which method you will use. In either case you must explicitly free the memory, by using the `ifx_var_dealloc()` function.

Starting 14.10.xC10, codeset conversion will be done when client locale differs from DB locale when `CLVCHARPTRTYPE` is used.

To allocate memory yourself

To specify that you are allocating the memory to store data for an **lvarchar** host variable you must first call `ifx_var_flag()`, giving the address of the **lvarchar** pointer and setting the flag value to zero (0), as the following example shows:

```
ifx_var_flag(&mypoly, 0);
```

Next you must fetch the data into `sqllda` or a system descriptor structure. You can then use the `ifx_var_getllen()` function to obtain the length of the data and use the `ifx_var_alloc()` function to allocate memory of that size.

```

#include <stdio.h>
exec sql include "polyvar.h" /* includes udt - polygon_type */

main()
{
    exec sql begin declare section;
        lvarchar 'polygon_type' *mypoly1
        char *buffer;
        int size, p_id, len;
    exec sql end declare section;

    ifx_var_flag(&mypoly1, 0); /* specifies that appl. will allocate
memory */
    exec sql select poly into :mypoly1 from polygon_tab where p_id = 1;
    if ( ifx_var_getlen(&mypoly1) > 0 ) { /* If select returns valid data
*/
        buffer = (char *)ifx_var_getdata(&mypoly1); /*Access data in
* mypoly1*/
        printf("Length of data : %ld \n", (int)ifx_var_getlen(&mypoly) );
        ifx_var_dealloc(&mypoly1); /* Always users responsibility to free */
    }
}

```

The opaque type name

This opaque type name is optional; its presence affects the declaration as follows:

- When you omit opaque type from the **lvarchar** declaration, the database server attempts to identify the appropriate support and casting functions to use when it converts between **lvarchar** and the opaque data type.

You can use the **lvarchar** host variable to hold data for several different opaque types (as long as the database server is able to find the appropriate support functions).

- When you specify opaque type in the **lvarchar** declaration, the database server knows precisely which support and casting functions to use when it converts between **lvarchar** and the opaque data type.

Using opaque type can make data conversion more efficient. In this case, however, the **lvarchar** host variable can hold data only for the specified opaque type.

In the declaration of an **lvarchar** host variable, the name of the opaque type must be a quoted string.



Important: Both the quotation mark (') and the double quotation mark (") are valid quote characters in **lvarchar** declarations. However, the beginning quote and ending quote characters must match.

The lvarchar host variables

Your IBM® Informix® ESQL/C program must manipulate the external data for an **lvarchar** host variable. If the length of the data that come from an opaque type column does not vary, or if you know the maximum length of the data in an opaque type column, you can use a fixed-size **lvarchar** host variable. If the size of the data varies from one table row to another, however, use an **lvarchar** pointer variable and manipulate the data with the `ifx_var()` functions.

Fixed-size lvarchar host variables

The following figure shows how to use a fixed-size **lvarchar** host variable to insert and select data in the **circle_col** column of the **circle_tab** table (see [Figure 59: Creating a column of the circle opaque data type on page 256](#)).

Figure 61. Accessing the external format of the circle opaque data type

```
EXEC SQL BEGIN DECLARE SECTION;
    lvarchar 'circle' lv_circle[30];
    char *x_coord;
EXEC SQL END DECLARE SECTION;

/* Insert a new circle_tab row with a literal opaque
 * value */
EXEC SQL insert into circle_tab
    values ('(3.00, 2.00, 11.5)');

/* Insert data into column circle of table circle_tab using an lvarchar host
 * variable */
strcpy(lv_circle, "(1.00, 17.00, 15.25)");
EXEC SQL insert into circle_tab values (:lv_circle);

/* Select column circle in circle_tab from into an lvarchar host variable
 */
EXEC SQL select circle_col into :lv_circle
    from circle_tab
    where radius(circle_col) = 15.25;
```

Inserting from a fixed-size lvarchar host variable

To insert the data from a fixed-size **lvarchar** host variable into an opaque-type column, take the following steps, which are illustrated in [Figure 61: Accessing the external format of the circle opaque data type on page 260](#):

1. Define the fixed-size **lvarchar** host variable.

The example explicitly reserves 30 bytes for the **lv_circle** host variable.

2. Put the character string that corresponds to the external format of the opaque data type into the **lvarchar** host variable.

When you put data into an **lvarchar** host variable, you must know the external format of the opaque type. For the INSERT statement to succeed, the data in the **lvarchar** host variable **lv_circle** must conform to the external format of the opaque data type (which [Figure 58: External Format of the circle Opaque data type on page 256](#) shows).

3. Insert the data that the **lvarchar** host variable contains into the opaque-type column.

When the database server executes the INSERT statement, it calls the input support function for the **circle** data type (**circle_in**) to translate the external format of the data that the IBM® Informix® ESQL/C client application sent to the internal format that it stores on disk.

Figure 61: Accessing the external format of the circle opaque data type on page 260 also shows an INSERT of literal values into the **circle_col** column. Literal values in an INSERT (or UPDATE) statement must also conform to the external format of the opaque data type.

You can use a fixed-size **lvvarchar** host variable to insert a null value into an opaque-type column with the following steps:

- Set the **lvvarchar** host variable to an empty string.
- Set an indicator variable for the **lvvarchar** host variable to `-1`.

The following code fragment inserts a null value into the **circle_col** column with the **lv_circle** host variable:

```
EXEC SQL BEGIN DECLARE SECTION;
    lvvarchar lv_circle[30];
    int circle_ind;
EXEC SQL END DECLARE SECTION;
;

strcpy(lv_circle, "");
circle_ind = -1;
EXEC SQL insert into circle_tab
    values (:lv_circle:circle_ind);
```

Select into a fixed-size lvvarchar host variable

To select data from an opaque type column into a fixed-size **lvvarchar** host variable, the code fragment in Figure 61: Accessing the external format of the circle opaque data type on page 260 takes the following steps:

1. Selects the data that the **circle_col** opaque-type column contains into the **lv_circle** host variable.

When the database server executes the SELECT statement, it calls the output support function for the **circle** data type (**circle_out**) to translate the internal format that it retrieved from disk to the external format that the Informix® ESQL/C application requests. This SELECT statement also uses a user-defined function called **radius** (see Figure 57: Registering the circle opaque data type on page 255) to extract the radius value from the opaque-type column. This function must be registered with the database server for this SELECT statement to execute successfully.

2. Accesses the **circle** data from the **lvvarchar** host variable.

After the SELECT statement, the **lv_circle** host variable contains data in the external format of the **circle** data type.

When you select a null value from an opaque-type column into an **lvvarchar** host variable, Informix® ESQL/C sets any accompanying indicator variable to `-1`.

The lvvarchar pointer variables

The following sections illustrate how to insert to and select from an opaque type column with an **lvvarchar** pointer host variable. The structural representation of the opaque type column that the examples use is referred to as **polygon_type**, and is defined in the following lines:

```
struct {
    int no_of_edges; /* No of sides in the polygon */
```

```
int length[100]; /* Maximum number of edges in this polygon
                is 100 */
int center_x; /* Center x co-ordinate of the polygon */
int center_y; /* Center y co-ordinate of the polygon */
}
```

The following line illustrates the string representation of this column:

```
"no_of_edges, length_of_edge 1, . . . length_of_edge n, -1, center_x,
center_y"
```

For information about using an **lvvarchar** pointer host variable with a FETCH or PUT statement that uses a dynamic SQL descriptor, see [An lvvarchar pointer host variable with a descriptor on page 483](#).

Insert from an lvvarchar pointer host variable

The following example code illustrates the steps to insert data from an **lvvarchar** pointer host variable to an opaque type column. To simplify the example, the code does not check returned values for errors.

```
#include <stdio.h>
exec sql include polyvar.h/* includes udt - polygon_type */

main()
{
    exec sql begin declare section;
        lvvarchar 'polygon_type' *mypoly1
        char *buffer;
        int size, p_id, len;
    exec sql end declare section;

    exec sql create table polygon_tab (p_id int, poly polygon_type);
    ifx_var_flag(&mypoly1, 0); /* User does allocation */
    buffer = malloc(50);

    /* String representation of mypoly1 copied into buffer*/
    strcpy(buffer, "5, 10, 20 15, 10, 5, -1, 0, 0");
    size = strlen(buffer);
    ifx_var_alloc(&mypoly1, size+1); /* Allocate memory for data in
                                    * mypoly1 */
    ifx_var_setlen(&mypoly1, size); /* Set length of data buffer in
                                    * mypoly1 */
    ifx_var_setdata(&mypoly1, buffer, size); /* Store data inside mypoly1
                                            */
    exec sql insert into polygon_tab values (1, :mypoly1);
    ifx_var_setnull(&mypoly1, 1); /* Set data buffer in mypoly1 to NULL
                                    */
    ifx_var_dealloc(&mypoly1); /* Deallocate the data buffer in mypoly1
                                */
    free (buffer);
}
```

The example code performs the following steps:

1. It declares the **lvvarchar** pointer host variable, ***mypoly1**.
2. It creates a table that consists of an integer ID column, **p_id**, and a column of polygons, **polygon_type**.

3. It calls the `ifx_var_flag()` function to specify that it will allocate memory for the data buffer (**flag** equals 0).
4. It creates a buffer, copies the string representation of the polygon to it, and sets the **size** variable to the size of the buffer.
5. It calls `ifx_var_alloc()`, `ifx_var_setlen()`, and `ifx_var_setdata()` to allocate the data transfer buffer, set the length of the buffer, and copy the data from the application buffer to the data transfer buffer.
6. It inserts an ID value of 1 and **mypoly1** to the **polygon_tab** table.

Select into an lvarchar pointer host variable

The following example code illustrates the steps to select data from an opaque type column into an **lvarchar** pointer host variable. To simplify the example, the code does not check returned values for errors.

```
#include <stdio.h>
exec sql include "polyvar.h" /* includes udt - polygon_type */

main()
{
    exec sql begin declare section;
        lvarchar 'polygon_type' *mypoly1
        char *buffer;
        int size, p_id, len;
    exec sql end declare section;

    ifx_var_flag(&mypoly1, 1); /* ESQL/C run time will do the allocation
                               */

    exec sql select poly into :mypoly1 from polygon_tab where p_id = 1;
    if ( ifx_var_getlen(&mypoly1) > 0 ) { /* If select returns valid data
                                         */
        buffer = (char *)ifx_var_getdata(&mypoly1); /*Access data in
                                                    * mypoly1*/
        printf("Length of data : %ld \n", (int)ifx_var_getlen(&mypoly1) );
        printf("Data: %s \n", buffer);
        ifx_var_dealloc(&mypoly1); /* Always users responsibility to free */
    }
}
```

The example code performs the following steps:

1. It declares the **lvarchar** pointer host variable, ***mypoly1**.
2. It calls the `ifx_var_flag()` function to specify that it will let IBM® Informix® ESQL/C allocate memory for the data buffer (**flag** equals 1). Informix® ESQL/C allocates the memory by default if you do not call `ifx_var_flag()`.
3. It selects the column **poly** into the ***mypoly** host variable.
4. It calls `ifx_var_getdata()` to obtain the address of the data buffer, casting the return value to **char *** and storing the address in **buffer**.
5. It calls `ifx_var_getlen()` to illustrate how to obtain the length of the data that was retrieved.
6. It deallocates the memory that Informix® ESQL/C allocated for ***mypoly1**.

For an example that uses **lvarchar** pointers as host variables for selecting from collection columns, see [The lvarptr.ec program on page 428](#).

Access the internal format of an opaque type

You can access the internal or binary format of an opaque data type with the IBM® Informix® ESQL/C host variable in two ways:

- Use the **fixed binary** data type to access a fixed-length opaque data type for which you have the C-language data structure that represents the opaque data type.

A fixed-length opaque data type has a predefined size for its data. This size is equal to the size of the internal data structure for the opaque data type.

- Use the **var binary** data type to access a varying-length opaque data type or to access a fixed-length opaque data type for which you do not have the C-language data structure.

A varying-length data type holds data whose size might vary from row to row or instance to instance.

Both the **fixed binary** and **var binary** data types have a one-to-one mapping between their declaration and the internal data structure of the opaque data type. The database server invokes the following support functions of the opaque data type when the application transfers data in the **fixed binary** or **var binary** host variables:

- The receive support function describes how to transfer the opaque-type data from the **fixed binary** or **var binary** host variable into the opaque-type column.

The database server invokes the receive support function for operations such as INSERT and UPDATE statements that send the internal format of an opaque type to the database server.

- The send support function describes how to transfer the opaque-type data from the opaque-type column to the **fixed binary** or **var binary** host variable.

The database server invokes the send support function for operations such as SELECT and FETCH statements that send the internal format of an opaque type to the client application.

Access a fixed-length opaque type

The **fixed binary** data type allows you to access a fixed-length opaque-type column in its internal format.

Follow these steps to transfer the internal format of a fixed-length opaque-type column between the database server and the Informix® ESQL/C application:

1. Declare a **fixed binary** host variable
2. Use the **fixed binary** host variable in an SQL statement to perform any select, insert, update, or delete operations on the internal format of the fixed-length opaque-type column.

Declare fixed binary host variables

Use the **fixed binary** data type to declare host variables that access the internal format of a fixed-length opaque data type.

To declare a **fixed binary** host variable, use the following syntax.

```
(explicit id) fixed binary [ 'opaque type ' ] structure name variable name ;
```

Element	Purpose	Restrictions	SQL Syntax
<i>opaque type</i>	Name of the fixed-length opaque data type whose internal format is to be stored in the fixed binary variable	Must already be defined in the database.	Identifier segment in the <i>HCL® Informix® Guide to SQL: Syntax</i>
<i>structure name</i>	Name of the C data structure that represents the internal format of the opaque data type	Must be defined in a header (.h) file that the source file includes. Must also match the data structure that the database server uses to represent the internal format of the opaque type.	Name must conform to language-specific rules for structure names.
<i>variable name</i>	Name of the ESQL/C variable to declare as a fixed binary variable		Name must conform to language-specific rules for variable names.



Important: A **fixed binary** host variable is only valid for a column of a fixed-length opaque data type. If the opaque data type is of varying length, use a **var binary** host variable. If you do not know the internal data structure of a fixed-length opaque data type, you must also use a **var binary** host variable to access it.

To use a **fixed binary** host variable, you must reference a C data structure that maps the internal data structure of the opaque data type. You specify this C data structure as the structure name in the **fixed binary** declaration.

It is suggested that you create a C header file (.h file) for the C data structure that defines a fixed-length opaque data type. You can then include this header file in each Informix® ESQL/C source file that uses **fixed binary** host variables to access the opaque data type.

For example, the following code fragment declares a **fixed binary** host variable called **my_circle** for the **circle** opaque data type:

```
#include <circle.h> /* contains definition of circle_t */

EXEC SQL BEGIN DECLARE SECTION;
    fixed binary 'circle' circle_t my_circle;
EXEC SQL END DECLARE SECTION;
```

In this example, the `circle.h` header file contains the declaration for the `circle_t` structure (see [Figure 56: Internal data structures for the circle opaque data type on page 255](#)), which is the internal data structure for the **circle** opaque type.

The declaration for the **my_circle** host variable specifies both the name of the opaque data type, **circle**, and the name of its internal data structure, `circle_t`.

The opaque type

When you declare a **fixed binary** host variable, you must specify the opaque type as a quoted string.



Important: Both the quotation mark (') and the double quotation mark (") are valid quote characters. However, the beginning quote and ending quote characters must match.

The opaque type name is optional; it affects the declaration as follows:

- When you omit opaque type from the **fixed binary** declaration, the database server attempts to identify the appropriate support functions to use when it sends the host variable to the database server for storage in the opaque-type column.

You can use the **fixed binary** host variable to hold data for several different opaque types (as long as the database server is able to find the appropriate support functions).

- When you specify opaque type in the **fixed binary** declaration, the database server knows precisely which support functions to use to read and write to the opaque-type column.

Using opaque type can make data conversion more efficient. In this case, however, the **fixed binary** host variable can hold data only for the specified opaque type data type.

You can declare several **fixed binary** variables in a single declaration. However, all variables must have the same opaque type, as the following declaration shows:

```
#include <shape.h>;

EXEC SQL BEGIN DECLARE SECTION;
    fixed binary 'shape' shape_t square1, square2;
EXEC SQL END DECLARE SECTION;
```

Fixed binary host variables

Your IBM® Informix® ESQL/C program must handle all manipulation of the internal data structure for the **fixed binary** host variable; it must explicitly allocate memory and assign field values.

The following figure shows how to use a **fixed binary** host variable to insert and select data in the **circle_col** column of the **circle_tab** table (see [Figure 59: Creating a column of the circle opaque data type on page 256](#)).

Figure 62. Accessing the internal format of the circle opaque data type with a fixed binary host variable

```

/* Include declaration for circle_t structure */
#include <circle.h>;

EXEC SQL BEGIN DECLARE SECTION;
    fixed binary 'circle' circle_t fbin_circle;
EXEC SQL END DECLARE SECTION;

/* Assign data to members of internal data structure */
fbin_circle.center.x = 1.00;
fbin_circle.center.y = 17.00;
fbin_circle.radius = 15.25;

/* Insert a new circle_tab row with a fixed binary host
 * variable */
EXEC SQL insert into circle_tab values (:fbin_circle);

/* Select a circle_tab row from into a fixed binary
 * host variable */
EXEC SQL select circle_col into :fbin_circle
    from circle_tab
    where radius(circle_col) = 15.25;
if ((fbin_circle.center.x == 1.00) &&
    (fbin_circle.center.y == 17.00))
    printf("coordinates = (%d, %d)\n",
        fbin_circle.center.x, fbin_circle.center.y);

```

Insert from a fixed binary host variable

To insert the data that a **fixed binary** host variable contains into an opaque-type column, the code fragment in [Figure 62: Accessing the internal format of the circle opaque data type with a fixed binary host variable on page 267](#) takes the following steps:

1. Includes the definition of the internal structure of the **circle** opaque data type.

The definition of the **circle_t** internal data structure, which [Figure 56: Internal data structures for the circle opaque data type on page 255](#) shows, must be available to your IBM® Informix® ESQL/C program. Therefore, the code fragment includes the **circle.h** header file, which contains the definition of the **circle_t** structure.

2. Stores the data for the **fixed binary** host variable into the internal data structure, **circle_t**.

The declaration of the **fixed binary** host variable associates the **circle_t** internal data structure with the **fbin_circle** host variable. The code fragment assigns a value to each member of the **circle_t** data structure.

3. Inserts the data that the **fbin_circle** host variable contains into the **circle_col** opaque-type column.

When the database server executes the INSERT statement, it calls the receive support function for the **circle** data type (**circle_rcv**) to perform any translation necessary between the internal format of the data that the Informix® ESQL/C client application has sent (**circle_t**) and the internal format of the **circle** data type on disk.

To insert a null value into an opaque-type column with a **fixed binary** host variable, set an indicator variable to `-1`. The following code fragment inserts a null value into the **circle_col** column with the **fbin_circle** host variable:

```
#include <circle.h>;

EXEC SQL BEGIN DECLARE SECTION;
    fixed binary 'circle' circle_t fbin_circle;
    int circle_ind;
EXEC SQL END DECLARE SECTION;
:

circle_ind = -1;
EXEC SQL insert into circle_tab
    values (:fbin_circle:circle_ind);
```

Select into a fixed binary host variable

To select the data that an opaque-type column contains into a **fixed binary** host variable, the code fragment in [Figure 62: Accessing the internal format of the circle opaque data type with a fixed binary host variable on page 267](#) takes the following steps:

1. Selects the data that the **circle_col** opaque-type column contains into the **fbin_circle** host variable.

When the database server executes the SELECT statement, it calls the send support function for **circle** (**circle_snd**) to perform any translation necessary between the internal format that it retrieved from disk and the internal format that the IBM® Informix® ESQL/C application uses. This SELECT statement also uses a user-defined function called **radius** (see [Figure 57: Registering the circle opaque data type on page 255](#)) to extract the radius value from the opaque-type column.

2. Accesses the **circle** data from the **fixed binary** host variable.

After the SELECT statement, the **fbin_circle** host variable contains data in the internal format of the **circle** data type. The code fragment obtains the value of the (x,y) coordinate from the members of the **circle_t** data structure.

When you select a null value from an opaque-type column into a **fixed binary** host variable, Informix® ESQL/C sets any accompanying indicator variable to `-1`.

Access a varying-length opaque type

The **var binary** data type allows you to access the internal format of either of the following opaque data types:

- A fixed-length opaque-type column for which you do not have access to the C-structure of the internal format
- A varying-length opaque-type column

Follow these steps to transfer the internal format of either of these opaque data type columns between the database server and the Informix® ESQL/C application:

1. Declare a **var binary** host variable
2. Use the **var binary** host variable in an SQL statement to perform any select, insert, update, or delete operations on the internal format of the opaque-type column.

Declare var binary host variables

To declare a **var binary** host variable, use the following syntax.

```
(explicit id) var binary [ 'opaque type ' ] structure name variable name ;
```

Element	Purpose	Restrictions	SQL syntax
<i>opaque type</i>	Name of the opaque data type whose internal format is to be stored in the var binary variable.	Must already be defined in the database	Identifier segment in the <i>HCL® Informix® Guide to SQL: Syntax</i>
<i>variable name</i>	Name of the ESQL/C variable to declare as a var binary variable		Name must conform to language-specific rules for variable names.

The following figure shows declarations for three **var binary** variables.

Figure 63. Sample var binary host variables

```
#include <shape.h>;
#include <image.h>;

EXEC SQL BEGIN DECLARE SECTION;
  var binary polygon1;
  var binary 'shape' polygon2, a_circle;
  var binary 'image' an_image;
EXEC SQL END DECLARE SECTION;
```

In the declaration of a **var binary** host variable, the name of the opaque type must be a quoted string.



Important: Both the quotation mark (') and the quotation mark (") are valid quote characters. However, the beginning quote and ending quote characters must match.

The opaque type name is optional; it affects the declaration as follows:

- When you omit opaque type from the **var binary** declaration, the database server attempts to identify the appropriate support functions to use when the application receives the internal data structure from the opaque-type column in a database.

The advantage of the omission of opaque type is that you can use the **var binary** host variable to hold data that was selected from several different opaque types (as long as the database server is able to find the appropriate support functions).

The disadvantage of the omission of opaque type is that host variables declared in this way cannot be used as parameters to user defined routines (UDRs).

- When you specify opaque type in the **var binary** declaration, the database server knows precisely which support functions to use when it sends the internal data structure to the database server for storage in the opaque-type column.

The loss of ambiguity that the opaque type name provides can make data conversion more efficient. However, in this case, the **var binary** host variable can only hold data from the specified opaque type data type.

You can declare several **var binary** variables in a single declaration line. However, all variables must have the same opaque type, as [Figure 63: Sample var binary host variables on page 269](#) shows.

The var binary host variables

In the IBM® Informix® ESQL/C program, the varying-length C structure, **ifx_varlena_t**, stores a binary value for a **var binary** host variable. This data structure allows you to transfer binary data without knowing the exact structure of the internal format for the opaque data type. It provides a data buffer to hold the data for the associated **var binary** host variable.



Important: The **ifx_varlena_t** structure is an opaque structure to Informix® ESQL/C programs. That is, you do not access its internal structure directly. The internal structure of **ifx_varlena_t** might change in future releases. Therefore, to create portable code, always use the Informix® ESQL/C accessor functions for this structure to obtain and store values in the **ifx_varlena_t** structure. For a list of these Informix® ESQL/C access functions, see [The lvarchar pointer and var binary library functions on page 275](#).

This section uses a varying-length opaque data type called **image** to demonstrate how the Informix® ESQL/C **var binary** host variable accesses an opaque data type. The image data type encapsulates an image such as a JPEG, GIF, or PPM file. If the image is less than 2 kilobytes, the data structure for the data type stores the image directly. However, if the image is greater than 2 kilobytes, the data structure stores a reference (an LO-pointer structure) to a smart large object that contains the image data. The following figure shows the internal data structure for the **image** data type in the database.

Figure 64. Internal data structures for the image opaque data type

```

typedef struct
{
  int      img_len;
  int      img_thresh;
  int      img_flags;
  union
  {
    {
      ifx_lob_t      img_lobhandle;
      char          img_data[4];
    }
  }
} image_t;

typedef struct
{
  point_t      center;
  double       radius;
} circle_t;

```

The following figure shows the CREATE TABLE statement that creates a table called **image_tab** that has a column of type **image** and an image identifier.

Figure 65. Creating a column of the image opaque data type

```

CREATE TABLE image_tab
(
  image_id      integer not null primary key),
  image_col     image
);

```

The following figure shows how to use a **var binary** host variable to insert and select data in the **image_col** column of the **image_tab** table (see [Figure 65: Creating a column of the image opaque data type on page 271](#)).

Figure 66. Accessing the internal format of the image opaque data type with a var binary host variable

```

#include <image.h>;

EXEC SQL BEGIN DECLARE SECTION;
    var binary 'image' vbin_image;
EXEC SQL END DECLARE SECTION;

struct image_t user_image, *image_ptr;
int imgsz;

/* Load data into members of internal data structure
load_image(&user_image);
imgsz = getsize(&user_image);

/* Allocate memory for var binary data buffer */
ifx_var_flag(&vbin_image, 0);
ifx_var_alloc(&vbin_image, imgsz);

/* Assign data to data buffer of var binary host
 * variable */
ifx_var_setdata(&vbin_image, &user_image, imgsz);

/* Insert a new image_tab row with a var binary host
 * variable */
EXEC SQL insert into image_tab values (1, :vbin_image);

/* Deallocate image data buffer */
ifx_var_dealloc(&vbin_image);

/* Select an image_tab row from into a var binary
 * host variable */
ifx_var_flag(&vbin_image, 1);
EXEC SQL select image_col into :vbin_image
    from image_tab
    where image_id = 1;
image_ptr = (image_t *)ifx_var_getdata(&vbin_image);
unload_image(&user_image);
ifx_var_dealloc(&vbin_image);

```

For more information about the `ifx_var_flag()`, `ifx_var_alloc()`, `ifx_var_setdata()`, `ifx_var_getdata()`, and `ifx_var_dealloc()` functions, see [The lvarchar pointer and var binary library functions on page 275](#).

Insert from a var binary host variable

To insert the data that a **var binary** host variable contains into an opaque-type column, the code fragment in [Figure 66: Accessing the internal format of the image opaque data type with a var binary host variable on page 272](#) takes the following steps:

1. Loads the image data from an external JPEG, GIF, or PPM file into the **image_t** internal data structure.

The `load_image()` C routine loads the **user_image** structure from an external file. The definition of the **image_t** internal data structure, which [Figure 64: Internal data structures for the image opaque data type on page 271](#) shows, must

be available to your IBM® Informix® ESQL/C program. Therefore, the code fragment includes the **image.h** header file, which defines the **image_t** structure.

The `getsize()` C function is provided as part of the Informix® ESQL/C support for the **image** opaque type; it returns the size of the **image_t** structure.

2. Allocates memory for the data buffer of the **var binary** host variable, **vbin_image**.

The `ifx_var_flag()` function with a flag value of `0` notifies Informix® ESQL/C that the application will perform memory allocation for the **vbin_image** host variable. The `ifx_var_alloc()` function then allocates for the data buffer the number of bytes that the image data requires (**imgsz**).

3. Stores the **image_t** structure in the data buffer of the **vbin_image** host variable.

The `ifx_var_setdata()` function saves the data that the **user_image** structure contains into the **vbin_image** data buffer. This function also requires the size of the data buffer, which the `getsize()` function has returned.

4. Inserts the data that the **vbin_image** data buffer contains into the **image_col** opaque-type column.

When the database server executes the INSERT statement, it calls the receive support function for the **image** data type to perform any translation necessary between the internal format of the data that the Informix® ESQL/C client application has sent (**image_t**) and the internal format of the **image** data type on disk.

5. Deallocates the data buffer of the **vbin_image** host variable.

The `ifx_var_dealloc()` function deallocates the **vbin_image** data buffer.

To insert a null value into an opaque-type column with a **var binary** host variable, you can use either of the following methods:

- Set an indicator variable that is associated with a **var binary** host variable to `-1`.

The following code fragment uses the **image_ind** indicator variable and the **vbin_image** host variable to insert a null value into the **circle_col** column:

```
#include <image.h>;

EXEC SQL BEGIN DECLARE SECTION;
    var binary 'image' vbin_image;
    int image_ind;
EXEC SQL END DECLARE SECTION;

image_ind = -1;
EXEC SQL insert into image_tab
    values (:vbin_image:image_ind);
```

- Use the `ifx_var_setnull()` function to set the data buffer of the **var binary** host variable to a null value.

For the same **vbin_image** host variable, the following lines use the `ifx_var_setnull()` function to insert a null value into the **circle_col** column:

```
ifx_var_setnull(&vbin_image, 1);
EXEC SQL insert into image_tab values (:vbin_image);
```

Select into a var binary host variable

To select the data that an opaque-type column contains into a **var binary** host variable, the code fragment in [Figure 66: Accessing the internal format of the image opaque data type with a var binary host variable on page 272](#) takes the following steps:

1. Allocates memory for the data buffer of the **var binary** host variable, **vbin_image**.

The `ifx_var_flag()` function with a flag value of `1` notifies IBM® Informix® ESQL/C that it is to allocate a new data buffer for the **vbin_image** host variable. (This data buffer had been deallocated after the INSERT statement completed.) Informix® ESQL/C performs this allocation when it receives the data from the SELECT statement.

2. Selects the data that the **image_col** opaque-type column contains into the **vbin_image** data buffer.

When the database server executes the SELECT statement, it calls the send support function for **image** to perform any translation necessary between the internal format of the **image** data type on disk and the internal format that the Informix® ESQL/C client application has sent (**image_t**).

3. Stores the data that the data buffer of the **vbin_image** host variable contains in an **image_t** structure.

After the SELECT statement, the data buffer of the **vbin_image** host variable contains data in the internal format of the **image** data type. The `ifx_var_getdata()` function returns the contents of this data buffer into an **image_t** data structure. Because the `ifx_var_getdata()` function returns the data buffer as a **void *** value, this call to `ifx_var_getdata()` casts this return value as a pointer to an **image_t** structure before it assigns it to the **image_ptr** variable.

4. Unloads the image data from the **image_t** internal data structure to an external JPEG, GIF, or PPM file.

The `unload_image()` routine unloads the **user_image** structure to an external file.

5. Deallocates the data buffer of the **vbin_image** host variable.

The `ifx_var_dealloc()` function deallocates the **vbin_image** data buffer. You must explicitly deallocate the data buffer even when Informix® ESQL/C allocated it for you.

To check for a null value from an opaque-type column with a **var binary** host variable, you can use either of the following methods:

- Check an indicator variable that is associated with a **var binary** host variable for a value of `-1`.

The following code fragment uses the **image_ind** indicator variable and the **vbin_image** host variable to check for a null value from the **circle_col** column:

```
#include <image.h>;

EXEC SQL BEGIN DECLARE SECTION;
    var binary 'image' vbin_image;
    int image_ind;
EXEC SQL END DECLARE SECTION;

EXEC SQL select image_col into :vbin_image:image_ind
```

```

from image_tab
where image_id = 1;
if (image_ind == -1)
:

```

- Use the `ifx_var_isnull()` function to check the data buffer of the **var binary** host variable for a null value.

For the same **vbin_image** host variable, the following lines use the `ifx_var_isnull()` function to check for a null value in the **image_col** column:

```

EXEC SQL select image_col into :vbin_image
from image_tab
where image_id = 1;
if (ifx_var_isnull(&vbin_image) == 1)
:

```

The lvarchar pointer and var binary library functions

The following library functions are available in IBM® Informix® ESQL/C to access the data buffer of an **lvarchar** pointer or **var binary** host variable.

Function name	Purpose	See
<code>ifx_var_alloc()</code>	Allocates memory for the data buffer.	The <code>ifx_var_alloc()</code> function on page 718
<code>ifx_var_dealloc()</code>	Deallocates memory for the data buffer.	The <code>ifx_var_dealloc()</code> function on page 719
<code>ifx_var_flag()</code>	Determines whether ESQL/C or the application handles memory allocation for the data buffer.	The <code>ifx_var_flag()</code> function on page 720
<code>ifx_var_getdata()</code>	Returns the contents of the data buffer.	The <code>ifx_var_getdata()</code> function on page 722
<code>ifx_var_getlen()</code>	Returns the length of the data buffer.	The <code>ifx_var_getlen()</code> function on page 723
<code>ifx_var_isnull()</code>	Checks whether the data in the data buffer is null.	The <code>ifx_var_isnull()</code> function on page 723
<code>ifx_var_setdata()</code>	Sets the data for the data buffer.	The <code>ifx_var_setdata()</code> function on page 724
<code>ifx_var_setlen()</code>	Sets the length of the data buffer.	The <code>ifx_var_setlen()</code> function on page 725
<code>ifx_var_setnull()</code>	Sets the data in the data buffer to a null value.	The <code>ifx_var_setnull()</code> function on page 726

These **lvarchar** pointer and **var binary** functions are defined in the `sqlhdr.h` header file so you do not need to include a special header file in your Informix® ESQL/C programs that use them.

Access predefined opaque data types

HCL Informix® implements several built-in data types as predefined opaque data types. These data types are opaque data types for which support functions and the database definition are provided. For example, the smart-large-object data types, CLOB and BLOB, as an opaque data type called **clob** and **blob** are implemented. Informix® ESQL/C uses the **ifx_lo_t** structure, called an LO-pointer, to access the smart large objects. This structure is defined in the `locator.h` header file.

Therefore, you declare Informix® ESQL/C host variables for database columns of type CLOB or BLOB as a **fixed binary** host variable, as follows:

```
EXEC SQL include locator;
:

EXEC SQL BEGIN DECLARE SECTION;
    fixed binary 'clob' ifx_lo_t clob_loptr;
    fixed binary 'blob' ifx_lo_t blob_loptr;
EXEC SQL END DECLARE SECTION;
:

EXEC SQL select blobcol into :blob_loptr from tab1;
```

Database server communication

Exception handling

Proper database management requires that you know whether the database server successfully processes your SQL statements as you intend. If a query fails and you do not know it, you might display meaningless data to the user. A more serious consequence might be that you update a customer account to show a payment of \$100, and the update fails without your knowledge. The account is now incorrect.

To handle such error situations, your Informix® ESQL/C program must check that every SQL statement executes as you intend. These topics describe the following exception-handling information:

- How to interpret the diagnostic information that the database server presents after it executes an SQL statement
- How to use the **SQLSTATE** variable and the GET DIAGNOSTICS statement to check for runtime errors and warnings that your Informix® ESQL/C program might generate
- How to use the **SQLCODE** variable and the SQL Communications Area (**sqlca**) to check for runtime errors and warnings that your Informix® ESQL/C program might generate
- How to choose an exception-handling strategy that consistently handles errors and warnings in your Informix® ESQL/C programs
- How to use the `rgetlmsg()` and `rgetmsg()` library functions to retrieve the message text that is associated with a given Informix® error number

The end of these topics present an annotated example program that is called **getdiag**. The **getdiag** sample program demonstrates how to handle exceptions with the **SQLSTATE** variable and the GET DIAGNOSTICS statement.

Obtain diagnostic information after an SQL statement

After your IBM® Informix® ESQL/C program executes an SQL statement, the database server returns information about the success of the statement. This section summarizes the following information:

- The types of diagnostic information that are available to the Informix® ESQL/C program
- The two methods that your Informix® ESQL/C program can use to obtain diagnostic information

Types of diagnostic information

The database server can return the following types of diagnostic information:

- Database exceptions are conditions that the database server returns to describe how successful the execution of the SQL statement was.
- Descriptive information, such as the DESCRIBE and GET DIAGNOSTICS statements can provide about certain SQL statements.

Types of database exceptions

When the database server executes an SQL statement, it can return one of four types of database exceptions to the application program:

- Success

The SQL statement executed successfully. When a statement that might return data into host variables executes, a success condition means that the statement has returned the data and that the program can access it through the host variables.

- Success, but warning generated

A warning is a condition that does not prevent successful execution of an SQL statement; however, the effect of the statement is limited and the statement might not produce the expected results. A warning can also provide additional information about the executed statement.

- Success, but no rows found

The SQL statement executed without errors, with the following exceptions:

- No rows matched the search criteria (the NOT FOUND condition).
- The statement did not operate on a row (the END OF DATA condition).

- Error

The SQL statement did not execute successfully and did not change the database. Runtime errors can occur at the following levels:

- Hardware errors include controller failure, bad sector on disk, and so on.
- Kernel errors include file-table overflow, insufficient semaphores, and so on.
- Access-method errors include duplicated index keys, SQL null inserted into non-null columns, and so on.

- Parser errors include invalid syntax, unknown objects, invalid statements, and so on.
- Application errors include user or lock-table overflow, and so on.

Descriptive information

The following SQL statements can return information about SQL statements:

- A DESCRIBE statement returns information about a prepared SQL statement. This information is useful when you execute dynamic SQL.
- A GET DIAGNOSTICS statement, when you call it after you have established a connection to a database environment, can return the name of the database server and the connection.

The *HCL® Informix® Guide to SQL: Syntax* fully describes these two statements.

Types of status variables

The following methods obtain diagnostic information about the outcome of an SQL statement:

- Access the **SQLSTATE** variable, a five-character string that contains status values that conform to the ANSI and X/Open standards
- Access the **SQLCODE** variable, an **int4** integer that contains status values that are specific to HCL Informix®

When you create applications that must conform to either the ANSI or X/Open standard, use the **SQLSTATE** variable as your primary exception-handling method.

Exception handling with SQLSTATE

It is recommended that you obtain diagnostic information about SQL statements with the **SQLSTATE** variable and the GET DIAGNOSTICS statement.



Important: **SQLSTATE** is a more effective way to detect and handle error messages than the **SQLCODE** variable because **SQLSTATE** supports multiple exceptions. **SQLSTATE** is also more portable because it conforms to ANSI and X/Open standards. IBM® Informix® ESQL/C supports the **sqlca** structure and **SQLCODE** for compatibility with earlier versions and for exceptions specific to Informix®.

After the database server executes an SQL statement, it sets **SQLSTATE** with a value that indicates the success or failure of the statement. From this value, your program can determine if it needs to perform further diagnostic tests. If **SQLSTATE** indicates a problem, you can use the GET DIAGNOSTICS statement to obtain more information.

This section describes how to use the **SQLSTATE** variable and the GET DIAGNOSTICS statement to perform exception handling. It describes the following topics:

- Using the GET DIAGNOSTICS statement to access fields of the diagnostics area
- Understanding the format of the **SQLSTATE** values
- Using **SQLSTATE** to check for the different types of exceptions

The GET DIAGNOSTICS statement

This section briefly summarizes how to use the GET DIAGNOSTICS statement within the IBM® Informix® ESQL/C program. For a full description of the GET DIAGNOSTICS statement, see the *HCL® Informix® Guide to SQL: Syntax*.

The GET DIAGNOSTICS statement returns information that is held in the fields of the *diagnostics area*. The diagnostics area is an internal structure that the database server updates after it executes an SQL statement. Each application has one diagnostics area. Although GET DIAGNOSTICS accesses the diagnostics area, it never changes the contents of this area.

To access a field in the diagnostics area, supply a host variable to hold the value and the field keyword to specify the field that you want to access:

```
:host_var = FIELD_NAME
```

Make sure that the data types of the host variable and the diagnostics field are compatible.

The fields of the diagnostics area fall into two categories:

- Statement information describes the overall result of the SQL statement, in particular the number of rows that it has modified and the number of exceptions that result.
- Exception information describes individual exceptions that result from the SQL statement.

Statement information

The GET DIAGNOSTICS statement returns information about the most-recently executed SQL statement.

This form of the GET DIAGNOSTICS statement has the following general syntax:

```
EXEC SQL get diagnostics statement_fields;
```

The following table summarizes the *statement_fields* of the diagnostics area.

Table 50. Statement information from the GET DIAGNOSTICS statement

Field-name keyword	ESQL/C data type	Description
NUMBER	mint	This field holds the number of exceptions that the diagnostics area contains for the most-recently executed SQL statement. NUMBER is in the range of 1 to 35,000. Even when an SQL statement is successful, the diagnostics area contains one exception.
MORE	char[2]	This field holds either an <code>N</code> or a <code>Y</code> (plus a null terminator). An <code>N</code> character indicates that the diagnostics area contains all of the available exception information. A <code>Y</code> character indicates that the database server has detected more exceptions than it can store in the diagnostics area. Now, the database server always returns an <code>N</code> because the database server can store all exceptions.

Table 50. Statement information from the GET DIAGNOSTICS statement (continued)

Field-name keyword	ESQL/C data type	Description
ROW_COUNT	mint	When the SQL statement is an INSERT, UPDATE, or DELETE, this field holds a numeric value that specifies the number of rows that the statement has inserted, updated, or deleted. ROW_COUNT is in the range of 0 to 999,999,999. For any other SQL statement, the value of ROW_COUNT is undefined.

The following figure shows a GET DIAGNOSTICS statement that retrieves statement information for a CREATE TABLE statement into the host variables **:exception_count** and **:overflow**.

Figure 67. Using GET DIAGNOSTICS to return statement information

```
EXEC SQL BEGIN DECLARE SECTION;
  mint exception_count;
  char overflow[2];
EXEC SQL END DECLARE SECTION;
;;

EXEC SQL create database db;

EXEC SQL create table tab1 (col1 integer);
EXEC SQL get diagnostics :exception_count = NUMBER,
  :overflow = MORE;
```

Use the statement information to determine how many exceptions the most-recently executed SQL statement has generated.

For more information about the statement fields of the diagnostics area, see "The Statement Clause" in the GET DIAGNOSTICS statement in the *HCL® Informix® Guide to SQL: Syntax*.

Exception information

The GET DIAGNOSTICS statement also returns information about the exceptions that the most-recently executed SQL statement has generated. Each exception has an exception number. To obtain information about a particular exception, use the EXCEPTION clause of the GET DIAGNOSTICS statement, as follows:

```
EXEC SQL get diagnostics exception except_num exception_fields;
```

The *except_num* argument can be a literal number or a host variable. An *except_num* of one (1) corresponds to the **SQLSTATE** value that the most-recently executed SQL statement sets. After this first exception, the order in which the database server fills the diagnostics area with exception values is not predetermined. For more information, see [Multiple exceptions on page 292](#).

The following table summarizes the *exception_fields* information of the diagnostics area.

Table 51. Exception information from the GET DIAGNOSTICS statement

Field name keyword	ESQL/C data type	Description
RETURNED_SQLSTATE	char[6]	This field holds the SQLSTATE value that describes the current exception. For information about the values of this field, see The SQLSTATE variable on page 282 .
INFORMIX_SQLCODE	int4	This field holds the status code specific to Informix®. This code is also available in the global SQLCODE variable. For more information, see The SQLCODE variable on page 296 .
CLASS_ORIGIN	char[255]	This field holds a variable-length character string that defines the source of the class portion of SQLSTATE . If Informix® defines the class code, the value is "IX000". If the International Standards Organization (ISO) defines the class code, the value of CLASS_ORIGIN is "ISO 9075". If a user-defined routine has defined the message text of the exception, the value of CLASS_ORIGIN is "U0001".
SUBCLASS_ORIGIN	char[255]	This field holds a variable-length character string that contains the source of the subclass portion of SQLSTATE . If ISO defines the subclass, the value of SUBCLASS_ORIGIN is "ISO 9075". If Informix® defines the subclass, the value is "IX000". If a user-defined routine has defined the message text of the exception, the value is "U0001".
MESSAGE_TEXT	char[8191]	This field holds a variable-length character string that contains the message text to describe this exception. This field can also contain the message text for any ISAM exceptions or a user-defined message from a user-defined routine.
MESSAGE_LENGTH	mint	This field holds the number of characters that are in the text of the MESSAGE_TEXT string.
SERVER_NAME	char[255]	This field holds a variable-length character string that holds the name of the database server that is associated with the actions of a CONNECT or DATABASE statement. This field is blank when no current connection exists. For more information about the SERVER_NAME field, see Identify an explicit connection on page 336 .
CONNECTION_NAME	char[255]	This field holds a variable-length character string that holds the name of the connection that is associated with the actions of a CONNECT or SET CONNECTION statement. This field is blank when no current connection or no explicit connection exists. Otherwise, it contains the name of the last successfully established connection.

Table 51. Exception information from the GET DIAGNOSTICS statement (continued)

Field name keyword	ESQL/C data type	Description
		For more information about the CONNECTION_NAME field, see Identify an explicit connection on page 336 .

Use the exception information to save detailed information about an exception. The code fragment in the following table retrieves exception information about the first exception of a CREATE TABLE statement.

Figure 68. Example of using GET DIAGNOSTICS to return exception information

```
EXEC SQL BEGIN DECLARE SECTION;
char class_origin_val[255];
char subclass_origin_val[255];
char message_text_val[8191];
mint messlength_val;
EXEC SQL END DECLARE SECTION;

EXEC SQL create database db;

EXEC SQL create table tab1 (col1 integer);
EXEC SQL get diagnostics exception 1
: class_origin_val = CLASS_ORIGIN,
: subclass_origin_val = SUBCLASS_ORIGIN,
: message_text_val = MESSAGE_TEXT,
: messlength_val = MESSAGE_LENGTH;
```

For more information about the exception fields, see the GET DIAGNOSTICS statement in the *HCL® Informix® Guide to SQL: Syntax*.

The SQLSTATE variable

The **SQLSTATE** variable is a five-character string that the database server sets after it executes each SQL statement.

The IBM® Informix® ESQL/C header file, `sqlca.h`, declares **SQLSTATE** as a global variable. Since the Informix® ESQL/C preprocessor automatically includes `sqlca.h` in the Informix® ESQL/C program, you do not need to declare **SQLSTATE**.

After the database server executes an SQL statement, the database server automatically updates the **SQLSTATE** variable as follows:

- The database server stores the exception value in the RETURNED_SQLSTATE field of the diagnostics area.
- Informix® ESQL/C copies the value of the RETURNED_SQLSTATE field to the global **SQLSTATE** variable.

These updates to the **SQLSTATE** variable are equivalent to the execution of the following GET DIAGNOSTICS statement immediately after an SQL statement:

```
EXEC SQL get diagnostics exception 1 :SQLSTATE = RETURNED_SQLSTATE;
```

Tip: At run time, Informix® ESQL/C automatically copies the value of the RETURNED_SQLSTATE field into the global **SQLSTATE** variable. Therefore, you do not usually need to access the RETURNED_SQLSTATE field directly.


The value in **SQLSTATE** is the status of the most-recently executed SQL statement before the GET DIAGNOSTICS statement executed. If the database server encounters an error when it executes the GET DIAGNOSTICS statement, it sets **SQLSTATE** to "IX001" and sets **SQLCODE** (and **sqlca.sqlcode**) to the value of the error number that corresponds to the error; the contents of the diagnostics area are undefined.

The **SQLSTATE** variable holds the ANSI-defined value for the exception. Each **SQLSTATE** value has an associated status code that is specific to Informix®. You can obtain the value of this status code, which is specific to Informix®, from either of the following items:

- The **INFORMIX_SQLCODE** field of the diagnostics area
- The **SQLCODE** variable

Class and subclass codes

To determine the success of an SQL statement, your IBM® Informix® ESQL/C program must be able to interpret the value in the **SQLSTATE** variable. **SQLSTATE** consists of a two-character class code and a three-character subclass code. In the following figure, **IX** is the class code and **000** is the subclass code. The value "IX000" indicates an error specific to Informix®. Figure 69. The structure of the SQLSTATE code with the value IX000



SQLSTATE can contain only digits and capital letters. The class code is unique but the subclass code is not. The meaning of the subclass code depends on the associated class code. The initial character of the class code indicates the source of the exception code, which the following table summarizes.

Table 52. Initial SQLSTATE class-code values

Initial class-Code value	Source of exception code	Notes®
0 - 4 A - H	X/Open and ANSI/ISO	The associated subclass codes also begin in the range 0 - 4 or A - H.
5 - 9	Defined by the implementation	Subclass codes are also defined by the implementation.
I - Z	Informix® ESQL/C	Any of the error messages specific to Informix® (those that the X/Open or ANSI/ISO reserved range does not support) have an SQLSTATE value of "IX000".

Table 52. Initial SQLSTATE class-code values (continued)

Initial class-Code value	Source of exception code	Notes®
		If a user-defined routine returns an error message was defined by the routine, the SQLSTATE value is "U0001".

List of SQLSTATE class codes

The following table lists the valid **SQLSTATE** class and subclass values. This figure lists the first entry for each class code in bold.

Table 53. Class and subclass codes for SQLSTATE

Class	Subclass	Meaning
00	000	Success
01	000	Success with warning
01	002	Disconnect error—transaction rolled back
01	003	Null value eliminated in set function
01	004	String data, right truncation
01	005	Insufficient item descriptor areas
01	006	Privilege not revoked
01	007	Privilege not granted
01	101	Database has transactions
01	103	ANSI-compliant database selected
01	104	The database server is a recent version of Informix®
01	105	Float to decimal conversion used
01	106	Informix® extension to ANSI-compliant standard syntax
01	107	After a DESCRIBE, a prepared UPDATE/DELETE statement does not have a WHERE clause
01	108	An ANSI keyword was used as cursor name
01	109	Number of items in select list is not equal to number of items in INTO list
01	110	Database server is running in secondary mode
01	111	DATASKIP feature is turned on

Table 53. Class and subclass codes for SQLSTATE (continued)

Class	Subclass	Meaning
01	U01	User-defined warning returned by a user-defined routine
02	000	No data found or end of data reached
07	000	Dynamic SQL error
07	001	USING clause does not match dynamic parameters
07	002	USING clause does not match target specifications
07	003	Cursor specification cannot be executed
07	004	USING clause is required for dynamic parameters
07	005	Prepared statement is not a cursor specification
07	006	Restricted data type attribute violation
07	008	Invalid descriptor count
07	009	Invalid descriptor index
08	000	Connection exception
08	001	Database server rejected the connection
08	002	Connection name in use
08	003	Connection does not exist
08	004	Client unable to establish connection
08	006	Transaction rolled back
08	007	Transaction state unknown
08	S01	Communication failure
0A	000	Feature not supported
0A	001	Multiple database server transactions
21	000	Cardinality violation
21	S01	Insert value list does not match column list
21	S02	Degree of derived table does not match column list

Table 53. Class and subclass codes for SQLSTATE (continued)

Class	Subclass	Meaning
22	000	Data exception
22	001	String data, right truncation
22	002	Null value, no indicator parameter
22	003	Numeric value out of range
22	005	Error in assignment
22	012	Division by zero
22	019	Invalid escape character
22	024	Unterminated string
22	025	Invalid escape sequence
22	027	Data exception trim error
23	000	Integrity-constraint violation
24	000	Invalid cursor state
25	000	Invalid transaction state
2B	000	Dependent privilege descriptors still exist
2D	000	Invalid transaction termination
26	000	Invalid SQL statement identifier
2E	000	Invalid connection name
28	000	Invalid user-authorization specification
33	000	Invalid SQL descriptor name
34	000	Invalid cursor name
35	000	Invalid exception number
37	000	Syntax error or access violation in PREPARE or EXECUTE IMMEDIATE
3C	000	Duplicate cursor name
40	000	Transaction rollback
40	003	Statement completion unknown
42	000	Syntax error or access violation

Table 53. Class and subclass codes for SQLSTATE (continued)

Class	Subclass	Meaning
S0	000	Invalid name
S0	001	Base table or view table exists
S0	002	Base table not found
S0	011	Index exists
S0	021	Column exists
S1	001	Memory-allocation error message
IX	000	Informix® reserved error message
IX	001	GET DIAGNOSTICS statement failed
U0	001	User-defined error returned by a user-defined routine

The ANSI or X/Open standards define all **SQLSTATE** values except the following:

- A "IX000" runtime error indicates an error message that is specific to Informix®.
- A "IX001" runtime error indicates the GET DIAGNOSTICS statement failed.
- A "U0001" runtime error indicates a user-defined error message.
- The "01Ixx" warnings indicate warnings that are specific to Informix®.
- The "01U01" warning indicates a user-defined warning message.

For more information about non-standard error values, see [Runtime errors in SQLSTATE on page 292](#). For more information about non-standard warning values, see [Warnings in SQLSTATE on page 289](#).

Check for exceptions with SQLSTATE

After an SQL statement executes, the **SQLSTATE** value can indicate one of the four conditions that the following table shows.

Table 54. Exceptions that SQLSTATE returns

Exception condition	SQLSTATE value
Success	"00000"
Success, but no rows found	"02000"
Success, but warnings generated	Class code = "01" Subclass code = "000" to "006" (for ANSI and X/Open warnings) Subclass code = "101" to "111" (for warnings specific to HCL Informix®)

Table 54. Exceptions that SQLSTATE returns (continued)

Exception condition	SQLSTATE value
	Subclass code = "U01" (for user-defined warnings)
Failure, runtime error generated	Class code > "02" (for ANSI and X/Open errors)
	Class code = "IX" (for warnings specific to HCL Informix®)
	Class code = "U0" (for user-defined errors)

Determining the cause of an exception in SQLSTATE

To determine the cause of an exception in **SQLSTATE**, use the GET DIAGNOSTICS statement.

About this task

To determine the cause of an exception in **SQLSTATE**:

1. Use GET DIAGNOSTICS to obtain the statement information such as the number of exceptions that the database server has generated.
2. For each exception, use the EXCEPTION clause of GET DIAGNOSTICS to obtain detailed information about the exception.

Success in SQLSTATE

When the database server executes an SQL statement successfully, it sets **SQLSTATE** to "00000" (class = "00", subclass = "000"). To check for successful execution, your code needs to verify only the first two characters of **SQLSTATE**.



Tip: After a CONNECT, SET CONNECTION, DATABASE, CREATE DATABASE, or START DATABASE statement, the **SQLSTATE** variable has a class value of "01" and a subclass value, which is specific to HCL Informix®, to provide information about the database and connection. For more information, see [Table 56: SQL statements that set a warning specific to Informix for a given condition on page 290](#).

The **getdiag** sample program in [Guide to the getdiag.ec file on page 308](#) uses the sqlstate_err() function to compare the first two characters of **SQLSTATE** with the string "00" to check for successful execution of an SQL statement. The sqlstate_exception() function shown in [Figure 72: Example of an exception-handling function that uses SQLSTATE on page 304](#) checks for a success in **SQLSTATE** with the system strcmp() function.

NOT FOUND in SQLSTATE

When a SELECT or FETCH statement encounters NOT FOUND (or END OF DATA), the database server sets **SQLSTATE** to "02000" (class = "02"). The following table lists the conditions that cause SQL statements to yield NOT FOUND.

Table 55. SQLSTATE values that are set when SQL statements do not return any rows

SQL statement that generates the indicated SQLSTATE result	Result for ANSI-compliant database	Result for non-ANSI-compliant database
FETCH statement: the last qualifying row has already been returned (the end of data was reached).	"02000"	"02000"
SELECT statement: no rows match the SELECT criteria.	"02000"	"02000"
DELETE and DELETE...WHERE statement (not part of multistatement PREPARE): no rows match the DELETE criteria.	"02000"	"00000"
INSERT INTO <i>tablename</i> SELECT statement (not part of multistatement PREPARE): no rows match the SELECT criteria.	"02000"	"00000"
SELECT... INTO TEMP statement (not part of multistatement PREPARE): no rows match the SELECT criteria.	"02000"	"00000"
UPDATE and UPDATE...WHERE statement (not part of multistatement PREPARE): no rows match the UPDATE criteria.	"02000"	"00000"

[Table 55: SQLSTATE values that are set when SQL statements do not return any rows on page 289](#) shows that the value that the NOT FOUND condition generates depends, in some cases, on whether the database is ANSI compliant.

To check for the NOT FOUND condition, your code needs to verify only the class code of **SQLSTATE**. The subclass code is always "000". The **getdiag** sample program in [Guide to the getdiag.ec file on page 308](#) uses the `sqlstate_err()` function to perform exception handling. To check for a warning in an SQL statement, `sqlstate_err()` compares the first two characters of **SQLSTATE** with the string "02".

Warnings in SQLSTATE

When the database server executes an SQL statement successfully, but encounters a warning condition, it sets the class code of **SQLSTATE** to "01". The subclass code then indicates the cause of the warning. This warning can be either of the following types:

- An ANSI or X/Open warning message has a subclass code in the range "000" to "006".

The **CLASS_ORIGIN** and **SUBCLASS_ORIGIN** exception fields of the diagnostics area have a value of "ISO 9075" to indicate ANSI or X/Open as the source of the warning.

- A warning message specific to HCL Informix® has a subclass code in the range "I01" to "I11" (see [Table 56: SQL statements that set a warning specific to Informix for a given condition on page 290](#)).

The **CLASS_ORIGIN** and **SUBCLASS_ORIGIN** exception fields of the diagnostics area have a value of "IX000" to indicate an exception, which is specific to Informix®, as the source of the warning.

- A user-defined warning message from a user-defined routine has a subclass code of "U01".

The **CLASS_ORIGIN** and **SUBCLASS_ORIGIN** exception fields of the diagnostics area have a value of "U0001" to indicate a user-defined routine as the source of the warning.

The following table lists the warning messages specific to Informix® and the SQL statements and conditions that generate the warning.

Table 56. SQL statements that set a warning specific to Informix® for a given condition

Warning value	SQL statement	Warning condition
"01I01"	CONNECT CREATE DATABASE DATABASE SET CONNECTION	Your application opened a database that uses transactions.
"01I03"	CONNECT CREATE DATABASE DATABASE SET CONNECTION	Your application opened an ANSI-compliant database.
"01I04"	CONNECT CREATE DATABASE DATABASE SET CONNECTION	Your application opened a database that the Informix® manages.
"01I05"	CONNECT CREATE DATABASE DATABASE SET CONNECTION	Your application opened a database that is on a host database server that requires float-to-decimal conversion for FLOAT columns (or smallfloat-to-decimal conversions for SMALLFLOAT columns).
"01I06"	All statements	The statement executed contains the Informix® extension to SQL (only when the DBANSIWARN environment variable is set).

Table 56. SQL statements that set a warning specific to Informix® for a given condition (continued)

Warning value	SQL statement	Warning condition
"01107"	PREPARE DESCRIBE	A prepared UPDATE or DELETE statement has no WHERE clause. The operation affects all rows of the table.
"01109"	FETCH SELECT...INTO EXECUTE...INTO	The number of items in the select list does not equal the number of host variables in the INTO clause.
"01110"	CONNECT CREATE DATABASE DATABASE SET CONNECTION	The database server is currently running in secondary mode. The database server is a secondary server in a data-replication pair; therefore, the database server is available only for read operations.
"01111"	Other statements (when your application activates the DATASKIP feature)	A data fragment (a dbspace) was skipped during query processing.

To check for a warning, your code only needs to verify the first two characters of **SQLSTATE**. However, to identify the particular warning, you need to examine the subclass code. You might also want to use the GET DIAGNOSTICS statement to obtain the warning message from the **MESSAGE_TEXT** field.

For example, the following block of code determines what database a CONNECT statement has opened.

```
int trans_db, ansi_db, online_db = 0;
;;

msg = "CONNECT stmt";
EXEC SQL connect to 'stores7';
if(!strcmp(SQLSTATE, "02", 2)) /* < 0 is an error */
    err_chk(msg);
if (!strcmp(SQLSTATE, "01", 2))
{
    if (!strcmp(SQLSTATE[2], "I01", 3))
        trans_db = 1;
    if (!strcmp(SQLSTATE[2], "I03", 3))
        ansi_db = 1;
    if (!strcmp(SQLSTATE[2], "I04", 3))
        online_db = 1;
}
```

The preceding code fragment checks **SQLSTATE** with the system `strcmp()` function. The **getdiag** sample program ([Guide to the getdiag.ec file on page 308](#)) uses the `sqlstate_err()` function to check the success of an SQL statement by comparing the first two characters of **SQLSTATE** with the string "01". For more information about the values of **SQLSTATE** that the

CONNECT, CREATE DATABASE, DATABASE, and SET CONNECTION statements set, see [Determine features of the database server on page 334](#).

Runtime errors in SQLSTATE

When an SQL statement results in a runtime error, the database server stores a value in **SQLSTATE** whose class code is greater than "02". The actual class and subclass codes identify the particular error. [Table 53: Class and subclass codes for SQLSTATE on page 284](#) lists the class and subclass codes for **SQLSTATE**. To retrieve the error message text, use the **MESSAGE_TEXT** field of the GET DIAGNOSTICS statement. The **CLASS_ORIGIN** and **SUBCLASS_ORIGIN** exception fields have a value of "ISO 9075" to indicate the source of the error.

If the SQL statement generates an error that the ANSI or X/Open standards do not support, **SQLSTATE** might contain either of the following values:

- An **SQLSTATE** value of "IX000" indicates an error that is specific to HCL Informix®.

The **SQLCODE** variable contains the error code, and the **MESSAGE_TEXT** field contains the error message text and any ISAM message text. The **CLASS_ORIGIN** and **SUBCLASS_ORIGIN** exception fields have a value of "IX000" to indicate the source of the error.

- An **SQLSTATE** value of "U0001" indicates a user-defined error message from a user-defined routine.

The **MESSAGE_TEXT** field contains the error message text. The **CLASS_ORIGIN** and **SUBCLASS_ORIGIN** exception fields have a value of "U0001" to indicate the source of the error.

GET DIAGNOSTICS failure

If the GET Diagnostics statement fails, SQLState contains a value of ix001. No other failure returns this value. The sqlcode indicates the specific error that caused the failure.

Multiple exceptions

The database server can generate multiple exceptions for a single SQL statement. A significant advantage of the GET DIAGNOSTICS statement is its ability to report multiple exception conditions.

To find out how many exceptions the database server has reported for an SQL statement, retrieve the value of the **NUMBER** field from the statement information of the diagnostics area. The following GET DIAGNOSTICS statement retrieves the number of exceptions that the database server generated and stores the number in the **:exception_num** host variable.

```
EXEC SQL get diagnostics :exception_num = NUMBER;
```

When you know the number of exceptions that occurred, you can initiate a loop to report each of them. Execute GET DIAGNOSTICS within this loop and use the number of exceptions to control the loop. The following code illustrates one way to retrieve and report multiple exception conditions after an SQL statement.

```
EXEC SQL get diagnostics :exception_count = NUMBER,
:overflow = MORE;
printf("NUMBER: %d\n", exception_count);
printf("MORE : %s\n", overflow);
```



```

for (i = 1; i <= exception_count; i++)
{
EXEC SQL get diagnostics exception :i
:sqlstate = RETURNED_SQLSTATE,
:class = CLASS_ORIGIN, :subclass = SUBCLASS_ORIGIN,
:message = MESSAGE_TEXT, :messlen = MESSAGE_LENGTH;

printf("SQLSTATE: %s\n",sqlstate);
printf("CLASS ORIGIN: %s\n",class);
printf("SUBCLASS ORIGIN: %s\n",subclass);
message[messlen] = '\0'; /* terminate the string. */
printf("TEXT: %s\n",message);
printf("MESSAGE LENGTH: %d\n",messlen);
}

```

Do not confuse the **RETURNED_SQLSTATE** value with the **SQLSTATE** global variable. The **SQLSTATE** variable provides a general status value for the most-recently executed SQL statement. The **RETURNED_SQLSTATE** value is associated with one particular exception that the database server has encountered. For the first exception, **SQLSTATE** and **RETURNED_SQLSTATE** have the same value. However, for multiple exceptions, you must access **RETURNED_SQLSTATE** for each exception.

To define a host variable in your application that receives the **RETURNED_SQLSTATE** value, you must define it as a character array with a length of six (five for the field plus one for the null terminator). You can assign this variable whatever name you want.

The following statements define such a host variable and assign it the name **sql_state**:

```

EXEC SQL BEGIN DECLARE SECTION;
char sql_state[6];
EXEC SQL END DECLARE SECTION;

```

A database system that is compliant with X/Open standards must report any X/Open exceptions before it reports any errors or warnings that are specific to HCL Informix®. Beyond this, however, the database server does not report the exceptions in any particular order. The **getdiag** sample program ([Guide to the getdiag.ec file on page 308](#)) includes the `disp_sqlstate_err()` function to display multiple exceptions.

Exception handling with the `sqlca` structure

An alternative way to obtain diagnostic information is through the SQL Communications Area. When an SQL statement executes, the database server automatically returns information about the success or failure of the statement in a C structure that is called **sqlca**.

To obtain exception information, your IBM® Informix® ESQL/C program can access the **sqlca** structure or the **SQLCODE** variable as follows:

- **The `sqlca` structure.** You can use C statements to obtain additional exception information. You can also obtain information relevant to performance or the nature of the data that is handled. For some statements, the **sqlca** structure contains warnings.
- **The `SQLCODE` variable directly.** You can obtain the status code of the most-recently executed SQL statement. **SQLCODE** holds an error code that is specific to HCL Informix®, which is copied from the **sqlca.sqlcode** field.

! **Important:** Informix® ESQL/C supports the **sqlca** structure for compatibility with earlier versions. It is recommended, however, that new applications use the **SQLSTATE** variable with the GET DIAGNOSTICS statement to perform exception checking. This method conforms to X/Open and ANSI SQL standards and supports multiple exceptions.

The next three sections describe how to use the **SQLCODE** variable and the **sqlca** structure to perform exception handling. These sections cover the following topics:

- Understanding the **sqlca** structure
- Using the **SQLCODE** variable to obtain error codes
- Checking for the different types of exceptions with the **sqlca** structure

Fields of the sqlca structure

The **sqlca** structure is defined in the `sqlca.h` header file. The IBM® Informix® ESQL/C preprocessor automatically includes the `sqlca.h` header file in the Informix® ESQL/C program.

The following table illustrates the fields of the **sqlca** structure.

Table 57. Fields of the sqlca structure

Field	Type	Value	Value description
sqlcode	int4	0	Indicates success.
		>=0, < 100	After a DESCRIBE statement, represents the type of SQL statement that is described.
		100	After a successful query that returns no rows, indicates the NOT FOUND condition. NOT FOUND can also occur in an ANSI-compliant database after an INSERT INTO/SELECT, UPDATE, DELETE, or SELECT... INTO TEMP statement fails to access any rows. For more information, see NOT FOUND in SQLSTATE on page 288 .
		<0	Error code.
sqlerrm	character (72) or character (600)		When working with Informix® database servers this field is 72 characters long and contains the error message parameter. This parameter is used to replace a %s token in the actual error message. If an error message requires no parameter, this field is blank.
sqlerrp	character (8)		Internal use only.
sqlerrd	array of 6 int4s	[0]	After a successful PREPARE statement for a SELECT, UPDATE, INSERT, or DELETE statement, or after a select cursor is opened, this field contains the estimated number of rows affected.

Table 57. Fields of the sqlca structure (continued)

Field	Type	Value	Value description
		[1]	<p>When SQLCODE contains an error code, this field contains either zero or an additional error code, called the ISAM error code, that explains the cause of the main error.</p> <p>After a successful insert operation of a single row, this field contains the value of any SERIAL value generated for that row.</p>
		[2]	<p>After a successful multirow insert, update, or delete operation, this field contains the number of rows that were processed.</p> <p>After a multirow insert, update, or delete operation that ends with an error, this field contains the number of rows that were successfully processed before the error was detected.</p>
		[3]	After a successful PREPARE statement for a SELECT, UPDATE, INSERT, or DELETE statement, or after a select cursor was opened, this field contains the estimated weighted sum of disk accesses and total rows processed.
		[4]	After a syntax error in a PREPARE, EXECUTE IMMEDIATE, DECLARE, or static SQL statement, this field contains the offset in the statement text where the error was detected.
		[5]	After a successful fetch of a selected row, or a successful insert, update, or delete operation, this field contains the rowid (physical address) of the last row that was processed. Whether this rowid value corresponds to a row that the database server returns to the user depends on how the database server processes a query, particularly for SELECT statements.

Table 58. Fields of the sqlca structure when opening a database

Field	Type	Value	Value description
sqlwarn	array of 8 characters	sqlwarn0	Set to W when any other warning field is set to W. If blank, others do not need to be checked.
		sqlwarn1	Set to W when the database now open uses a transaction log.
		sqlwarn2	Set to W when the database now open is ANSI compliant.
		sqlwarn3	Set to W.
		sqlwarn4	Set to W when the database server stores the FLOAT data type in DECIMAL form (done when the host system lacks support for FLOAT data types).
		sqlwarn5	Reserved.

Table 58. Fields of the `sqlca` structure when opening a database (continued)

Field	Type	Value	Value description
		sqlwarn6	Set to W when the application is connected to a database server that is running in secondary mode. The database server is a secondary server in a data-replication pair (the database server is available only for read operations).
		sqlwarn7	Set to W when client DB_LOCALE does not match the database locale. For more information, see the chapter on Informix® ESQL/C in the <i>HCL® Informix® GLS User's Guide</i> .

Table 59. Fields of the `sqlca` structure for all other operations:

Field	Type	Value	Value description
sqlwarn	array of 8 characters	sqlwarn0	Set to W when any other warning field is set to W. If blank, other fields in sqlwarn do not need to be checked.
		sqlwarn1	Set to W if a column value is truncated when it is fetched into a host variable with a FETCH or a SELECT...INTO statement. On a REVOKE ALL statement, set to W when not all seven table-level privileges are revoked.
		sqlwarn2	Set to W when a FETCH or SELECT statement returns an aggregate function (SUM, AVG, MIN, MAX) value that is null.
		sqlwarn3	On a SELECT...INTO, FETCH...INTO, or EXECUTE...INTO statement, set to W when the number of items in the select list is not the same as the number of host variables given in the INTO clause to receive them. On a GRANT ALL statement, set to W when not all seven table-level privileges are granted.
		sqlwarn4	Set to W after a DESCRIBE statement if the prepared statement contains a DELETE statement or an UPDATE statement without a WHERE clause.
		sqlwarn5	Set to W following execution of a statement that does not use ANSI-standard SQL syntax (provided the DBANSIWARN environment variable is set).
		sqlwarn6	Set to W when a data fragment (a dbspace) has been skipped during query processing (when the DATASKIP feature is on).
		sqlwarn7	Reserved.


The `SQLCODE` variable

The **SQLCODE** variable is an **int4** that indicates whether the SQL statement succeeded or failed.

The IBM® Informix® ESQL/C header file, `sqlca.h`, declares **SQLCODE** as a global variable. Since the Informix® ESQL/C preprocessor automatically includes `sqlca.h` in the Informix® ESQL/C program, you do not need to declare **SQLCODE**.

When the database server executes an SQL statement, the database server automatically updates the **SQLCODE** variable as follows:

1. The database server stores the exception value in the **sqlcode** field of the **sqlca** structure.
2. Informix® ESQL/C copies the value of **sqlca.sqlcode** to the global **SQLCODE** variable.

 **Tip:** For readability and brevity, use **SQLCODE** in your Informix® ESQL/C program in place of **sqlca.sqlcode**.

The **SQLCODE** value can indicate the following types of exceptions:

SQLCODE = 0

Success

SQLCODE = 100

NOT FOUND condition

SQLCODE < 0

Runtime error

SQLCODE in pure C modules

To return the same values that the **SQLCODE** status variable in Informix® ESQL/C modules returns, you can use **SQLCODE** in pure C modules (modules with the `.c` extension) that you link to the Informix® ESQL/C program. To use **SQLCODE** in a pure C module, declare **SQLCODE** as an external variable, as follows:

```
extern int4 SQLCODE;
```

SQLCODE and the exit() call

To return an error code to a parent process, do not attempt to use the **SQLCODE** value as an argument to the `exit()` system call. When Informix® ESQL/C passes back the argument of `exit()` to the parent, it passes only the lower eight bits of the value. Since **SQLCODE** is a four-byte (**long**) integer, the value that Informix® ESQL/C returns to the parent process might not be what you expect.

To pass error information between processes, use the exit value as an indication that some type of error has occurred. To obtain information about the actual error, use a temporary file, a database table, or some form of interprocess communication.

SQLCODE after a DESCRIBE statement

The DESCRIBE statement returns information about a prepared statement before the statement executes. It operates on a statement ID that a PREPARE statement has previously assigned to a dynamic SQL statement.

After a successful DESCRIBE statement, the database server sets **SQLCODE** (and **sqlca.sqlcode**) to a nonnegative integer value that represents the type of SQL statement that DESCRIBE has examined. The `sqlstype.h` header file declares

constant names for each of these return values. For a list of possible **SQLCODE** values after a DESCRIBE statement, see [Determine the statement type on page 447](#).

Because the DESCRIBE statement uses the **SQLCODE** field differently than any other statement, you might want to revise your exception-handling routines to accommodate this difference.

Check for exceptions with sqlca

After an SQL statement executes, the **sqlca** structure can indicate one of the four possible conditions that the following table shows.

Table 60. Exceptions that the sqlca structure returns

Exception condition	sqlca value
Success	SQLCODE (and sqlca.sqlcode) = 0
Success, but no rows found	SQLCODE (and sqlca.sqlcode) = 100
Success, but warnings generated	sqlca.sqlwarn.sqlwarn0 = 'W' To indicate specific warning: <ul style="list-style-type: none"> • One of sqlwarn1 to sqlwarn7 in the sqlca.sqlwarn structure is also set to W
Failure, runtime error generated	SQLCODE (and sqlca.sqlcode) < 0

For a general introduction to these four conditions, see [Types of database exceptions on page 277](#).

Success in sqlca

When the database server executes an SQL statement successfully, it sets **SQLCODE** (**sqlca.sqlcode**) to 0. The database server might also set one or more of the following informational fields in **sqlca** after a successful SQL statement:

- After a PREPARE for a SELECT, DELETE, INSERT, or UPDATE:
 - **sqlca.sqlerrd[0]** indicates an estimated number of rows affected.
 - **sqlca.sqlerrd[3]** contains the estimated weighted sum of disk accesses and total rows processed.
- After an INSERT, **sqlca.sqlerrd[1]** contains the value that the database server has generated for a SERIAL column.
- After a SELECT, INSERT, DELETE, or UPDATE:
 - **sqlca.sqlerrd[2]** contains the number of rows that the database server processed.
 - **sqlca.sqlerrd[5]** contains the rowid (physical address) of the last row that was processed. Whether this rowid value corresponds to a row that the database server returns to the user depends on how the database server processes a query, particularly for SELECT statements.
- After a CONNECT, SET CONNECTION, DATABASE, CREATE DATABASE, or START DATABASE, the **sqlca.sqlwarn.sqlwarn0** field is set to W and other fields of **sqlca.sqlwarn** provide information about the database and connection.

NOT FOUND in SQLCODE

When a SELECT or FETCH statement encounters NOT FOUND (or END OF DATA), the database server sets **SQLCODE** (`sqlca.sqlcode`) to 100. The following table lists conditions that cause SQL statements to yield NOT FOUND.

Table 61. SQLCODE values that are set when SQL statements do not return any rows

SQL statement where SQLCODE gets the indicated result	Result for ANSI-compliant database	Result for Non-ANSI-compliant database
FETCH statement: the last qualifying row has already been returned (the end of data was reached).	100	100
SELECT statement: no rows match the SELECT criteria.	100	100
DELETE and DELETE...WHERE statement (not part of multistatement PREPARE): no rows match the DELETE criteria.	100	0
INSERT INTO <i>tablename</i> SELECT statement (not part of multistatement PREPARE): no rows match the SELECT criteria.	100	0
SELECT... INTO TEMP statement (not part of multistatement PREPARE): no rows match the SELECT criteria.	100	0
UPDATE...WHERE statement (not part of multistatement PREPARE): no rows match the UPDATE criteria.	100	0

[Table 61: SQLCODE values that are set when SQL statements do not return any rows on page 299](#) shows that what the NOT FOUND condition generates depends, in some cases, on whether the database is ANSI compliant.

In the following example, the INSERT statement inserts into the **hot_items** table any stock item that has an order quantity greater than 10,000. If no items have an order quantity that great, the SELECT part of the statement fails to insert any rows. The database server returns 100 in an ANSI-compliant database and 0 if the database is not ANSI compliant.

```
EXEC SQL insert into hot_items
select distinct stock.stock_num,
       stock.manu_code,description
from items, stock
where stock.stock_num = items.stock_num
      and stock.manu_code = items.manu_code
      and quantity > 10000;
```

For readability, use the constant SQLNOTFOUND for the END OF DATA value of 100. The `sqlca.h` header file defines the SQLNOTFOUND constant. The following comparison checks for the NOT FOUND and END OF DATA conditions:

```
if(SQLCODE == SQLNOTFOUND)
```

Warnings in sqlca.sqlwarn

When the database server executes an SQL statement successfully, but encounters a warning condition, it updates the following two fields in the **sqlca.sqlwarn** structure:

- It sets the **sqlca.sqlwarn.sqlwarn0** field to the letter **w**.
- It sets one other field within the **sqlwarn** structure (**sqlwarn1** to **sqlwarn7**) to the letter **w** to indicate the specific warning condition.

These warnings are specific to HCL Informix®. [Table 57: Fields of the sqlca structure on page 294](#) contains two sets of warning conditions that can occur in the fields of the **sqlca.sqlwarn** structure. The first set of warnings, shown in [Table 57: Fields of the sqlca structure on page 294](#), occurs after the database server opens a database or establishes a connection. For more information about these conditions, see [Determine features of the database server on page 334](#). The second set of warnings is for conditions that can occur as a result of other SQL statements.

To test for warnings, check whether the first warning field (**sqlwarn0**) is set to **w**. After you determine that the database server has generated a warning, you can check the values of the other fields in **sqlca.sqlwarn** to identify the specific condition. For example, if you want to find out what database a CONNECT statement has opened, you can use the code that the following figure shows.

Figure 70. Code fragment that checks for warnings after a CONNECT statement

```
int trans_db, ansi_db, us_db = 0;
:

msg = "CONNECT stmt";
EXEC SQL connect to 'stores7';
if(SQLCODE < 0)      /* < 0 is an error */
    err_chk(msg);
if (sqlca.sqlwarn.sqlwarn0 == 'W')
{
    if (sqlca.sqlwarn.sqlwarn1 == 'W' )
        trans_db = 1;
    if (sqlca.sqlwarn.sqlwarn2 == 'W' )
        ansi_db = 1;
    if (sqlca.sqlwarn.sqlwarn3 == 'W' )
        us_db = 1;
}
```

Runtime errors in SQLCODE

When an SQL statement results in a runtime error, the database server sets **SQLCODE** (and **sqlca.sqlcode**) to a negative value. The actual number identifies the particular error. The error message documentation lists the error codes specific to HCL Informix® and their corrective actions.

From within your Informix® ESQL/C program, you can retrieve error message text that is associated with a negative **SQLCODE** (**sqlca.sqlcode**) value with the **rgetlmsg()** or **rgetmsg()** library function.

When the database server encounters a runtime error, it might also set the following other fields in the **sqlca** structure:

- **sqlca.sqlerrd[1]** to hold the additional ISAM error return code. You can also use the `rgetlmsg()` and `rgetmsg()` library functions to obtain ISAM error message text.
- **sqlca.sqlerrd[2]** to indicate the number of rows processed before the error occurred in a multirow INSERT, UPDATE, or DELETE statement.
- **sqlca.sqlerrm** is used differently depending on what type of database server is using it.


If the server is the HCL Informix® database server this value is set to an error message parameter. This value is used to replace a %s token in the error message.

For example, in the following error message, the name of the table (**sam.xyz**) is saved in **sqlca.sqlerrm**:

```
310: Table (sam.xyz) already exists in database.
```

If the server is the IBM® DB2® database server this field is set to the complete error message.

- **sqlca.sqlerrd[4]** after a PREPARE, EXECUTE IMMEDIATE, or DECLARE statement that encountered an error.


 **Tip:** You can also test for errors with the WHENEVER SQLERROR statement.

Errors after a PREPARE statement

When the database server returns an error for a PREPARE statement, this error is usually because of a syntax error in the prepared text. When this occurs, the database server returns the following information:

- The **SQLCODE** variable indicates the cause of the error.
- The **sqlca.sqlerrd[4]** field contains the offset into the prepared statement text at which the error occurs. Your program can use the value in **sqlca.sqlerrd[4]** to indicate where the syntax of the dynamically prepared text is incorrect.

If you prepare multiple statements with a single PREPARE statement, the database server returns an error status on the first error in the text, even if it encounters several errors.

 **Important:** The **sqlerrd[4]** field, which is the offset of the error into the SQL statement, might not always be correct because the IBM® Informix® ESQL/C preprocessor converts the embedded SQL statements into host-language format. In so doing, the preprocessor might change the relative positions of the elements within the embedded statement.

For example, consider the following statement, which contains an invalid WHERE clause:

```
EXEC SQL INSERT INTO tab VALUES (:x, :y, :z)
WHERE i = 2;
```

The preprocessor converts this statement to a string like the following string:

```
" insert into tab values ( ? , ? , ? ) where i = 2 "
```

This string does not have the EXEC SQL keywords. Also, the characters `?`, `?`, `?` have replaced `:x`, `:y`, `:z` (five characters instead of eight). The Informix® ESQL/C preprocessor has also dropped a newline character between the left parenthesis ("`)`") and the WHERE keyword. Thus, the offset of error in the SQL statement that the database server sees is different from the offset of the error in the embedded SQL statement.

The `sqlca.sqlerrd[4]` field also reports statement-offset values for errors in the EXECUTE IMMEDIATE and DECLARE statements.

SQLCODE after an EXECUTE statement

After an EXECUTE statement, the database server sets **SQLCODE** to indicate the success of the prepared statement as follows:

- If the database server cannot execute a prepared statement successfully, it sets **SQLCODE** to a value less than 0. The **SQLCODE** variable holds the error that the database server returns from the statement that failed.
- If the database server can successfully execute the prepared statement in the block, it sets **SQLCODE** to 0; if the prepared block includes multiple statements, all of the statements succeeded.

Display error text (Windows™)

Your IBM® Informix® ESQL/C application can use the HCL Informix® `ERRMESS.HLP` file to display text that describes an error and its corrective action.

You can call the Windows™ API `WinHelp()` with the following `WinHelp` parameters.

WinHelp parameter

Data

HELP_CONTEXT

Error number from **SQLCODE** or `sqlca.sqlcode`

HELP_CONTEXTPOPUP

Error number from **SQLCODE** or `sqlca.sqlcode`

HELP_KEY

Pointer to string that contains error number from **SQLCODE** or `sqlca.sqlcode` and is converted to ASCII with `sprintf()` or `wsprintf()`

HELP_PARTIALKEY

Pointer to string that contains error number from **SQLCODE** or `sqlca.sqlcode` and is converted to ASCII with `sprintf()` or `wsprintf()`

Choose an exception-handling strategy

By default, the IBM® Informix® ESQL/C application does not perform any exception handling for SQL statements. Therefore, unless you explicitly provide such code, execution continues when an exception occurs. While this behavior might not be too

serious for successful execution, warnings, and NOT FOUND conditions, it can have serious consequences in the event of a runtime error.

A runtime error might halt the program execution. Unless you check for and handle these errors in the application code, this behavior can cause the user confusion and annoyance. It also can leave the application in an inconsistent state.

Within the Informix® ESQL/C application, choose a consistent strategy for exception handling. You can choose one of the following exception-handling strategies:

- You can check after each SQL statement, which means that you include code to test the value of **SQLSTATE** (or **SQLCODE**) after each SQL statement.
- You can use the **WHENEVER** statement to associate a response to take each time a particular type of exception occurs.



Important: Consider how to perform exception handling in an application before you begin development so that you take a consistent and maintainable approach.

Check after each SQL statement

To check for an exception, you can include code to explicitly test the value of **SQLSTATE** (or **SQLCODE**).



Tip: Decide whether to use **SQLSTATE** (and the diagnostics area) or **SQLCODE** (and the **sqlca** structure) to determine exception values. Use the chosen exception-handling variables consistently. If you mix these two variables unnecessarily, you create code that is difficult to maintain. Keep in mind that **SQLSTATE** is the more flexible and portable of these two options.

For example, if you want to use **SQLSTATE** to check whether a **CREATE DATABASE** statement has executed as expected, you can use the code that the following figure shows.

Figure 71. Using **SQLSTATE** to test whether an error occurred during an SQL statement

```
EXEC SQL create database personnel with log;
if(strncmp(SQLSTATE, "02", 2) > 0) /* > 02 is an error */
{
EXEC SQL get diagnostics exception 1
:message = MESSAGE_TEXT, :messlen = MESSAGE_LENGTH;
message[messlen] = '\0'; /* terminate the string. */

printf("SQLSTATE: %s, %s\n", SQLSTATE, message);
exit(1);
}
```

As an alternative, you can write an exception-handling function that processes any exception. Your program can then call this single exception-handling function after each SQL statement.

The `sqlstate_exception()` function, which the following figure shows, is an example of an exception-handling function that uses the **SQLSTATE** variable and the diagnostics area to check for warnings, the NOT FOUND condition, and runtime errors. It is called after each SQL statement.

Figure 72. Example of an exception-handling function that uses SQLSTATE

```
EXEC SQL select * from customer where fname not like "%y";
sqlstate_exception("select");
;;

int4 sqlstate_exception(s)
char *s;
{
    int err = 0;

    if(!strncmp(SQLSTATE, "00", 2) ||
        !strncmp(SQLSTATE, "02", 2))
        return(SQLSTATE[1]);

    if(!strncmp(SQLSTATE, "01", 2))
        printf("\n*****Warning encountered in %s*****\n",
            statement);
    else /* SQLSTATE class > "02" */
    {
        printf("\n*****Error encountered in %s*****\n",
            statement);
        err = 1;
    }

    disp_sqlstate_err(); /* See the getdiag sample program */
    if(err)
    {
        printf("*****Program terminated*****\n\n");
        exit(1);
    }

    /*
     * Return the SQLCODE
     */
    return(SQLCODE);
}
```

The `sqlstate_exception()` function, which [Figure 72: Example of an exception-handling function that uses SQLSTATE on page 304](#) shows, handles exceptions as follows:

- If the statement was successful, `sqlstate_exception()` returns zero.
- If a NOT FOUND condition occurs after a SELECT or a FETCH statement, `sqlstate_exception()` returns a value of 2.
- If a warning or a runtime error occurs—that is, if the first two bytes of **SQLSTATE** are "01" (warning) or are greater than "02" (error)—the `sqlstate_exception()` function calls the `disp_sqlstate_err()` function to display exception information. (For the code of the `disp_sqlstate_err()` function, see [Lines 32 - 80 on page 312](#).)
- If **SQLSTATE** indicates an error, the `sqlstate_exception()` function uses the `exit()` system call to exit the program. Without this call to `exit()`, execution would continue at the next SQL statement after the one that had generated the error.

To handle errors, the `sqlstate_exception()` function can alternatively omit the `exit()` call and allow execution to continue. In this case, the function must return the **SQLSTATE** or **SQLCODE** (for errors specific to HCL Informix®) value so the calling program can determine what action to take for a runtime error.

The WHENEVER statement

You can use the WHENEVER statement to trap for exceptions that occur during the execution of SQL statements.

The WHENEVER statement provides the following information:

- What condition to check for:
 - **SQLERROR** checks whether an SQL statement has failed. The application performs the specified action when the database server sets **SQLCODE** (`sqlca.sqlcode`) to a negative value and the class code of **SQLSTATE** to a value greater than "02".
 - **NOT FOUND** checks whether specified data has not been found. The application performs the specified action when the database server sets **SQLCODE** (`sqlca.sqlcode`) to `SQLNOTFOUND` and the class code of **SQLSTATE** to "02".
 - **SQLWARNING** checks whether the SQL statement has generated a warning. The application performs the specified action when the database server sets `sqlca.sqlwarn.sqlwarn0` (and some other field of `sqlca.sqlwarn`) to `w` and sets the class code of **SQLSTATE** to "01".

In a Windows™ environment, do not use the WHENEVER ERROR STOP construction in the IBM® Informix® ESQL/C program that you want to compile as a DLL.

- What action to take when the specified condition occurs:
 - **CONTINUE** ignores the exception and continues execution at the next statement after the SQL statement.
 - **GO TO *label*** transfers execution to the section of code that the specified *label* introduces.
 - **STOP** stops program execution immediately.
 - **CALL *function name*** transfers execution to the specified *function name*.

If no WHENEVER statement exists for a given condition, the Informix® ESQL/C preprocessor uses CONTINUE as the default action. To execute the `sqlstate_exception()` function (shown in [Figure 72: Example of an exception-handling function that uses SQLSTATE on page 304](#)) every time an error occurs, you can use the GOTO action of the WHENEVER SQLERROR statement. If you specify the SQLERROR condition of WHENEVER, you obtain the same behavior as if you check the **SQLCODE** or **SQLSTATE** variable for an error after each SQL statement.

The WHENEVER statement for the GOTO action can take the following two forms:

- The ANSI-standard form uses the keywords GOTO (one word) and introduces the label name with a colon (:):

```
EXEC SQL whenever goto :error_label;
```

- The Informix® extension uses the keywords GO TO (two words) and specifies just the label name:

```
EXEC SQL whenever go to error_label;
```

With the GOTO action, your program automatically transfers control to the **error_label** label when the SQL statement generates an exception. When you use the GOTO *label* action of the WHENEVER statement, your code must contain the

label and appropriate logic to handle the error condition. In the following example, the logic at *label* is simply a call to the `sqlstate_exception()` function:

```
error_label:
    sqlstate_exception (msg);
```

You must define this **error_label** label in each program block that contains SQL statements. If your program contains more than one function, you might need to include the **error_label** label and code in each function. Otherwise, the preprocessor generates an error when it reaches the function that does not contain the **error_label**. It tries to insert the code that the `WHENEVER...GOTO` statement has requested, but the function has not defined the **error_label** label.

To remove the preprocessor error, you can put the labeled statement with the same label name in each function, you can issue another action for the `WHENEVER` statement to reset the error condition, or you can replace the `GOTO` action with the `CALL` action to call a separate function.

You can also use the `CALL` keyword in the `WHENEVER` statement to call the `sqlstate_exception()` function when errors occur. (The `CALL` option is the Informix® extension to the ANSI standard.)

If you want to call the `sqlstate_exception()` function every time an SQL error occurs in the program, take the following steps:

- Modify the `sqlstate_exception()` function so that it does not need any arguments. Functions that the `CALL` action specifies cannot take arguments. To pass information, use global variables instead.
- Put the following `WHENEVER` statement in the early part of your program, before any SQL statements:

```
EXEC SQL whenever sqlerror call sqlstate_exception;
```




Tip: In the preceding code fragment, you do not include the parentheses after the `sqlstate_exception()` function.


Make sure, however, that all functions that the `WHENEVER...CALL` affects can find a declaration of the `sqlstate_exception()` function.

Library functions for retrieving error messages

Each **SQLCODE** value has an associated message. Error message files in the `$INFORMIXDIR/msg` directory store the message number and its text.

When you use **SQLCODE** and the `sqlca` structure, you can retrieve error message text with the `rgetlmsg()` and `rgetmsg()` functions. Both of these functions take the **SQLCODE** error code as input and return the associated error message.

 **Tip:** When you use **SQLSTATE** and the GET DIAGNOSTICS statement, you can access information in the **MESSAGE_TEXT** field of the diagnostics area to retrieve the message text that is associated with an exception.

 **Important:** Use `rgetlmsg()` in any new Informix® ESQL/C code that you write. Informix® ESQL/C provides the `rgetmsg()` function primarily for compatibility with earlier versions.

Display error text in a Windows™ environment

Your IBM® Informix® ESQL/C application can use the HCL Informix® `ERRMESS.HLP` file to display text that describes an error and its corrective action.

You can call the Windows™ API `WinHelp()` with the following `WinHelp` parameters.

WinHelp parameter

Data

HELP_CONTEXT

Error number from `SQLCODE` or **sqlca.sqlcode**

HELP_CONTEXTPOPUP

Error number from `SQLCODE` or **sqlca.sqlcode**

HELP_KEY

Pointer to string that contains error number from `SQLCODE` or **sqlca.sqlcode** and is converted to ASCII with `sprintf()` or `wsprintf()`

HELP_PARTIALKEY

Pointer to string that contains error number from `SQLCODE` or **sqlca.sqlcode** and is converted to ASCII with `sprintf()` or `wsprintf()`

A program that uses exception handling

The `getdiag.ec` program contains exception handling on each of the SQL statements that the program executes. This program is a modified version of the `demo1.ec` program. The version that this section lists and describes uses the following exception-handling methods:

- The **SQLSTATE** variable and the GET DIAGNOSTICS statement to obtain exception information.
- The **SQLWARNING** and **SQLERROR** keywords of the **WHENEVER** statement to call the `whenexp_chk()` function for warnings and errors.

The `whenexp_chk()` function displays the error number and the accompanying ISAM error, if one exists. The `exp_chk.ec` source file contains this function and its exception-handling functions. The `getdiag.ec` source file includes the `exp_chk.ec` file.

Compile the program

Use the following command to compile the **getdiag** program:

```
esql -o getdiag getdiag.ec
```

The `-o getdiag` option tells `esql` to name the executable program **getdiag**. Without the `-o` option, the name of the executable program defaults to `a.out`.

Guide to the getdiag.ec file

The annotations in this section primarily describe the exception-handling statements.

```
=====
1. #include <stdio.h>
2. EXEC SQL define FNAME_LEN 15;
3. EXEC SQL define LNAME_LEN 15;
4. int4 sqlstate_err();
5. extern char statement[20];
6. main()
7. {
8.     EXEC SQL BEGIN DECLARE SECTION;
9.     char fname[ FNAME_LEN + 1 ];
10.    char lname[ LNAME_LEN + 1 ];
11.    EXEC SQL END DECLARE SECTION;
12.    EXEC SQL whenever sqlerror CALL whenexp_chk;
13.    EXEC SQL whenever sqlwarning CALL whenexp_chk;
14.    printf("GETDIAG Sample ESQL program running.\n\n");
15.    strcpy (statement, "CONNECT stmt");
16.    EXEC SQL connect to 'stores7';
17.    strcpy (statement, "DECLARE stmt");
18.    EXEC SQL declare democursor cursor for
19.        select fname, lname
20.        into :fname, :lname;
21.        from customer
22.        where lname < 'C';
23.    strcpy (statement, "OPEN stmt");
24.    EXEC SQL open democursor;
25.    strcpy (statement, "FETCH stmt");
26.    for (;;)
27.    {
28.        EXEC SQL fetch democursor;
29.        if(sqlstate_err() == 100)
30.            break;
31.        printf("%s %s\n", fname, lname);
32.    }
33.    strcpy (statement, "CLOSE stmt");
34.    EXEC SQL close democursor;
=====
```

Line 4

Line 4 declares an external global variable to hold the name of the most-recently executed SQL statement. The exception-handling functions use this information (see [Lines 169 - 213 on page 317](#)).

Lines 12 and 13

The `WHENEVER SQLERROR` statement tells the IBM® Informix® ESQL/C preprocessor to add code to the program to call the `whenexp_chk()` function whenever an SQL statement generates an error. The `WHENEVER SQLWARNING` statement tells the Informix® ESQL/C preprocessor to add code to the program to call the `whenexp_chk()` function whenever an SQL statement generates a warning. The `whenexp_chk()` function is in the `exp_chk.ec` file, which line 40 includes.

Line 15

The `strcpy()` function copies the string `"CONNECT stmt"` to the global `statement` variable. If an error occurs, the `whenexp_chk()` function uses this variable to print the name of the statement that caused the failure.

Lines 17, 23, 25, and 33

These lines copy the name of the current SQL statement into the `statement` variable before the `DECLARE`, `OPEN`, `FETCH`, and `CLOSE` statements execute. This action enables the `whenexp_chk()` function to identify the statement that failed if an error occurs.

```

=====
36.      strcpy (statement, "FREE stmt");
37.      EXEC SQL free democursor;
38.      strcpy (statement, "DISCONNECT stmt");
39.      EXEC SQL disconnect current;
40.      printf("\nGETDIAG Sample Program Over.\n");
41. }      /* End of main routine */
42. EXEC SQL include exp_chk.ec;
=====

```

Lines 35 and 37

These lines copy the name of the current SQL statement into the `statement` variable before the `FREE` and `DISCONNECT` statements execute. The `whenexp_chk()` function uses the `statement` variable to identify the statement that failed if an error occurs.

Line 41

The `whenexp_chk()` function examines the `SQLSTATE` status variable to determine the outcome of an SQL statement. Because several demonstration programs use the `whenexp_chk()` function with the `WHENEVER` statement for exception handling, the `whenexp_chk()` function and its supporting functions are placed in a separate source file, `exp_chk.ec`. The `getdiag` program must include this file with the Informix® ESQL/C `include` directive because the exception-handling functions use Informix® ESQL/C statements.



Tip: Consider putting functions such as `whenexp_chk()` into a library and include this library on the command line when you compile the Informix® ESQL/C program.

Guide to the `exp_chk.ec` file

The `exp_chk.ec` file contains exception-handling functions for the Informix® ESQL/C demonstration programs.

These functions support the following two types of exception handling:

- A function that a WHENEVER SQLERROR CALL statement specifies performs exception handling.

Functions to support this type of exception handling include `whenexp_chk()`, `sqlstate_err()`, and `disp_sqlstate_err()`. The **getdiag** sample program in this chapter uses this form of exception handling.

- A function that the IBM® Informix® ESQL/C program calls explicitly after each SQL statement performs exception handling.

Functions to support this type of exception handling include `exp_chk()`, `exp_chk2()`, `sqlstate_err()`, **disp_sqlstate_err()**, and `disp_exception()`. The **dispcat_pic** sample program ([Simple large objects on page 135](#)) uses `exp_chk2()` while the **dyn_sql** sample program ([A system-descriptor area on page 477](#)) uses `exp_chk()` to perform exception handling.

To obtain exception information, the preceding functions use the **SQLSTATE** variable and the GET DIAGNOSTICS statement. They use **SQLCODE** only when they need information specific to Informix®.

```

=====
1. EXEC SQL define SUCCESS 0;
2. EXEC SQL define WARNING 1;
3. EXEC SQL define NODATA 100;
4. EXEC SQL define RTERROR -1;
5. char statement[80];
6. /*
7. * The sqlstate_err() function checks the SQLSTATE status variable
  * to see
8. * if an error or warning has occurred following an SQL statement.
9. */
10. int4 sqlstate_err()
11. {
12.     int4 err_code = RTERROR;
13.     if(SQLSTATE[0] == '0') /* trap '00', '01', '02' */
14.     {
15.         switch(SQLSTATE[1])
16.         {
17.             case '0': /* success - return 0 */
18.                 err_code = SUCCESS;
19.                 break;
20.             case '1': /* warning - return 1 */
21.                 err_code = WARNING;
22.                 break;
23.             case '2': /* end of data - return 100 */
24.                 err_code = NODATA;
25.                 break;
26.             default: /* error - return -1*/
27.                 break;
28.         }
29.     }
30.     return(err_code);
31. }
=====

```

Lines 1 - 4

These Informix® ESQL/C **define** directives create definitions for the success, warning, NOT FOUND, and runtime error exceptions. Several functions in this file use these definitions instead of constants to determine actions to take for a given type of exception.

Line 5

The **statement** variable is a global variable that the calling program (which declares it as **extern**) sets to the name of the most-recent SQL statement.

The `whenexp_chk()` function displays the SQL statement name as part of the error information (see lines 85 and 92).

Lines 6 - 31

The `sqlstate_err()` function returns a status of `0`, `1`, `100`, or `-1` to indicate if the current exception in **SQLSTATE** is a success, warning, NOT FOUND, or runtime error. The `sqlstate_err()` function checks the first two characters of the global **SQLSTATE** variable. Because Informix® ESQL/C automatically declares the **SQLSTATE** variable, the function does not need to declare it.

Line 13 checks the first character of the global **SQLSTATE** variable. This character determines whether the most-recently executed SQL statement has generated a non-error condition. Non-error conditions include the NOT FOUND condition (or END OF DATA), success, and warnings. Line 15 checks the second character of the global **SQLSTATE** variable (**SQLSTATE[1]**) to determine the type of non-error condition generated.

The `sqlstate_err()` function sets **err_code** to indicate the exception status as follows:

- Lines 17 - 19: If **SQLSTATE** has a class code of `"00"`, the most-recently executed SQL statement was successful. The `sqlstate_err()` function returns `0` (which line 1 defines as SUCCESS).
- Lines 20 - 22: If **SQLSTATE** has a class code of `"01"`, the most-recently executed SQL statement generated a warning. The `sqlstate_err()` function returns `1` (which line 2 defines as WARNING).
- Lines 23 - 25: If **SQLSTATE** has a class code of `"02"`, the most-recently executed SQL statement generated the NOT FOUND (or END OF DATA) condition. The `sqlstate_err()` function returns `100` (which line 3 defines as NODATA).

If **SQLSTATE[1]** contains any character other than `'0'`, `'1'`, or `'2'`, then the most-recently executed SQL statement generated a runtime error. **SQLSTATE** also indicates a runtime error if **SQLSTATE[0]** contains some character other than `'0'`. In either case, line 30 returns a negative one (`-1`) (which line 4 defines as RTERROR).

```

=====
32. /*
33. * The disp_sqlstate_err() function executes the GET DIAGNOSTICS
34. * statement and prints the detail for each exception that is
35. * returned.
36. */
37. void disp_sqlstate_err()
38. {
39.     mint j;
40.     EXEC SQL BEGIN DECLARE SECTION;
41.         mint exception_count;
42.         char overflow[2];

```

```

43.     int exception_num=1;
44.     char class_id[255];
45.     char subclass_id[255];
46.     char message[8191];
47.     mint messlen;
48.     char sqlstate_code[6];
49.     mint i;
50. EXEC SQL END DECLARE SECTION;
51.     printf("-----");
52.     printf("-----\n");
53.     printf("SQLSTATE: %s\n",SQLSTATE);
54.     printf("SQLCODE: %d\n", SQLCODE);
55.     printf("\n");
56. EXEC SQL get diagnostics :exception_count = NUMBER,
57.     :overflow = MORE;
58.     printf("EXCEPTIONS: Number=%d\t", exception_count);
59.     printf("More? %s\n", overflow);
60.     for (i = 1; i <= exception_count; i++)
61.     {
62.         EXEC SQL get diagnostics exception :i
63.             :sqlstate_code = RETURNED_SQLSTATE,
64.             :class_id = CLASS_ORIGIN, :subclass_id = SUBCLASS_ORIGIN,
65.             :message = MESSAGE_TEXT, :messlen = MESSAGE_LENGTH;
66.         printf("- - - - -\n");
67.         printf("EXCEPTION %d: SQLSTATE=%s\n", i,
68.             sqlstate_code);
69.         message[messlen-1] = '\0';
70.         printf("MESSAGE TEXT: %s\n", message);
71.         j = byleng(class_id, stleng(class_id));
72.         class_id[j] = '\0';
73.         printf("CLASS ORIGIN: %s\n",class_id);
74.         j = byleng(subclass_id, stleng(subclass_id));
75.         subclass_id[j] = '\0';
76.         printf("SUBCLASS ORIGIN: %s\n",subclass_id);
77.     }
78.     printf("-----");
79.     printf("-----\n");
80. }
=====

```

Lines 32 - 80

The `disp_sqlstate_err()` function uses the GET DIAGNOSTICS statement to obtain diagnostic information about the most-recently executed SQL statement.

Lines 40 - 50 declare the host variables that receive the diagnostic information. The GET DIAGNOSTICS statement copies information from the diagnostics area into these host variables. Line 48 includes a declaration for the **SQLSTATE** value (called **sqlstate_code**) because the `disp_sqlstate_err()` function handles multiple exceptions. The **sqlstate_code** variable holds the **SQLSTATE** value for each exception.

Lines 53 - 55 display the values of the **SQLSTATE** and **SQLCODE** variables. If **SQLSTATE** contains "IX000" (an error specific to HCL Informix®), **SQLCODE** contains the error code that is specific to Informix®.

The first GET DIAGNOSTICS statement (lines 56 and 57) stores the statement information in the **:exception_count** and **:overflow** host variables. Lines 58 and 59 then display this information.

The **for** loop (lines 60 - 77) executes for each exception that the most-recently executed SQL statement has generated. The **:exception_count** host variable, which holds the number of exceptions, determines the number of iterations that this loop performs.

The second GET DIAGNOSTICS statement (lines 62 - 65) obtains the exception information for a single exception. Lines 67 - 70 print the **SQLSTATE** value (**sqlstate_code**) and its corresponding message text. In addition to SQL error messages, `disp_sqlstate_err()` can display ISAM error messages because the MESSAGE_TEXT field of the diagnostics area also contains these messages. The function uses the MESSAGE_LENGTH value to determine where to place a null terminator in the message string. This action causes only the portion of the message variable that contains text to be output (rather than the full 255-character buffer).

Declare both the class- and the subclass-origin host variables as character buffers of size 255. However, often the text for these variables fills only a small portion of the buffer. Rather than display the full buffer, lines 71 - 73 use the Informix® ESQL/C `byleng()` and `stleng()` library functions to display only that portion of **:class_id** that contains text; lines 74 - 76 perform this same task for **:subclass_id**.

```

=====
81. void disp_error(stmt)
82. char *stmt;
83. {
84.     printf("\n*****Error encountered in %s*****\n",
85.         stmt);
86.     disp_sqlstate_err();
87. }
88. void disp_warning(stmt)
89. char *stmt;
90. {
91.     printf("\n*****Warning encountered in %s*****\n",
92.         stmt);
93.     disp_sqlstate_err();
94. }
95. void disp_exception(stmt, sqlerr_code, warn_flg)
96. char *stmt;
97. int4 sqlerr_code;
98. mint warn_flg;
99. {
100.    switch(sqlerr_code)
101.    {
102.        case SUCCESS:
103.        case NODATA:
104.            break;
105.        case WARNING:
106.            if(warn_flg)
107.                disp_warning(stmt);
108.            break;
109.        case RTERROR:
110.            disp_error(stmt);
111.            break;
112.        default:
113.            printf("\n*****INVALID EXCEPTION STATE for
114.                %s*****\n",
115.                stmt);
116.            /* break;

```

```
117. }
```

```
=====
```

Lines 81 - 87

The `disp_error()` function notifies the user of a runtime error. It calls the `disp_sqlstate_err()` function (line 86) to display the diagnostic information.

Lines 88 - 94

The `disp_warning()` function notifies the user of a warning. It calls the `disp_sqlstate_err()` function (line 93) to display the diagnostic information.

Lines 95 - 117

The `disp_exception()` function handles the display of the exception information. It expects the following three arguments:

stmt

The name of the most-recently executed SQL statement.

sqlerr_code

The code that `sqlstate_err()` returns to indicate the type of exception encountered.

warn_flg

A flag to indicate whether to display the diagnostic information for a warning.

Lines 102 - 104 handle the SUCCESS and NOData conditions. For either of these cases, the function displays no diagnostic information. Lines 105 - 108 notify the user that a warning has occurred. The function checks the **warn_flg** argument to determine whether to call the `disp_warning()` function to display warning information for the most-recently executed SQL statement (lines 137 - 142). Lines 109 - 111 notify the user that a runtime error has occurred. The `disp_err()` function actually handles display of the diagnostic information.

```
=====
118. * The exp_chk() function calls sqlstate_err() to check the SQLSTATE
119. * status variable to see if an error or warning has occurred
    * following
120. * an SQL statement. If either condition has occurred, exp_chk()
121. * calls disp_sqlstate_err() to print the detailed error
    * information.
122. *
123. * This function handles exceptions as follows:
124. *   runtime errors - call exit()
125. *   warnings - continue execution, returning "1"
126. *   success - continue execution, returning "0"
127. *   Not Found - continue execution, returning "100"
128. */
129. long exp_chk(stmt, warn_flg)
130. char *stmt;
131. int warn_flg;
132. {
133.     int4 sqlerr_code = SUCCESS;
134.     sqlerr_code = sqlstate_err();
```

```

135.  disp_exception(stmt, sqlerr_code, warn_flg);
136.  if(sqlerr_code == RTERROR)    /* Exception is a runtime error */
137.  {
138.      /* Exit the program after examining the error */
139.      printf("*****Program terminated*****\n\n");
140.      exit(1);
141.  }
142. /* else                          /* Exception is "success", "Not Found", */
143.  return(sqlerr_code); /* or "warning" */
144. }
=====

```

Lines 118 - 144

The `exp_chk()` function is one of three wrapper functions that handle exceptions. It analyzes the **SQLSTATE** value to determine the success or failure of the most-recent SQL statement. This function is called explicitly after each SQL statement. This design requires the following features:

- The `exp_chk()` function passes as an argument the name of the SQL statement that generated the exception.

Because the **WHENEVER** statement does not invoke the function, the function is not restricted to using a global variable.

- The `exp_chk()` function returns a value in the event of a successful execution of the SQL statement (`0`), the **NOT FOUND** condition (`100`), or a warning (`1`).

Because the calling program explicitly calls `exp_chk()`, the calling program can handle the return value.

- The `exp_chk()` function uses a flag argument (**warn_flg**) to indicate whether to display warning information to the user.

Because warnings can indicate non-serious errors and, after a **CONNECT**, can be informational, displaying warning information can be both distracting and unnecessary to the user. The **warn_flg** argument allows the calling program to determine whether to display warning information that SQL statements might generate.

The `sqlstate_err()` function (line 134) determines the type of exception that **SQLSTATE** contains. The function then calls `disp_exception()` (line 135) and passes the **warn_flg** argument to indicate whether to display warning information. To handle a runtime error, the `sqlstate_err()` function calls the `exit()` system function (lines 136 - 141) to terminate the program. This behavior is the same as what the `whenexp_chk()` function (see lines 170 - 214) provides for runtime errors.

The **dyn_sql** sample program also uses `exp_chk()` to handle exceptions.

```

=====
145. * The exp_chk2() function calls sqlstate_err() to check the
      * SQLSTATE
146. * status variable to see if an error or warning has occurred
      * following
147. * an SQL statement. If either condition has occurred, exp_chk2()
148. * calls disp_sqlstate_err() to print the detailed error
      * information.
149. *
150. * This function handles exceptions as follows:

```

```

151. * runtime errors - continue execution, returning SQLCODE (<0)
152. * warnings - continue execution, returning one (1)
153. * success - continue execution, returning zero (0)
154. * Not Found - continue execution, returning 100
155. */
156. int4 exp_chk2(stmt, warn_flg)
157. char *stmt;
158. mint warn_flg;
159. {
160.     int4 sqlerr_code = SUCCESS;
161.     int4 sqlcode;
162.     sqlcode = SQLCODE; /* save SQLCODE in case of error */
163.     sqlerr_code = sqlstate_err();
164.     disp_exception(stmt, sqlerr_code, warn_flg);
165.     if(sqlerr_code == RTERROR)
166. /*         sqlerr_code = sqlcode;
167.     return(sqlerr_code);
168. }
=====

```

Lines 145 - 168

The `exp_chk2()` function is the second of the three exception-handling wrapper functions in the `exp_chk.ec` file. It performs the same basic task as the `exp_chk()` function. Both functions are called after each SQL statement and both return a status code. The only difference between the two is in the way they respond to runtime errors. The `exp_chk()` function calls `exit()` to terminate the program (line 140), while the `exp_chk2()` function returns the **SQLCODE** value to the calling program (lines 165 - 166).

The `exp_chk2()` function returns **SQLCODE** rather than **SQLSTATE** to allow the program to check for particular error codes that are specific to HCL Informix®. A possible enhancement might be to return both the **SQLSTATE** and **SQLCODE** values.

The `dyn_sql` sample program also uses `exp_chk2()` to handle exceptions.

```

=====
169. *
170. * The whenexp_chk() function calls sqlstate_err() to check the
    * SQLSTATE
171. * status variable to see if an error or warning has occurred
    * following
172. * an SQL statement. If either condition has occurred, whenerr_chk()
173. * calls disp_sqlstate_err() to print the detailed error
    * information.
174. *
175. * This function is expected to be used with the WHENEVER SQLERROR
176. * statement: it executes an exit(1) when it encounters a negative
177. * error code. It also assumes the presence of the "statement"
    * global
178. * variable, set by the calling program to the name of the statement
179. * encountering the error.
180. */
181. whenexp_chk()
182. {
183.     int4 sqlerr_code = SUCCESS;
184.     mint disp = 0;
185.     sqlerr_code = sqlstate_err();

```



```

186.  if(sqlerr_code == WARNING)
187.  {
188.      disp = 1;
189.      printf("\n*****Warning encountered in %s*****\n",
190.          statement);
191.  }
192.  else
193.      if(sqlerr_code == RTERROR)
194.      {
195.          printf("\n*****Error encountered in %s*****\n",
196.              statement);
197.          disp = 1;
198.      }
199.  if(disp)
200.      disp_sqlstate_err();
201.  if(sqlerr_code == RTERROR)
202.      {
203.          /* Exit the program after examining the error */
204.          printf("*****Program terminated*****\n\n");
205.          exit(1);
206.      }
207.  else
208.      {
209.          if(sqlerr_code == WARNING)
210.              printf("\n*****Program execution
continues*****\n\n");
211.          return(sqlerr_code);
212.      }
213. }
=====

```

Lines 169 - 213

The `whenexp_chk()` function is the third exception-handling wrapper function in the `exp_chk.ec` file. It too analyzes the **SQLSTATE** values and uses the `GET DIAGNOSTICS` statement for exception handling. However, this function is called with the following `WHENEVER` statements:

```

EXEC SQL whenever sqlerror call whenexp_chk;
EXEC SQL whenever sqlwarning call whenexp_chk;

```

The `WHENEVER` statement imposes the following restrictions on the design of the `whenexp_chk()` function:

- The `whenexp_chk()` function cannot receive arguments; therefore, the function uses a global variable, **statement**, to identify the SQL statement that generated the exception (lines 190 and 196).

To use arguments with the `whenexp_chk()` function, you can use the `GOTO` clause of the `WHENEVER` statement.

```

EXEC SQL whenever sqlerror goto :excpt_hndlng;

```

where the label `:excpt_hndlng` would have the following code:

```

:excpt_hndlng
    whenexp_chk(statement);

```

- The `whenexp_chk()` function cannot return any value; therefore, it cannot return the particular exception code to the main program.

For this reason, `whenexp_chk()` handles runtime errors instead of the main program; `whenexp_chk()` calls the `exit()` function when it encounters a runtime error. To have the main program access the error code, you can modify `whenexp_chk()` to set a global variable.

The `getdiag` sample program, which this chapter describes, uses `whenexp_chk()` to handle exceptions. See lines 11 and 12 of the `getdiag.ec` file in [Guide to the `getdiag.ec` file on page 308](#).

The `sqlstate_err()` function (line 185) returns an integer that indicates the success of the most-recently executed SQL statement. This return value is based on the **SQLSTATE** value.

Lines 186 - 198 display a special line to bring attention to the exception information that was generated. The **disp** variable is a flag that indicates whether to display exception information. The function displays exception information for warnings (WARNING) and runtime errors (RTERROR) but not for other exception conditions. The calls to the `printf()` function (lines 189 and 195) display the name of the SQL statement that generated the warning or error. A global variable (called **statement**) must store this statement name because the function cannot receive it as an argument.

The `disp_sqlstate_err()` function (lines 199 and 200) displays the information that the diagnostics area contains only if **SQLSTATE** indicates a warning or a runtime error (**disp** = 1).

Lines 201 - 206 handle a runtime error. They notify the user of the program termination and then use the `exit()` system call (line 205) to terminate the program. The call to the `disp_sqlstate_err()` function (line 200) has already displayed information about the cause of the runtime error.

Working with the database server

These topics explain how the HCL Informix® ESQL/C program can interact with a database server.

It contains the following information:

- A description of the client-server architecture of the Informix® ESQL/C application
- An overview of the ways the Informix® ESQL/C program can interact with the database server
- The syntax of the Informix® ESQL/C library functions that control the database server

The end of these topics present an annotated example program that is called **timeout**. The **timeout** sample program demonstrates how to interrupt an SQL request.


The client-server architecture of ESQL/C applications

When the IBM® Informix® ESQL/C program executes an SQL statement, it effectively passes the statement to a database server. The database server receives SQL statements from the database application, parses them, optimizes the approach to data retrieval, retrieves the data from the database, and returns the data and status information to the application.

The Informix® ESQL/C program and the database server communicate with each other through an interprocess-communication mechanism. The Informix® ESQL/C program is the client process in the dialogue because it requests information from the database server. The database server is the server process because it provides information in response to requests from the client. The division of labor between the client and server processes is advantageous in networks where data might not be on the same computer as the client program that needs it.


When you compile the Informix® ESQL/C program, it is automatically equipped to communicate with database servers that are either on the same computer (local) or over a network on other computers (remote). The following figure shows a connection between the Informix® ESQL/C application and local database servers.

Figure 73. ESQL/C application that connects to a local database server

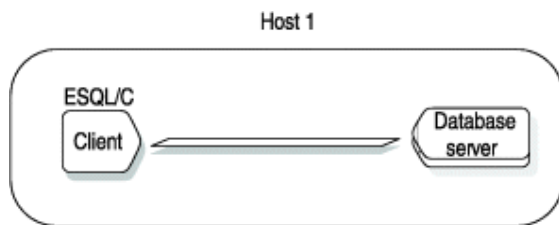

The following figure illustrates the Informix® ESQL/C application that connects across a network to a remote database server.

Figure 74. ESQL/C application that connects to a remote database server

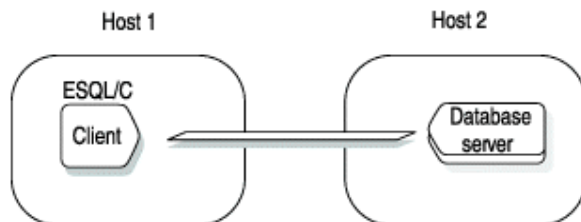

To establish a connection to a database server, your application must take the following actions:

- Identify database server connections that have been defined for the client-server environment of the application
- Execute an SQL statement to connect to a database server

The client-server connection

The IBM® Informix® ESQL/C application can establish a connection to any valid *database environment*. A database environment can be a database, a database server, or a database and a database server.

Every database must have a database server to manage its information. To establish connections, the client application must be able to locate information about the available database servers. This information is in the `sqlhosts` file or registry. At run time, the application must also be able to access information about environment variables relevant for connection.

The following environment variables are accessed:

INFORMIXCONTIME

Defines a limit in seconds within which the client must establish a server connection

INFORMIXCONRETRY

Defines a limit on connection attempts (after an initial failure) within the **INFORMIXCONTIME** limit

INFORMIXSQLHOSTS

Defines where to find the `sqlhosts` information. The `sqlhosts` information contains a list of valid database servers that the client can connect to, the type of connection to be used, and the server machine name on which each database server is. On a UNIX™ operating system, this is a path to a file. In a Windows™ environment, this is the name of the machine on the network that contains the central registry which is accessible to the client application.

INFORMIXSERVER

Specifies the name of the default database server that the client connects to. This value identifies which entry in the `sqlhosts` file or registry to use to establish the database connection.



Important: The client application connects to the default database server when the application does not explicitly specify a database server for the connection. You must set the **INFORMIXSERVER** environment variable even if the application does not establish a connection to the default database server.

The client also sends environment variables so that the database server can determine the server-processing locale. For more information about how the database server establishes the server-processing locale, see the *HCL® Informix® GLS User's Guide*.

The database server uses appropriate environment information when it processes the application requests. It ignores any information that is not relevant. For example, if the application sends environment variables for a database with Asian Language Support (ALS), but it connects to a non-ALS database, the database server ignores the ALS information.

For information about how to set environment variables, see the *HCL® Informix® Guide to SQL: Reference* for your operating system.

Sources of connection information about a UNIX™ operating system

- The `sqlhosts` file, which contains definitions for all valid database servers in the network environment
- The **INFORMIXSERVER** environment variable, which specifies the default database server for the application

Many other environment variables can customize the database environment. For more information, see the *HCL® Informix® Guide to SQL: Reference* and the *HCL® Informix® Administrator's Guide*.

Access the `sqlhosts` file

To establish a connection to a database server, the application process must be able to locate an entry for the database server in the `sqlhosts` file. The `sqlhosts` file defines database server connections that are valid for the client-server environment. For each database server, this file defines the following information:

- The name of the database server.
- The type of connection to make between the client application and the database server.
- The name of the host computer where the database server is.
- The name of a system file or program to use to establish a connection.

The application expects to find the `sqlhosts` file in the `$INFORMIXDIR/etc` directory; however, you can change this location or the name of the file with the **INFORMIXSQLHOSTS** environment variable. If the database server is not on the computer where the client program runs, an `sqlhosts` file must be on the host computers of both the Informix® ESQL/C client program and the database server.

The client application can connect to any database server that the `sqlhosts` file defines. If your application needs to connect to a database server that `sqlhosts` does not define, you might need assistance from your database administrator (DBA) to create the necessary entries in this file. In addition to the `sqlhosts` file, you might also need to configure system network files to support connections. Your *HCL® Informix® Administrator's Guide* describes how to create a database server entry in the `sqlhosts` file.

If you are enabling single-sign on (SSO), additional steps are in [Configuring ESQL/C and ODBC drivers for SSO on page](#) .

Specify the default database server

For your IBM® Informix® ESQL/C application to communicate with any database server, you must set the **INFORMIXSERVER** environment variable to specify the name of the default database server. Therefore, the name of the default database server must exist in the `sqlhosts` file and `sqlhosts` must exist on the computer that runs the application.

Sources of connection information in a Windows™ environment

To establish a connection to a database server, the IBM® Informix® ESQL/C application in a Windows™ environment performs the following tasks:

- Provide information about the connection with the registry, the `ifx_putenv()` function, or the **InetLogin** structure
- Use a central registry for connection information
- Perform connection authentication for the application user

In Windows™ environments, Informix® ESQL/C obtains the configuration information from the **InetLogin** structure or the in-memory copy of the registry.

If the application has initialized a field in **InetLogin**, Informix® ESQL/C sends this value to the database server. For any field the application has not set in the **InetLogin** structure, Informix® ESQL/C uses the corresponding information in the Informix® subkey of the registry.



Important: Because the application needs configuration information to establish a connection, you must set any **InetLogin** configuration values before the SQL statement that establishes the connection.

The registry contains the following configuration information:

- The values of the Informix® environment variables
- Connection information

When a client Informix® ESQL/C application establishes a connection to a database server, it sends the configuration information to the database server.

Set environment variables for connections in a Windows™ environment

The registry provides default values for most environment variables. For a description of environment variables and their default values, see the *HCL® Informix® Guide to SQL: Reference* and the *HCL® Informix® GLS User's Guide*. To change the value of an environment variable in the Registry, use the Environment tab of the Setnet32 utility, which the *Informix® Client Products Installation Guide* describes.

For more information about how to change the environment variable for the current process, see [Set and retrieve environment variables in Windows environments on page 35](#). For more information about **InetLogin**, see [The InetLogin structure on page 36](#).

The sqlhosts information in a Windows™ environment

The registry contains the following connection information:

- The `sqlhosts` information defines a connection to an established database server.

This information includes the name of the host computer, the type of protocol to use, and the name of the connection. The Registry stores the `sqlhosts` information in the **SqlHosts** subkey of the **Informix®** key. To store `sqlhosts` information in the Registry, use the **Server Information** tab of the Setnet32 utility.

- The `.netrc` information defines a valid user for a remote connection.

On UNIX™ operating systems, this file is in the home directory of the user and specifies the name and password for the user account. In Windows™ environments, the **NETRC** subkey of the **Informix®** key in the Registry stores the same account information. To store `.netrc` information in the Registry, use the **Host Information** tab of the Setnet32 utility.

The client sends network parameters to establish a connection to a database server. The first step in establishing a connection is to log on to the correct host computer. The protocol software uses the network parameters for the current database server. The client locates the network parameters for the current database server in either of the following ways:

1. If the SQL statement that requests the connection (such as a `CONNECT` or `DATABASE`) specifies the name of a database server, the client sends the network parameters for this specified database server.

If the **InfxServer** field of **InetLogin** contains the name of the specified database server, the client checks **InetLogin** for the network parameters. Otherwise, the client obtains network parameters for that database server from the in-memory copy of the Registry.

2. If the SQL statement does not specify a database server, the client sends the network parameters for the default database server.

If the **InfxServer** field of **InetLogin** contains the name of a database server, the client checks **InetLogin** for the network parameters. Otherwise, the client determines the default database server from the **INFORMIXSERVER** value in the in-memory copy of the Registry. It then sends network parameter values from the Registry for that database server.

Informix® ESQL/C checks the network parameter fields of **InetLogin** for any of these network parameters that the application has currently set. For any fields (including the name of the default database server) that are not set, Informix® ESQL/C obtains the values from the in-memory copy of the Registry. (For more information, see [Precedence of configuration values on page 41.](#))

For example, the following code fragment initializes the **InetLogin** structure with information for the **mainsrvr** database server; **mainsrvr** is the default database server.

```
void *cnctHndl;
;;

strcpy(InetLogin.InfxServer, "mainsrvr");
strcpy(InetLogin.User, "finance");
strcpy(InetLogin.Password, "in2money");
EXEC SQL connect to 'accounts';
;;

QL connect to 'custhist@bcksrvr';
```

When execution reaches the first CONNECT statement in the preceding code fragment, the client application requests a connection to the **accounts** database on the **mainsrvr** database server. The CONNECT statement does not specify a database server, so the client sends the following network parameters for default database server:

- The default database server is **mainsrvr** because **InfxServer** is set in **InetLogin**.
- The **User** and **Password** values are `finance` and `in2money` because the application sets them in **InetLogin**.
- The **Host**, **Service**, **Protocol**, and **AskPassAtConnect** values are from the **mainsrvr** subkey of the Registry values, because the application does not set them in **InetLogin**.

The second CONNECT statement in preceding code fragment requests a connection to the **custhist** database on the **bcksrvr** database server. For this connection, the client sends the network parameters for the specified database server, **bcksrvr**. Because the **InetLogin** structure currently contains network parameters for **mainsrvr**, the client must obtain *all* these parameters from the in-memory copy of the Registry. Therefore, the application does not use the **finance** user account for this second connection (unless the Registry specifies **User** and **Password** values of `finance` and `in2money` for the **bcksrvr** database server).

If you are enabling single-sign on (SSO), the process differs. Details and additional steps for configuration, see [Configuring ESQL/C and ODBC drivers for SSO on page](#) .

A central registry

You can specify the `sqlhosts` information in one of the following locations:

- The local registry is the registry that is on the same Windows™ computer as your IBM® Informix® ESQL/C application.
- The central registry is a registry that two or more Informix® ESQL/C applications can access to obtain `sqlhosts` information.

The central registry can be on the Domain Server or on any Windows™ workstation on the Microsoft™ network. It might be local to one application and remote to all others. A central registry enables you to maintain a single copy of the `sqlhosts` information for use by all Informix® ESQL/C applications in Windows™ environments.

To use a central registry, you must set the **INFORMIXSQLHOSTS** environment variable on your computer. This environment variable specifies the name of the computer where the central registry is. To set this environment variable, you can use `Setnet32`, the `ifx_putenv()` function ([Set and retrieve environment variables in Windows environments on page 35](#)), or the **InetLogin** structure ([The InetLogin structure on page 36](#)).

In a Windows™ environment, the Informix® ESQL/C application uses the following precedence to locate `sqlhosts` information when it requests a connection:

1. The `sqlhosts` information in the central registry, on computer that the **INFORMIXSQLHOSTS** environment variable indicates (if **INFORMIXSQLHOSTS** is set)
2. The `sqlhosts` information in the local registry

Connection authentication functionality in a Windows™ environment

After the IBM® Informix® ESQL/C application has obtained the information about the connection (from either the registry or the **InetLogin** structure), the ESQL client-interface DLL performs the following steps:

1. It copies connection information from the **InetLogin** structure (or from the registry for undefined **InetLogin** fields) into a **HostInfoStruct** structure (see [Table 62: Fields of the HostInfoStruct structure on page 324](#)).
2. It passes a pointer to the **HostInfoStruct** to the `sqlauth()` function in the `esqlauth.dll` to verify connection authentication.

If `sqlauth()` returns TRUE, the connection is verified and the user can access the server computer. However, if `sqlauth()` returns FALSE, the connection is refused and access denied. By default, the `sqlauth()` function returns a value of TRUE.

The parameter passed to `sqlauth()` is a pointer to a **HostInfoStruct** structure, which the `login.h` header file defines. This structure contains the subset of the **InetLogin** fields that the following table shows.

Table 62. Fields of the HostInfoStruct structure

HostInfoStruct field	Data type	Purpose
InfxServer	char[19]	Specifies the value for the INFORMIXSERVER network parameter
Host	char[19]	Specifies the value for the HOST network parameter
User	char[19]	Specifies the value for the USER network parameter passed into the <code>sqlauth()</code> function

Table 62. Fields of the HostInfoStruct structure (continued)

HostInfoStruct field	Data type	Purpose
Pass	char[19]	Specifies the value for the PASSWORD network parameter passed into the sqlauth() function
AskPassAtConnect	char[2]	Indicates whether sqlauth() requests a password at connection time passed into the sqlauth() function
Service	char[19]	Specifies the value for the SERVICE network parameter passed into the sqlauth() function
Protocol	char[19]	Specifies the value for the PROTOCOL network parameter passed into the sqlauth() function
Options	char[20]	Reserved for future use

Within sqlauth(), you can access the fields of **HostInfoStruct** with the **pHostInfo** pointer, as follows:

```
if (pHostInfo->AskPassAtConnect)
```

You can edit all the **HostInfoStruct** field values. ESQL/C, however, checks only the **User** and **Pass** fields of **HostInfoStruct**.

The following code fragment shows the default sqlauth() function, which the `esqlauth.c` file contains.

```
BOOL __declspec( dllexport ) sqlauth ( HostInfoStruct *pHostInfo )
{
    return TRUE;
}
```

This default action of sqlauth() means that Informix® ESQL/C performs no authentication verification when it establishes a connection. To provide verification, you can customize the sqlauth() function. You might want to customize sqlauth() to perform one of the following verification tasks:

- Validation of the user name

The function can compare the current user name against a list of valid or invalid user names.

- Prompt for a password

The function can check the value of the **AskPassAtConnect** field in the **HostInfoStruct** structure when this field is set to `y` or `Y`. You can code sqlauth() to display a window that prompts the user to enter a password.

The following steps describe how to create a customized sqlauth() function:

1. Open the `esqlauth.c` source file in your system editor. This file is located in the `%INFORMIXDIR%\demo\esqlauth` directory.
2. Add to the body of the `sqlauth()` function the code that performs the desired connection verification. Of the fields in [Table 62: Fields of the HostInfoStruct structure on page 324](#), the `sqlauth()` function can modify only the **User** and **Pass** fields. Make sure that `sqlauth()` returns `TRUE` or `FALSE` to indicate whether to continue with the connection request. Do not modify other code in this file.

Create a version of the `esqlauth.dll` by compiling the `esqlauth.c` file and specifying the `-target:dll` (or `-wd`) command-line option of the `esql` command processor. For an example of how to define the `sqlauth()` function, see the `esqlauth.c` file in the `%INFORMIXDIR%\demo\esqlauth` directory.

Connect to a database server

When the IBM® Informix® ESQL/C application begins execution, it has no connections to any database server. For SQL statements to execute, however, such a connection must exist. To establish a connection to a database server, the Informix® ESQL/C program must take the following actions:

- Use an SQL statement to establish a connection to the database server
- Specify, in the SQL statement, the name of the database server to which to connect

Establish a connection

The following two groups of SQL statements can establish connections to a database environment:

- The SQL connection statements are `CONNECT`, `SET CONNECTION`, and `DISCONNECT`. These statements conform to ANSI SQL and X/Open standards for the creation of connections.
- The SQL database statements include `DATABASE`, `CREATE DATABASE`, `CLOSE DATABASE`, and `START DATABASE`. These statements are a way to establish connections that are specific to HCL Informix®.



Important: It is recommended that you use the `CONNECT`, `DISCONNECT`, and `SET CONNECTION` connection statements for new applications of Version 6.0 and later. For versions before 6.0, the SQL database statements (such as `DATABASE`, `START DATABASE`, and `CLOSE DATABASE`) remain valid for compatibility with earlier versions.

The type of connection that the application establishes depends on which of these types of statements executes first in the application:

- If the first SQL statement is a connection statement (`CONNECT`, `SET CONNECT`) statement, the application establishes an explicit connection.
- If the first statement is an SQL database statement (`DATABASE`, `CREATE DATABASE`, `START DATABASE`), the application establishes an implicit connection.

The explicit connection

When you use the `CONNECT` statement to connect to a database environment, you establish an explicit connection.

The application connects directly to the database server that you specify. If you do not specify the name of a database server in the CONNECT statement, the application establishes an explicit connection to the default database server (that the **INFORMIXSERVER** environment variable identifies).

An explicit connection enables an application to support multiple connections to one or more database environments. Although the application can connect to several database environments during its execution, only one connection can be current at a time. Dormant connections are connections that the application has established but is not currently using. The application must have a current connection to execute SQL statements.

The following SQL connection statements establish and manage explicit connections:

- The CONNECT statement establishes an explicit connection between a database environment and the application.
- The SET CONNECTION statement switches between explicit connections. It makes a dormant connection the current connection.
- The DISCONNECT statement terminates a connection to a database environment.

These connection statements provide the following benefits, which allow you to create more portable applications:

- Compliance with ANSI and X/Open standards for database connections
- A uniform syntax for local and remote data access for use in a distributed client-server environment
- Support for multiple connections within a single application

Because the CONNECT, DISCONNECT, and SET CONNECTION statements include HCL Informix® extensions to ANSI-standard syntax, these statements generate ANSI-extension warning messages at the following times:

- At run time, if you have set the **DBANSIWARN** environment variable
- At compile time, if you have compiled the Informix® ESQL/C source file with the **-ansi** preprocessor option

The Informix® ESQL/C application, not the database server, processes these connection statements. Therefore, the application cannot use them in a PREPARE or an EXECUTE IMMEDIATE statement.



Important: Use of the DATABASE, CREATE DATABASE, START DATABASE, CLOSE DATABASE, and DROP DATABASE statements is still valid with an explicit connection. However, in this context, refer only to databases that are local to the current connection in these statements; do not use the **@server** or **//server** syntax.

The implicit Connection

When one of the following SQL statements is the first SQL statement that the application executes, the statement establishes an implicit connection:

- The DATABASE statement creates an implicit connection to a database environment and opens the specified database.
- The CREATE DATABASE statement creates an implicit connection and creates a database.

- The DROP DATABASE statement creates an implicit connection and drops (removes) the specified database.
- A single-statement PREPARE of one of the preceding statements also establishes an implicit connection.

When you execute one of the preceding statements, the application first connects to the default database server (that the **INFORMIXSERVER** environment variable indicates). The default database server parses the database statement. If the statement specifies the name of a database server, the application then connects to the specified database server. To establish an implicit connection to a specified database server, an application must therefore connect to two database servers. An explicit connection only requires a connection to a single database server, and therefore involves less overhead.

If an implicit connection exists, these database statements close it before they establish the new connection. The new implicit connection remains open after the SQL statement completes. This behavior contrasts with explicit connections, which allow multiple connections to the same or to a different database environment.

The CLOSE DATABASE statement closes the database and, in applications before version 6.0, also closes the implicit connection to the database. If you precede these statements with a CONNECT, each can also operate in the context of the current explicit connection.

Use of an implicit connection provides a smooth migration path for older applications into the connection-oriented environment that CONNECT, DISCONNECT, and SET CONNECTION statements support. For more information about implicit connections, see the CONNECT statement in the *HCL® Informix® Guide to SQL: Syntax*.

Summary of connection types

The following table summarizes the methods that IBM® Informix® ESQL/C supports to connect to a database server.

Table 63. Statements and functions that start the database server

SQL statement or ESQL/C function	Implicit	Explicit	Establishes a connection	Opens a database
If first SQL statement in the program is:				
DATABASE	Y		Y	Y
CREATE DATABASE	Y		Y	Y
START DATABASE	Y		Y	Y
DROP DATABASE	Y		Y	
sqlstart()	Y		Y	
CONNECT TO DEFAULT		Y	Y	
CONNECT TO '@servername'		Y	Y	
CONNECT TO 'dbname'		Y	Y	Y

Table 63. Statements and functions that start the database server

(continued)

SQL statement or ESQL/C function	Implicit	Explicit	Establishes a connection	Opens a database
CONNECT TO 'dbname@servername'		Y	Y	Y

Establish an explicit connection in a Windows™ environment

With an implicit connection, one connection to the database server can exist for each IBM® Informix® ESQL/C module and this connection cannot be shared. An explicit connection allows multiple connections within a client application. You might want to design an application that needs to perform multiple connections for one of the following reasons:

- When you want multiple Informix® ESQL/C modules (either .exe or .dll) to use the same connection to manipulate database data

[Figure 75: Two scenarios in which multiple applications use a single connection to a database server on page 330](#) shows scenarios in which multiple applications use the same connection to a database server.


- When you want one Informix® ESQL/C module to create two or more connections to one or more databases, which includes sharing an ESQL DLL between two C applications

[Figure 76: One application that uses connections to more than one database server at the same time on page 330](#) shows a single application that establishes connections to multiple database servers.

[Figure 75: Two scenarios in which multiple applications use a single connection to a database server on page 330](#) shows the following two scenarios in which multiple applications share a single connection to the database server:


- The scenario on the left requires that APP1 . EXE establish an explicit connection to the **dbserverA** database server. After this connection is established, APP1 can pass the connection information required to set the connection in the APP2 DLL.
- The scenario on the right requires that APP3 . EXE establish an explicit connection to the **dbserverB** database server. Both the APP4 and APP5 DLLs can share this connection when APP3 passes the appropriate connection information.

Figure 75. Two scenarios in which multiple applications use a single connection to a database server

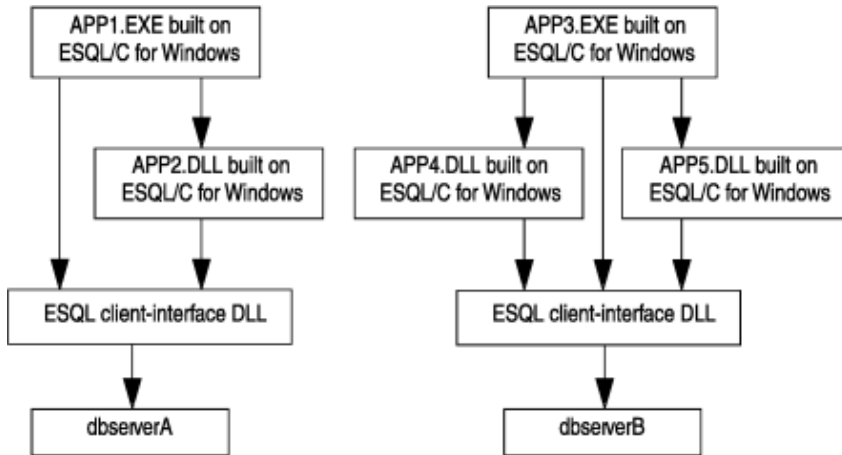

You can also use explicit connections if you want one application to establish connections to two separate database servers at the same time, as the following shows.

Figure 76. One application that uses connections to more than one database server at the same time

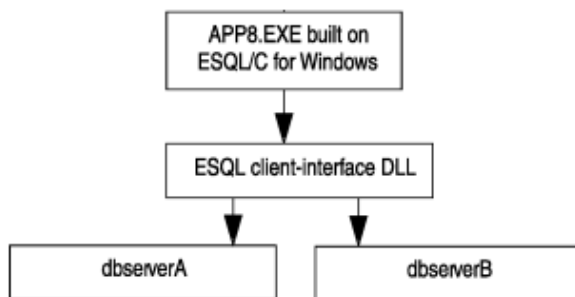

Password encryption

When a client application sends a password to the database server for authentication, the password is not encrypted unless you request password encryption through the simple password communications support module (SPWDCSM). You activate password encryption by specifying it on the configuration for the database server name, or an alias, in the `sqlhosts` information.

To activate password encryption, specify the following value in the `options` field of the `sqlhosts` entry:

```

csm=(SPWDCSM)
  
```

The client or the database server uses the string "SPWDCSM" as a key to look up the entry that describes the CSM in the CSS/CSM configuration file.

When activated, the SPWDCSM requires a password, effectively overriding any trusted host mechanisms. It is contradictory to specify a password encryption mechanism if a trusted host policy is in place.

For more information about implementing password encryption and for information about communication support services (CSS), see your *HCL® Informix® Administrator's Guide*.



Note: Support for Communication Support Module (CSM) is removed starting Informix Server 14.10.xC9 . You should use Transport Layer Security (TLS)/Secure Sockets Layer (SSL) instead.

Pluggable Authentication Modules (PAM)

To use a Pluggable Authentication Module (PAM) service for client-server authentication you must rewrite your client application so that it registers a callback function. The callback function must support any challenge-response mechanisms of the PAM service you intend to use.

The demonstration program `pamdemo.ec` is provided as an example of the use of a callback function.

LDAP authentication

You can use Lightweight Directory Access Protocol (LDAP) authentication on Windows™ with IBM® Informix® ESQL/C.

Use the LDAP Authentication Support module when you want to use an LDAP server to authenticate your system users. The module contains source code that you can modify for your specific situation.

Multiplexed connections

A multiplexed connection enables the IBM® Informix® ESQL/C application to establish multiple connections to different databases on the same database server, by using a minimum amount of communication resources. When you initiate a multiplexed connection, the database server uses a single connection to the client for multiple SQL connections (CONNECT statement). Without multiplexing, each SQL connection creates a database-server connection.

Client requirements for execution

To implement a multiplexed connection, set the multiplexing option, in the client `sqlhosts` file or registry, on the **dbservername** parameter of the database server to which you will connect. To specify multiplexing, set the `m` option to `1`. The following **dbservername** parameter specifies a multiplexed connection to the **personnel** database server:


Servername	nettype	hostname	servicename	options
personnel	onsoctcp	corp	prsnl_ol	m=1

Setting the multiplexing option to zero (`m = 0`), which is the default, disables multiplexing for the specified database server.

To use multiplexed connections for any application that was compiled before version 9.13 of IBM® Informix® ESQL/C for UNIX™ or version 9.21 of Informix® ESQL/C for Windows™, you must relink it. Applications that you compiled before these

versions of Informix® ESQL/C can connect to a multiplexing database server, however. The database server establishes a non-multiplexed connection in this case.

On Windows™ platforms, in addition to setting the multiplexing option in the `sqlhosts` registry you must also define the `ifx_session_mux` environment variable. If you do not define the `ifx_session_mux` environment variable, the database server ignores the multiplexing option and does not multiplex connections.

 **Restriction:** On Windows™, a multithreaded application must not use the multiplexed-connection feature. If a multithreaded application enables the multiplexing option in the `sqlhosts` registry entry and also defines the `IFX_SESSION_MUX` environment variable, it can produce disastrous results, including crashing and data corruption.

If a multithreaded application and a single-threaded application are running on the same Windows™ computer, the single-threaded application can use a multiplexed connection in the following two ways:

- Use different `sqlhosts` information.
- Use a `dbserver` alias in the `sqlhosts` file that does not specify the multiplexing option. For example, you could use the following configuration:

Servername	Nettype	Host name	Servicename	Options
personnel	onsoctcp	corp	prsnl_01	m=1
personnel_nomux	onsoctcp	corp	prsnl_02	

Any multithreaded application connecting to the `personnel` server uses the servername `personnel_nomux` while single-threaded applications can continue to use the servername `personnel`.

Limitations for multiplexed connections

IBM® Informix® ESQL/C imposes the following limitations on multiplexed connections:

- Shared memory connections are not supported.
- Multithreaded applications are not supported.
- The database server ignores the `sqlbreak()` function on a multiplexed connection. If you call it, the database server does not interrupt the connection and does not return an error.

Identify the database server

To connect to a database environment (with, for example, a `CONNECT` statement), the IBM® Informix® ESQL/C application can identify the database server in one of two ways:

- The application can specify the name of the database server in the SQL statement. Such a database server is a *specific database server*.
- The application can omit the name of the database server in the SQL statement. Such a database server is the *default database server*. The `INFORMIXSERVER` environment variable specifies the name of the default database server.

A specific database server

The Informix® ESQL/C application can establish a connection to a specific database server when it lists the database server name, and optionally the database name, in an SQL statement, as follows:

- The CONNECT statement establishes an explicit connection to the database server.

Each of the following CONNECT statements establishes an explicit connection to a database server that is called **valley**:

```
EXEC SQL connect to 'stores7@valley';
EXEC SQL connect to '@valley';
```

- When one of the SQL database statements (such as DATABASE or START DATABASE) is the first SQL statement of the application, it can establish an implicit connection.

Each of the following SQL statements establishes an implicit connection to the **stores7** database in a specific database server that is called **valley**:

```
EXEC SQL database '//valley/stores7';
EXEC SQL database stores7@valley;
```

For the UNIX™ operating system, use the following statement:

```
EXEC SQL database '/usr/dbapps/stores7@valley';
```

For a Windows™ environment, use the following statement:

```
EXEC SQL database 'C:\usr\dbapps\stores@valley';
```

The default database server

The IBM® Informix® ESQL/C application can establish a connection to a default database server when it omits the database server name from the database environment in an SQL statement, as follows:

- The CONNECT statement can establish an explicit default connection with the keyword DEFAULT or when it omits the database server name.

Each of the following CONNECT statements establishes an explicit default connection:

```
EXEC SQL connect to 'stores7';
EXEC SQL connect to default;
```

In a UNIX™ operating system, use the following statement:

```
EXEC SQL connect to '/usr/dbapps/stores7';
```

In a Windows™ environment, use the following statement:

```
EXEC SQL connect to 'C:\usr\dbapps\stores7';
```

- When one of the SQL database statements (such as DATABASE or START DATABASE) is the first SQL statement of the application, it can establish an implicit default connection.

Each of the following SQL statements establishes an implicit default connection to a database that is called **stores7** on the default database server:

```
EXEC SQL database stores7;
EXEC SQL start database stores7 with no log;
```

The **INFORMIXSERVER** environment variable determines the name of the database server.



Important: You must set the **INFORMIXSERVER** environment variable even if the application does not establish a default connection.

You can also use the **DBPATH** environment variable to specify a list of database server names to use as default database servers. The application searches for these database servers after it searches for the database server that **INFORMIXSERVER** specifies.

Interact with the database server

Within your IBM® Informix® ESQL/C program, you can interact with the database server in the following ways:

- Start a new database server process. This process does not exist when an application begins execution.
- Switch between multiple connections. An application can establish several connections.
- Identify an explicit connection. An application can obtain the name of the database server and connection.
- Identify the databases that the database server of the current connection can access.
- Check on the status of the database server process. For some actions the database server must be busy, for others the database server must be idle.
- Detaching from the current connection. An application must detach a child process from the current connection.
- Interrupt the database server process. If an SQL request executes for a long time, the application can interrupt it.
- Terminate the database server process. The application can close an unused connection to free resources.

Informix® ESQL/C supports Secure Sockets Layer (SSL) connections. For information about using the SSL protocol, see [Secure sockets layer protocol on page](#) .

Determine features of the database server

You can check on features of the database server after you execute one of the following SQL statements.

- CONNECT
- CREATE DATABASE
- DATABASE
- SET CONNECTION

When the database server establishes a connection with one of these statements, it can obtain the following information about the database server:

- Is a long identifier or long user name truncated?
- Does the open database use a transaction log?
- Is the open database an ANSI-compliant database?
- What is the database server name?
- Does the database store the FLOAT data type in DECIMAL form (done when the host system lacks support for FLOAT types)?
- Is the database server in secondary mode? (If the database server is in secondary mode, it is a secondary server in a data-replication pair and is available only for read operations.)

Does the value of the **DB_LOCALE** environment variable set by the client application match the value of the database locale of the open database? The following table summarizes the values that the **SQLSTATE** variable and the **sqlca** structure take to indicate these conditions.

Database feature	SQLSTATE value	sqlca value
Long identifier or long username has truncated	"01004"	sqlca.sqlwarn.sqlwarn1 is 'W'
Database has transactions	"01101"	sqlca.sqlwarn.sqlwarn1 is 'W'
Database is ANSI compliant	"01103"	sqlca.sqlwarn.sqlwarn2 is 'W'
The database server is not an obsolete product	"01104"	sqlca.sqlwarn.sqlwarn3 is 'W'
FLOAT represented as DECIMAL	"01105"	sqlca.sqlwarn.sqlwarn4 is 'W'
Database server in secondary mode	"01106"	sqlca.sqlwarn.sqlwarn6 is 'W'
Mismatched database locales	undefined	sqlca.sqlwarn.sqlwarn7 is 'W'

The **SQLSTATE** variable might return multiple exceptions after these connection statements. For more information about the **SQLSTATE** variable and the **sqlca** structure, see [Exception handling on page 276](#).

Switch between multiple database connections

The IBM® Informix® ESQL/C application can make a number of simultaneous database connections with a **CONNECT** statement. These connections can be to several database environments or can be multiple connections to the same database environment. To switch between connections, the Informix® ESQL/C application must follow these steps:

1. Establish a connection with the **CONNECT STATEMENT**
2. Handle any active transactions

If the current connection has an active transaction, you can switch connections only if the **CONNECT** statement with the **WITH CONCURRENT TRANSACTION** clause establishes the current connection.


3. Make a connection current with the **SET CONNECTION** or **CONNECT** statement

Make a connection current

When multiple connections exist, the application can only communicate with one connection at a time. This connection is the *current connection*. All other established connections are *dormant*. Your application can make another connection current with either of the following connection statements:

- The CONNECT statement establishes a new connection and makes the connection current.
- The SET CONNECTION statement switches to a dormant connection and makes the connection current.

When you make a connection dormant and then current again, you perform an action similar to when you disconnect and then reconnect to the database environment. However, if you make a connection dormant you can typically avoid the need for the database server to perform authentication again, and thus save the cost and use of resources that are associated with the connection.

 **Tip:** A thread-safe Informix® ESQL/C application can have multiple current connections, one current connection per thread. However, only one current connection is active at a time.

Handling transactions

If the CONNECT statement with the WITH CONCURRENT TRANSACTION clause has established the connection, the application can switch to another connection even if the current connection contains an active transaction.

For connections that are not established with the CONNECT...WITH CONCURRENT TRANSACTION statement, the application must end the active transaction before it switches to another connection. Any attempt to switch while a transaction is active causes the CONNECT or SET CONNECTION statement to fail (error number -1801). The transaction in the current connection remains active.

To maintain the integrity of database information, explicitly end the active transaction in one of the following ways:

- Commit the transaction with the COMMIT WORK statement to ensure that the database server saves any changes that have been made to the database within the transaction.
- Roll back the transaction with the ROLLBACK WORK statement to ensure that the database server backs out any changes that have been made to the database within the transaction.

The COMMIT WORK or ROLLBACK WORK statement applies only to the transaction that is within the current connection, not to transactions that are in any dormant connection.

Identify an explicit connection

From within the IBM® Informix® ESQL/C application, you can obtain the name of the database server and the name of the explicit connection with the GET DIAGNOSTICS statement.

When you use GET DIAGNOSTICS after an SQL connection statement (CONNECT, SET CONNECTION, and DISCONNECT), GET DIAGNOSTICS puts this database server information in the diagnostics area in the SERVER_NAME and CONNECTION_NAME fields.

The following code fragment saves connection information in the **srvrname** and **cnctname** host variables.

```
EXEC SQL connect to :dbname;
if(!strcmp(SQLSTATE, "00", 2)
{
EXEC SQL get diagnostics exception 1
:srvrname = SERVER_NAME, :cnctname = CONNECTION_NAME;
printf("The name of the server is '%s'\n", srvrname);
}
```

From within the Informix® ESQL/C application, you can obtain the name of the current connection with the `ifx_getcur_conn_name()` function. This function returns the name of the current connection into a user-defined character buffer. The function is useful to determine the current connection among a group of active connections in a Informix® ESQL/C application that has multiple threads.

For example, the following code consists of a callback function, `cb()`, that two `sqlbreakcallback()` calls use in two different threads:

```
void
cb(mint status)
{
mint res;
char *curr_conn = ifx_getcur_conn_name();

if (curr_conn && strcmp(curr_conn, "con2") == 0)
{
res = sqlbreak();
printf("Return status of sqlbreak(): %d\n", res);
}
}

void
thread_1()
{
EXEC SQL BEGIN DECLARE SECTION;
mint res;
EXEC SQL END DECLARE SECTION;

EXEC SQL connect to 'db' as 'con1' ;
sqlbreakcallback(100, cb);
EXEC SQL SELECT count(*) INTO :res FROM x, y;
if (sqlca.sqlcode == -213)
printf("Connection con1 fired an sqlbreak().\n");
printf("con1: Result of count(*) = %d\n", res);
EXEC SQL set connection 'con1' dormant ;
}

void
thread_2()
{
EXEC SQL BEGIN DECLARE SECTION;
mint res;
EXEC SQL END DECLARE SECTION;

EXEC SQL connect to 'db' as 'con2' ;
sqlbreakcallback(100, cb);
```

```
EXEC SQL SELECT count(*) INTO :res FROM x, y;
if (sqlca.sqlcode == -213)
    printf("Connection con2 fired an sqlbreak().\n");
printf("con2: Result of count(*) = %d\n", res);
EXEC SQL set connection 'con2' dormant ;
}
```

The `cb()` callback function uses the `ifx_getcur_conn_name()` to check which connection is current.

Obtain available databases

From within the IBM® Informix® ESQL/C application, you can obtain the name of the databases that are available from a specified database server with the `sqgetdbs()` function. This function returns the names of the databases that are available in the database server of the current connection. For more information about `sqgetdbs()`, see [The timeout program on page 348](#).

Check the status of the database server

Some interactions with the database server cannot execute unless the database server is idle. Other actions assume that the database server is busy processing a request. You can check whether the database server is currently processing an SQL request with the `sqldone()` function. This function returns 0 if the database server is idle and a negative value if it is busy.

Establishing a separate database connection for the child process

About this task

When your application forks a process, the child process inherits the database connections of the parent. If you leave these connections open, both parent and child processes use the same connection to communicate with the same database server. Therefore, the child process needs to establish a separate database connection.

To establish a separate database connection for the child process:

1. Call `sqldetach()` to detach the child process from the database server connection in the parent process.
2. Establish a new connection in the child process (if one is needed).

Interrupt an SQL request

To interrupt the database server, you can use the `sqlbreak()` library function.

Sometimes you might need to cancel an SQL request. If, for example, you inadvertently provide the wrong search criteria for a long query, you want to cancel the SELECT statement rather than wait for unneeded data. While the database server executes an SQL request, the IBM® Informix® ESQL/C application is blocked. To regain control, the application must interrupt the SQL request.

You might want to interrupt an SQL request for some of the following reasons:

- The application user wants to terminate the current SQL request.
- The current SQL request has exceeded some timeout interval.



Important: The application must handle any open transactions, cursors, and databases after it interrupts an SQL request.

Interruptible SQL statements

You cannot cancel all SQL statements. Some types of database operations are not interruptible and others cannot be interrupted at certain points. The IBM® Informix® ESQL/C application can interrupt the following SQL statements.

- ALTER INDEX
- ALTER TABLE
- CREATE INDEX
- CREATE TABLE
- EXECUTE FUNCTION
- EXECUTE PROCEDURE
- DELETE
- INSERT
- OPEN
- SELECT
- UPDATE

In addition to the preceding statements, you can also cancel the operation of a loop as it executes within an SPL routine.

The Informix® ESQL/C application and the database server communicate through *message requests*. A message request is the full round trip of the message that initiates an SQL task. It can consist of the message that the application sends to the database server as well as the message that the database server sends back in reply. Alternatively, a message request can consist of the message that the database server sends to the application as well as the message that the application sends in acknowledgment.

Most SQL statements require only one message request to execute. The application sends the SQL statement to the database server and the database server executes it. However, an SQL statement that transfers large amounts of data (such as a SELECT, an INSERT, or a PUT), can require more than one message request to execute, as follows:

- In the first message request, the application sends the SQL statement to the database server to execute.
- In subsequent message requests, the database server fills a buffer with data and then sends this data to the application. The size of the buffer determines the amount of data that the database server sends in a single message request.

In addition, the OPEN statement always requires two message requests.

The database server decides when to check for an interrupt request. Therefore, the database server might not immediately terminate execution of an SQL statement and your application might not regain control as soon as it sends the interrupt request.

Allow a user to interrupt

When the database server processes a large query, you might want to allow the user to interrupt the query request with the Interrupt key (usually **CTRL-C**).

To do this, you must set up a *signal-handler function*. The signal-handler function is a user-defined function that the application process calls when it receives a specific signal.

To allow the user to interrupt an SQL request, you define a signal-handler function for the SIGINT signal. This function must have the following declaration:

```
void sigfunc_ptr();
```

The user-defined signal-handler function can contain the IBM® Informix® ESQL/C control functions `sqlbreak()` and `sqldone()`. If you use any other Informix® ESQL/C control function or any SQL statement in the signal handler while the database server is processing, Informix® ESQL/C generates an error (-439).

The Informix® ESQL/C application must determine how to continue execution after the signal handler completes. One possible method is to set up a nonlocal *go to* with the `setjmp()` and `longjmp()` system functions. These functions work together to support low-level interrupts, as follows:

- The `setjmp()` function saves the current execution environment and establishes a return point for execution after the `longjmp()` call.
- The `longjmp()` call is in the signal-handler function. Use `longjmp()` in a signal-handling function only if `sqldone()` returns 0 (the database server is idle).

See your UNIX™ operating system documentation for more information about the `setjmp()` and `longjmp()` system functions.

To associate the user-defined signal handler with a system signal, use the `signal()` system function, as follows:

```
signal(SIGINT, sigfunc_ptr);
```

When the Informix® ESQL/C application receives the SIGINT signal, it calls the function that `sigfunc_ptr` indicates. For more information about the `signal()` system function, see your UNIX™ operating system documentation.

To disassociate the signal-handler function from the SIGINT signal, call `signal()` with `SIG_DFL` as the function pointer, as follows:

```
signal(SIGINT, SIG_DFL);
```

`SIG_DFL` is the default signal-handling action. For the SIGINT signal, the default action is to stop the process and to generate a core dump. You might instead want to specify the `SIG_IGN` action to cause the application to ignore the signal.



Important: On most systems, the signal handler remains in effect after the application catches the signal. On these systems, you need to disassociate the signal handler explicitly if you do not want it to execute the next time the same signal is caught.

On a few (mostly older) systems, however, when a signal handler catches a signal, the system reinstates the `SIG_DFL` action as the handling mechanism. On these systems, it is up to the signal handler to reinstate itself if you want it to



handle the same signal the next time the signal is caught. For information about how your system handles signals, check your system documentation.

Set up a timeout interval

When the database server processes a large query, you might want to prompt the user periodically to determine whether to continue the request.

To do this, you can use the `sqlbreakcallback()` function to provide the following information:

- A timeout interval is the period to wait for an SQL request to execute before the application regains control.
- A callback function is the user-defined function to call each time the timeout interval has elapsed.



Restriction: Do not use the `sqlbreakcallback()` function if your Informix® ESQL/C application uses shared memory (`onipcshm`) as the `nettype` in a connection to an instance of the database server. Shared memory is not a true network protocol and does not handle the nonblocking I/O that support for a callback function requires. When you use `sqlbreakcallback()` with shared memory, the function call appears to register the callback function successfully (it returns zero), but during SQL requests, the application never calls the callback function.

The timeout interval

With the `sqlbreakcallback()` function, you specify a *timeout interval*.

A timeout interval is the amount of time (in milliseconds) for which the database server can process an SQL request before the application regains control. The application then calls the callback function that you specify and executes it to completion.

After the callback function completes, the application resumes its wait until one of the following actions take place:

- The database server returns control to the application under one of the following conditions:
 - It has completed the SQL request. The database server returns the status of the request in the `SQLCODE` and `SQLSTATE` variables.
 - It has discontinued processing of the SQL request because it has received an interrupt request from the `sqlbreak()` function in the callback function. For more information about how the database server responds to `sqlbreak()`, see [Database server control functions on page 347](#).
- The next timeout interval elapses. When the application resumes execution, it calls the callback function again.

The application calls the callback function each time the timeout interval elapses until the database server completes the request or is interrupted.

The callback function

With the `sqlbreakcallback()` function, you also specify a *callback function* to be called at several points in the execution of an SQL request.

A callback function is a user-defined IBM® Informix® ESQL/C function that specifies actions to take during execution of an SQL request. This function must have the following declaration:

```
void callbackfunc(status)
mint status;
```

The **integer** *status* variable identifies at what point in the execution of the SQL request the callback function was called. Within the callback function, you can check this *status* variable to determine at which point the function was called. The following table summarizes the valid *status* values.

Table 64. Status values of a callback function

Point at which callback is called	Callback argument value
After the database server has completed the SQL request	0
Immediately after the application sends an SQL request to the database server	1
While the database server is processing an SQL request, after the timeout interval has elapsed	2

Within the callback function, you might want to check the value of the *status* argument to determine what actions the function takes.

i Tip: When you register a callback function with `sqlbreakcallback()`, the application calls the callback function each time it sends a message request. Therefore, SQL statements that require more than one message request cause the application to call the callback function more than once.

For more information about message requests, see [Interruptible SQL statements on page 339](#).

The callback function, and any of its subroutines, can contain only the following Informix® ESQL/C control functions:

- The `sqldone()` library function determines whether the database server is still busy.
If `sqldone()` returns error `-439`, the database server is still busy and you can proceed with the interrupt.
- The `sqlbreakcallback()` library function disassociates the callback function from the timeout interval.

Call `sqlbreakcallback()` with the following arguments:

```
sqlbreakcallback(-1L, (void *)NULL);
```

This step is not necessary if you want the callback function to remain for the duration of the current connection. When you close the current connection, you also disassociate the callback function.

- The `sqlbreak()` library function interrupts the execution of the database server.

If you use any Informix® ESQL/C control function other than those in the preceding list, or if you use any SQL statement while the database server is processing, Informix® ESQL/C generates an error (-439).

If the application calls a callback function because a timeout interval has elapsed, the function can prompt the user for whether to continue or cancel the SQL request, as follows:

- To continue execution of the SQL request, the callback function skips the call to `sqlbreak()`.

While the callback function executes, the database server continues processing its SQL request. After the callback function completes, the application waits for another timeout interval before it calls the callback function again. During this interval, the database server continues execution of the SQL request.

- To cancel the SQL request, the callback function calls the `sqlbreak()` function, which sends an interrupt request to the database server.

Execution of the callback function continues immediately after `sqlbreak()` sends the request. The application does not wait for the database server to respond until it completes execution of the callback function.

When the database server receives the interrupt request signal, it determines if the current SQL request is interruptible (see [Interruptible SQL statements on page 339](#)). If so, the database server discontinues processing and returns control to the application. The application is responsible for the graceful termination of the program; it must release resources and roll back the current transaction. For more information about how the database server responds to an interrupt request, see the description of `sqlbreak()` in [Database server control functions on page 347](#).

Use the `sqlbreakcallback()` function to set the timeout interval (in milliseconds) and to register a callback function, as follows:

```
sqlbreakcallback(timeout, callbackfunc_ptr);
```

This `callbackfunc_ptr` must point to a callback function that you already defined (see [The callback function on page 341](#)). Within the calling program, you must also declare this function, as follows:

```
void callbackfunc_ptr();
```



Important: You must register the callback function after you establish the connection and before you execute the first embedded SQL statement that you want to cancel. After you close the connection, the callback function is no longer registered.

The **timeout** demonstration program, which [Database server control functions on page 347](#) describes, uses the `sqlbreakcallback()` function to establish a timeout interval for a database query.

Error checking during data transfer

The **IFX_LOB_XFERSIZE** environment variable is used to specify the number of kilobytes in a CLOB or BLOB to transfer from a client application to the database server before checking whether an error has occurred. The error check occurs each time the specified number of kilobytes is transferred. If an error occurs, the remaining data is not sent and an error is reported. If no error occurs, the file transfer continues until it finishes.

The valid range for **IFX_LOB_XFERSIZE** is 1 - 9223372036854775808 KB. The **IFX_LOB_XFERSIZE** environment variable is set on the client.

Terminate a connection

The IBM® Informix® ESQL/C program can use the following statements and functions to close a connection:

- The CLOSE DATABASE statement closes a database. For applications before version 6.0, it also closes the connection. For applications of Version 6.0 and later, the connection remains open after the CLOSE DATABASE statement executes.
- The sqlexit() library function closes all current connections, implicit and explicit. If you call sqlexit() when any databases are still open, the function causes any open transactions to be rolled back.
- The sqldetach() library function closes the database server connection of the child process. It does not affect the database server connection of the parent process.
- The DISCONNECT statement closes a specified connection. If a database is open, DISCONNECT closes it before it closes the connection. If transactions are open, the DISCONNECT statement fails.

Optimized message transfers

IBM® Informix® ESQL/C provides a feature called *optimized message transfers*, which allow you to minimize message transfers with the database server for most Informix® ESQL/C statements.

Informix® ESQL/C accomplishes optimized message transfers by chaining messages together and even eliminating some small message packets. When the optimized message transfer feature is enabled, Informix® ESQL/C expects that SQL statements will succeed. Consequently, Informix® ESQL/C chains, and in some cases eliminates, confirmation messages from the database server.

Restrictions on optimized message transfers

IBM® Informix® ESQL/C does not chain the following SQL statements even when you enable optimized message transfers:

- COMMIT WORK
- DESCRIBE
- EXECUTE
- FETCH
- FLUSH
- PREPARE
- PUT
- ROLLBACK WORK
- SELECT INTO (singleton SELECT)

When Informix® ESQL/C reaches one of the preceding statements, it flushes the message out to the database server. Informix® ESQL/C then continues message chaining for subsequent SQL statements. Only SQL statements that require network traffic cause Informix® ESQL/C to flush the message queue.

SQL statements that do not require network traffic, such as the DECLARE statement, do not cause Informix® ESQL/C to send the message queue to the database server.

Enabling optimized message transfers

About this task

To enable optimized message transfers, or message chaining, you must set the following variables in the client environment:

1. Set the **OPTMSG** environment variable at run time to enable optimized message transfers for all qualifying SQL statements.
2. Set the **OptMsg** global variable within the IBM® Informix® ESQL/C application to control which SQL statements use message chaining.

Set the OPTMSG environment variable

The **OPTMSG** environment variable enables the optimized message transfers for all SQL statements in the application.

You can assign the following values to the **OPTMSG** environment variable:

1

This value enables optimized message transfers, implementing the feature for any connection that is after.

0

This value disables optimized message transfers. (Default)

The default value of the **OPTMSG** environment variable is **0**. Setting **OPTMSG** to **0** explicitly disables message chaining. You might want to disable optimized message transfers for statements that require immediate replies, or for debugging purposes.

To enable optimized message transfers, you must set **OPTMSG** before you start the IBM® Informix® ESQL/C application.

On UNIX™ operating systems, you can set **OPTMSG** within the application with the `putenv()` system call (as long as your system supports the `putenv()` function). The following call to `putenv()`, for example, enables optimized message transfers:

```
putenv("OPTMSG=1");
```

In Windows™ environments, you can set **OPTMSG** within the application with the `ifx_putenv()` function. The following call to `ifx_putenv()`, for example, enables optimized message transfers:

```
ifx_putenv("OPTMSG=1");
```

When you set **OPTMSG** within an application, you can activate or deactivate optimized message transfers for each connection or within each thread. To enable optimized message transfers, you must set **OPTMSG** before you establish a connection.

Set the OptMsg global variable

The **OptMsg** global variable is defined in the Informix® ESQL/C `sqlhdr.h` header file.

After you set the **OPTMSG** environment variable to **1**, you must set the **OptMsg** global variable to specify whether message chaining takes effect for each subsequent SQL statement. You can assign the following values to **OptMsg**:

1

This value enables message chaining for every subsequent SQL statement.

0

This value disables message chaining for every subsequent SQL statement.

With the **OPTMSG** environment variable set to **1**, you must still set the **OptMsg** global variable to **1** to enable the message chaining. If you omit the following statement from your program, IBM® Informix® ESQL/C does not perform message chaining:

```
OptMsg = 1;
```

When you have set the **OPTMSG** environment variable to **1**, you might want to disable message chaining for the following reasons:

- Some SQL statements require immediate replies.

See [Restrictions on optimized message transfers on page 344](#) for more information about these SQL statements. Re-enable the OPTMSG feature once the restricted SQL statement completes.

- For debugging purposes

You can disable the OPTMSG feature when you are trying to determine how each SQL statement responds.

- Before the last SQL statement in the program to ensure that the database server processes all messages before the application exits. If **OPTMSG** is enabled, the message is queued up for the database server but it is not sent for processing.

To avoid unintended chaining, reset the **OptMsg** global variable immediately after the SQL statement that requires it. The following code fragment enables message chaining for the DELETE statement:

```
OptMsg = 1;
EXEC SQL delete from customer;
OptMsg = 0;
EXEC SQL create index ix1 on customer (zipcode);
```

This example enables message chaining because the execution of the DELETE statement is not likely to fail. Therefore, it can be safely chained to the next SQL statement. Informix® ESQL/C delays sending the message for the DELETE statement. The example disables message chaining after the DELETE statement so that Informix® ESQL/C flushes all messages that have been queued up when the next SQL statement executes. By disabling the message chaining after the DELETE, the code fragment avoids unintended message chaining. When unintended chaining occurs, it can be difficult to determine which of the chained statements has failed.

At the CREATE INDEX statement, Informix® ESQL/C sends both the DELETE and the CREATE INDEX statements to the database server.

Error handling with optimized message transfers

When the `OPTMSG` feature is enabled, your IBM® Informix® ESQL/C application cannot perform error handling on any chained statement. If you are not sure whether a particular statement might generate an error, include error-handling code and do not enable message chaining for that statement.

When an error occurs in a chained statement, the database server stops execution. Any SQL statements that follow the error are not executed. For example, the following code fragment intends to chain five `INSERT` statements (this fragment assumes that the `OPTMSG` environment variable is set to `1`):

```
EXEC SQL create table tab1 (col1 INTEGER);

/* enable message chaining */
OptMsg = 1;

/* these two INSERT statements execute successfully */
EXEC SQL insert into tab1 values (1);
EXEC SQL insert into tab1 values (2);

/* this INSERT statement generates an error because the data
* in the VALUES clause is not compatible with the column type */
EXEC SQL insert into tab1 values ('a');

/* these two INSERT statements never execute */
EXEC SQL insert into tab1 values (3);
EXEC SQL insert into tab1 values (4);

/* disable message chaining */
OptMsg = 0;

/* update one of the tab1 rows */
EXEC SQL update tab1 set col1 = 5 where col1 = 2;
if ( SQLCODE < 0 )
  ;;
```

In this code fragment, Informix® ESQL/C flushes the message queue when it reaches the `UPDATE` statement, sending the five `INSERT` statements and the `UPDATE` statement to the database server for execution. Because the third `INSERT` statement generates an error, the database server does not execute the remaining `INSERT` statements or the `UPDATE` statement. The `UPDATE` statement, which is the last statement in the chained statements, returns the error from the failed `INSERT` statement. The `tab1` table contains the rows with `col1` values of `1` and `2`.

Database server control functions

The following section describes the IBM® Informix® ESQL/C library functions that you can use to control the database server sessions.

Function name	Description	See
<code>ifx_getcur_conn_name()</code>	Returns the name of the current connection.	The <code>ifx_getcur_conn_name()</code> function on page 639

Function name	Description	See
sqgetdbs()	Returns the names of databases that a database server can access.	The sqgetdbs() function on page 802
sqlbreak()	Sends the database server a request to stop processing.	The sqlbreak() function on page 805
sqlbreakcallback()	Establishes a timeout interval and a callback function for interrupting an SQL request.	The sqlbreak() function on page 805
sqldetach()	Detaches a child process from a database server connection.	The sqldetach() function on page 808
sqldone()	Determines whether the database server is currently processing an SQL request.	The sqldone() function on page 814
sqlexit()	Terminates a database server connection.	The sqlexit() function on page 814
sqlsignal()	Performs signal handling and cleanup of child processes.	The sqlsignal() function on page 815
sqlstart()	Starts a database server connection.	The sqlstart() function on page 816

The timeout program

The **timeout** program demonstrates how to set up a timeout interval.

This program uses the `sqlbreakcallback()` function to perform the following actions:

- To specify a timeout interval of 200 milliseconds for execution of an SQL request
- To register the `on_timeout()` callback function to be called when an SQL request begins and ends as well as when the timeout interval elapses

If execution of an SQL request exceeds the timeout interval, the callback function uses the `sqldone()` function to ensure that the database server is still busy, prompts the user for confirmation of the interrupt, and then uses the `sqlbreak()` function to send an interrupt request to the database server.

Compile the program

Use the following command to compile the **timeout** program:

```
esql -o timeout timeout.ec
```

The **-o timeout** option causes the executable program to be named **timeout**. Without the **-o** option, the name of the executable program defaults to **a.out**.

Guide to the timeout.ec File

```

=====
1. /*
2.  * timeout.ec *
3.  */
4. #include <stdio.h>
5. #include <string.h>
6. #include <ctype.h>
7. #include <decimal.h>
8. #include <errno.h>
9. EXEC SQL include sqltypes;
10. #define LCASE(c) (isupper(c) ? tolower(c) : (c))
11. /* Defines for callback mechanism */
12. #define DB_TIMEOUT      200 /* number of milliseconds in timeout */
13. #define SQL_INTERRUPT -213 /* SQLCODE value for interrupted stmt
    */
14. /* These constants are used for the cancelst table, created by
15.  * this program.
16.  */
17. #define MAX_ROWS      10000 /* number of rows added to table */
18. EXEC SQL define CHARFLDSIZE 20; /* size of character columns in
    * table */
19. /* Define for sqldone() return values */
20. #define SERVER_BUSY  -439
21. /* These constants used by the exp_chk2() function to determine
22.  * whether to display warnings.
23.  */
24. #define WARNNOTIFY      1
25. #define NOWARNNOTIFY    0
26. int4 dspquery();
27. extern int4 exp_chk2();
28. void on_timeout();
29. main()
30. {
31.     char ques[80], prompt_ans();
32.     int4 ret;
33.     mint create_tbl(), drop_tbl();
34.     printf("TIMEOUT Sample ESQL Program running.\n\n");
35.     /*
36.      * Establish an explicit connection to the stores7 database
37.      * on the default database server.
38.      */
39.     EXEC SQL connect to 'stores7';
=====

```

Lines 4 - 9

Lines 4 - 8 include the UNIX™ header files from the /usr/include directory. The IBM® Informix® ESQL/C `sqltypes.h` header file (line 9) defines names for integer values that identify SQL and C data types.

Lines 10 - 20

Line 10 defines `LCASE`, a macro that converts an uppercase character to a lowercase character. The `DB_TIMEOUT` (line 12) constant defines the number of milliseconds in the timeout interval. The `SQL_INTERRUPT` constant (line 13) defines the `SQLCODE` value that the database server returns when it interrupts an SQL statement.

Lines 17 and 18 define constants that the `create_tbl()` function uses to create the **cancelst** table. This table holds the test data needed for the large query (lines 125 - 132). `MAX_ROWS` is the number of rows that `create_tbl()` inserts into **cancelst**. You can change this number if you find that the query does not run long enough for you to interrupt it. `CHARFLDSIZE` is the number of characters in the character fields (`char_fld1` and `char_fld2`) of **cancelst**.

Line 20 defines the `SERVER_BUSY` constant to hold the `sqldone()` return value that indicates that the database server is busy processing an SQL request. Use of this constant makes code more readable and removes the explicit return value from the code.

Lines 24 and 25

The `exp_chk2()` exception-handling function uses the `WARNNOTIFY` and `NOWARNNOTIFY` constants (lines 24 and 25). Calls to `exp_chk2()` specify one of these as the second argument to indicate whether the function displays `SQLSTATE` and `SQLCODE` information for warnings (`WARNNOTIFY`) or does not display this information for warnings (`NOWARNNOTIFY`). For more information about the `exp_chk2()` function, see [Lines 348 - 355 on page 361](#).

Lines 29 - 33

The `main()` program block begins on line 29. Lines 31 - 33 declare variables local to the `main()` program block.

```
=====
40.  if (exp_chk2("CONNECT to stores7", NOWARNNOTIFY) < 0)
41.      exit(1);
42.  printf("Connected to 'stores7' on default server\n");
43.  /*
44.   * Create the cancelst table to hold MAX_ROWS (10,000) rows.
45.   */
46.  if (!create_tbl())
47.      {
48.      printf("\nTIMEOUT Sample Program over.\n\n");
49.      exit(1);
50.      }
51.  while(1)
52.      {
53.      /*
54.       * Establish on_timeout() as callback function. The callback
55.       * function is called with an argument value of 2 when the
56.       * database server has executed a single SQL request for number
57.       * of milliseconds specified by the DB_TIMEOUT constant
58.       * (0.00333333 minutes by default). Call to sqlbreakcallback()
59.       * must come after server connection is established and before
60.       * the first SQL statement that can be interrupted.
61.       */
62.      if (sqlbreakcallback(DB_TIMEOUT, on_timeout))
63.          {
64.          printf("\nUnable to establish callback function.\n");
```

```

65.     printf("TIMEOUT Sample Program over.\n\n");
66.     exit(1);
67.     }
68.     /*
69.     * Notify end user of timeout interval.
70.     */
71.     printf("Timeout interval for SQL requests is: ");
72.     printf("%.8f minutes\n", DB_TIMEOUT/60000.00);
73.     strcpy("Are you ready to begin execution of the query?",
74.     ques);
75.     if (prompt_ans(ques) == 'n')
76.     {
77.     /*
78.     * Unregister callback function so table cleanup will not
79.     * be interrupted.
80.     */
81.     sqlbreakcallback(-1L, (void *)NULL);
82.     break;
83.     }
=====

```

Lines 43 - 50

The `create_tbl()` function creates the **cancelst** table in the **stores7** database. It inserts `MAX_ROWS` number of rows into this table. If `create_tbl()` encounters some error while it creates **cancelst**, execution of the **timeout** program cannot continue. The program exits with a status value of `1` (line 49).

Line 51

This **while** loop (which ends on line 97), controls the execution of the query on the **cancelst** table. It allows the user to run this query multiple times to test various interrupt scenarios.

Lines 53 - 67

The first task of the **while** loop is to use `sqlbreakcallback()` to specify a timeout interval of `DB_TIMEOUT` (200) milliseconds and to register `on_timeout()` as the callback function. If this call to `sqlbreakcallback()` fails, the program exits with a status value of `1`. To test different timeout intervals, you can change the `DB_TIMEOUT` constant value and recompile the `timeout.ec` source file.

Lines 68 - 72

These `printf()` functions notify the user of the timeout interval. Notice that the message displays this interval in minutes, not milliseconds. It divides the `DB_TIMEOUT` value by 60,000 (number of milliseconds in a minute).

Lines 73 - 83

The `prompt_ans()` function asks the user to indicate when to begin execution of the **cancelst** query. If the user enters `n` (no), the program calls the `sqlbreakcallback()` function to unregister the callback function. This call prevents the SQL statements in the `drop_tbl()` function (lines 322 - 329) from initiating the callback function. For a description of the `prompt_ans()` function, see [Lines 337 - 347 on page 361](#).

```

=====
84.      /*
85.      * Start display of query output
86.      */
87.      printf("\nBeginning execution of query...\n\n");
88.      if ((ret = dspquery()) == 0)
89.      {
90.          if (prompt_ans("Try another run?") == 'y')
91.              continue;
92.          else
93.              break;
94.      }
95.      else /* dspquery() encountered an error */
96.          exit(1);
97.      } /* end while */
98.  /*
99.  * Drop the table created for this program
100.  */
101.  drop_tbl();
102.  EXEC SQL disconnect current;
103.  if (exp_chk2("DISCONNECT for stores7", WARNNOTIFY) != 0)
104.      exit(1);
105.  printf("\nDisconnected stores7 connection\n");
106.  printf("\nTIMEOUT Sample Program over.\n\n");
107. }
108. /* This function performs the query on the cancelst table. */
109. int4 dspquery()
110. {
111.     int4 cnt = 0;
112.     int4 ret = 0;
113.     int4 sqlcode = 0;
114.     int4 sqlerr_code, sqlstate_err();
115.     void disp_exception(), disp_error(), disp_warning();
116.     EXEC SQL BEGIN DECLARE SECTION;
117.         char fld1_val[ CHARFLDSIZE + 1 ];
118.         char fld2_val[ CHARFLDSIZE + 1 ];
119.         int4 int_val;
120.     EXEC SQL END DECLARE SECTION;
121.     /* This query contains an artificially complex WHERE clause to
122.     * keep the database server busy long enough for an interrupt
123.     * to occur.
124.     */
125.     EXEC SQL declare cancel_curs cursor for
126.         select sum(int_fld), char_fld1, char_fld2
127.         from cancelst
128.         where char_fld1 matches "*f*"
129.            or char_fld1 matches "*h*"
130.            or char_fld2 matches "*w*"
131.            or char_fld2 matches "*l*"
132.         group by char_fld1, char_fld2;
=====

```

Lines 84 - 97

If the user chooses to continue the query, the program calls the `dspquery()` function (line 88) to run the **cancelst** query. The `prompt_ans()` function displays a prompt so the user can decide whether to run the program again.

Lines 98 - 101

The `drop_tbl()` function drops the **cancelst** table from the **stores7** database to clean up after the program.

Lines 108 - 120

The `dspquery()` function runs a query of the **cancelst** table and displays the results. It returns zero (success) or the negative value of `SQLCODE` (failure) to indicate the result of the **cancelst** query.

Lines 121 - 132

Line 125 declares the **cancel_curs** cursor for the query. The actual `SELECT` (lines 126 - 132) obtains the sum of the **int_fld** column and the values of the two character columns (**char_fld1** and **char_fld2**). The `WHERE` clause uses the `MATCHES` operator to specify matching rows, as follows:

- All **char_fld1** columns that contain an `e` or an `h` with the criteria:

```
char_fld1 matches "*f*"
or char_fld1 matches "*h*"
```

These criteria match rows with a **char_fld1** value of `Informix` or `"4100 Bohannon Dr."`

- All **char_fld2** columns that contain a `w` or a `l` with the criteria:

```
char_fld2 matches "*w*"
or char_fld2 matches "*l*"
```

These criteria match rows with a **char_fld2** value of `Software` or `"Menlo Park, CA"`.

This `SELECT` is artificially complex to ensure that the query takes a long time to execute. Without a reasonably complex query, the database server finishes execution before the user has a chance to interrupt it. In a production application, only use the `sqlbreakcallback()` feature with queries that take a long time to execute.

```
=====
EXEC SQL open cancel_curs;
sqlcode = SQLCODE;
sqlerr_code = sqlstate_err(); /* check SQLSTATE for exception */
if (sqlerr_code != 0)        /* if exception found */
{
  if (sqlerr_code == -1)    /* runtime error encountered */
  {
    if (sqlcode == SQL_INTERRUPT) /* user interrupt */
    {
      /* This is where you would clean up resources */
      printf("\n      TIMEOUT INTERRUPT PROCESSED\n\n");
      sqlcode = 0;
    }
    else
      /* serious runtime error */
      disp_error("OPEN cancel_curs");
    EXEC SQL close cancel_curs;
    EXEC SQL free cancel_curs;
    return(sqlcode);
  }
  else if (sqlerr_code == 1) /* warning encountered */
```

```

        disp_warning("OPEN cancel_curs");
    }
=====

```

Line 133

This OPEN statement causes the database server to execute the SELECT that is associated with the **cancel_curs** cursor. Because the database server executes the **cancelst** query, this OPEN is the statement that the user would be most likely to interrupt. When the FETCH executes, the database server just sends matching rows to the application, an operation that is not usually time intensive.

Lines 134 - 154

This block of code checks the success of the OPEN. Since the OPEN can be interrupted, this exception checking must include an explicit check for the interrupt value of `-213`. The database server sets SQLCODE to `-213` when it has interrupted an SQL request. On line 140, the program uses the `SQL_INTERRUPT` defined constant (which line 13 defines), for this SQLCODE value.

The `sqlstate_err()` function (line 135) uses the GET DIAGNOSTICS statement to analyze the value of the SQLSTATE variable. If this function returns a non-zero value, SQLSTATE indicates a warning, a runtime error, or the NOT FOUND condition. Before the call to `sqlstate_err()`, line 134 saves the SQLCODE value so that execution of any other SQL statements (such as GET DIAGNOSTICS in `sqlstate_err()`) does not overwrite it. The function returns the value of SQLCODE if the OPEN encounters a runtime error (line 150).

The first **if** statement (line 136) checks if the OPEN encounters any type of exception (`sqlstate_err()` returns a nonzero value). The second **if** (line 138) checks if the OPEN has generated a runtime error (return value of `-1`). However, if the database server has interrupted the OPEN, `sqlstate_err()` also returns `-1`. Since Informix® ESQL/C does not handle an interrupted SQL statement as a runtime error, the third **if** checks explicitly for the `SQL_INTERRUPT` value (line 140). If the OPEN was interrupted, line 143 notifies the user that the interrupt request was successful and then the function resets the saved SQLCODE value (in **sqlcode**) to zero to indicate that the OPEN did not generate a runtime error.

Lines 146 and 147 execute only if the OPEN generates a runtime error other than `SQL_INTERRUPT (-213)`. The `disp_error()` function displays the exception information in the diagnostics area and the SQLCODE value. Lines 148 - 150 cleanup after the OPEN. They close and free the **cancel_curs** cursor and then return the SQLCODE value. The `dspquery()` function does not continue with the FETCH (line 158) if the OPEN was interrupted.

If `sqlstate_err()` returns one (`1`), the OPEN has generated a warning. Lines 152 and 153 call the `disp_warning()` function to display warning information from the diagnostics area. For more information about the `disp_error()` and `disp_warning()` functions, see [Lines 348 - 355 on page 361](#).

```

=====
155.    printf("Displaying data...\n");
156.    while(1)
157.        {
158.        EXEC SQL fetch cancel_curs into :int_val, :fld1_val,
        :fld2_val;
159.        if ((ret = exp_chk2("FETCH from cancel_curs", NOWARNNOTIFY))
        == 0)

```

```

160.     {
161.     printf("   sum(int_fld) = %d\n", int_val);
162.     printf("   char_fld1 = %s\n", fld1_val);
163.     printf("   char_fld2 = %s\n\n", fld2_val);
164.     }
165.     /*
166.     * Will display warning messages (WARNNOTIFY) but continue
167.     * execution when they occur (exp_chk2() == 1)
168.     */
169.     else
170.     {
171.         if (ret==100)           /* NOT FOUND condition */
172.         {
173.             printf("\nNumber of rows found: %d\n\n", cnt);
174.             break;
175.         }
176.         if (ret < 0)           /* Runtime error */
177.         {
178.             EXEC SQL close cancel_curs;
179.             EXEC SQL free cancel_curs;
180.             return(ret);
181.         }
182.     }
183.     cnt++;
184.     } /* end while */
185. EXEC SQL close cancel_curs;
186. EXEC SQL free cancel_curs;
187. return(0);
188. }
189. /*
190. * The on_timeout() function is the callback function. If the user
191. * confirms the cancellation, this function uses sqlbreak() to
192. * send an interrupt request to the database server.
193. */
194. void on_timeout(when_called)
195. mint when_called;
196. {
197. mint ret;
198. static intr_sent;
=====

```

Lines 155 - 182

This **while** loop executes for each row that the **cancel_curs** cursor contains. The **FETCH** statement (line 158) retrieves one row from the **cancel_curs** cursor. If the **FETCH** generates an error, the function releases the cursor resources and returns the **SQLCODE** error value (lines 176 - 181). Otherwise, the function displays the retrieved data to the user. On the last row (**ret = 100**), the function displays the number of rows that it retrieved (line 173).

Lines 185 - 187

After the **FETCH** has retrieved the last row from the cursor, the function releases resources allocated to the **cancel_curs** cursor and returns a success value of zero.

Lines 190 - 198

The `on_timeout()` function is the callback function for the **timeout** program. The `sqlbreakcallback()` call on line 62 registers this callback function and establishes a timeout interval of 200 milliseconds. This function is called every time the database server begins and ends an SQL request. For long-running requests, the application also calls `on_timeout()` each time the timeout interval elapses.

```

=====
199.  /* Determine when callback function has been called. */
200.  switch(when_called)
201.  {
202.  case 0: /* Request to server completed */
203.      printf("+-----SQL Request ends");
204.      printf("-----+\n\n");
205.      /*
206.       * Unregister callback function so no further SQL statements
207.       * can be interrupted.
208.       */
209.      if (intr_sent)
210.          sqlbreakcallback(-1L, (void *)NULL);
211.      break;
212.  case 1: /* Request to server begins */
213.      printf("+-----SQL Request begins");
214.      printf("-----+\n");
215.      printf("|                ");
216.      printf("                |\n");
217.      intr_sent = 0;
218.      break;
219.  case 2: /* Timeout interval has expired */
220.      /*
221.       * Is the database server still processing the request?
222.       */
223.      if (sqldone() == SERVER_BUSY)
224.          if (!intr_sent) /* has interrupt already been sent? */
225.          {
226.              printf("|  An interrupt has been received ");
227.              printf("by the application.|\n");
228.              printf("|                ");
229.              printf("                |\n");
230.              /*
231.               * Ask user to confirm interrupt
232.               */
233.              if (cancel_request())
234.              {
235.                  printf("|      TIMEOUT INTERRUPT ");
236.                  printf("REQUESTED                |\n");
237.                  /*
238.                   * Call sqlbreak() to issue an interrupt request for
239.                   * current SQL request to be cancelled.
240.                   */
241.                  sqlbreak();
242.              }
243.              intr_sent = 1;
244.          }
245.      break;
=====

```


Lines 199 - 249

This **switch** statement uses the callback function argument, **when_called**, to determine the actions of the callback function, as follows:

- Lines 202 - 211: If **when_called** is 0, the callback function was called after the database server ends an SQL request. The function displays the bottom of the message-request box to indicate the end of the SQL request, as follows:

```
+-----SQL Request ends-----+
```

- Lines 212 - 218: If **when_called** is 1, the callback function was called when the database server begins an SQL request. The display of the top of the message-request box indicates this condition:

```
+-----SQL Request begins-----+
|                                     |
```

For more information about these message-request boxes, see [Lines 21 - 30 on page 362](#). The function also initializes the **intr_sent** flag to 0 because the user has not yet sent an interrupt for this SQL request.

- Lines 219 - 245: If **when_called** is 2, the callback function was called because the timeout interval has elapsed.

To handle the elapsed timeout interval, the callback function first calls the Informix® ESQL/C `sqldone()` function (line 223) to determine whether the database server is still busy processing the SQL request. If the database server is idle, the application does not need to send an interrupt. If `sqldone()` returns `SERVER_BUSY` (-439), the database server is still busy.

Line 224 checks if the user has already attempted to interrupt the SQL request that is currently executing. If an interrupt was sent, **intr_sent** is 1, and the program does not need to send another request. If an interrupt request has not yet been sent, the callback function notifies the user that the timeout interval has elapsed (lines 226 - 229). It then uses the `cancel_request()` function (line 233) to allow the user to confirm the interrupt. For more information about **cancel_request()**, see [Lines 251 - 261 on page 358](#).

```
=====
246.  default:
247.      printf("Invalid status value in callback: %d\n", when_called);
248.      break;
249.  }
250.  }
251.  /* This function prompts the user to confirm the sending of an
252.   * interrupt request for the current SQL request.
253.   */
254.  mint cancel_request()
255.  {
256.      char prompt_ans();
257.      if (prompt_ans("Do you want to confirm this interrupt?") == 'n')
258.          return(0); /* don't interrupt SQL request */
259.      else
260.          return(1); /* interrupt SQL request */
261.  }
262.  /* This function creates a new table in the current database. It
263.   * populates this table with MAX_ROWS rows of data. */
264.  mint create_tbl()
265.  {
266.      char st_msg[15];
```

```

267.     int ret = 1;
268.     EXEC SQL BEGIN DECLARE SECTION;
269.         mint cnt;
270.         mint pa;
271.         mint i;
272.         char fld1[ CHARFLDSIZE + 1 ], fld2[ CHARFLDSIZE + 1 ];
273.     EXEC SQL END DECLARE SECTION;
274.     /*
275.     * Create canceltst table in current database
276.     */
277.     EXEC SQL create table canceltst (char_fld1 char(20),
278.         char_fld2 char(20), int_fld integer);
279.     if (exp_chk2("CREATE TABLE", WARNNOTIFY) < 0)
280.         return(0);
281.     printf("Created table 'canceltst'\n");
282.     /*
283.     * Insert MAX_ROWS of data into canceltst
284.     */
285.     printf("Inserting rows into 'canceltst'...\n");
286.     for (i = 0; i < MAX_ROWS; i++)
187.         {
=====

```

Lines 199 - 249 (continued)

If the user confirms the interrupt, the callback function calls the `sqlbreak()` function to send the interrupt request to the database server. The callback function does not wait for the database server to respond to the interrupt request. Execution continues to line 243 and sets the `intr_sent` flag to `1`, to indicate that the interrupt request was sent. If the callback function was called with an invalid argument value (a value other than `0`, `1`, or `2`), the function displays an error message (line 247).

Lines 251 - 261

The `cancel_request()` function asks the user to confirm the interrupt request. It displays the prompt:

```
Do you want to confirm this interrupt?
```

If the user answers `y` (yes), `cancel_request()` returns `0`. If the user answers `n` (no), `cancel_request()` returns `1`.

Lines 262 - 281

The `create_tbl()` function creates the `canceltst` table and inserts the test data into this table. The `CREATE TABLE` statement (lines 277 and 278) creates the `canceltst` table with three columns: `int_fld`, `char_fld1`, and `char_fld2`. If the `CREATE TABLE` encounters an error, the `exp_chk2()` function (line 279) displays the diagnostics-area information and `create_tbl()` returns `0` to indicate that an error has occurred.

Lines 282 - 287

This `for` loop controls the insertion of the `canceltst` rows. The `MAX_ROWS` constant determines the number of iterations for the loop, and hence the number of rows that the function inserts into the table. If you cannot interrupt the `canceltst` query (lines 126 - 132) because it executes too quickly, increase the value of `MAX_ROWS` and recompile the `timeout.ec` file.

```

=====
288.         if (i%2 == 1) /* odd-numbered rows */

```

```

289.     {
290.         stcopy("4100 Bohannon Dr", fld1);
291.         stcopy("Menlo Park, CA", fld2);
292.     }
293.     else          /* even-numbered rows */
294.     {
295.         stcopy("Informix", fld1);
296.         stcopy("Software", fld2);
297.     }
298.     EXEC SQL insert into canceltst
299.         values (:fld1, :fld2, :i);
300.     if ( (i+1)%1000 == 0 ) /* every 1000 rows */
301.         printf("  Inserted %d rows\n", i+1);
302.     sprintf(st_msg, "INSERT #%d", i);
303.     if (exp_chk2(st_msg, WARNNOTIFY) < 0)
304.     {
305.         ret = 0;
306.         break;
307.     }
308.     }
309.     printf("Inserted %d rows into 'canceltst'.\n", MAX_ROWS);
310. /*
311.  * Verify that MAX_ROWS rows have added to canceltst
312.  */
313.     printf("Counting number of rows in 'canceltst' table...\n");
314.     EXEC SQL select count(*) into :cnt from canceltst;
315.     if (exp_chk2("SELECT count(*)", WARNNOTIFY) < 0)
316.         return(0);
317.     printf("Number of rows = %d\n", cnt);
318.     return (ret);
319. }
320. /* This function drops the 'canceltst' table */
321. mint drop_tbl()
322. {
323.     printf("\nCleaning up...\n");
324.     EXEC SQL drop table canceltst;
325.     if (exp_chk2("DROP TABLE", WARNNOTIFY) < 0)
326.         return(0);
327.     printf("Dropped table 'canceltst'\n");
328.     return(1);
329. }
=====

```

Lines 288 - 292

This **if** statement generates the values for the **char_fld1** and **char_fld2** columns of the **canceltst** table. Lines 290 and 291 execute for odd-numbered rows. They store the strings "4100 Bohannon Dr" and "Menlo Park, CA" in the **fld1** and **fld2** variables.

Lines 293 - 297

Lines 295 and 296 execute for even-numbered rows. They store the strings **Informix** and **Software** in the **fld1** and **fld2** variables.

Lines 298 - 307

The INSERT statement inserts a row into the **cancelst** table. It takes the value for the **int_fld** column from the **:i** host variable (the row number), and the values for the **char_fld1** and **char_fld2** columns from the **:fld1** and **:fld2** host variables. The function notifies the user after it inserts every 1000 rows (lines 300 and 301). If the INSERT encounters an error, the **exp_chk2()** function (line 303) displays the diagnostics-area information and **create_tbl()** returns zero to indicate that an error has occurred.

Lines 300 - 317

These lines verify that the program has added the rows to the **cancelst** table and that it can access them. The program does a SELECT on the newly created **cancelst** table and returns the number of rows found. The program checks whether this number matches the number that the function has added, which line 309 displays. If the SELECT encounters an error, the **exp_chk2()** function (line 315) displays the diagnostics-area information, and **create_tbl()** returns 0 to indicate that an error has occurred.

Lines 320 - 329

The **drop_tbl()** function drops the **cancelst** table from the current database. If the DROP TABLE statement (line 324) encounters an error, the **exp_chk2()** function displays the diagnostics-area information and **drop_tbl()** returns 0 to indicate that an error has occurred.

```

=====
330. /*
331.  * The inpfuncs.c file contains the following functions used in
      this
332.  * program:
333.  *   getans(ans, len) - accepts user input, up to 'len' number of
334.  *                   characters and puts it in 'ans'
335.  */
336. #include "inpfuncs.c"
337. char prompt_ans(question)
338. char * question;
339. {
340.     char ans = ' ';
341.     while(ans != 'y' && ans != 'n')
342.     {
343.         printf("\n*** %s (y/n): ", question);
344.         getans(&ans,1);
345.     }
346.     return ans;
347. }
348. /*
349.  * The exp_chk() file contains the exception handling functions to
350.  * check the SQLSTATE status variable to see if an error has
      * occurred
351.  * following an SQL statement. If a warning or an error has
352.  * occurred, exp_chk2() executes the GET DIAGNOSTICS statement and
353.  * displays the detail for each exception that is returned.
354.  */
355. EXEC SQL include exp_chk.ec;
=====

```

Lines 330 - 336

Several of the Informix® ESQL/C demonstration programs also call the `getans()` function. Therefore, this function is broken out into a separate C source file and included in the appropriate demonstration program. Because this function does not contain Informix® ESQL/C, the program can use the C **#include** preprocessor statement to include the file. For a description of this function, see [Guide to the `inpfuncs.c` file on page 176](#).

Lines 337 - 347

The `prompt_ans()` function displays the string in the **question** argument and waits for the user to enter `y` (yes) or `n` (no) as a response. It returns the single-character response.

Lines 348 - 355

The **timeout** program uses the `exp_chk2()`, `sqlstate_err()`, `disp_error()`, and `disp_warning()` functions to perform its exception handling. Because several demonstration programs use these functions, the `exp_chk2()` function and its supporting functions have been placed in a separate `exp_chk.ec` source file. The **timeout** program must include this file with the Informix® ESQL/C **include** directive because the exception-handling functions use Informix® ESQL/C statements. For a description of the `exp_chk.ec` file, see [Guide to the `exp_chk.ec` file on page 309](#).



Tip: In a production environment, you would put functions such as `getans()`, `exp_chk2()`, `sqlstate_err()`, `disp_error()`, and `disp_warning()` into a library and include this library on the command line of the Informix® ESQL/C compilation program.

Example output

This section includes a sample output of the **timeout** demonstration program.

This program performs two runs of the **canceltst** query, as follows:

- Lines 20 - 43: The first run confirms the interrupt request as soon as the confirmation prompt appears. (The user enters `y`.)
- Lines 44 - 75: The second run does not confirm the interrupt request. (The user enters `n`.)

The numbers that appear in the following output are for explanation only. They do not appear in the actual program output.

```
=====
1.  TIMEOUT Sample ESQL Program running.
2.  Connected to 'stores7' on default server
3.  Created table 'canceltst'
4.  Inserting rows into 'canceltst'...
5.   Inserted 1000 rows
6.   Inserted 2000 rows
7.   Inserted 3000 rows
8.   Inserted 4000 rows
9.   Inserted 5000 rows
10.  Inserted 6000 rows
11.  Inserted 7000 rows
```

```

12.   Inserted 8000 rows
13.   Inserted 9000 rows
14.   Inserted 10000 rows
15.  Inserted 10000 rows into 'canceltst'.
16.  Counting number of rows in 'canceltst' table...
17.  Number of rows = 10000
18.  Timeout interval for SQL requests is: 0.00333333 minutes
19.  *** Are you ready to begin execution of the query? (y/n): y
20.  Beginning execution of query...
21.  +-----SQL Request begins-----+
22.  |                               |
23.  +-----SQL Request ends-----+
24.  +-----SQL Request begins-----+
25.  |                               |
26.  |   An interrupt has been received by the application. |
27.  |                               |
28.  *** Do you want to confirm this interrupt? (y/n): y
29.  |   TIMEOUT INTERRUPT REQUESTED   |
30.  +-----SQL Request ends-----+
=====

```

Lines 3 - 17

The `create_tbl()` function generates these lines. They indicate that the function has successfully created the **canceltst** table, inserted the `MAX_ROWS` number of rows (1,000), and confirmed that a `SELECT` statement can access these rows. For a description of the `create_tbl()` function, see the annotation beginning with [Lines 262 - 281 on page 358](#).

Lines 18 - 19

Line 18 displays the timeout interval to indicate that `sqlbreakcallback()` has successfully registered the callback function and established the timeout interval of 200 milliseconds (0.00333333 minutes). Line 19 asks the user to indicate the beginning of the query execution. This prompt prepares the user for the confirmation prompt (lines 28 and 43), which must be answered quickly to send an interrupt while the database server is still executing the query.

Line 20

This line indicates the beginning of the `dspquery()` function, the point at which the database server begins the **canceltst** query.

Lines 21 - 30

The program output uses a message-request box to indicate client-server communication:

```

+-----SQL Request begins-----+
|                               |
+-----SQL Request ends-----+

```

Each box represents a single message request sent between the client and the server. The callback function displays the text for a message-request box. (For a description of which parts of the function display the text, see [Lines 199 - 249 on page 357](#).) To execute the `OPEN` statement, the client and server exchanged two message requests, which the two message-request boxes in the output indicate. For more information about message requests, see [Interruptible SQL statements on page 339](#).

The first message-request box (lines 21 - 23) indicates that the first message request completes before the timeout interval elapses. The second message-request box (lines 29 - 30) indicates that execution of this message request exceeds the timeout interval and calls the callback function with a status value of 2. The callback function prompts the user to confirm the interrupt request (line 28).

Line 29 indicates that the `sqlbreak()` function has requested an interrupt. The message request then completes (line 30).

```

=====
31. TIMEOUT INTERRUPT PROCESSED
32. *** Try another run? (y/n): y
33. Timeout interval for SQL requests is: 0.00333333 minutes
34. *** Are you ready to begin execution of the query? (y/n): y
35. Beginning execution of query...
36. +-----SQL Request begins-----+
37. |                                     |
38. +-----SQL Request ends-----+
39. +-----SQL Request begins-----+
40. |                                     |
41. |   An interrupt has been received by the application. |
42. |                                     |
43. *** Do you want to confirm this interrupt? (y/n): n
44. +-----SQL Request ends-----+
45. Displaying data...
46.   sum(int_fld) = 25000000
47.   char_fld1 = 4100 Bohannon Dr
48.   char_fld2 = Menlo Park, CA
49.   sum(int_fld) = 24995000
50.   char_fld1 = Informix
51.   char_fld2 = Software
52. Number of rows found: 2
53. *** Try another run? (y/n): n
54. Cleaning up...
55. Dropped table 'canceltst'
56. Disconnected stores7 connection
57. TIMEOUT Sample Program over.
=====

```

Line 31

When the database server actually processes the interrupt request, it sets `SQLCODE` to `-213`. Line 31 indicates that the application program has responded to this status.

Line 32

This prompt indicates the end of the first run of the `canceltst` query. The user responds `y` to the prompt to run the query a second time.

Lines 36 - 41

The message-request box indicates that the first message request completes before the timeout interval elapses. The second message-request box (lines 39 - 44) indicates that execution of this message request again exceeds the timeout interval and calls the callback function (with `when_called = 2`). The callback function prompts the user to confirm the interrupt request (line 43). This time the user answers `n`.

Lines 45 - 52

Because the user has not interrupted the **cancelst** query, the program displays the row information that the query returns.

Lines 54 and 55

The `drop_tbl()` function generates these lines. They indicate that the function has successfully dropped the **cancelst** table from the database. For a description of the `drop_tbl()` function, see the annotation beginning with [Lines 320 - 329 on page 360](#).

ESQL/C connection library functions in a Windows™ environment

To establish an explicit connection (sometimes called a direct connection), IBM® Informix® ESQL/C supports the SQL connection statements. For a complete description of the SQL connection statements, see the *HCL® Informix® Guide to SQL: Syntax*. Informix® ESQL/C also supports the connection library functions that The following table lists for establishing an explicit connection from a Windows™ environment.

Table 65. ESQL/C connection library functions and their sql equivalents

ESQL/C for Windows™ library function	Description	SQL equivalent	See
GetConnect()	Requests an explicit connection and returns a pointer to the connection information	CONNECT TO '@dbservername' WITH CONCURRENT TRANSACTION	The GetConnect() function (Windows) on page 625
SetConnect()	Switches the connection to an established (dormant) explicit connection	SET CONNECT TO (without the DEFAULT option)	The SetConnect() function (Windows) on page 800
ReleaseConnect()	Closes an established explicit connection	DISCONNECT (without the DEFAULT, CURRENT, or ALL options)	The ReleaseConnect() function (Windows) on page 753



Important: Informix® ESQL/C supports the connection library functions for compatibility with Version 5.01 Informix® ESQL/C for Windows™ applications. When you write new Informix® ESQL/C applications for Windows™ environments, use the SQL connection statements (CONNECT, DISCONNECT, and SET CONNECTION) instead of the Informix® ESQL/C connection library functions.

Informix® ESQL/C uses an internal structure that contains the handle for the connection and other connection information. The Informix® ESQL/C connection library functions use the connection handle, together with the information in the internal structure, to pass connection information to and from the application. The application can use the connection handle to identify an explicit connection.

If you use these connection functions to establish explicit connections, keep in mind the following restrictions:

- If you open a cursor in one module (such as a shared DLL), and then use an explicit connection to use that cursor in another module, you must use a host variable for the name of the cursor when you declare the cursor.
- Make sure that your application uses the correct connection handle at all times.



Important: If an application uses the wrong connection handle, the application can modify the wrong database without the knowledge of the user.

When you compile your Informix® ESQL/C program, the esql command processor automatically links the Informix® ESQL/C connection functions to your program.

Informix® libraries

These topics describe how to link the static, shared, and thread-safe HCL Informix® general libraries with your Informix® ESQL/C application.

HCL Informix® products use the Informix® general libraries for interactions between the client SQL application programming interface (API) products (Informix® ESQL/C) and the database server. You can choose between the following types of Informix® general libraries to link with your Informix® ESQL/C application:

- Static Informix® general libraries

To link a static library, the linker copies the library functions to the executable file of your Informix® ESQL/C program. The static Informix® general libraries allow the Informix® ESQL/C program on computers that do not support shared memory to access the Informix® general library functions.

- Shared Informix® general libraries

To link a shared library, the linker copies information about the location of the library to the executable file of your Informix® ESQL/C program. The shared Informix® libraries allow several applications to share a single copy of these libraries, which the operating system loads, once, into shared memory.

- Thread-safe versions of static and shared Informix® general libraries

The thread-safe versions of Informix® general libraries allow the Informix® ESQL/C application that has several threads to call these library functions simultaneously. The thread-safe versions of Informix® libraries are available as both static libraries and shared libraries.

Beginning with HCL Informix® Client Software Development Kit version 3.0, static versions of Informix® general libraries are available on Windows™ and UNIX™ operating systems. The following table shows the available options.

Table 66. Different version of the ESQL/C general library available for UNIX™ and Windows™

Linking options	Thread-safe	Default
Static	Static, thread-safe general libraries	Static, default general libraries
Shared	Shared, thread-safe general libraries	Shared, default general libraries.

Choose a version of the Informix® general libraries

This section provides information about the following topics:

- What are the HCL Informix® general libraries?
- What command-line options of the `esql` command determine the version of the Informix® general libraries to link with your Informix® ESQL/C program?
- How do you link the static Informix® general libraries that are available on UNIX™ and Windows™ operating systems with your Informix® ESQL/C program?
- How do you link the shared Informix® general libraries with your Informix® ESQL/C program?
- What are some factors that you need to consider to determine which type of Informix® general libraries to use?

The Informix® general libraries

The following is a list of the HCL Informix® general libraries for Informix® ESQL/C on a UNIX™ operating system.

libgen

Contains functions for general tasks.

libos

Contains functions for tasks that are required from the operating system.

libsql

Contains functions that send SQL statements between client application and database server.

libgls

Contains functions that provide Global Language Support (GLS) to HCL Informix® products.

libasf

Contains functions that handle communication protocols between client application and database server.

Informix® general libraries are in the `$INFORMIXDIR/lib/esql` and `$INFORMIXDIR/lib` directories on UNIX™ operating systems.

The Informix® general library for Informix® ESQL/C for Windows™ is just one DLL named `isqlt09a.dll`. The file is in the `%INFORMIXDIR%\lib` directory.

The static library for Informix® ESQL/C for Windows™ is named `isqlt09s.lib`. The file is in the `$INFORMIXDIR/lib` directory.

On many platforms there is a system library named `libgen.a`. To avoid compilation errors, it is recommended that you do not use the `libgen.a` Informix® library. Instead, use `libifgen.a` Informix® library which contains a symbolic link to `libgen.a`.

The esql command

To determine which type of HCL Informix® general libraries to link with your Informix® ESQL/C application, the esql command supports the command-line options in the following table.

Table 67. The esql command-line options for Informix® general libraries

Version of Informix® libraries to link	The esql command- line option	See
Shared libraries	No option (default)	Link shared Informix general libraries on page 368
Static libraries	-static	Link static Informix general libraries on page 367.
Thread-safe shared libraries	-thread	Linking thread-safe Informix general libraries to an ESQL/C module on a UNIX operating system on page 380 and Linking thread-safe Informix general libraries to an ESQL/C module in a Windows environment on page 382
Thread-safe static libraries	-thread -static	Create a dynamic thread library on UNIX operating systems on page 389

Link static Informix® general libraries

Beginning with HCL Informix® Client Software Development Kit version 3.0, static versions of HCL Informix® general libraries are available on Windows™ and UNIX™ operating systems.

The static Informix® general libraries retain their pre-version 7.2 names. Static-library names have the following formats:

- A non-thread-safe static Informix® general library has a name of the form `libxxx.a`.
- A thread-safe static Informix® general library has a name of the form `libthxxx.a`.

In these static-library names, `xxx` identifies the particular static Informix® general library. With version 7.2 and later, the static and thread-safe static Informix® general libraries use names of this format as their actual names. The following sample output shows the actual names for the **libos** static (`libos.a`) and thread-safe static (`libthos.a`) libraries:

```
% cd $INFORMIXDIR/lib/esql
% ls -l lib*os.a
-rw-r--r-- 1 informix 145424 Nov 8 01:40 libos.a
-rw-r--r-- 1 informix 168422 Nov 8 01:40 libthos.a
```

The esql command links the code that is associated with the actual names of the static Informix® general libraries into the Informix® ESQL/C application. At run time, your Informix® ESQL/C program can access these Informix® general-library functions directly from its executable file.

Link static Informix® general libraries into an ESQL/C module

To link static HCL Informix® general libraries with the Informix® ESQL/C module, compile your program with the **-static** command-line option.

The following command links the static non-thread-safe Informix® libraries with the `file.exe` executable file:

```
esql -static file.ec -o file.exe
```

The `esql` command can also link the code for thread-safe shared Informix® general libraries with the Informix® ESQL/C application.

i Tip: The `esql` command for pre-version 7.2 products linked static versions of the Informix® general libraries. Because the `esql` command links shared versions of these libraries by default, you must specify the **-static** option to link the static versions with your Informix® ESQL/C application.

Link shared Informix® general libraries

IBM® Informix® ESQL/C can dynamically link a shared library, which places this library in shared memory. When the shared library is in shared memory, other Informix® ESQL/C applications can also use it. Shared libraries are most useful in multiuser environments where only one copy of the library is required for all applications.

! Important: To use shared libraries in your Informix® ESQL/C application, your operating system must support shared libraries. Operating systems that support shared libraries include Sun and HP versions of UNIX™ and Windows™. You should be familiar with the creation of shared libraries and with the compile options that your C compiler requires to build them.

Symbolic names of linked shared libraries (UNIX™)

When the `esql` command links shared or thread-safe shared HCL Informix® libraries with your Informix® ESQL/C application, it uses the *symbolic* names of these libraries. The symbolic names of the Informix® shared libraries have the following formats:


- A non-thread-safe shared Informix® general library has a symbolic name of the form **libxxx.yyy**.
- A thread-safe shared Informix® general library has a symbolic name of the form **libthxxx.yyy**.

In these static-library names, `xxx` identifies the particular library and `yyy` is a platform-specific file extension that identifies shared library files.

i Tip: To refer to a specific shared-library file, this publication often uses the file extension for the Sun UNIX™ operating system, the `.so` file extension. For the shared-library file extension that your UNIX™ operating system uses, see your UNIX™ operating system documentation.

When you install the Informix® ESQL/C product, the installation script makes a symbolic link of the actual shared product library name to the file with the symbolic name. The following figure shows the format for the actual names of shared and thread-safe shared versions of Informix® libraries.

Figure 77. Format of the Informix® shared-library name

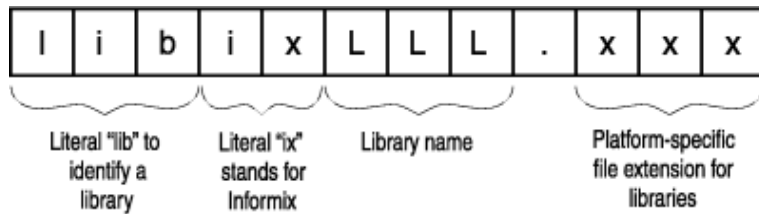

The following sample output shows the symbolic and actual names for the **libos.a** static library and the **libos.so** shared library (on a Sun platform):

```
%ls -l $INFORMIXDIR/esql/libos*
-rw-r--r--  1 informix  145424 Nov  8 01:40 libos.a
lrwxrwxrwx  1 root      11 Nov  8 01:40 libos.so -> iosls07a.so*
```

The `esql` command links the symbolic shared-library names with the Informix® ESQL/C application. At runtime, Informix® ESQL/C dynamically links the code for the shared Informix® general library when the program requires the Informix® general-library function.

Linking shared Informix® general libraries to an ESQL/C module

About this task

To link shared HCL Informix® general libraries to an ESQL/C module:

1. Set the environment variable that specifies the library search path at run time so that it includes the `$INFORMIXDIR/lib` and `$INFORMIXDIR/lib/esql` paths on a UNIX™ operating system; and `%INFORMIXDIR%lib` in a Windows™ environment.

On many UNIX™ operating systems, the `LD_LIBRARY_PATH` environment variable specifies the library search path. The following command sets `LD_LIBRARY_PATH` in a C shell:

```
setenv LD_LIBRARY_PATH $INFORMIXDIR/lib:$INFORMIXDIR/
lib/esql:/usr/lib
```

In Windows™ environments, use the following command:

```
set LIB = %INFORMIXDIR%\lib\;%LIB%
```

2. Compile your program with the `esql` command.

To link shared Informix® general libraries with the Informix® ESQL/C module, you do not need to specify a command-line option. Informix® ESQL/C links shared libraries by default. The following command compiles the `file.ec` source file with shared Informix® libraries:

```
esql file.ec -o file.exe
```

Results

The `esql` command also uses the symbolic name when it links the thread-safe shared Informix® general libraries with the Informix® ESQL/C application.

Choose between shared and static library versions

Beginning with HCL Informix® Client Software Development Kit version 3.0, static versions of HCL Informix® general libraries are available on Windows™ and UNIX™ operating systems.

Informix® ESQL/C products before version 7.2 use static versions of the libraries for the Informix® general libraries. While static libraries are effective in an environment that does not require multitasking, they become inefficient when more than one application calls the same functions. Version 7.2 and later of Informix® ESQL/C also supports shared versions of the Informix® general libraries.

Shared libraries are most useful in multiuser environments where only one copy of the library is required for all applications. Shared libraries bring the following benefits to your Informix® ESQL/C application:

- Shared libraries reduce the sizes of executable files because these library functions are linked dynamically, on an as-needed basis.
- At run time, a single copy of a shared library can be linked to several programs, which results in less memory use.
- The effects of shared libraries in the Informix® ESQL/C executable are transparent to the user.

Although shared libraries save both disk and memory space, when the Informix® ESQL/C application uses them it must perform the following overhead tasks:

- Dynamically load the shared library into memory for the first time
- Perform link-editing operations
- Execute library position-independent code

These overhead tasks can incur runtime penalties and are not necessary when you use static libraries. However, these costs can be offset by the savings in input/output (I/O) access time once the operating system has already loaded and mapped the Informix® shared library.



Important: You might experience a one-time negative effect on the performance of the client side of the application when you load the shared libraries the first time the application is executed. For more information, consult your operating system documentation.

Because the real I/O time that the operating system needs to load a program and its libraries usually does not exceed the I/O time saved, the apparent performance of a program that uses shared libraries is as good as or better than one that uses static libraries. However, if applications do not share, or if your processor is saturated when your applications call shared-library routines, you might not realize these savings.

You can also link thread-safe versions of the static and shared Informix® general libraries with the Informix® ESQL/C application.

Compatibility of preexisting ESQL/C applications with current library versions

You specify the esql command-line options (in [Table 67: The esql command-line options for Informix general libraries on page 367](#)) to tell the esql command which version of the HCL Informix® libraries to link with the Informix® ESQL/C

application. After the esql command successfully compiles and links your application, the version of the Informix® general libraries is fixed. When you install a new version of Informix® ESQL/C, you receive new copies of the Informix® general libraries. Whether you need to recompile and relink your existing Informix® ESQL/C applications to run with these new copies depends on the factors that the following table describes.

Change to the Informix® general library	Version of the Informix® general library	Need to recompile or relink?
New release of the Informix® general libraries	Static	Only if the application needs to take advantage of a new feature in the new release
	Thread-safe static	
Informix® general libraries in new release have a new major-version number	Shared	Only if the application needs to take advantage of a new feature in the new release
	Thread-safe shared	
Informix® general libraries in new release have a new API-version number	Shared	Must recompile and relink
	Thread-safe shared	

On UNIX™, you can use the `ifx_getversion` utility to determine the version of the Informix® library that is installed on your system.

In Windows™ environments, use the following `find` command to find the occurrence of the string that contains the version number in the `isqlt09a.dll`. The command needs to be issued from the `%INFORMIXDIR%\bin` directory.

```
C: cd %INFORMIXDIR%\bin
C: find "INFORMIX-SQL" isqlt09a.dll
```

The output of the `find` command is shown:

```
- - - - - ISQLT09A.DLL
INFORMIX-SQL Version 9.20T1N79
```

The `ifx_getversion` utility (UNIX™)

To obtain the complete version name of the HCL Informix® library, use the `ifx_getversion` utility.

Before you run `ifx_getversion`, set the **INFORMIXDIR** environment variable to the directory in which your HCL Informix® product is installed.

The **`ifx_getversion`** utility has the following syntax.

```
ifx_getversion { libgen.xx | libthgen.x | libos.xx | libthos.x | libsql.xx | libthsql.x | libgls.xx | libasf.xx }
```

Element	Purpose	Key considerations
xx	For static libraries, xx specifies the .a file extension; for shared libraries, xx specifies the platform-specific file extension.	For shared libraries, the Sun platform uses the .so file extension and the Hewlett-Packard (HP) platform uses the .sl file extension.

The following example shows an example of output that the ifx_getversion utility generates for the **libgen** Informix® library:

```
IBM/Informix-Client SDK Version 3.00.UN191
IBM/Informix LIBGEN LIBRARY Version 3.00.UN191
Copyright (C) 1991-2007 IBM
```

Output of ifx_getversion depends on the version of Informix® ESQL/C software that is installed on your system.

Check the API version of a library

When you invoke the IBM® Informix® ESQL/C application that is linked with shared HCL Informix® general libraries, the release number of these shared libraries must be compatible with that of the shared libraries in the \$INFORMIXDIR/lib or the %INFORMIXDIR%\lib directory.


In a Windows™ environment, a developer can easily verify the name of the shared library DLL, namely `isqltnnx.dll`, where *nn* stand for the version number, and *x* stand for the API version.

For the Informix® ESQL/C application on UNIX™, however, given that the linked libraries get symbolic names, it is not easy to find the version number of the linked library. Therefore, Informix® ESQL/C does this check for you. Informix® ESQL/C performs an internal check between the API version of the library that the application uses and the API version of the library that is installed as part of your Informix® ESQL/C product. [Figure 77: Format of the Informix shared-library name on page 369](#) shows where the API version appears in the shared library name.

Informix® ESQL/C uses the HCL Informix® function that is called `checkapi()` to perform this check. The `checkapi()` function is in the `checkapi.o` object file, which is contained in the \$INFORMIXDIR/lib/esql directory. The `esql` command automatically links this `checkapi.o` object file with every executable that it creates.

To determine the API version of the library that the application uses, Informix® ESQL/C checks the values of special macro definitions in the executable file. When the Informix® ESQL/C preprocessor processes a source file, it copies the macro definitions from the `sqlhdr.h` header file into the C source file (.c) that it generates. The following example shows sample values for these macros:

```
#define CLIENT_GEN_VER          710
#define CLIENT_OS_VER           710
#define CLIENT_SQLI_VER        710
#define CLIENT_GLS_VER         710
```


 **Tip:** The Informix® ESQL/C preprocessor automatically includes the `sqlhdr.h` file in all Informix® ESQL/C executable files that it generates.

If the API version of the libraries in this executable file is not compatible, Informix® ESQL/C returns a runtime error that indicates which library is not compatible. You must recompile your Informix® ESQL/C application to link the new release version of the shared library.

If you do not use `esql` to link one of the shared Informix® general libraries with your Informix® ESQL/C application, you must explicitly link the `checkapi.o` file with your application. Otherwise, Informix® ESQL/C might generate an error at link time of the form:

```
undefined ifx_checkAPI()
```

Create thread-safe ESQL/C applications

IBM® Informix® ESQL/C provides shared and static thread-safe and shared and static default versions of the Informix® general libraries on both UNIX™ and Windows™ operating systems. On Windows™ operating systems, Informix® ESQL/C provides a dll named `isqlt09a.dll` and a static thread-safe library named `isqlt09s.lib`.

A thread-safe Informix® ESQL/C application can have one active connection per thread and many threads per application. The thread-safe libraries contain thread-safe (or reentrant) functions. A thread-safe function is one that behaves correctly when several threads call it simultaneously.

For the Informix® ESQL/C on a UNIX™ operating system, the thread-safe Informix® general libraries use functions from the Distributed Computing Environment (DCE) thread package. The DCE thread library, which the Open Software Foundation (OSF) developed, creates a standard interface for thread-safe applications.

If the DCE thread library is not available on your operating system, ESQL/C can use POSIX thread libraries or Sun Solaris thread libraries.

If your operating system supports the DCE, POSIX, or Solaris thread packages, you must install them on the same client computer as ESQL/C.

In Windows™ environments, the Informix® general libraries use the Windows™ API to ensure that they are thread safe.

With the thread-safe Informix® general libraries, you can develop thread-safe Informix® ESQL/C applications. A thread-safe application can have many threads of control. It separates a process into multiple execution threads, each of which runs independently. While a non-threaded Informix® ESQL/C application can establish many connections to one or more databases, it can have only one active connection at a time. An active connection is one that is ready to process SQL requests. A thread-safe Informix® ESQL/C application can have one active connection per thread and many threads per application.

When you specify the `-thread` command-line option, the `esql` command passes this option to the Informix® ESQL/C preprocessor, `esqlc`. With the `-thread` option, the Informix® ESQL/C preprocessor generates thread-safe code that different threads can execute concurrently.

Characteristics of thread-safe ESQL/C code

The thread-safe IBM® Informix® ESQL/C code has the following characteristics that are different from non-thread-safe code:

- The thread-safe code does not define any static data structures.

For example, Informix® ESQL/C allocates **sqllda** structures dynamically and binds host variables to these **sqllda** structures at run time. For more information about **sqllda** structures to perform dynamic SQL, see [Working with the database server on page 318](#).

- The thread-safe code declares cursor blocks dynamically instead of declaring them statically.
- The thread-safe code uses macro definitions for status variables (SQLCODE, SQLSTATE, and the **sqlca** structure).

For more information, see [Define thread-safe variables \(UNIX\) on page 381](#).

Because of the preceding differences, the thread-safe C source file (.c) that the Informix® ESQL/C preprocessor generates is different from the non-threaded C source file. Therefore, you cannot link Informix® ESQL/C applications that have been compiled with the **-thread** option with applications that have not already been compiled with **-thread**. To link such applications, you must compile both applications with the **-thread** option.

Program a thread-safe ESQL/C application

This section provides useful hints for how to create thread-safe IBM® Informix® ESQL/C applications.

It discusses the following programming techniques for a thread-safe environment:

- Establishing concurrent active connections
- Using connections across threads
- Disconnecting all connections
- Using prepared statements across threads
- Using cursors across threads
- Accessing environment variables
- Handling **decimal** values
- Handling DCE restrictions (UNIX™)

Concurrent active connections

In a thread-safe IBM® Informix® ESQL/C application, a database server connection can be in one of the following states:

- An active database server connection is ready to process SQL requests.

The major advantage of a thread-safe Informix® ESQL/C application is that each thread can have one active connection to a database server. Use the CONNECT statement to establish a connection and make it active. Use the SET CONNECTION statement (with no DORMANT clause) to make a dormant connection active.

- A dormant database server connection was established but is not currently associated with a thread.


When a thread makes an active connection dormant, that connection becomes available to other threads. Conversely, when a thread makes a dormant connection active, that connection becomes unavailable to other threads. Use the SET CONNECTION...DORMANT statement to explicitly put a connection in a dormant state.

The current connection is the active database server connection that is currently sending SQL requests to, and possibly receiving data from, the database server. A single-threaded application has only one current (or active) connection at a time. In a multithreaded application, each thread can have a current connection. Thus a multithreaded application can have multiple active connections simultaneously.

When you switch connections with the SET CONNECTION statement (with no DORMANT clause), SET CONNECTION implicitly puts the current connection in the dormant state. When in a dormant state, a connection is available to other threads. Any thread can access any dormant connection. However, a thread can only have one active connection at a time.

The following figure shows a thread-safe Informix® ESQL/C application that establishes three concurrent connections, each of which is active.

Figure 78. Concurrent connections in a thread-safe ESQL/C application

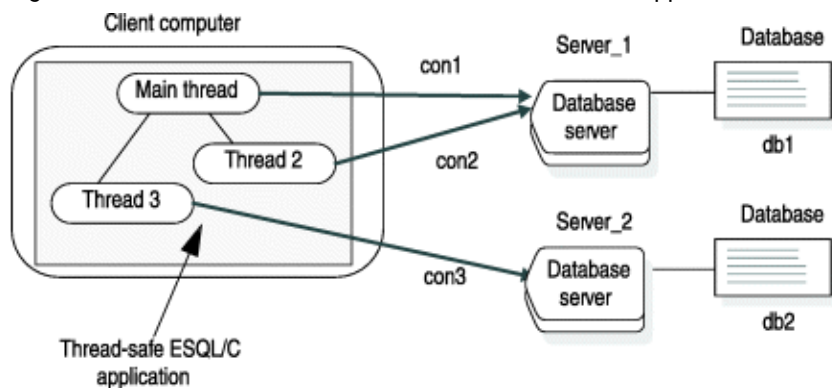

In previous figure, the Informix® ESQL/C application consists of the following threads:

- The main thread (main function) starts connection **con1** to database **db1** on **Server_1**.
- The main thread creates Thread 2. Thread 2 establishes connection **con2** to database **db1** on **Server_1**.
- The main thread creates Thread 3. Thread 3 establishes connection **con3** to database **db2** on **Server_2**.

All connections in [Figure 78: Concurrent connections in a thread-safe ESQL/C application on page 375](#) are concurrently active and can execute SQL statements. The following code fragment establishes the connections that [Figure 78: Concurrent connections in a thread-safe ESQL/C application on page 375](#) illustrates. It does not show DCE-related calls and code for the start_threads() function.

```
main()
{
    EXEC SQL connect to 'db1@Server_1' as 'con1';
    start_threads(); /* start 2 threads */
    EXEC SQL select a into :a from t1; /* table t1 resides in db1 */
    :
```

```

}
thread_1()
{
    EXEC SQL connect to 'db1@Server_1' as 'con2';
    EXEC SQL insert into table t2 values (10); /* table t2 is in db1 */
    EXEC SQL disconnect 'con2';
}
thread_2()
{
    EXEC SQL connect to 'db2@Server_2' as 'con3';
    EXEC SQL insert into table t1 values(10); /* table t1 resides in db2
                                           */
    EXEC SQL disconnect 'con3';
}

```

You can use the `ifx_getcur_conn_name()` function to obtain the name of the current connection.

Connections across threads

If your application contains threads that need to use the same connection, one thread might be using the connection when another thread needs to access it. To avoid this type of contention, your Informix® ESQL/C application must manage access to the connections.

The simplest way to manage a connection that several threads must use is to put the SET CONNECTION statement in a loop. The following code fragment shows a simple SET CONNECTION loop.

```

/* wait for connection: error -1802 indicates that the connection
   is in use
*/
do {
    EXEC SQL set connection :con_name;
} while (SQLCODE == -1802);

```

The preceding algorithm waits for the connection that the host variable `:con_name` names to become available. However, the disadvantage of this method is that it consumes processor cycles.

The following code fragment uses the CONNECT statement to establish connections and SET CONNECTION statements to make dormant connections active within threads. It also uses SET CONNECTION...DORMANT to make active connections dormant. This code fragment establishes the connections that [Figure 78: Concurrent connections in a thread-safe ESQL/C application on page 375](#) illustrates. It does not show DCE-related calls and code for the `start_threads()` function.

```

main()
{
    EXEC SQL BEGIN DECLARE SECTION;
        int a;
    EXEC SQL END DECLARE SECTION;

    start_threads(); /* start 2 threads */
    wait for the threads to finish work.

    /* Use con1 to update table t1; Con1 is dormant at this point.*/
    EXEC SQL set connection 'con1';
    EXEC SQL update table t1 set a = 40 where a = 10;
}

```

```

/* disconnect all connections */
EXEC SQL disconnect all;
}
thread_1()
{
EXEC SQL connect to 'db1' as 'con1';
EXEC SQL insert into table t1 values (10); /* table t1 is in db1*/

/* make con1 available to other threads */
EXEC SQL set connection 'con1' dormant;

/* Wait for con2 to become available and then update t2 */
do {
EXEC SQL set connection 'con2';
} while ((SQLCODE == -1802) );
if (SQLCODE != 0)
return;
EXEC SQL update t2 set a = 12 where a = 10; /* table t2 is in db1 */
EXEC SQL set connection 'con2' dormant;
}

thread_2()
{ /* Make con2 an active connection */
EXEC SQL connect to 'db2' as 'con2';
EXEC SQL insert into table t2 values(10); /* table t2 is in db2*/
/* Make con2 available to other threads */
EXEC SQL set connection'con2' dormant;
}

```

In this code fragment, **thread_1()** uses a SET CONNECTION statement loop (see [Figure 80: Declaration of thread-scoped status variables on page 382](#)) to wait for **con2** to become available. When **thread_2()** makes **con2** dormant, other threads can use this connection. At this time, the SET CONNECTION statement in **thread_1()** is successful and **thread_1()** can use the **con2** connection to update table **t2**.

The DISCONNECT ALL Statement

The DISCONNECT ALL statement serially disconnects all connections in an application.

In a thread-safe IBM® Informix® ESQL/C application, only the thread that issues the DISCONNECT ALL statement can be processing an SQL statement (in this case, the DISCONNECT ALL statement). If any other thread is executing an SQL statement, the DISCONNECT ALL statement fails when it tries to disconnect that connection. This failure might leave the application in an inconsistent state.

For example, suppose a DISCONNECT ALL statement successfully disconnects connection A and connection B but is unable to disconnect connection C because this connection is processing an SQL statement. The DISCONNECT ALL statement fails, with connections A and B disconnected but connection C open. It is recommended that you issue the DISCONNECT ALL statement in the main function of your application after all threads complete their work.

While the DISCONNECT ALL statement is serially disconnecting application connections, Informix® ESQL/C blocks other connection requests. If another thread requests a connect while the DISCONNECT ALL statement executes, this thread must wait until the DISCONNECT ALL statement completes before Informix® ESQL/C can send this new connection request to the database server.

Prepared statements across threads

The PREPARE statements are scoped at the connection level. That is, they are associated with a connection. When a thread makes a connection active, it can access any of the prepared statements that are associated with this connection. If your thread-safe IBM® Informix® ESQL/C application uses prepared statements, you might want to isolate compilation of PREPARE statements so that they are compiled only once in a program.

One possible way to structure your application is to execute the statements that initialize the connection context as a group. The connection context includes the name of the current user and the information that the database environment associates with this name (including prepared statements).


For each connection, the application would perform the following steps:

1. Use the CONNECT statement to establish the connection that the thread requires.
2. Use the PREPARE statement to compile any SQL statements that are associated with the connection.
3. Use the SET CONNECTION...DORMANT statement to put the connection in the dormant state.

When the connection is dormant, any thread can access the dormant connection through the SET CONNECTION statement. When the thread makes this connection active, it can send the corresponding prepared statement or statements to the database server for execution.

In the following figure, the code fragment prepares SQL statements during the connection initialization and executes them later in the program.

Figure 79. Using prepared SQL statements across threads

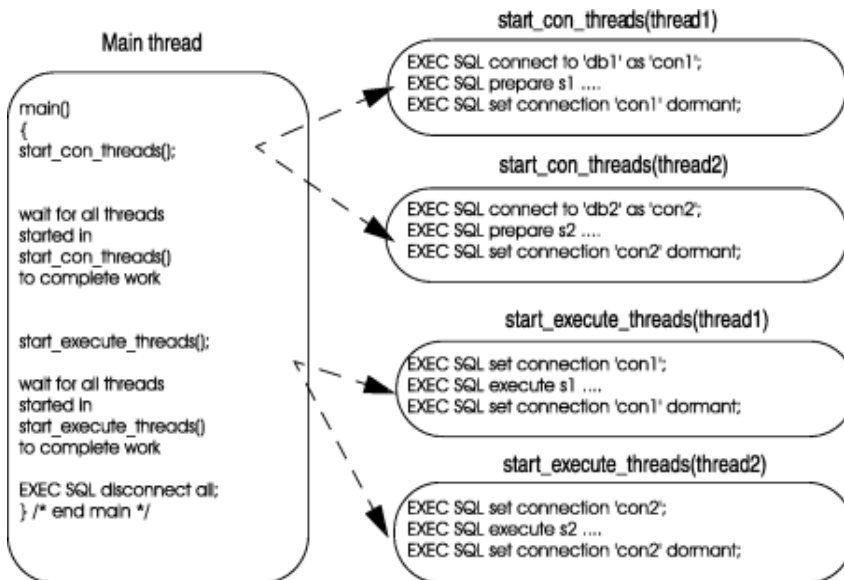

The code fragment in [Figure 79: Using prepared SQL statements across threads on page 378](#) performs the following actions:

1. The main thread calls `start_con_threads()`, which calls `start_con_thread()` to start two threads:
 - For Thread 1, the `start_con_thread()` function establishes connection **con1**, prepares a statement that is called **s1**, and makes connection **con1** dormant.
 - For Thread 2, the `start_con_thread()` function establishes connection **con2**, prepares a statement that is called **s2**, and makes connection **con2** dormant.
2. The main thread calls `start_execute_threads()`, which calls `start_execute_thread()` to execute the prepared statements for each of the two threads:
 - For Thread 1, the `start_execute_thread()` function makes connection **con1** active, executes the **s1** prepared statement associated with **con1**, and makes connection **con1** dormant.
 - For Thread 2, the `start_execute_thread()` function makes connection **con2** active, executes the **s2** prepared statement associated with **con2**, and makes connection **con2** dormant.
3. The main thread disconnects all connections.

Cursors across threads

Like prepared statements, cursors are scoped at the connection level. That is, they are associated with a connection. When a thread makes a connection active, it can access any of the database cursors that are declared for this connection. If your thread-safe Informix® ESQL/C application uses database cursors, you might want to isolate the declaration of cursors in much the same way that you can isolate prepared statements (see [Prepared statements across threads on page 378](#)). The following code fragment shows a modified version of the `start_con_thread()` function (in [Figure 79: Using prepared SQL statements across threads on page 378](#)). This version prepares an SQL statement and declares a cursor for that statement:

```
EXEC SQL connect to 'db1' as 'con1';
EXEC SQL prepare s1 ....
EXEC SQL declare cursor cursor1 for s1;
EXEC SQL set connection 'con1' dormant;
```

Environment variables across threads

Environment variables are not thread-scoped in a thread-safe IBM® Informix® ESQL/C application. That is, if a thread changes the value of a particular environment variable, this change is visible in all other threads as well.

Message file descriptors

By default ESQL/C frees all file descriptors for a message file when it closes the message file. As a performance optimization, however, you can set the environment variable **IFX_FREE_FD** to cause IBM® Informix® ESQL/C to not free the file descriptor if the message file being closed is open for another thread. If you set **IFX_FREE_FD** to 1, Informix® ESQL/C frees the message file descriptor only for the thread that closes the file.

Decimal functions

The `dececv()` and `decfcvt()` functions of the IBM® Informix® ESQL/C library return a character string that can be overwritten if two threads simultaneously call these functions. For this reason, use the thread-safe versions of these two functions, `ifx_dececv()` and `ifx_decfcvt()`.

DCE restrictions (UNIX™)

A thread-safe IBM® Informix® ESQL/C code is also subject to all restrictions that the DCE thread package imposes. DCE requires that all applications that use the DCE thread library are ANSI compliant. This section lists some of the restrictions to keep in mind when you create a thread-safe Informix® ESQL/C application. For more information, see your DCE documentation.

Operating-system calls

You must substitute DCE thread-jacket routines for all operating-system calls within the thread-safe IBM® Informix® ESQL/C application. Thread-jacket routines take the name of a system call, but they call the DCE `pthread_lock_global_np()` function to lock the global mutual exclusion lock (mutex) before they call the actual system service. (Mutexes serialize thread execution by ensuring that only one thread at a time executes a critical section of code.) The DCE include file, `pthread.h`, defines the jacketed versions of system calls.

The `fork()` operating-system call

In the DCE environment, restrict use of the `fork()` operating-system call. In general, terminate all threads but one before you call `fork()`. An exception to this rule is when a call to the `fork()` system call immediately follows the `fork()` call. If your application uses `fork()`, it is recommended that the child process call `sqldetach()` before it executes any IBM® Informix® ESQL/C statements.

Resource allocation

It is recommended that you include the DCE `pthread_yield()` call in tight loops to remind the scheduler to allocate resources as necessary. The call to `pthread_yield()` instructs the DCE scheduler to try to uniformly allocate resources if a thread is caught in a tight loop, waiting for a connection (thus preventing other threads from proceeding). The following code fragment shows a call to the `pthread_yield()` routine:

```
/* loop until the connection is available*/
do
{
EXEC SQL set connection :con_name;
pthread_yield();
} while (SQLCODE == -1802);
```

Link thread-safe libraries

The `esql` command links the thread-safe versions of the static or shared HCL Informix® general libraries when you specify the **-thread** command-line option.

Linking thread-safe Informix® general libraries to an ESQL/C module on a UNIX™ operating system

Perform the following steps to link thread-safe HCL Informix® general libraries to the Informix® ESQL/C module on a UNIX™ operating system:

1. Install the DCE thread package on the same client computer as the Informix® ESQL/C product. For more information, see your DCE installation instructions.

If DCE is not available on your platform, ESQL/C can use POSIX thread libraries or Sun Solaris thread libraries.

2. Set the **THREADLIB** environment variable to indicate which thread package to use when you compile the application.

The following C-shell command sets **THREADLIB** to the DCE thread package:

```
setenv THREADLIB DCE
```

SOL and POSIX are also valid options for the **THREADLIB** environment variable.



Important: This version of Informix® ESQL/C supports only the DCE thread package.

3. Compile your program with the `esql` command, and specify the `-thread` command-line option.

The `-thread` command-line option tells `esql` to generate thread-safe code and to link in thread-safe libraries. The following command links thread-safe shared libraries with the `file.exe` executable file:

```
esql -thread file.ec -o file.exe
```

The **-thread** command-line option instructs the `esql` command to perform the following steps:

1. Pass the **-thread** option to the Informix® ESQL/C preprocessor to generate thread-safe code.
2. Call the C compiler with the `-DIFX_THREAD` command-line option.
3. Link the appropriate thread libraries (shared or static) to the executable file.



Tip: You must set the **THREADLIB** environment variable before you use the `esql` command with the **-thread** command-line option.

If you specify the **-thread** option but do not set **THREADLIB**, or if you set **THREADLIB** to some unsupported thread package, the `esql` command issues the following message:

```
esql: When using -thread, the THREADLIB environment variable
must be set to a supported thread library. Currently
supporting: DCE, POSIX(Solaris 2.5 and higher only) and
SOL (Solaris Kernel Threads)
```

Define thread-safe variables (UNIX™)

When you specify the **-thread** command-line option to `esql`, the IBM® Informix® ESQL/C preprocessor passes the `IFX_THREAD` definition to the C compiler. The `IFX_THREAD` definition tells the C compiler to create thread-scoped variables for variables that are global in non-thread-safe Informix® ESQL/C code.

For example, when the C compiler includes the `sqlca.h` file with `IFX_THREAD` set, it defines thread-scoped variables for the Informix® ESQL/C status variables: `SQLCODE`, `SQLSTATE`, and the `sqlca` structure. The thread-scoped versions of status

variables are macros that map the global status variables to thread-safe function calls that obtain thread-specific status information.

The following figure shows an excerpt from the `sqlca.h` file with the thread-scoped definitions for Informix® ESQL/C status variables.

Figure 80. Declaration of thread-scoped status variables

```

;

extern struct sqlca_s sqlca;

extern int4 SQLCODE;

extern char SQLSTATE[];
#else /* IFX_THREAD */
extern int4 * ifx_sqlcode();
extern struct sqlca_s * ifx_sqlca();
#define SQLCODE (*(ifx_sqlcode()))
#define SQLSTATE ((char *) (ifx_sqlstate()))
#define sqlca (*(ifx_sqlca()))
#endif /* IFX_THREAD */

```

Link shared or static versions

To tell the `esql` command to link the thread-safe versions of the HCL Informix® libraries into your application, use the **-thread** command-line option of `esql`, as follows:

- Thread-safe shared libraries require the **-thread** command-line option only.
- Thread-safe static libraries require the **-thread** and **-static** command-line options.

Linking thread-safe Informix® general libraries to an ESQL/C module in a Windows™ environment

About this task

To create a thread-safe IBM® Informix® ESQL/C application, you must perform the following steps:

1. In your Informix® ESQL/C source file, include the appropriate thread functions and variables of the Windows™ API. For more information about threads, consult your Microsoft™ or Borland programmer documentation.
2. When you compile the Informix® ESQL/C source file, specify the **-thread** command-line option of the `esql` command.

The **-thread** option tells the Informix® ESQL/C preprocessor to generate thread-safe C code when it translates SQL and Informix® ESQL/C statements. This thread-safe code includes calls to thread-safe functions in the Informix® DLLs.

What to do next

If you are not creating the Informix® ESQL/C application with threads, omit the **-thread** option. Although the Informix® DLLs are thread safe, your non-thread-safe application does not use the thread-safe feature when you omit **-thread**.

ESQL/C thread-safe decimal functions

The `dececv()` and `decfcvt()` functions of the IBM® Informix® ESQL/C library return a character string that can be overwritten if two threads simultaneously call these functions. For this reason, use the following thread-safe versions of these two functions.

Function Name	Description	See
<code>ifx_dececv()</code>	Thread-safe version of the <code>dececv()</code> ESQL/C function	The <code>ifx_dececv()</code> and <code>ifx_decfcvt()</code> function on page 628
<code>ifx_decfcvt()</code>	Thread-safe version of the <code>decfcvt()</code> ESQL/C function	The <code>ifx_dececv()</code> and <code>ifx_decfcvt()</code> function on page 628

Both of these functions convert a decimal value to an ASCII string and return it in the user-defined buffer.

When you compile your Informix® ESQL/C program with the **-thread** command-line option of the `esql` command, `esql` automatically links these functions to your program.

Context threaded optimization

IBM® Informix® ESQL/C allows developers to specify the runtime context that is used for a set of statements. A runtime context holds all the thread-specific data that Informix® ESQL/C must maintain including connections and their current states, cursors, and their current states.

This feature allows Informix® ESQL/C programmers to improve the performance of their MESQL/C applications. By using the `SQLCONTEXT` definitions and directives, the number of thread-specific data block lookups is reduced.

The following embedded SQL statements support the definition and usage of runtime contexts:

```
SQLCONTEXT context_var;
PARAMETER SQLCONTEXT param_context_var;
BEGIN SQLCONTEXT OPTIMIZATION;
END SQLCONTEXT OPTIMIZATION;
```

The `SQLCONTEXT` definition and statements are only recognized when the `esql-thread` option is used. If the **-thread** option is not specified, the statements are ignored.

The use of the `SQLCONTEXT` statements causes the ESQL/C preprocessor to generate code in the `.c` file that differs from the generated code when no `SQLCONTEXT` statements are present.

The following `SQLCONTEXT` definition generates code to define and set the value of the `SQLCONTEXT` to the handle of the runtime context:

```
SQLCONTEXT context_var;
```

The following `SQLCONTEXT` is used to generate code to define a parameter that contains the handle of the runtime context:

```
PARAMETER SQLCONTEXT param_context_var;
```

The following BEGIN SQLCONTEXT directive causes all statements positionally following it in the source file to use the indicated runtime context until the END CONTEXT directive is seen:

```
BEGIN SQLCONTEXT OPTIMIZATION;
...
END SQLCONTEXT OPTIMIZATION;
```

The END SQLCONTEXT directive appears before the end of the scope of the SQLCONTEXT definition currently used, or compile-time errors occur for "undefined symbol sql_context_var."

A sample thread-safe program

The following sample program, **thread_safe**, shows how you can use a cursor across threads. Sample output for this program follows the source listing.

Source listing

The main thread starts a connection that is named **con1** and declares a cursor on table **t**. It then opens the cursor and makes connection **con1** dormant. The main thread then starts six threads (six instances of the threads_all() function) and waits for the threads to complete their work with the pthread_join() DCE call.

Each thread uses the connection **con1** and the opened cursor to perform a fetch operation. After the fetch operation, the program makes the connection dormant. Threads use connection **con1** in a sequential manner because only one thread can use the connection at a time. Each thread reads the next record from the **t** table.

```
/* *****
 * Program Name: thread_safe()
 *
 * purpose      : If a server connection is initiated with the WITH
 *                CONCURRENT TRANSACTION clause, an ongoing transaction
 *                can be shared across threads that subsequently
 *                connect to that server.
 *                In addition, if an open cursor is associated with such
 *                connection, the cursor will remain open when the
 *                connection
 *                is made dormant. Therefore, multiple threads can share a
 *                cursor.
 *
 * Methods      : - Create database db_con221 and table t1.
 *                - Insert 6 rows into table t1, i.e. values 1 through 6.
 *                - Connect to db_con221 as con1 with CONCURRENT
 *                  TRANSACTION.
 *                  The CONCURRENT TRANSACTION option is required since
 *                  all
 *                  threads use the cursor throughout the same
 *                  connection.
 *                - Declare c1 cursor for "select a from t1 order by a".
 *                - Open the cursor.
 *                - Start 6 threads. Use DCE pthread_join() to determine if
 *                  all threads complete & all threads do same thing as
 *                  follows.
 *                For thread_1, thread_2, ..., thread_6:
```

```

*          o SET CONNECTION con1
*          o FETCH a record and display it.
*          o SET CONNECTION con1 DORMANT
*          - Disconnect all connections.
*****
*/

#include <pthread.h>
#include <dce/dce_error.h>

/* global definitions */
#define num_threads    6

/* Function definitions */
static void thread_all();
static long dr_dbs();
static int checksql(char *str, long expected_err, char *con_name);
static void dce_err();

/* Host variables declaration */
EXEC SQL BEGIN DECLARE SECTION;
    char  con1[] = "con1";
EXEC SQL END DECLARE SECTION;

/* *****
* Main Thread
*****/
main()
{
/* create database */

EXEC SQL create database db_con221 with log;
if (! checksql("create database", 0, EMPTYSTR))
    {
    printf("MAIN:: create database returned status {%d}\n", SQLCODE);
    exit(1);
    }

EXEC SQL create table t1( sales int);
if (! checksql( "create_table", 0, EMPTYSTR))
    {
    dr_dbs("db_con221");
    printf("MAIN:: create table returned status {%d}\n", SQLCODE);
    exit(1);
    }

if ( populate_tab() != FUNCSUCC)
    {
    dr_dbs("db_con221");
    printf("MAIN:: returned status {%d}\n", SQLCODE);
    exit(1);
    }

EXEC SQL close database;
checksql("[main] <close database>", 0, EMPTYSTR);

/* Establish connection 'con1' */

```

```

EXEC SQL connect to 'db_con221' as 'con1' WITH CONCURRENT TRANSACTION;
if (! checksql("MAIN:: <close database>", 0, EMPTYSTR))
{
    dr_dbs("db_con221");
    exit(1);
}

/* Declare cursor c1 associated with the connection con1 */
EXEC SQL prepare tabid from "select sales from t1 order by sales";
checksql("MAIN:: <prepare>", 0, EMPTYSTR);

EXEC SQL declare c1 cursor for tabid;
checksql("MAIN:: <declare c1 cursor for>", 0, EMPTYSTR);

/* Open cursor c1 and make the connection dormant */
EXEC SQL open c1;
checksql("MAIN:: <open c1>", 0, EMPTYSTR);
EXEC SQL set connection :con1 dormant;
checksql("MAIN:: <set connection con1 dormant>", 0, EMPTYSTR);

/* Start threads */
start_threads();

/* Close cursor and drop database */
EXEC SQL set connection :con1;
checksql("MAIN:: set connection", 0, EMPTYSTR);
EXEC SQL close c1;
checksql("MAIN:: <close cursor>", 0, EMPTYSTR);
EXEC SQL free c1;
checksql("MAIN:: <free cursor>", 0, EMPTYSTR);

EXEC SQL disconnect all;
checksql("MAIN:: disconnect all", 0, EMPTYSTR);
dr_dbs("db_con221");
} /* end of Main Thread */

/*****
* Function: thread_all()
* Purpose : Uses connection con1 and fetches a row from table t1 using *
            cursor c1.
* Returns : Nothing
*****/
static void thread_all(thread_num)
int *thread_num;
{
EXEC SQL BEGIN DECLARE SECTION;
    int  val;
EXEC SQL END DECLARE SECTION;

/* Wait for the connection to become available */
do {
    EXEC SQL set connection :con1;
    } while (SQLCODE == -1802);

checksql("thread_all: set connection", 0, con1);

/* Fetch a row */

```

```

EXEC SQL fetch c1 into :val;
checksql("thread_all: fetch c1 into :val", 0, con1);

/* Free connection con1 */
EXEC SQL set connection :con1 dormant;
checksql("thread_all: set connection con1 dormant", 0, EMPTYSTR);
printf("Thread id %d fetched value %d from t1\n", *thread_num, val);
} /* thread_all() */

/*****
* Function: start_threads()
* purpose : Create num_threads and passes a thread id number to each
*          thread
*****/

start_threads()
{
    int          thread_num[num_threads];
    pthread_t    thread_id[num_threads];
    int          i, ret, return_value;

for(i=0; i< num_threads; i++)
    {
        thread_num[i] = i;
        if ((pthread_create(&thread_id[i], pthread_attr_default
            (pthread_startroutine_t ) thread_all, &thread_num[i])) == -1)
            {
                dce_err(__FILE__, "pthread_create failed", (unsigned long)-1);
                dr_dbs("db_con221");
                exit(1);
            }
    }

    /* Wait for all the threads to complete their work */
for(i=0; i< num_threads; i++)
    {
        ret = pthread_join(thread_id[i], (pthread_addr_t *) &return_value);
        if(ret == -1)
            {
                dce_err(__FILE__, "pthread_join", (unsigned long)-1);
                dr_dbs("db_con221");
                exit(1);
            }
    }
} /* start_threads() */

/*****
* Function: populate_tab()
* Purpose : insert values in table t1.
* Returns : FUNCSUCC on success and FUNCFAIL when it fails.
*****/
static int
populate_tab()
{
EXEC SQL BEGIN DECLARE SECTION;
    int i;
EXEC SQL END DECLARE SECTION;

```

```

EXEC SQL begin work;
if (!checksql("begin work", 0,EMPTYSTR))
    return FUNCFAIL;
for (i=1; i<=num_threads; i++)
    {
    EXEC SQL insert into t1 values (:i);
    if(!checksql("insert", 0,EMPTYSTR))
        return FUNCFAIL;
    }
EXEC SQL commit work;
if (!checksql("commit work", 0,EMPTYSTR))
    return FUNCFAIL;

return FUNCSUCC;
} /* populate_tab() */

/*****
 * Function: dr_dbs()
 * Purpose : drops the database.
 *****/
long dr_dbs(db_name)
EXEC SQL BEGIN DECLARE SECTION;
char *db_name;
EXEC SQL END DECLARE SECTION;

{
EXEC SQL connect to DEFAULT;
checksql("dr_dbs: connect", 0, "DEFAULT");

EXEC SQL drop database :db_name;
checksql("dr_dbs: drop database", 0, EMPTYSTR);

EXEC SQL disconnect all;
checksql("dr_dbs: disconnect all", 0, EMPTYSTR);
} /*dr_dbs() */

/*****
 * Function: checksql()
 * Purpose : To check the SQLCODE against the expected error
 *           (or the expected SQLCODE) and issue a proper message.
 * Returns : FUNCSUCC on success & FUNCFAIL on FAILURE.
 *****/
int checksql(str, expected_err, con_name)
char *str;
long expected_err;
char *con_name;
{
if (SQLCODE != expected_err)
    {
    printf( "%s %s Returned {%d}, Expected {%d}\n", str, con_name,
SQLCODE,
    expected_err);
    return(FUNCFAIL);
    }
return (FUNCSUCC);
} /* checksql() */

```



```

/*****
* Function: dce_err()
* purpose : prints error from dce lib routines
* return  : nothing
*****/

void dce_err(program, routine, status)
char *program, *routine;
unsigned long status;
{
int dce_err_status;
char dce_err_string[dce_c_error_string_len+1];

if(status == (unsigned long)-1)
{
dce_err_status = 0;
sprintf(dce_err_string, "returned FAILURE (errno is %d)", errno);
}
else
dce_error_inq_text(status, (unsigned char *)dce_err_string,
&dce_err_status);

if(!dce_err_status)
{
fprintf(stderr, "%s: error in %s:\n ==> %s (%lu) <==\n",
program, routine, dce_err_string, status);
}
else
fprintf(stderr, "%s: error in %s: %lu\n", program, routine, status);
} /* dce_err() */

```

Output

The sample output might appear different each time the sample program executes because it depends on the execution order of the threads.

```

Thread id 0 fetched value 1 from t1
Thread id 2 fetched value 2 from t1
Thread id 3 fetched value 3 from t1
Thread id 4 fetched value 4 from t1
Thread id 5 fetched value 5 from t1
Thread id 1 fetched value 6 from t1

```

In this output, Thread 1 fetches the last record in the table.

Create a dynamic thread library on UNIX™ operating systems

To create a dynamic thread library, you must define routines for every threaded operation that Informix® ESQL/C performs and you must register those functions with Informix® ESQL/C. The following list shows all of the functions that a multithreaded Informix® ESQL/C application requires and describes what each function must do.

mint ifxOS_th_once(ifxOS_th_once_t *pblock, ifxOS_th_initroutine_t pfn, int *init_data)

This routine executes the initialization routine pfn(). Execute the pfn() functions only once, even if they are called simultaneously by multiple threads or multiple times in the same thread. The pfn() routine is equivalent to the DCE pthread_once(), or the POSIX pthread_once() routines.

The **init_data** variable is used for thread packages that do not have a pthread_once() type routine, such as Solaris Kernel Threads. The routine can be simulated as follows by using **init_data** as a global variable initialized to 0.

```
if (!*init_data)
{
    mutex_lock(pblock);
    if (!*init_data)
    {
        (*pfn)();
        *init_data = 1;
    }
    mutex_unlock(pblock);
}
return(0);
```

mint ifxOS_th_mutexattr_create(ifxOS_th_mutexattr_t *mutex_attr)

This function creates a mutex attributes object that specifies the attributes of mutexes when they are created. The mutex attributes object is initialized with the default value for all of the attributes defined by the implementation of the user. This routine is equivalent to the DCE pthread_mutexattr_create(), or the POSIX pthread_mutexattr_init() routines. If a thread package does not support mutex attribute objects, the mutex attribute routines can be no-ops.

mint ifxOS_th_mutexattr_setkind_np(ifxOS_th_mutexattr_t *mutex_attr, int kind)

This routine sets the mutex type attribute that is used when a mutex is created. The mutex attribute mutex_attr is set to type **kind**. For DCE, this routine is pthread_mutexattr_setkind_np().

mint ifxOS_th_mutexattr_delete(ifxOS_th_mutexattr_t *mutex_attr)

This routine deletes the mutex attribute object mutex_attr. This routine has the same functionality as the DCE pthread_mutexattr_delete(), or the POSIX pthread_mutexattr_destroy() routines.

mint ifxOS_th_mutex_init(ifxOS_th_mutex_t *mutexp, ifxOS_th_mutexattr_t mutex_attr)

This routine creates a mutex and initializes it to the unlocked state. This routine has the same functionality as the DCE pthread_mutex_init(), or the POSIX pthread_mutex_init() routines.

mint ifxOS_th_mutex_destroy(ifxOS_th_mutex_t *mutexp)

This routine deletes a mutex. The mutex must be unlocked before it is deleted. This routine has the same functionality as the DCE pthread_mutex_destroy(), or the POSIX pthread_mutex_destroy() routines.

mint ifxOS_th_mutex_lock(ifxOS_th_mutex_t *mutexp)

This routine locks an unlocked mutex. If the mutex is already locked, the calling thread waits until the mutex becomes unlocked. This routine has the same functionality as the DCE pthread_mutex_lock(), or the POSIX pthread_mutex_lock() routines.

mint ifxOS_th_mutex_trylock(ifxOS_th_mutex_t *mutexp)

If the mutex is successfully locked, it returns the value 1, if the mutex is locked by another thread, it returns the value 0.

This routine has the same functionality as the DCE pthread_mutex_trylock() routine.

mint ifxOS_th_mutex_unlock(ifxOS_th_mutex_t *mutexp)

This routine unlocks the mutex mutexp. If threads are waiting to lock this mutex, the implementation defines which thread receives the mutex. This routine has the same functionality as the DCE pthread_mutex_unlock(), or the POSIX pthread_mutex_unlock() routines.

mint ifxOS_th_condattr_create(ifxOS_th_condattr_t *cond_attr)

This routine creates an object that is used to specify the attributes of condition variables when they are created. Initialize the object with the default value for all of the attributes defined by the implementation of the user. This routine has the same functionality as the DCE pthread_condattr_create(), or the POSIX pthread_condattr_init() routines.

mint ifxOS_th_cond_init(ifxOS_th_cond_t *condp, ifxOS_th_condattr_t cond_attr)

This routine creates and initializes a condition variable. This routine has the same functionality as the DCE pthread_cond_init(), or the POSIX pthread_cond_init() routines.

mint ifxOS_th_condattr_delete(ifxOS_th_condattr_t *cond_attr)

This routine deletes the condition variable attribute object cond_attr. This routine has the same functionality as the DCE pthread_condattr_delete(), or POSIX pthread_condattr_destroy() routines.

mint ifxOS_th_cond_destroy(ifxOS_th_cond_t *condp)

This routine deletes the condition variable condp. The routine has the same functionality as the DCE pthread_cond_destroy(), or the POSIX pthread_cond_destroy() routines.

mint ifxOS_th_cond_timedwait(ifxOS_th_cond_t *sleep_cond, ifxOS_th_mutex_t *sleep_mutex, ifxOS_th_timespec_t *t)

This routine causes a thread to wait until either the condition variable sleep_cond is signaled or broadcast, or the current system clock time becomes greater than or equal to the time specified in t. The routine has the same functionality as the DCE pthread_cond_timedwait(), or the POSIX pthread_cond_timedwait() routines.

mint ifxOS_th_keycreate(ifxOS_th_key_t *allkey, ifxOS_th_destructor_t AllDestructor)

This routine generates a unique value that identifies a thread-specific data value. This routine has the same functionality as the DCE pthread_keycreate(), or the POSIX pthread_key_create() routines.

mint ifxOS_th_getspecific(ifxOS_th_key_t key, ifxOS_th_addr_t *tcb)

This routine obtains the thread-specific data associated with the key. This routine has the same functionality as the DCE pthread_getspecific(), or the POSIX pthread_getspecific() routines.

mint ifxOS_th_setspecific(ifxOS_th_key_t key, ifxOS_th_addr_t tcb)

This routine sets the thread-specific data in the **tcb** associated with the **key** for the current thread. If a value is already defined for **key** in the current thread, the new value is substituted for the existing value. This routine has the same functionality as the DCE `pthread_setspecific()`, or the POSIX `pthread_setspecific()` routines.

Data types

You can create typedefs for the data types in the preceding functions to the equivalent data types in your thread package, or you can use the appropriate data type from the thread package instead of the **ifxOS_** version. The following list includes all the data types that the preceding functions use:

ifxOS_th_mutex_t

This structure defines a mutex object: **pthread_mutex_t** in DCE and POSIX.

ifxOS_th_mutexattr_t

This structure defines a mutex attributes object called **pthread_mutexattr_t** in DCE and POSIX. If mutex attribute objects are unsupported in your thread package (for instance, Solaris Kernel Threads), you can assign them a data type of **mint**.

ifxOS_th_once_t

This structure allows client initialization operations to guarantee mutually exclusive access to the initialization routine, and to guarantee that each initialization is executed only once. This routine has the same functionality as the **pthread_once_t** structure in DCE and POSIX.

ifxOS_th_condattr_t

This structure defines an object that specifies the attributes of a condition variable: **pthread_condattr_t** in DCE and POSIX. If this object is unsupported in your thread package (for instance, Solaris Kernel Threads), you can assign it a data type of **mint**.

ifxOS_th_cond_t

This structure defines a condition variable called **pthread_cond_t** in DCE and POSIX.

ifxOS_th_timespec_t

This structure defines an absolute time at which the `ifxOS_th_cond_timedwait()` function times out if a condition variable has not been signaled or broadcast. This structure is **timespec_t** in DCE and POSIX.

ifxOS_th_key_t

This structure defines a thread-specific data key used in the `ifxOS_th_keycreate()`, `ifxOS_th_setspecific()` and `ifxOS_getspecific()` routines. This structure is **pthread_key_t** in DCE and POSIX.

ifxOS_th_addr_t

This structure defines an address that contains data to be associated with a thread-specific data key of type **ifxOS_th_key_t**. The **ifxOS_th_addr_t** structure is equivalent to **pthread_addr_t** in DCE. You can specify **void *** as an alternative that can be used for thread packages (such as POSIX) that do not define such a structure.

The following example uses the Solaris Kernel Threads package to demonstrate how to set up a dynamic-thread library. The first task is to define the 17 dynamic-thread functions that the shared and/or static library needs. In this example, the file is called `dynthr.c`:

```

/* Prototypes for the dynamic thread functions */

mint ifx_th_once(mutex_t *pblock, void (*pfn)(void), mint *init_data);
mint ifx_th_mutexattr_create(mint *mutex_attr);
mint ifx_th_mutexattr_setkind_np(mint *mutex_attr, mint kind);
mint ifx_th_mutexattr_delete(mint *mutex_attr);
mint ifx_th_mutex_init(mutex_t *mutexp, mint mutex_attr);
mint ifx_th_mutex_destroy(mutex_t *mutexp);
mint ifx_th_mutex_lock(mutex_t *mutexp);
mint ifx_th_mutex_trylock(mutex_t *mutexp);
mint ifx_th_mutex_unlock(mutex_t *mutexp);
mint ifx_th_condattr_create(mint *cond_attr);
mint ifx_th_cond_init(cond_t *condp, mint cond_attr);
mint ifx_th_condattr_delete(mint *cond_attr);
mint ifx_th_cond_destroy(cond_t *condp);
mint ifx_th_cond_timedwait(cond_t *sleep_cond, mutex_t *sleep_mutex,
    timestruc_t *t);
mint ifx_th_keycreate(thread_key_t *allkey, void (*AllDestructor)
    (void *));
mint ifx_th_getspecific(thread_key_t key, void **tcb);
mint ifx_th_setspecific(thread_key_t key, void *tcb);

/*
 * The functions . . . *
 */

mint ifx_th_once(mutex_t *pblock, void (*pfn)(void), mint *init_data)
{
    if (!*init_data)
    {
        mutex_lock(pblock);
        if (!*init_data)
        {
            (*pfn)();
            *init_data = 1;
        }
        mutex_unlock(pblock);
    }
    return(0);
}

/* Mutex attributes are not supported in solaris kernel threads *
 * The functions must be defined anyway, to avoid accessing      *
 * a NULL function pointer.                                     */

mint ifx_th_mutexattr_create(mint *mutex_attr)
{
    *mutex_attr = 0;
    return(0);
}

/* Mutex attributes are not supported in solaris kernel threads */
mint ifx_th_mutexattr_setkind_np(mint *mutex_attr, mint kind)

```

```

{
    *mutex_attr = 0;
    return(0);
}

/* Mutex attributes are not supported in solaris kernel threads */
mint ifx_th_mutexattr_delete(mint *mutex_attr)
{
    return(0);
}

mint ifx_th_mutex_init(mutex_t *mutexp, mint mutex_attr)
{
    return(mutex_init(mutexp, USYNC_THREAD, (void *)NULL));
}

mint ifx_th_mutex_destroy(mutex_t *mutexp)
{
    return(mutex_destroy(mutexp));
}

mint ifx_th_mutex_lock(mutex_t *mutexp)
{
    return(mutex_lock(mutexp));
}
/* Simulate mutex_trylock using mutex_lock */
mint ifx_th_mutex_trylock(mutex_t *mutexp)
{
    mint ret;

    ret = mutex_trylock(mutexp);
    if (ret == 0)
        return(1); /* as per the DCE call */
    if (ret == EBUSY)
        return(0); /* as per the DCE call */
    return(ret);
}

mint ifx_th_mutex_unlock(mutex_t *mutexp)
{
    return(mutex_unlock(mutexp));
}

/* Condition attributes are not supported in solaris kernel threads */
mint ifx_th_condattr_create(mint *cond_attr)
{
    *cond_attr = 0;
    return(0);
}

mint ifx_th_cond_init(cond_t *condp, mint cond_attr)
{
    return(cond_init(condp, USYNC_THREAD, (void *)NULL));
}

mint ifx_th_condattr_delete(int *cond_attr)
{

```

```

    return(0);
}

mint ifx_th_cond_destroy(cond_t *condp)
{
    return(cond_destroy(condp));
}

mint ifx_th_cond_timedwait(cond_t *sleep_cond, mutex_t
    *sleep_mutex, timestruc_t
    *t)
{
    return(cond_timedwait(sleep_cond, sleep_mutex, t));
}

mint ifx_th_keycreate(thread_key_t *allkey, void (*AllDestructor)
    (void *))
{
    return(thr_keycreate(allkey, AllDestructor));
}

mint ifx_th_getspecific(thread_key_t key, void **tcb)
{
    return(thr_getspecific(key, tcb));
}

mint ifx_th_setspecific(thread_key_t key, void *tcb)
{
    return(thr_setspecific(key, tcb));
}

```

Register the dynamic thread functions

Your IBM® Informix® ESQL/C application must use the `ifxOS_set_thrfunc()` function to register the dynamic thread functions with Informix® ESQL/C.

The following declaration describes the `ifxOS_set_thrfunc()` function.

```
mint ifxOS_set_thrfunc(mint func, mulong (*funcptr)())
```

The first parameter, **func**, is a **mint** that indexes the function being registered. The second parameter is the name of the function that is being registered.

You must call `ifxOS_set_thrfunc()` once for each of the 17 **ifxOS** functions listed in [Create a dynamic thread library on UNIX operating systems on page 389](#).

The `ifxOS_set_thrfunc()` function returns `0` if it successfully registers the function and `-1` if it fails to register the function. For example, to register the user-defined function `my_mutex_lock()` as the **ifxOS_th_mutex_lock** routine, you use the following call:

```
if (ifxOS_set_thrfunc(TH_MUTEX_LOCK, (mulong (*)())my_mutex_lock)
== -1)
```

`TH_MUTEX_LOCK` is defined in `sqlhdr.h` and tells the client to call **my_mutex_lock()** whenever it needs to lock a mutex.

The following list shows the indexes and the functions they register.

Index**Function****TH_ONCE**`ifxOS_th_once`**TH_MUTEXATTR_CREATE**`ifxOS_th_mutexattr_create()`**TH_MUTEXATTR_SETKIND**`ifxOS_th_mutexattr_setkind_np()`**TH_MUTEXATTR_DELETE**`ifxOS_th_mutexattr_delete()`**TH_MUTEX_INIT**`ifxOS_th_mutex_init()`**TH_MUTEX_DESTROY**`ifxOS_th_mutex_destroy()`**TH_MUTEX_LOCK**`ifxOS_th_mutex_lock()`**TH_MUTEX_UNLOCK**`ifxOS_th_mutex_unlock()`**TH_MUTEX_TRYLOCK**`ifxOS_th_mutex_trylock()`**TH_CONDATTR_CREATE**`ifxOS_th_condattr_create()`**TH_CONDATTR_DELETE**`ifxOS_th_condattr_delete()`**TH_COND_INIT**`ifxOS_th_cond_init()`**TH_COND_DESTROY**`ifxOS_th_cond_destroy()`**TH_COND_TIMEDWAIT**`ifxOS_th_cond_timedwait()`

TH_KEYCREATE**ifxOS_th_keycreate()****TH_GETSPECIFIC****ifxOS_th_getspecific()****TH_SETSPECIFIC****ifxOS_th_setspecific()**

The following function, **dynthr_init()**, which is also defined in **dynthr.c**, registers the 17 functions defined in [Create a dynamic thread library on UNIX operating systems on page 389](#). FUNCFAIL is defined to be `-1`.

```

dynthr_init()
{
    if (ifxOS_set_thrfunc(TH_ONCE, (mulong (*)())ifx_th_once)
    == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_MUTEXATTR_CREATE,
        (mulong (*)())ifx_th_mutexattr_create) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_MUTEXATTR_SETKIND,
        (mulong (*)())ifx_th_mutexattr_setkind_np) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_MUTEXATTR_DELETE,
        (mulong (*)())ifx_th_mutexattr_delete) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_MUTEX_INIT,
        (mulong (*)())ifx_th_mutex_init) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_MUTEX_DESTROY,
        (mulong (*)()) ifx_th_mutex_destroy) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_MUTEX_LOCK,
        (mulong (*)()) ifx_th_mutex_lock) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_MUTEX_UNLOCK,
        (mulong (*)())ifx_th_mutex_unlock) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_MUTEX_TRYLOCK,
        (mulong (*)())ifx_th_mutex_trylock) == FUNCFAIL)
        return FUNCFAIL;
    if (ifxOS_set_thrfunc(TH_CONDATTR_CREATE,
        (mulong (*)())ifx_th_condattr_create) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_CONDATTR_DELETE,
        (mulong (*)())ifx_th_condattr_delete) == FUNCFAIL)

```

```

    return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_COND_INIT,
        (mulong (*)())ifx_th_cond_init) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_COND_DESTROY,
        (mulong (*)())ifx_th_cond_destroy) == FUNCFAIL)
        return FUNCFAIL;
    if (ifxOS_set_thrfunc(TH_COND_TIMEDWAIT,
        (mulong (*)())ifx_th_cond_timedwait) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_KEYCREATE,
        (mulong (*)())ifx_th_keycreate) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_GETSPECIFIC,
        (mulong (*)())ifx_th_getspecific) == FUNCFAIL)
        return FUNCFAIL;

    if (ifxOS_set_thrfunc(TH_SETSPECIFIC,
        (mulong (*)())ifx_th_setspecific) == FUNCFAIL)
        return FUNCFAIL;
    return 0;
}

```

Set the \$THREADLIB environment variable

The following C-shell command sets the **THREADLIB** environment variable to specify a user-defined thread package:

```
setenv THREADLIB DYNAMIC
```

Create the shared library

You must compile `dynthr.c` into a shared or static library. The following example illustrates how to compile a shared or static library on a workstation running the Solaris operating system:

```
% cc -c -DIFX_THREAD -I$INFORMIXDIR/incl/esql -D_REENTRANT -K pic
dynthr.c
% ld -G -o libdynthr.so dynthr.o
% cp libdynthr.so /usr/lib          <== as root

```

You can also use the **\$LD_LIBRARY_PATH** environment variable:

```
% cc -c -DIFX_THREAD -I$INFORMIXDIR/incl/esql -D_REENTRANT -K pic
dynthr.c
% cp dynthr.so <some directory>
% setenv LD_LIBRARY_PATH ${LD_LIBRARY_PATH}:<some directory>

```

To compile `dynthr.c` into a static library, perform the following tasks (on Solaris):

```
% cc -c -DIFX_THREAD -I$INFORMIXDIR/incl/esql -D_REENTRANT dynthr.c
% ar -cr dynthr.a dynthr.o

```

You must update your application, `test.ec`, to call the `dynthr_init()` routine first, or none of the thread functions are registered.

```
void main(argc , argv )
int argc;
char *argv[] ;
{   /* begin main */

    /* First, set up the dynamic thread library */

    dynthr_init();

    /* Rest of program */

    EXEC SQL database stores7;

};
}
```

Compile with the `-thread` and `-I` preprocessor options

You must compile the application by using the `-thread` and the `-I` preprocessor options.

The `-thread` option indicates that you are linking thread-safe libraries instead of the default HCL Informix® shared libraries. The `-I` option allows you to specify system libraries that you want to link. Finally, you compile your application, link `libdynthr.so` and run it, as shown in the following example:

```
% setenv THREADLIB "dynamic"
% esql -thread -ldynthr test.ec -o test.exe
% test.exe
```

Dynamic SQL

Using dynamic SQL

A static SQL statement is one for which all the information is known at compile time. For example, the following `SELECT` statement is a static SQL statement because all information needed for its execution is present at compile time.

```
EXEC SQL select company into :cmp_name from customer where customer_num
= 101;
```

However, in some applications the programmer does not know the contents, or possibly even the types, of SQL statements that the program needs to execute. For example, a program might prompt the user to enter a select statement, so that the programmer has no idea what columns are accessed when the program is run. Such applications require *dynamic SQL*. Dynamic SQL allows the IBM® Informix® ESQL/C program to build an SQL statement at run time, so that the contents of the statement can be determined by user input.

These topics describe the following dynamic SQL information:

- How to execute a dynamic SQL statement, the SQL statements to use, and the types of statements that you can execute dynamically
- How to execute SQL statements when you know most of the information about the statement at compile time

Execute dynamic SQL

To execute an SQL statement, the database server must have the following information about the statement:

- The type of statement, such as SELECT, DELETE, EXECUTE PROCEDURE, or GRANT
- The names of any database objects, such as tables, columns, and indexes
- Any WHERE-clause conditions, such as column names and matching criteria
- Where to put any returned values, such as the column values from the select list of a SELECT statement
- Values that need to be sent to the database server, such as the column values for a new row for an INSERT statement

If information in an SQL statement varies according to some conditions in the application, your IBM® Informix® ESQL/C program can use dynamic SQL to build the SQL statement at run time. The basic process to dynamically execute SQL statements consists of the following steps:

1. Assemble the text of an SQL statement in a character-string variable.
2. Use a PREPARE statement to have the database server examine the statement text and prepare it for execution.
3. Execute the prepared statement with the EXECUTE or OPEN statement.
4. Free dynamic resources that are used to execute the prepared statement.

Assemble and prepare the SQL statement

Dynamic SQL allows you to assemble an SQL statement in a character string as the user interacts with your program. A dynamic SQL statement is like any other SQL statement that is embedded into a program, except that the statement string cannot contain the names of any host variables. The PREPARE statement sends the contents of an SQL statement string to the database server, which parses it and creates a statement identifier structure (statement identifier).


Assemble the statement

Assign the text for the SQL statement to a single host variable, which appears in the PREPARE statement. The key to dynamically execute an SQL statement is to assemble the text of the statement into a character string. You can assemble this statement string in the following two ways:

- As a fixed string, if you know all the information at compile time
- As a series of string operations, if you do not have all the information at compile time

If you know the whole statement structure, you can list it after the FROM keyword of the PREPARE statement. Quotation marks or double quotation marks around the statement text are valid, although the ANSI SQL standard specifies quotation marks. For example:

```
EXEC SQL prepare slct_id from
'select company from customer where customer_num = 101';
```

 **Tip:** Although IBM® Informix® ESQL/C does not allow newline characters in quoted strings, you can include newline characters in the quoted string of a PREPARE statement. The quoted string is passed to the database server with the PREPARE statement and, if you specify that it should, the database server allows newline characters in quoted strings. Therefore, you can allow a user to enter the preceding SQL statement from the command line as follows:


```
select lname from customer
where customer_num = 101
```

Alternatively, you can copy the statement into a **char** variable as shown in the following code fragment.

```
stcopy("select company from customer where customer_num = 101", stmt_txt);
EXEC SQL prepare slct_id from :stmt_txt;
```

Both of these methods have the same restriction as a static SQL statement. They assume that you know the entire statement structure at compile time. The disadvantage of these dynamic forms over the static one is that any syntax errors encountered in the statement are not discovered until run time (by the PREPARE statement). If you statically execute the statement, the Informix® ESQL/C preprocessor can uncover syntactic errors at compile time (semantic errors might remain undiagnosed until run time). You can improve performance when you dynamically execute an SQL statement that is to be executed more than once. The statement is parsed only once.

In preceding code fragment, the **stmt_txt** variable is a host variable because it is used in an embedded SQL statement (the PREPARE statement). Also the INTO clause of the SELECT statement was removed because host variables cannot appear in a statement string. Instead, you specify the host variables in the INTO clause of an EXECUTE or FETCH statement. Other SQL statements like DESCRIBE, EXECUTE, and FREE can access the prepared statement when they specify the **slct_id** statement identifier.

 **Important:** By default, the scope of a statement identifier is global. If you create a multifile application and you want to restrict the scope of a statement identifier to a single file, preprocess the file with the **-local** preprocessor option.

If you do not know all the information about the statement at compile time, you can use the following features to assemble the statement string:

- The **char** host variables can hold the identifiers in the SQL statement (column names or table names) or parts of the statement like the WHERE clause. They can also contain keywords of the statement.
- If you know what column values the statement specifies, you can declare host variables to provide column values that are needed in a WHERE clause or to hold column values that are returned by the database server.
- Input-parameter placeholders, represented by a question mark (?), in a WHERE clause indicate a column value to be provided, usually in a host variable at time of execution. Host variables used in this way are called input parameters.
- You can use Informix® ESQL/C string library functions like `stcopy()` and `stcat()`.

The following code fragment shows the SELECT statement of the preceding code fragment changed so that it uses a host variable to determine the customer number dynamically.

```
stcopy("select company from customer where customer_num = ", stmt_txt);
stcat(cust_num, stmt_txt);
EXEC SQL prepare slct_id from :stmt_txt;
```

The following code fragment shows how you can use an input parameter to program this same SELECT statement so that the user can enter the customer number.

```
EXEC SQL prepare slct_id from
    'select company from customer where customer_num = ?';
```

You can prepare almost any SQL statement dynamically. The only statements that you cannot prepare dynamically are those statements directly concerned with dynamic SQL and cursor management (such as FETCH and OPEN), and the SQL connection statements. For a complete list of statements, see the PREPARE statement in the *HCL® Informix® Guide to SQL: Syntax*.



Tip: You can use the Deferred-PREPARE feature to defer execution of a prepared SELECT, INSERT, or EXECUTE FUNCTION statement until the OPEN statement.

Prepare statements that have collection variables

You use the Collection Derived Table clause with an INSERT or SELECT statement to access the IBM® Informix® ESQL/C **collection** variable. (For more information about how to use the Collection Derived Table clause and **collection** variables, see [Complex data types on page 203](#).)

When you prepare a statement that manipulates the Informix® ESQL/C **collection** variable, the following restrictions apply:

- You must specify the statement text as a quoted string in the PREPARE statement.

For **collection** variables, Informix® ESQL/C does not support statement text that is stored in a program variable.

- The quoted string for the statement text cannot contain any **collection** host variables.


To manipulate a **collection** variable, you must use the question mark (?) symbol to indicate an input parameter and then provide the **collection** variable when you execute the statement.

- You cannot perform multi-statement prepares if a statement contains a **collection** variable.

For example, the following Informix® ESQL/C code fragment prepares an INSERT on the **a_set** client **collection** variable:

```
EXEC SQL BEGIN DECLARE SECTION;
    client collection set(integer not null) a_set;
EXEC SQL END DECLARE SECTION;

EXEC SQL prepare coll_stmt from
    'insert into table values (1, 2, 3)';
EXEC SQL execute coll_stmt using :a_set;
```

 **Important:** You must declare the Informix® ESQL/C collection variable as a client **collection** variable (a collection variable that is stored on the client computer).

Check the prepared statement

When PREPARE sends the statement string to the database server, the database server parses it to analyze it for errors. The database server indicates the success of the parse in the **sqlca** structure, as follows:

- If the syntax is correct, the database server sets the following **sqlca** fields:
 - The **sqlca.sqlcode** field (SQLCODE) contains zero.
 - The **sqlca.sqlerrd[0]** field contains an estimate of the number of rows affected if the parsed statement was a SELECT, UPDATE, INSERT, or DELETE.
 - The **sqlca.sqlerrd[3]** field contains an estimated cost of execution if the parsed statement was a SELECT, UPDATE, INSERT, or DELETE. This execution cost is a weighted sum of disk accesses and total number of rows processed.
- If the statement string contains a syntax error, or if some other error was encountered during the PREPARE, the database server sets the following **sqlca** fields:
 - The **sqlca.sqlcode** field (SQLCODE) is set to a negative number (<0). The database server also sets the SQLSTATE variable to an error code.
 - The **sqlca.sqlerrd[4]** field contains the offset into the statement text where the error was detected.

Execute the SQL statement

After an SQL statement is prepared, the database server can execute it. The way to execute a prepared statement depends on:

- How many rows (groups of values) the SQL statement returns:
 - Statements that return one row of data include a singleton SELECT and an EXECUTE FUNCTION statement.
 - Statements that can return more than one row of data require a cursor to execute; they include a non-singleton SELECT and an EXECUTE FUNCTION statement.
 - All other SQL statements, including EXECUTE PROCEDURE, return no rows of data.

For more information about how to execute statements that require cursors, see [A database cursor on page 406](#).

- Whether the statement has input parameters

If so, the statement must be executed with the USING clause:

- For SELECT and INSERT statements, use the OPEN...USING statement.
- For non-SELECT statements, use the EXECUTE...USING statement.
- Whether you know the data types of statement columns at compile time:
 - When you know the number and data types of the columns at compile time, you can use host variables to hold the column values.

For more information, see [SQL statements that are known at compile time on page 424](#).

- When you do not know the number and data types of columns at compile time, you must use the DESCRIBE statement to define the column and a dynamic-management structure to hold the column values.

For more information, see [Determine SQL statements on page 438](#).

The following tables summarize how to execute the different types of prepared SQL statements.

Table 68. Executing prepared SQL statements that do not return rows (except INSERT, which is associated with a cursor)

Type of SQL statement	Input parameters	Statement to execute	See
With no input parameters	No	EXECUTE	Execute non-SELECT statements on page 424
When number and data types of input parameters are known	Yes	EXECUTE...USING	An EXECUTE USING statement on page 434
When number and data types of input parameters are not known	Yes	EXECUTE...USING SQL DESCRIPTOR EXECUTE...USING DESCRIPTOR	Handling a parameterized UPDATE or DELETE statement on page 506 Handling a parameterized UPDATE or DELETE statement on page 547

Table 69. Executing an INSERT statement that is associated with a cursor

Type of SQL statement	Input parameters	Statement to execute	See
With no input parameters	No	OPEN	Declare a select cursor on page 427
When number and data types of input parameters (insert columns) are known	Yes	OPEN...USING	An OPEN USING statement on page 435, Handling an unknown column list on page 456
When number and data types of input parameters are not known	Yes	OPEN...USING SQL DESCRIPTOR OPEN...USING DESCRIPTOR	Handling an unknown column list on page 496 Handling an unknown column list on page 538

Table 70. Executing prepared SQL statements that can return more than one row: non-singleton SELECT, SPL function

Type of SQL statement	Input parameters	Statement to execute	See
With no input parameters	No	OPEN	Declare a select cursor on page 427
When number and data types of select-list columns are not known	No	OPEN	Execute a SELECT that returns multiple rows on page 487, Execute a SELECT that returns multiple rows on page 530

Table 70. Executing prepared SQL statements that can return more than one row: non-singleton SELECT, SPL function (continued)

Type of SQL statement	Input parameters	Statement to execute	See
When number and data types of return values are not known	No	OPEN	Executing a cursor function on page 495 , Executing a cursor function on page 537
When number and data types of input parameters are known	Yes	OPEN...USING	An OPEN USING statement on page 435
When number and data types of input parameters are not known	Yes	OPEN...USING SQL DESCRIPTOR OPEN...USING DESCRIPTOR	Execute a parameterized SELECT that returns multiple rows on page 501 Execute a parameterized SELECT that returns multiple rows on page 540

Table 71. Executing prepared SQL statements that return only one row: singleton SELECT, any external function, or an SPL function that returns only one group of values

Type of SQL statement	Input parameters	Statement to execute	See
With no input parameters	No	EXECUTE...INTO	The PREPARE and EXECUTE INTO statements on page 426
When number and data types of returned values are not known	No	EXECUTE...INTO DESCRIPTOR EXECUTE...INTO SQL DESCRIPTOR	Handling an unknown select list on page 486 Execute a noncursor function on page 492 Handling an unknown select list on page 529 Execute a noncursor function on page 536
When number and data types of input parameters are known	Yes	EXECUTE...INTO ...USING	An EXECUTE USING statement on page 434
When number and data types of input parameters are not known	Yes	EXECUTE...INTO ...USING SQL DESCRIPTOR EXECUTE...INTO ...USING DESCRIPTOR	Execute a parameterized singleton SELECT statement on page 505 Execute a parameterized singleton SELECT statement on page 545

Free resources

Sometimes you can ignore the cost of resources allocated to prepared statements and cursors. However, the number of prepared objects that the application can create is limited. Free resources that IBM® Informix® ESQL/C uses to execute a prepared statement, as follows:

- If the statement is associated with a cursor, use CLOSE to close the cursor after all the rows are fetched (or inserted).
- Use the FREE statement to release the resources allocated for the prepared statement and any associated cursor. After you have freed a prepared statement, you can no longer use it in your program until you reprepare or redeclare it. However, once you declare the cursor, you can free the associated statement identifier but not affect the cursor.

You can use the AUTOFREE feature to have the database server automatically free resources for a cursor and its prepared statement.

If your program uses a dynamic-management structure to describe an SQL statement at run time, also deallocate the resources of this structure once the structure is no longer needed.

A database cursor

A database cursor is an identifier associated with a group of rows. It is, in a sense, a pointer to the current row in a buffer.

You must use a cursor in the following cases:

- Statements that return more than one row of data from the database server:
 - A SELECT statement requires a select cursor.
 - An EXECUTE FUNCTION statement requires a function cursor.
- An INSERT statement that sends more than one row of data to the database server requires an insert cursor.

For more information about how to use cursors, see the *HCL® Informix® Guide to SQL: Tutorial*.

Receive more than one row

Statements that return one row of data include a singleton SELECT and an EXECUTE FUNCTION statement whose user-defined function returns only one row of data. Statements that can return more than one row of data include:

- A non-singleton SELECT.

When a SELECT statement returns more than one row, define a select cursor with the DECLARE statement.

- An EXECUTE FUNCTION statement whose user-defined function returns more than one row.

When an EXECUTE FUNCTION statement executes a user-defined function that returns more than one row, define a function cursor with the DECLARE statement.

For the select or function cursor, you can use a sequential, scroll, hold, or update cursor. The following table summarizes the SQL statements that manage a select or function cursor.

Table 72. SQL statements that manage a select or function cursor

Task	Select cursor	Function cursor
Declare the cursor identifier	DECLARE associated with a SELECT statement	DECLARE associated with an EXECUTE FUNCTION statement

Table 72. SQL statements that manage a select or function cursor (continued)

Task	Select cursor	Function cursor
Execute the statement	OPEN	OPEN
Access a single row from the fetch buffer into the program	FETCH	FETCH
Close the cursor	CLOSE	CLOSE
Free cursor resources	FREE	FREE

For more information about any of these statements, see their entries in the *HCL® Informix® Guide to SQL: Syntax*. You can change the size of the select or fetch buffer with the Fetch-Buffer-Size feature. For more information, see [Size the cursor buffer on page 410](#).

A select cursor

A select cursor enables you to scan multiple rows of data that a SELECT statement returns. The DECLARE statement associates the SELECT statement with the select cursor.

In the DECLARE statement, the SELECT statement can be in either of the following formats:

- A literal SELECT statement in the DECLARE statement

The following DECLARE statement associates a literal SELECT statement with the **slct1_curs** cursor:

```
EXEC SQL declare slct1_curs cursor for select * from customer;
```

- A prepared SELECT statement in the DECLARE statement

The following DECLARE statement associates a prepared SELECT statement with the **slct2_curs** cursor:

```
EXEC SQL prepare slct_stmt cursor from
    'select * from customer';
EXEC SQL declare slct2_curs for slct_stmt;
```

If the SELECT returns only one row, it is called a singleton SELECT and it does not require a select cursor to execute.

A function cursor

A function cursor enables you to scan multiple rows of data that the user-defined function returns.

The following user-defined functions can return more than one row:

- An SPL function that contains the WITH RESUME keywords in its RETURN statement

For information about how to write this type of SPL function, see the chapter on SPL in the *HCL® Informix® Guide to SQL: Tutorial*.

- An external function that is an iterator function

For information about how to write an iterator function, see the *HCL® Informix® DataBlade® API Programmer's Guide*.

You execute a user-defined function with the EXECUTE FUNCTION statement. The DECLARE statement associates the EXECUTE FUNCTION with the function cursor. In the DECLARE statement, the EXECUTE FUNCTION statement can be in either of the following formats:

- A literal EXECUTE FUNCTION statement in the DECLARE statement

The following DECLARE statement associates a literal EXECUTE FUNCTION statement with the **func1_curs** cursor:

```
EXEC SQL declare func1_curs cursor for execute function
      func1();
```

- A prepared EXECUTE FUNCTION statement in the DECLARE statement

The following DECLARE statement associates a prepared EXECUTE FUNCTION statement with the **func2_curs** cursor:

```
EXEC SQL prepare func_stmt from
      'execute function func1()';
EXEC SQL declare func2_curs cursor for func_stmt;
```

If the external or SPL function returns only one row, it does not require a function cursor to execute.

Send more than one row

When you execute the INSERT statement, the statement sends one row of data to the database server. When an INSERT statement sends more than one row, define an *insert cursor* with the DECLARE statement. An insert cursor enables you to buffer multiple rows of data for insertion at one time. The DECLARE statement associates the INSERT statement with the insert cursor. In the DECLARE statement, the INSERT statement can be in either of the following formats:

- A literal INSERT statement in the DECLARE statement

The following DECLARE statement associates a literal INSERT statement with the **ins1_curs** cursor:

```
EXEC SQL declare ins1_curs cursor for
      insert into customer values;
```

- A prepared INSERT statement in the DECLARE statement

The following DECLARE statement associates a prepared INSERT statement with the **ins2_curs** cursor:

```
EXEC SQL prepare ins_stmt from
      'insert into customer values!';
EXEC SQL declare ins2_curs cursor for ins_stmt;
```

If you use an insert cursor it can be much more efficient than if you insert rows one at a time, because the application process does not need to send new rows to the database as often. You can use a sequential or hold cursor for the insert cursor. The following table summarizes the SQL statements that manage an insert cursor.

Table 73. SQL statements that manage an insert cursor

Task	Insert cursor
Declare the cursor ID	DECLARE associated with an INSERT statement
Execute the statement	OPEN
Send a single row from the program into the insert buffer	PUT
Clear the insert buffer and send the contents to the database server	FLUSH
Close the cursor	CLOSE
Free cursor resources	FREE

For more information about any of these statements, see their entries in the *HCL® Informix® Guide to SQL: Syntax*. You can change the size of the insert buffer with the Fetch-Buffer-Size feature. For more information, see [Size the cursor buffer on page 410](#).

Name the cursor

In the IBM® Informix® ESQL/C program, you can specify a cursor name with any of the following items:

- A literal name must follow the rules for identifier names.
- A delimited identifier is an identifier name that contains characters that do not conform to identifier-naming rules.
- A dynamic cursor is a character host variable that contains the name of the cursor. This type of cursor specification means that the cursor name is specified dynamically by the value of the host variable. You can use a dynamic cursor in any SQL statement that allows a cursor name except the WHERE CURRENT OF clause of the DELETE or UPDATE statement.

Dynamic cursors are useful to create generic functions to perform cursor-management tasks. You can pass in the name of the cursor as an argument to the function. If the cursor name is to be used in the Informix® ESQL/C statement within the function, make sure that you declare the argument as a host variable with the PARAMETER keyword. The following code fragment shows a generic cursor deallocation function called `remove_curs()`.

```
void remove_curs(cursname)
EXEC SQL BEGIN DECLARE SECTION;
    PARAMETER char *cursname;
EXEC SQL END DECLARE SECTION;
{
    EXEC SQL close :cursname;
    EXEC SQL free :cursname;
}
```

Optimize cursor execution

IBM® Informix® ESQL/C supports the following features that allow you to minimize network traffic when the Informix® ESQL/C application fetches rows from a database server:

- Change the size of the fetch and insert buffers
- Automatically free the cursor
- Defer the PREPARE statement until the OPEN statement

Size the cursor buffer

The cursor buffer is the buffer that the IBM® Informix® ESQL/C application uses to hold the data (except simple large-object data) in a cursor.

Informix® ESQL/C has the following uses for the cursor buffer:

- The fetch buffer holds data from a select or function cursor.

When the database server returns rows from the active set of a query, Informix® ESQL/C stores these rows in the fetch buffer.

- The insert buffer holds data for an insert cursor.

Informix® ESQL/C stores the rows to be inserted in the insert buffer then sends this buffer as a whole to the database server for insertion.

With a fetch buffer, the client application performs the following tasks:

1. Sends the size of the buffer to the database server and requests rows when it executes the first FETCH statement.

The database server sends as many rows that can fit in the fetch buffer to the application.

2. Retrieves the rows from the database server and puts them in the fetch buffer.
3. Takes the first row out of the fetch buffer and puts the data in the host variables that the user has provided.

For subsequent FETCH statements, the application checks whether more rows exist in the fetch buffer. If they do, it takes the next row out of the fetch buffer. If no more rows are in the fetch buffer, the application requests more rows from the database server, sending the fetch-buffer size.

The client application uses an insert buffer to perform the following tasks:

1. Put the data from the first PUT statement into the insert buffer.
2. Check whether more room exists in the insert buffer for subsequent PUT statements.

If more rows can fit, the application puts the next row into the insert buffer. If no more rows can fit into the insert buffer, the application sends the contents of the insert buffer to the database server.

The application continues this procedure until no more rows are put into the insert buffer. It sends the contents of the insert buffer to the database server when:

- The insert buffer is full
- It executes the FLUSH statement on the insert cursor
- It executes the CLOSE statement on the insert cursor

Default buffer size

The client application sends the prepared statement that is associated with the cursor to the database server and requests DESCRIBE information about the statement. If the cursor has an associated prepared statement, IBM® Informix® ESQL/C makes this request when the PREPARE statement executes. If the cursor does not have an associated statement, Informix® ESQL/C makes the request when the DECLARE statement executes.

When it receives this request, the database server sends the DESCRIBE information about each column in the projection list to the application. With this information, Informix® ESQL/C can determine the size of a row of data. By default, Informix® ESQL/C sizes this cursor buffer to hold one row of data. It uses the following algorithm to determine the default size of the cursor buffer:

1. If one row fits in a 4096-byte buffer, the default buffer size is 4096 bytes (4 kilobytes).
2. If the size of one row exceeds 4096 bytes, the default buffer size is the size of that row.

Once it has the buffer size, Informix® ESQL/C allocates the cursor buffer.

Automatically freeing a cursor

When the IBM® Informix® ESQL/C application uses a cursor, it usually sends a FREE statement to the database server to deallocate memory assigned to a select cursor once it no longer needs that cursor. Execution of this statement involves a round trip of message requests between the application and the database server. The Automatic-FREE feature (AUTOFREE) reduces the number of round trips by one.

When the AUTOFREE feature is enabled, Informix® ESQL/C saves a round trip of message requests because it does not need to execute the FREE statement. When the database server closes a select cursor, it automatically frees the memory that it has allocated for it. Suppose you enable the AUTOFREE feature for the following select cursor:

```
/* Select cursor associated with a SELECT statement */
EXEC SQL declare sel_curs cursor for
  select * from customer;
```

When the database server closes the **sel_curs** cursor, it automatically performs the equivalent of the following FREE statement:

```
FREE sel_curs
```

If the cursor had an associated prepared statement, the database server also frees memory allocated to the prepared statement. Suppose you enable the AUTOFREE feature for the following select cursor:

```
/* Select cursor associated with a prepared statement */
EXEC SQL prepare sel_stmt 'select * from customer!';
EXEC SQL declare sel_curs2 cursor for sel_stmt;
```

When the database server closes the **sel_curs2** cursor, it automatically performs the equivalent of the following FREE statements:

```
FREE sel_curs2;
FREE sel_stmt
```

You must enable the AUTOFREE feature before you open or reopen the cursor.

Enable the AUTOFREE feature

You can enable the AUTOFREE feature for the IBM® Informix® ESQL/C application in either of the following ways:

- Set the **IFX_AUTOFREE** environment variable to **1**.

When you use the **IFX_AUTOFREE** environment variable to enable the AUTOFREE feature, you automatically free cursor memory when cursors in any thread of the program are closed.

- Execute the SQL statement, SET AUTOFREE.

With the SET AUTOFREE statement, you can enable the AUTOFREE feature for a particular cursor. You can also enable or disable the feature in a particular connection or thread.



Important: Be careful when you enable the AUTOFREE feature in legacy Informix® ESQL/C applications. If a legacy application uses the same cursor twice, it generates an error when it tries to open the cursor for the second time. When the AUTOFREE feature is enabled, the database server automatically frees the cursor when it closes it. Therefore, the cursor does not exist when the legacy application attempts to open it a second time, even though the application does not explicitly execute the FREE statement.

For more information about the **IFX_AUTOFREE** environment variable, see the *HCL® Informix® Guide to SQL: Reference*.

The SET AUTOFREE statement

You can use the SQL statement, SET AUTOFREE, to enable and disable the AUTOFREE feature.

The SET AUTOFREE statement allows you to take the following actions in the IBM® Informix® ESQL/C program:

- Enable the AUTOFREE feature for all cursors:

```
EXEC SQL set autofree;
EXEC SQL set autofree enabled;
```

These statements are equivalent because the default action of the SET AUTOFREE statement is to enable all cursors.

- Disable the AUTOFREE feature for all cursors:

```
EXEC SQL set autofree disabled;
```

- Enable the AUTOFREE feature for a specified cursor identifier or cursor variable:

```
EXEC SQL set autofree for cursor_id;
EXEC SQL set autofree for :cursor_var;
```

The SET AUTOFREE statement overrides any value of the **IFX_AUTOFREE** environment variable.

The following code fragment uses the FOR clause of the SET AUTOFREE statement to enable the AUTOFREE feature for the **curs1** cursor only. After the database server executes the CLOSE statement for **curs1**, it automatically frees the cursor and the prepared statement. The **curs2** cursor and its prepared statement are not automatically freed.


```

EXEC SQL BEGIN DECLARE SECTION;
    int a_value;
EXEC SQL END DECLARE SECTION;

EXEC SQL create database tst_autofree;
EXEC SQL connect to 'tst_autofree';
EXEC SQL create table tab1 (a_col int);
EXEC SQL insert into tab1 values (1);

/* Declare the curs1 cursor for the slct1 prepared
 * statement */
EXEC SQL prepare slct1 from 'select a_col from tab1';
EXEC SQL declare curs1 cursor for slct1;

/* Enable AUTOFREE for cursor curs1 */
EXEC SQL set autofree for curs1;

/* Open the curs1 cursor and fetch the contents */
EXEC SQL open curs1;
while (SQLCODE == 0)
    {
    EXEC SQL fetch curs1 into :a_value;
    printf("Value is: %d\n", a_value);
    }

/* Once the CLOSE completes, the curs1 cursor is freed and
 * cannot be used again. */
EXEC SQL close curs1;

/* Declare the curs2 cursor for the slct2 prepared
 * statement */
EXEC SQL prepare slct2 from 'select a_col from tab1';
EXEC SQL declare curs2 cursor for slct2;

/* Open the curs2 cursor and fetch the contents */
EXEC SQL open curs2;
while (SQLCODE == 0)
    {
    EXEC SQL fetch curs2 into :a_value;
    printf("Value is: %d\n", a_value);
    }

/* Once this CLOSE completes, the curs2 cursor is still
 * available for use. It has not been automatically freed. */
EXEC SQL close curs2;

/* You must explicitly free the curs2 cursor and slct2
 * prepared statement. */
EXEC SQL free curs2;
EXEC SQL free slct2;

```

When you use the AUTOFREE feature, make sure that you do not cause a prepared statement to become detached. This situation can occur if you declare more than one cursor on the same prepared statement. A prepared statement is associated or attached to the first cursor that specifies it in a DECLARE statement. If the AUTOFREE feature is enabled for

this cursor, then the database server frees the cursor and its associated prepared statement when it executes the CLOSE statement on the cursor.

A prepared statement becomes detached when either of the following events occur:

- If the prepared statement was not associated with any declared cursor
- If the cursor with the prepared statement was freed but the prepared statement was not.

This second condition can occur if the AUTOFREE feature is not enabled for a cursor and you free only the cursor, not the prepared statement. The prepared statement becomes detached. To reattach the prepared statement, declare a new cursor for the prepared statement. Once a prepared statement was freed, it cannot be used to declare any new cursor.

The following code fragment declares the following cursors on the **slct1** prepared statement:

- The **curs1** cursor, with which the **slct1** prepared statement is first associated
- The **curs2** cursor, which executes **slct1** but with which slct1 is not associated
- The **curs3** cursor, with which **slct1** is associated

The following code fragment shows how a detached prepared statement can occur:

```

/*****
 * Declare curs1 and curs2. The slct1 prepared statement is      *
 * associated curs1 because curs1 is declared first.           */
EXEC SQL prepare slct1 'select a_col from tabl';
EXEC SQL declare curs1 cursor for slct1;
EXEC SQL declare curs2 cursor for slct1;

/*****
 * Enable the AUTOFREE feature for curs2                       */
EXEC SQL set autofree for curs2;

/*****
 * Open the curs1 cursor and fetch the contents                 */
EXEC SQL open curs1;
{
  EXEC SQL fetch curs1 into :a_value;
  printf("Value is: %d\n", a_value);
}

EXEC SQL close curs1;

/* Because AUTOFREE is enabled only for the curs2 cursor, this *
 * CLOSE statement frees neither the curs1 cursor nor the slct1 *
 * prepared statement. The curs1 cursor is still defined so the *
 * slct1 prepared statement does not become detached.          *
 *****/

/*****
 * Open the curs2 cursor and fetch the contents                 */
EXEC SQL open curs2;
while (SQLCODE == 0)
{
  EXEC SQL fetch curs2 into :a_value;

```

```

printf("Value is: %d\n", a_value);
}

EXEC SQL close curs2;

/* This CLOSE statement frees the curs2 cursor but does not free *
 * slct1 prepared statement because the prepared statement is not*
 * associated with curs2.                                         *
*****/

/*****
 * Reopen the curs1 cursor. This open is possible because the *
 * AUTOFREE feature has not been enabled on curs1. Therefore, the*
 * database server did not automatically free curs1 when it closed it.*/
EXEC SQL open curs1;
while (SQLCODE == 0)
{
EXEC SQL fetch curs1 into :a_value;
printf("Value is: %d\n", a_value);
}

EXEC SQL close curs1;
EXEC SQL free curs1;

/* Explicitly freeing the curs1 cursor, with which the slct1 *
 * statement is associated, causes slct1 to become detached. It *
 * is no longer associated with a cursor.                         *
*****/

/*****
 * This DECLARE statement causes the slct1 prepared statement *
 * to become reassociated with a cursor. Therefore, the slct1 *
 * statement is no longer detached.                               */
EXEC SQL declare curs3 cursor for slct1;
EXEC SQL open curs3;

/* Enable the AUTOFREE feature for curs                          */
EXEC SQL set autofree for curs3;

/* Open the curs3 cursor and fetch the content                    */
EXEC SQL open curs3;
while (SQLCODE == 0)
{
EXEC SQL fetch curs3 into :a_value;
printf("Value is: %d\n", a_value);
}

EXEC SQL close curs3;

/* Because AUTOFREE is enabled for the curs3 cursor, this CLOSE*
 * statement frees the curs3 cursor and the slct1 PREPARE stmt.*
*****/

/*****
 * This DECLARE statement would generate a run time error *
 * because the slct1 prepared statement has been freed.      */

```

```
EXEC SQL declare x4 cursor for slct1;
/*****
```

For more information about the syntax and use of the SET AUTOFREE statement, see the *HCL® Informix® Guide to SQL: Syntax*.

Defer execution of the PREPARE statement

When the IBM® Informix® ESQL/C application uses a PREPARE/DECLARE/OPEN statement block to execute a cursor, each statement involves a round trip of message requests between the application and the database server. The Deferred-PREPARE feature reduces the number of round trips by one. When the Deferred-PREPARE feature is enabled, Informix® ESQL/C saves a round trip of message requests because it does not need to send a separate command to execute the PREPARE statement. Instead, the database server automatically executes the PREPARE statement when it receives the OPEN statement.

Suppose you enable the Deferred-PREPARE feature for the following select cursor:

```
/* Select cursor associated with a SELECT statement */
EXEC SQL prepare slct_stmt FOR
    'select * from customer';
EXEC SQL declare sel_curs cursor for slct_stmt;
EXEC SQL open sel_curs;
```

The Informix® ESQL/C application does not send the PREPARE statement to the database server when it encounters the PREPARE before the DECLARE statement. Instead, it sends the PREPARE and the OPEN to the database server together when it executes the OPEN statement.

You can use the Deferred-PREPARE feature in Informix® ESQL/C applications that contain dynamic SQL statements that use statement blocks of PREPARE, DECLARE, and OPEN to execute the following statements:

- SELECT statements (select cursors)
- EXECUTE FUNCTION statements (function cursors)
- INSERT statement (insert cursors)

For example, the Deferred-PREPARE feature reduces network round trips for the following select cursor:

```
/* Valid select cursor for Deferred-PREPARE optimization */
EXEC SQL prepare sel_stmt 'select * from customer';
EXEC SQL declare sel_curs cursor for sel_stmt;
EXEC SQL open sel_curs;
```

Restrictions on deferred-PREPARE

When you enable the deferred-PREPARE feature, the client application does not send PREPARE statements to the database server when it encounters them. The database server receives a description of the prepared statement when it executes the OPEN statement.

The database server generates an error if you execute a DESCRIBE statement on a prepared statement before the first OPEN of the cursor. The error occurs because the database server has not executed the PREPARE statement that the DESCRIBE

statement specifies. When the deferred-PREPARE feature is enabled, you must execute the DESCRIBE statement after the first OPEN of a cursor.



Important: The deferred-PREPARE feature eliminates execution of the PREPARE statement as a separate step.

Therefore, the application does not receive any error conditions that might exist in the prepared statement until after the initial OPEN.

Enable the deferred-PREPARE Feature

You can enable the Deferred-PREPARE feature for the IBM® Informix® ESQL/C application in either of the following ways:

- Set the **IFX_DEFERRED_PREPARE** environment variable to **1**.

When you use the **IFX_DEFERRED_PREPARE** environment variable to enable the Deferred-PREPARE feature, you automatically defer execution of the PREPARE statement until just before the OPEN statement executes for every PREPARE statement in any thread of the application.

The default value of the **IFX_DEFERRED_PREPARE** environment variable is **0**. If you set this environment variable from the shell, make sure that you set it before you start the Informix® ESQL/C application.

- Execute the SQL statement, SET DEFERRED_PREPARE.

With the SET DEFERRED_PREPARE statement, you can enable the Deferred-PREPARE feature for a particular PREPARE statement. You can also enable or disable the feature in a particular connection or thread.

For more information about the **IFX_DEFERRED_PREPARE** environment variable, see the *HCL® Informix® Guide to SQL: Reference*.

The SET DEFERRED_PREPARE statement

In the IBM® Informix® ESQL/C application you can use the SQL statement, SET DEFERRED_PREPARE, to enable and disable the Deferred-PREPARE feature.

The SET DEFERRED_PREPARE statement allows you to take the following actions in the Informix® ESQL/C program:

- Enable the Deferred-PREPARE feature:

```
EXEC SQL set deferred_prepare;
```

```
EXEC SQL set deferred_prepare enabled;
```

- Disable the Deferred-PREPARE feature:

```
EXEC SQL set deferred_prepare disabled;
```

The SET DEFERRED_PREPARE statement overrides any value of the **IFX_DEFERRED_PREPARE** environment variable.

The following code fragment shows how to enable the Deferred-PREPARE feature for the **ins_curs** insert cursor:

```

EXEC SQL BEGIN DECLARE SECTION;
    int a;
EXEC SQL END DECLARE SECTION;

EXEC SQL create database test;
EXEC SQL create table table_x (col1 integer);

/*****
 * Enable Deferred-Prepare feature
 *****/
EXEC SQL set deferred_prepare enabled;

/*****
 * Prepare an INSERT statement
 *****/
EXEC SQL prepare ins_stmt from
    'insert into table_x values(?)';

/*****
 * Declare the insert cursor for the
 * prepared INSERT.
 *****/
EXEC SQL declare ins_curs cursor for ins_stmt;

/*****
 * OPEN the insert cursor. Because the Deferred-PREPARE feature
 * is enabled, the PREPARE is executed at this time
 *****/
EXEC SQL open ins_curs;
a = 2;
while (a<100)
{
    EXEC SQL put ins_curs from :a;
    a++;
}

```

To execute a DESCRIBE statement on a prepared statement, you must execute the DESCRIBE after the initial OPEN statement for the cursor. In the following code fragment, the first DESCRIBE statement fails because it executes before the first OPEN statement on the cursor. The second DESCRIBE statement succeeds because it follows an OPEN statement.

```

EXEC SQL BEGIN DECLARE SECTION;
    int a, a_type;
EXEC SQL END DECLARE SECTION;
EXEC SQL allocate descriptor 'desc';
EXEC SQL create database test;
EXEC SQL create table table_x (col1 integer);

/*****
 * Enable Deferred-Prepare feature
 *****/
EXEC SQL set deferred_prepare enabled;

/*****
 * Prepare an INSERT statement
 *****/
EXEC SQL prepare ins_stmt from 'insert into table_x values (?)';

/*****

```

```

* The DESCRIBE results in an error, because the description of the
* statement is not determined until after the OPEN. The OPEN is what
* actually sends the PREPARE statement to the database server and
* requests a description for it.
*****/
EXEC SQL describe ins_stmt using sql descriptor 'desc'; /* fails */
if (SQLCODE)
    printf("DESCRIBE : SQLCODE is %d\n", SQLCODE);

/*****
* Now DECLARE a cursor for the PREPARE statement and OPEN it.
*****/
EXEC SQL declare ins_cursor cursor for ins_stmt;
EXEC SQL open ins_cursor;

/*****
* Now the DESCRIBE returns the information about the columns to the
* system-descriptor area.
*****/
EXEC SQL describe ins_stmt using sql descriptor 'desc'; /* succeeds */
if (SQLCODE)
    printf("DESCRIBE : SQLCODE is %d\n", SQLCODE);
a = 2;
a_type = SQLINT;
while (a<100)
{
    EXEC SQL set descriptor 'desc' values 1
        type = :a_type, data = :a;
    EXEC SQL put ins_curs using sql descriptor 'desc';
    a++;
}

```

The collect.ec program

The `collect.ec` example program illustrates the use of collection variables to access LIST, SET, and MULTISET columns. The SELECT statement is considered static because the columns that it accesses are determined when the program is written.

```

/*
**
** Sample use of collections in ESQL/C.
**
** Statically determined LIST, SET, and MULTISET collection types.
**
*/

#include <stdio.h>

static void print_collection(
const char *tag,
EXEC SQL BEGIN DECLARE SECTION;
parameter client collection c
EXEC SQL END DECLARE SECTION;
)
{
    EXEC SQL BEGIN DECLARE SECTION;
    int4 value;
    EXEC SQL END DECLARE SECTION;
}

```

```

mint item = 0;

EXEC SQL WHENEVER ERROR STOP;
printf("COLLECTION: %s\n", tag);
EXEC SQL DECLARE c_collection CURSOR FOR
    SELECT * FROM TABLE(:c);
EXEC SQL OPEN c_collection;
while (sqlca.sqlcode == 0)
{
    EXEC SQL FETCH c_collection INTO :value;
    if (sqlca.sqlcode != 0)
        break;
    printf("\tItem %d, value = %d\n", ++item, value);
}
EXEC SQL CLOSE c_collection;
EXEC SQL FREE c_collection;
}

mint main(int argc, char **argv)
{
    EXEC SQL BEGIN DECLARE SECTION;
    client collection list    (integer not null) lc1;
    client collection set     (integer not null) sc1;
    client collection multiset (integer not null) mc1;
    char *dbase = "stores7";
    mint seq;
    char *stmt1 =
        "INSERT INTO t_collections VALUES(0, "
        "'LIST{-1,0,-2,3,0,0,32767,249}', 'SET{-1,0,-2,3}', "
        "'MULTISET{-1,0,0,-2,3,0}') ";
    EXEC SQL END DECLARE SECTION;

    if (argc > 1)
        dbase = argv[1];
    EXEC SQL WHENEVER ERROR STOP;
    printf("Connect to %s\n", dbase);
    EXEC SQL connect to :dbase;

    EXEC SQL CREATE TEMP TABLE t_collections
    (
        seq serial not null,
        l1 list    (integer not null),
        s1 set     (integer not null),
        m1 multiset(integer not null)
    );
    EXEC SQL EXECUTE IMMEDIATE :stmt1;

    EXEC SQL ALLOCATE COLLECTION :lc1;
    EXEC SQL ALLOCATE COLLECTION :mc1;
    EXEC SQL ALLOCATE COLLECTION :sc1;

    EXEC SQL DECLARE c_collect CURSOR FOR
        SELECT seq, l1, s1, m1 FROM t_collections;
    EXEC SQL OPEN c_collect;

    EXEC SQL FETCH c_collect INTO :seq, :lc1, :sc1, :mc1;
    EXEC SQL CLOSE c_collect;
    EXEC SQL FREE c_collect;
}

```



```

print_collection("list/integer", lc1);
print_collection("set/integer", sc1);
print_collection("multiset/integer", mc1);

EXEC SQL DEALLOCATE COLLECTION :lc1;
EXEC SQL DEALLOCATE COLLECTION :mc1;
EXEC SQL DEALLOCATE COLLECTION :sc1;

puts("OK");
return 0;
}

```

Optimize OPEN, FETCH, and CLOSE

When the IBM® Informix® ESQL/C application uses DECLARE and OPEN statements to execute a cursor, each statement involves a round trip of message requests between the application and the database server. The optimize-OPEN-FETCH-CLOSE feature (OPTOFC) reduces the number of round trips by two, as follows:

- Informix® ESQL/C saves one round trip because it does not send the OPEN statement as a separate command.

When Informix® ESQL/C executes the OPEN statement, it does not open the cursor. Instead, it saves any input value that was supplied in the USING clause of the OPEN statement. When Informix® ESQL/C executes the initial FETCH statement, it sends this input value along with the FETCH statement. The database server opens the cursor and returns the first value in this cursor.

- Informix® ESQL/C saves a second round trip because it does not send the CLOSE statement as a separate command.

When the database server reaches the last value of an open cursor, it automatically closes the cursor after it sends the last value to the client application. Therefore, Informix® ESQL/C does not need to send the CLOSE statement to the database server.



Important: Informix® ESQL/C does not send the CLOSE statement to the database server. However, if you include the CLOSE statement, no error is generated.

Restrictions on OPTOFC

With the OPTOFC feature enabled, the following restrictions exist:

- You can only use the OPTOFC feature on select cursors whose SELECT statement was prepared. For example, the OPTOFC feature reduces network round trips for the following select cursor:

```

/* Valid select cursor for OPTOFC optimization */
EXEC SQL prepare sel_stmt 'select * from customer';
EXEC SQL declare sel_curs cursor for sel_stmt;

```

- The OPTOFC feature eliminates execution of the OPEN statement as a separate step. Therefore, any error conditions that opening the cursor might generate are not returned until after the initial FETCH.

- Static cursors are not freed when they are closed.

With the OPTOFC feature enabled, static or dynamic cursors are not freed when they are closed. Because IBM® Informix® ESQL/C does not actually send the CLOSE statement to the database server, a cursor is not implicitly freed. A subsequent OPEN and FETCH on a cursor actually opens the same cursor. Only at this time would the database server notice if the table was modified (if it was dropped, altered, or renamed), in which case it generates an error (-710).

With the OPTOFC feature disabled, a static cursor is freed when it is closed. When ESQL/C reaches a CLOSE statement for a static cursor, it actually sends a message to close the cursor and free memory associated with this cursor. However, dynamic cursors are not implicitly freed when they are closed.

- The GET DIAGNOSTICS statement does not work for SQL statements that are delayed on the way to the database server. For example, in the following sequence of SQL statements, GET DIAGNOSTICS returns 0, indicating success, even though the OPEN is delayed until the first fetch:

```
EXEC SQL declare curs1
EXEC SQL open curs1
EXEC SQL get diagnostic
EXEC SQL fetch curs1
```

Enable the OPTOFC Feature

The **OPTOFC** environment variable enables the OPTOFC feature.

You can assign the following values to the **OPTOFC** environment variable.

1

This value enables the OPTOFC feature. When you specify this value, you enable the OPTOFC feature for every cursor in every thread of the application.

0

This value disables the OPTOFC feature for all threads of the application.

The default value of the **OPTOFC** environment variable is **0**. If you set this environment variable from the shell, make sure that you set it before you start the ESQL/C application.

On UNIX™ operating systems, you can set **OPTOFC** in the application with the `putenv()` system call (as long as your system supports the `putenv()` function). For example, the following call to `putenv()` enables the OPTOFC feature:

```
putenv("OPTOFC=1");
```

In Windows™ environments, you can use the `ifx_putenv()` function.

With `putenv()` or `ifx_putenv()`, you can activate or deactivate the OPTOFC feature for each connection or within each thread. You must call the `putenv()` or `ifx_putenv()` function before you establish a connection.



Important: HCL Informix® utilities do not support the **IFX_AUTOFREE**, **OPTOFC**, and **IFX_DEFERRED_PREPARE** environment variables. Use these environment variables only with IBM® Informix® ESQL/C client applications.

Using OPTOFC and Deferred-PREPARE together

To achieve the most optimized number of messages between the client application and the database server, use the Optimize OPEN, FETCH, CLOSE feature, and the Deferred-PREPARE feature together.

However, keep in mind the following requirements when you use these two optimization features together:

- If syntax errors exist in the statement text, the database server does not return the error to the application until it executes the FETCH.

IBM® Informix® ESQL/C does not send the PREPARE, DECLARE, and OPEN statements to the database server until it executes the FETCH statement. Therefore, any errors that any of these statements generate are not available until the database server executes the FETCH statement.

- You must use a special case of the GET DESCRIPTOR statement to obtain DESCRIBE information for a prepared statement.

Typical use of the DESCRIBE statement is to execute it after the PREPARE to determine information about the prepared statement. However, with both the OPTOFC and Deferred-PREPARE features enabled, Informix® ESQL/C does not send the DESCRIBE statement to the database until it reaches the FETCH statement. To allow you to obtain information about the prepared statement, Informix® ESQL/C executes a statement similar to the SET DESCRIPTOR statement to obtain data type, length, and other system-descriptor fields for the prepared statement. You can then use the GET DESCRIPTOR statement after the FETCH to obtain this information.

Also, Informix® ESQL/C can only perform data conversions on the host variables in the GET DESCRIPTOR statement when the data types are built-in data types. For opaque data types and complex data types (collections and row types), the database server always returns the data to the client application in its native format. You can then perform data conversions on this data after the GET DESCRIPTOR statement.

For example, the database server returns data from an opaque-type column in its internal (binary) format. Therefore, your Informix® ESQL/C program must put column data into a **var binary** (or **fixed binary**) host variable when it executes the GET DESCRIPTOR statement. The **var binary** and **fixed binary** data types hold opaque-type data in its internal format. You cannot use an **lvarchar** host variable to hold the data, because Informix® ESQL/C cannot convert the opaque-type data from its internal format (which it receives from the database server) to its external (**lvarchar**) format.

- The FetArrSize feature does not work when both the Deferred-PREPARE and OPTOFC features are enabled. When these two features are enabled, Informix® ESQL/C does not know the size of a row until after the FETCH completes. By this time, it is too late for the fetch buffer to be adjusted with the FetArrSize value.

 **Tip:** To obtain the maximum optimization, use the OPTOFC, Deferred-PREPARE, and AUTOFREE features together.


SQL statements that are known at compile time

The simplest type of dynamic SQL to execute is one for which you know both of the following items:

- The structure of the SQL statement to be executed, including information like the statement type and the syntax of the statement
- The number and data types of any data that passes between the IBM® Informix® ESQL/C program and the database server

Execute non-SELECT statements

The term non-SELECT statement refers to any SQL statement that can be prepared, except SELECT and EXECUTE FUNCTION. This term includes the EXECUTE PROCEDURE statement.

 **Important:** The INSERT statement is an exception to the rules for non-SELECT statements. If the INSERT inserts a single row, use PREPARE and EXECUTE to execute it. However, if the INSERT is associated with an insert cursor, you must declare the insert cursor.

For a list of SQL statements that cannot be prepared, see the entry for the PREPARE statement in the *HCL® Informix® Guide to SQL: Syntax*.

You can execute a non-SELECT statement in the following ways:

- If the statement is to be executed more than once, use the PREPARE and EXECUTE statements.
- If the statement is to be executed only once, use the EXECUTE IMMEDIATE statement. This statement does have some restrictions on the statements it can execute.

The PREPARE and EXECUTE statements

The PREPARE and EXECUTE statements allow you to separate the execution of a non-SELECT statement into two steps:

1. PREPARE sends the statement string to the database server, which parses the statement and assigns it a statement identifier.
2. EXECUTE executes the prepared statement indicated by a statement identifier.

This two-step process is useful for statements that need to be executed more than once. You reduce the traffic between the client application and the database server when you parse the statement only once.

For example, you can write a general-purpose deletion program that works on any table. This program would take the following steps:

1. Prompt the user for the name of the table and the text of the WHERE clause and put the information into C variables such as **tablename** and **search_condition**. The **tablename** and **search_condition** variables do not need to be host variables because they do not appear in the actual SQL statement.
2. Create a text string by concatenating the following four components: DELETE FROM, **tablename**, WHERE, and **search_condition**. In this example, the string is in a host variable called **stmt_buf**:

```
sprintf(stmt_buf, "DELETE FROM %s WHERE %s",
        tablename, search_condition);
```

3. Prepare the entire statement. The following PREPARE statement operates on the string in **stmt_buf** and creates a statement identifier called **d_id**:

```
EXEC SQL prepare d_id from :stmt_buf;
```

4. Execute the statement. The following EXECUTE statement executes the DELETE:

```
EXEC SQL execute d_id;
```

5. If you do not need to execute the statement again, free the resources used by the statement identifier structure. This example would use the following FREE statement:

```
EXEC SQL free d_id;
```

If the non-SELECT statement contains input parameters, you must use the USING clause of the EXECUTE statement.

The EXECUTE statement is generally used to execute non-SELECT statements. You can use EXECUTE with the INTO clause for a SELECT or an EXECUTE FUNCTION statement as long as these statements return only one group of values (one row). However, do not use the EXECUTE statement for:

- An INSERT...VALUES statement that is associated with an insert cursor.
- An EXECUTE FUNCTION statement for a cursor function (a user-defined function that returns more than one group of values).

The EXECUTE IMMEDIATE statement

Rather than prepare the statement and then execute it, you can prepare and execute the statement in the same step with the EXECUTE IMMEDIATE statement. The EXECUTE IMMEDIATE statement also frees statement-identifier resources upon completion.

For example, for the DELETE statement used in the previous section, you can replace the PREPARE-EXECUTE statement sequence with the following statement:

```
EXEC SQL execute immediate :stmt_buf;
```

You cannot use EXECUTE IMMEDIATE if the statement string contains input parameters. The SQL statements also have restrictions that you can execute with EXECUTE IMMEDIATE.

Execute SELECT statements

You can execute a SELECT statement in the following two ways:

- If the SELECT statement returns only one row, use PREPARE and EXECUTE INTO. This type of SELECT is often called a singleton SELECT.
- If the SELECT statement returns more than one row, you must use cursor-management statements.

The PREPARE and EXECUTE INTO statements

The only prepared SELECT statement that you can execute with the EXECUTE statement is a singleton SELECT. Your IBM® Informix® ESQL/C program must take the following actions:

1. Declare host variables to receive the values that the database server returns.


For a prepared SELECT statement, these values are the select-list columns.

2. Assemble and prepare the statement.

A prepared SELECT statement can contain input parameters in the WHERE clause.

3. Execute the prepared selection with the EXECUTE...INTO statement, with the host variables after the INTO keyword.

If the SELECT statement contains input parameters, include the USING clause of EXECUTE.

 **Tip:** To execute a singleton SELECT, the EXECUTE...INTO statement is more efficient than using the DECLARE, OPEN, and FETCH statements.

With the INTO clause of the EXECUTE statement, you can still use the following features:

- You can associate indicator variables with the host variables that receive the select-list column values.


Use the INDICATOR keyword followed by the name of the indicator host variable, as follows:

```
EXEC SQL prepare sel1 from
  'select fname, lname from customer where customer_num = 123';
EXEC SQL execute sel1 into :fname INDICATOR :fname_ind,
  :lname INDICATOR :lname_ind;
```

- You can specify input parameter values.

Include the USING clause of EXECUTE, as follows:

```
EXEC SQL prepare sel2 from
  'select fname, lname from customer where customer_num = ?';
EXEC SQL execute sel2 into :fname, :lname using :cust_num;
```

 **Important:** When you use the EXECUTE INTO statement, make sure that the SELECT statement is a singleton SELECT. If the SELECT returns more than one row, you receive a runtime error. An error is also generated if you attempt to execute a prepared statement that was declared (with DECLARE).

You are not required to prepare a singleton SELECT. If you do not need the benefits of a prepared statement, you can embed a singleton SELECT statement directly in your Informix® ESQL/C program, as shown in the following example:

```
EXEC SQL select order_date from orders where order_num = 1004;
```

The following figure shows how to execute the `items_pct()` SPL function (which [Figure 84: Code for items_pct SPL function on page 492](#) shows). Because this function returns a single **decimal** value, the EXECUTE...INTO statement can execute it.

```
EXEC SQL prepare exfunc_id from
  'execute function items_pct(\"HSK\")';
EXEC SQL execute exfunc_id into :manuf_dec;
```

You can use host variables for routine arguments but not the routine name. For example, if the `manu_code` variable holds the value `"HSK"`, the following EXECUTE statement replaces the input parameter in the prepared statement to perform the same task as the EXECUTE in the preceding code fragment.

```
EXEC SQL prepare exfunc_id from
  'execute function items_pct(?)';
EXEC SQL execute exfunc_id into :manuf_dec using :manu_code;
```

If you do not know the number or data types of the select-list columns or function return values, you must use a dynamic-management structure instead of host variables with the EXECUTE...INTO statement. The dynamic-management structure defines the select-list columns at run time.

Declare a select cursor

To execute a SELECT statement that returns more than one row, you must declare a select cursor. The select cursor enables the IBM® Informix® ESQL/C application to handle multiple rows that a query returns.

Your Informix® ESQL/C program must take the following actions to use a select cursor:

1. Declare host variables to receive the values that the database server returns.

For a prepared SELECT statement, these values are the select-list columns. For a prepared EXECUTE FUNCTION statement, these values are the return values of the user-defined function.

2. Assemble and prepare the statement.

A prepared SELECT statement can contain input parameters in the WHERE clause. A prepared EXECUTE FUNCTION statement can contain input parameters as function arguments.

3. Declare the select cursor.

The DECLARE statement associates the prepared SELECT statement with the select cursor.

4. Execute the query.

The OPEN statement sends any input parameters that its USING clause specifies to the database server and tells the database server to execute the SELECT statement.

5. Retrieve the rows of values from the select cursor.

The FETCH statement retrieves one row of data that matches the query criteria.



Restriction: Do not use the INTO clause in both a SELECT statement that is associated with a cursor and in a FETCH statement that retrieves data from the cursor. The Informix® ESQL/C preprocessor or the executable program cannot generate an error for this condition. Using the INTO clause in both statements, however, can generate unexpected results.

The lvarptr.ec program

The `lvarptr.ec` example program, which follows, uses **lvarchar** pointers

```

/*
**
** Sample use of LVARCHAR to fetch collections in ESQL/C.
**
** Statically determined collection types.
**
*/

#include <stdio.h>

static void print_lvarchar_ptr(
const char *tag,
EXEC SQL BEGIN DECLARE SECTION;
parameter lvarchar **lv
EXEC SQL END DECLARE SECTION;
)
{
    char *data;

    data = ifx_var_getdata(lv);
    if (data == 0)
        data = "<<NO DATA>>";
    printf("%s: %s\n", tag, data);
}

static void process_stmt(char *stmt)
{
    EXEC SQL BEGIN DECLARE SECTION;
    lvarchar *lv1;
    lvarchar *lv2;
    lvarchar *lv3;
    mint seq;
    char *stmt1 = stmt;
    EXEC SQL END DECLARE SECTION;

    printf("SQL: %s\n", stmt);

    EXEC SQL WHENEVER ERROR STOP;
    EXEC SQL PREPARE p_collect FROM :stmt1;
    EXEC SQL DECLARE c_collect CURSOR FOR p_collect;
    EXEC SQL OPEN c_collect;

    ifx_var_flag(&lv1, 1);
    ifx_var_flag(&lv2, 1);
    ifx_var_flag(&lv3, 1);
}

```



```

while (sqlca.sqlcode == 0)
{
    EXEC SQL FETCH c_collect INTO :seq, :lv1, :lv2, :lv3;
    if (sqlca.sqlcode == 0)
    {
        printf("Sequence: %d\n", seq);
        print_lvarchar_ptr("LVARCHAR 1", &lv1);
        print_lvarchar_ptr("LVARCHAR 2", &lv2);
        print_lvarchar_ptr("LVARCHAR 3", &lv3);
        ifx_var_dealloc(&lv1);
        ifx_var_dealloc(&lv2);
        ifx_var_dealloc(&lv3);
    }
}

EXEC SQL CLOSE c_collect;
EXEC SQL FREE c_collect;
EXEC SQL FREE p_collect;
}

mint main(int argc, char **argv)
{
    EXEC SQL BEGIN DECLARE SECTION;
    char *dbase = "stores7";
    char *stmt1 =
        "INSERT INTO t_collections VALUES(0, "
        "'LIST{-1,0,-2,3,0,0,32767,249}', 'SET{-1,0,-2,3}', "
        "'MULTISET{-1,0,0,-2,3,0}');"
    char *data;
    EXEC SQL END DECLARE SECTION;

    if (argc > 1)
        dbase = argv[1];
    EXEC SQL WHENEVER ERROR STOP;
    printf("Connect to %s\n", dbase);
    EXEC SQL CONNECT TO :dbase;

    EXEC SQL CREATE TEMP TABLE t_collections
    (
        seq serial not null,
        l1 list (integer not null),
        s1 set (integer not null),
        m1 multiset(integer not null)
    );

    EXEC SQL EXECUTE IMMEDIATE :stmt1;
    EXEC SQL EXECUTE IMMEDIATE :stmt1;
    EXEC SQL EXECUTE IMMEDIATE :stmt1;

    process_stmt("SELECT seq, l1, s1, m1 FROM t_collections");

    puts("OK");
    return 0;
}

```

Execute user-defined routines in Informix®

In HCL Informix®, a user-defined routine is a collection of statements that performs a user-defined task. A procedure is a routine that can accept arguments but does not return any values. A function is a routine that can accept arguments and returns values.

The following table summarizes the SQL statements for user-defined routines.

Table 74. SQL statement for user-defined routines

Task	Procedure	Function
Create and register a routine	CREATE PROCEDURE	CREATE FUNCTION
Execute a routine	EXECUTE PROCEDURE	EXECUTE FUNCTION
Drop a routine	DROP PROCEDURE	DROP FUNCTION

For more information about these statements, see the *HCL® Informix® Guide to SQL: Syntax*.

HCL Informix® supports several languages for user-defined routines:

- External routines are written in external languages such as C.

An external function can return one value while an external procedure does not return a value. For information about how to write an external routine in C, see *HCL® Informix® User-Defined Routines and Data Types Developer's Guide*.

- SPL routines are written in Stored Procedure Language (SPL).

An SPL function can return one or more values while an SPL procedure does not return any values. For information about how to write a stored routine, see the *HCL® Informix® Guide to SQL: Tutorial*.



Tip: In earlier versions of HCL Informix® products, the term *stored procedure* was used for both SPL procedures and SPL functions. That is, a stored procedure can include the RETURN statement to return values. For compatibility with earlier products, HCL Informix® continues to support the execution of SPL functions with the EXECUTE PROCEDURE statement. However, for new SPL routines, it is recommended that you use EXECUTE PROCEDURE only for procedures and EXECUTE FUNCTION only for functions.

A user-defined routine can use input parameters for its arguments. However, it cannot use an input parameter for its routine name.

A user-defined procedure

If you know the name of the user-defined procedure (external or SPL) at compile time, execute the user-defined procedure with the EXECUTE PROCEDURE statement. The following EXECUTE PROCEDURE statement executes a user-defined procedure called `revise_stats()`:

```
EXEC SQL execute procedure revise_stats("customer");
```

For more information about the syntax of the EXECUTE PROCEDURE statement, see the *HCL® Informix® Guide to SQL: Syntax*.

If you do not know the name of the user-defined procedure until run time, you must dynamically execute the procedure. To dynamically execute a user-defined procedure, you can use:

- the PREPARE and EXECUTE statements
- the EXECUTE IMMEDIATE statement

A user-defined function

If you know the name of the user-defined function at compile time, execute the user-defined function (external or SPL) with the EXECUTE FUNCTION statement. In the INTO clause of EXECUTE FUNCTION, you list the host variables that hold the return value or values. The following EXECUTE FUNCTION statement executes a user-defined function called items_pct() (which [Figure 84: Code for items_pct SPL function on page 492](#) defines):

```
EXEC SQL execute function items_pct(\"HSK\")
into :manuf_percent;
```

If you do not know the name of the user-defined function until run time, you must dynamically execute the function. Dynamic execution of a user-defined function is a similar dynamic execution of a SELECT statement ([Handling an unknown select list on page 455](#)). Both the SELECT and the user-defined function return values to the IBM® Informix® ESQL/C program.

Execute a user-defined function with the EXECUTE FUNCTION statement. You can execute an EXECUTE FUNCTION statement in the following two ways:

- If the user-defined function returns only one row, use PREPARE and EXECUTE INTO to execute the EXECUTE FUNCTION statement. This type of user-defined function is often called a noncursor function.
- If the user-defined function returns more than one row, you must declare a function cursor to execute the EXECUTE FUNCTION statement.

This type of user-defined function is often called a cursor function. A cursor function that is written in SPL (an SPL function) has the WITH RESUME clause in its RETURN statement. A cursor function that is written in an external language such as C is an iterator function.



Tip: If you do not know the data type of the return value, you must use a dynamic-management structure to hold the value.

A noncursor function

You can use the PREPARE and EXECUTE statement to execute a user-defined *noncursor function*. A noncursor function returns only one row of values.

Your IBM® Informix® ESQL/C program must take the following actions:

1. Declare host variables to receive the values that the database server returns.

For a prepared EXECUTE FUNCTION statement, these values are the return values of the user-defined function.

2. Assemble and prepare the statement.

A prepared EXECUTE FUNCTION statement can contain input parameters as function arguments.

3. Execute the prepared user-defined function with the EXECUTE...INTO statement, with the host variables after the INTO keyword.

If the EXECUTE FUNCTION contains input parameters, include the USING clause of EXECUTE.



Important: To execute a noncursor function, EXECUTE...INTO is more efficient than the DECLARE, OPEN, and FETCH statements. However, you often do not know the number of returned rows. When you do not use a cursor to execute a cursor function that returns multiple rows, Informix® ESQL/C generates a runtime error. Therefore, it is a good practice to always associate a user-defined function with a cursor.

Most external functions can return only one row of data and only a single value. For example, the following code fragment executes an external function called `stnd_dev()`:

```
strcpy(func_name, "stnd_dev(ship_date)");
sprintf(exfunc_stmt, "%s %s %s",
        "execute function",
        func_name);
EXEC SQL prepare exfunc_id from :exfunc_stmt;
EXEC SQL execute exfunc_id into :ret_val;
```

To return more than one value, the external function must return a complex data type, such as a collection or a row type.

An SPL function can return one or more values. If the RETURN statement of the SPL function does not contain the WITH RESUME keywords, then the function returns only one row. To execute the SPL function dynamically, prepare the EXECUTE FUNCTION and execute it with the EXECUTE...INTO statement.

A function cursor

To execute an EXECUTE FUNCTION statement whose user-defined function returns more than one row, you must declare a *function cursor*. The function cursor enables the Informix® ESQL/C application to handle the multiple rows that a user-defined function returns.

Your Informix® ESQL/C program must take the following actions to use a function cursor:

1. Declare host variables to receive the values that the user-defined function returns.
2. Assemble and prepare the statement.

A prepared EXECUTE FUNCTION statement can contain input parameters as function arguments.

3. Declare the function cursor.

The DECLARE statement associates the prepared EXECUTE FUNCTION statement with the function cursor.

4. Execute the user-defined function.

The OPEN statement sends any input parameters that its USING clause specifies to the database server and tells the database server to execute the EXECUTE FUNCTION statement.

5. Retrieve the rows of values from the function cursor.

The FETCH statement retrieves one row of values that the user-defined function returns.

Only an external function that is an iterator function can return more than one row of data. For information about how to write an iterator function, see the *HCL® Informix® DataBlade® API Programmer's Guide*.

If the RETURN statement of the SPL function contains the WITH RESUME keywords, then the function can return more than one row. You must associate such an SPL function with a function cursor. To execute the SPL function dynamically, associate the EXECUTE FUNCTION statement with a cursor, use the OPEN statement to execute the function, and use the FETCH...INTO statement to retrieve the rows from the cursor into host variables.

Execute statements with input parameters

An input parameter is a placeholder in an SQL statement that indicates that the actual value is provided at run time. You cannot list a host-variable name in the text of a dynamic SQL statement because the database server knows nothing about variables declared in the application. Instead, you can indicate an input parameter with a question mark (?), which serves as a placeholder, anywhere within a statement where an expression is valid. You cannot use an input parameter to represent an identifier such as a database name, a table name, or a column name.

An SQL statement that contains input parameters is called a parameterized statement. For a parameterized SQL statement, your program must provide the following information to the database server about its input parameters:

- Your program must use a question mark (?) as a placeholder in the text of the statement to indicate where to expect an input parameter. For example, the following DELETE statement contains two input parameters:

```
EXEC SQL prepare dlt_stmt from
  'delete from orders where customer_num = ? \
  and order_date > ?';
```

The first input parameter is defined for the value of the **customer_num** column and the second for the value of the **order_date** column.


- Your program must specify the value for the input parameter when the statement executes with the USING clause. To execute the DELETE statement in the previous step, you can use the following statement:

```
EXEC SQL execute dlt_stmt using :cust_num, :ord_date;
```

The statement that you use to provide an input parameter with a value at run time depends on the type of SQL statement that you execute, as follows:

- For a non-SELECT statement (such as UPDATE, INSERT, DELETE, or EXECUTE PROCEDURE) with input parameters, the EXECUTE...USING statement executes the statement and provides input parameter values.
- For a SELECT statement associated with a cursor or for a cursor function (EXECUTE FUNCTION), the OPEN...USING statement executes the statement and provides input parameter values.
- For a singleton SELECT statement or for a noncursor function (EXECUTE FUNCTION), the EXECUTE...INTO...USING statement executes the statement and provides input parameter values.

When the statement executes, you can list host variables or literal values to substitute for each input parameter in the USING clause. The values must be compatible in number and data type with the associated input parameters. A host variable must also be large enough to hold the data.


 **Important:** To use host variables with the USING clause, you must know the number of parameters in the SQL statement and their data types. If you do not know the number and data types of the input parameters at run time, you must use a dynamic-management structure with the USING clause.

An EXECUTE USING statement

You can execute a parameterized non-SELECT statement (a non-SELECT that contains input parameters) with the EXECUTE...USING statement.

The following statements are parameterized non-SELECT statements:

- A DELETE or UPDATE statement with input parameters in the WHERE clause
- An UPDATE statement with input parameters in the SET clause
- An INSERT statement with input parameters in the VALUES clause
- An EXECUTE PROCEDURE statement with input parameters for its function arguments

 **Tip:** You cannot use an input parameter as the procedure name for a user-defined procedure.

For example, the following UPDATE statement requires two parameters in its WHERE clause:


```
EXEC SQL prepare upd_id from
'update orders set paid_date = NULL \
where order_date > ? and customer_num = ?';
```

The USING clause lists the names of the host variables that hold the parameter data. If the input parameter values are stored in **hvar1** and **hvar2**, your program can execute this UPDATE with the following statement:

```
EXEC SQL execute upd_id using :hvar1, :hvar2;
```

The following steps describe how to handle a parameterized UPDATE or DELETE statement when the type and number of parameters are known at compile time:

1. Declare a host variable for each input parameter that is in the prepared statement.
2. Assemble the character string for the statement, with a question mark (?) placeholder for each input parameter. Once you have assembled the string, prepare it. For more information about these steps, see [Assemble and prepare the SQL statement on page 400](#).
3. Assign a value to the host variable that is associated with each input parameter. (The application might obtain these values interactively.)
4. Execute the UPDATE or DELETE statement with the EXECUTE...USING statement. You must list the host variables that contain the input parameter values in the USING clause.
5. Optionally, use the FREE statement to release the resources that were allocated with the prepared statement.

 **Important:** If you do not know the number and data types of the input parameters in the prepared statement at compile time, do not use host variables with the USING clause. Instead, use a dynamic-management structure to specify input parameter values.


For more information about determining the number and types of input parameters, see [Determine unknown input parameters on page 456](#).

For more information about the USING clause, see the entry for EXECUTE in the *HCL® Informix® Guide to SQL: Syntax*.

An OPEN USING statement

You can execute the following statements with the OPEN...USING statement:

- A parameterized SELECT statement (a SELECT statement that contains input parameters in its WHERE clause) that returns one or more rows
- A parameterized EXECUTE FUNCTION statement (a cursor function that contains input parameters for its arguments)

 **Tip:** You cannot use an input parameter as the function name for a user-defined function.

For example, the following SELECT statement is a parameterized SELECT that requires two parameters in its WHERE clause:

```
EXEC SQL prepare slct_id from
  'select from orders where customer_num = ? and order_date > ?';
EXEC SQL declare slct_cursor cursor for slct_id;
```

If the **cust_num** and **ord_date** host variables contain the input parameter values, the following OPEN statement executes the SELECT with these input parameters:

```
EXEC SQL open slct_id using :cust_num, :ord_date;
```

Use the USING *host_var* clause only when you know, at compile time, the type and number of input parameters in the WHERE clause of the SELECT statement.

The demo2.ec sample program

The `demo2.ec` sample program shows how to handle a dynamic SELECT statement that has input parameters in its WHERE clause.

The `demo2.ec` program uses a host variable to hold the value of the input parameter for a SELECT statement. It also uses host variables to hold the column values that are returned from the database.

```

1. #include <stdio.h>
2. EXEC SQL define FNAME_LEN      15;
3. EXEC SQL define LNAME_LEN     15;
4. main()
5. {
6. EXEC SQL BEGIN DECLARE SECTION;
7.   char demoquery[80];
8.   char queryvalue[2];
9.   char fname[ FNAME_LEN + 1 ];
10.  char lname[ LNAME_LEN + 1 ];
11. EXEC SQL END DECLARE SECTION;
12.   printf("DEMO2 Sample ESQL program running.\n\n");
13.   EXEC SQL connect to'stores7';
14. /* The next three lines have hard-wired the query. This
15.  * information could have been entered from the terminal
16.  * and placed into the demoquery string
17.  */
18.   sprintf(demoquery, "%s %s",
19.           "select fname, lname from customer",
20.           "where lname > ? ");
21.   EXEC SQL prepare demo2id from :demoquery;

```

Lines 9 and 10

These lines declare a host variable (**fname**) for the parameter in the WHERE clause of the SELECT statement and declare host variables (**fname** and **lname**) for values that the SELECT statement returns.

Lines 14 - 21

These lines assemble the character string for the statement (in **demoquery**) and prepare it as the **demo2id** statement identifier. The question mark (?) indicates the input parameter in the WHERE clause. For more information about these steps, see [Assemble and prepare the SQL statement on page 400](#).

```

22. EXEC SQL declare demo2cursor cursor for demo2id;
23. /* The next line has hard-wired the value for the parameter.
24.  * This information could also have been entered from the
25.  * terminal
26.  * and placed into the queryvalue string.
27.  */
28.   sprintf(queryvalue, "C");
29.   EXEC SQL open demo2cursor using :queryvalue;
30.   for (;;)
31.   {
32.     EXEC SQL fetch demo2cursor into :fname, :lname;
33.     if (strncmp(SQLSTATE, "00", 2) != 0)
34.       break;
35.     /* Print out the returned values */

```



```

35.     printf("Column: fname\tValue: %s\n", fname);
36.     printf("Column: lname\tValue: %s\n", lname);
37.     printf("\n");
38.     }

```

Line 22

This line declares the **demo2cursor** cursor for the prepared statement identifier, **demo2id**. All non-singleton SELECT statements must have a declared cursor.

Lines 23 - 27

The **queryvalue** host variable is the input parameter for the SELECT statement. It contains the value `c`. In an interactive application, this value probably would be obtained from the user.

Line 28

The database server executes the SELECT statement when it opens the **demo2cursor** cursor. Because the WHERE clause of the SELECT statement contains input parameters (lines 20 and 21), the OPEN statement includes the USING clause to specify the input parameter value in **queryvalue**.

Lines 29 - 38

This **for** loop executes for each row fetched from the database. The FETCH statement (line 31) includes the INTO clause to specify the **fname** and **lname** host variables for the column values. After this FETCH statement executes, the column values are stored in these host variables.

```

39.     if (strncmp(SQLSTATE, "02", 2) != 0)
40.         printf("SQLSTATE after fetch is %s\n", SQLSTATE);
41.     EXEC SQL close demo2cursor;
42.     EXEC SQL free demo2cursor;
43.     EXEC SQL free demo2id;
44.     EXEC SQL disconnect current;
45.     printf("\nProgram Over.\n");
46. }

```

Lines 39 and 40

Outside the **for** loop, the program tests the SQLSTATE variable again so it can notify the user in the event of successful execution, a runtime error, or a warning (class code not equal to "02").

Line 41

After all the rows are fetched, the CLOSE statement closes the **demo2cursor** cursor.

Lines 42 and 43

These FREE statements release the resources allocated for the prepared statement (line 42) and the database cursor (line 43). Once a cursor or prepared statement has been freed, it cannot be used again in the program.

SQL statements that are not known at compile time

An SQL statement that is not known at compile time is usually one that the user enters in an interactive application.

When you write an interactive database-query application like DB-Access, you do not know in advance which databases, tables, or columns the user wants to access, or what conditions the user might apply in a WHERE clause. If the IBM® Informix® ESQL/C application interprets and runs SQL statements that the user enters, this application does not know what type of information is to be stored in host variables until after the user enters the statement at run time.

For example, if a program contains the following DELETE statement, you know the number of values and the data types that you receive, based on the affected columns:

```
DELETE FROM customer WHERE city = ? AND lname > ?
```

You can define host variables whose data types are compatible with the data they receive. However, suppose your program provides a prompt for the user such as:

```
Enter a DELETE statement for the stores7 database:
```

In this case, you do not know until run time either the name of the table on which the DELETE takes place or the columns that are listed in the WHERE clause. Therefore, you cannot declare the necessary host variables.

You can dynamically determine a prepared SQL statement and information about the tables and columns it accesses with the DESCRIBE statement and the dynamic-management structures.

Determine SQL statements

If you do not know until run time what SQL statement to execute, you can dynamically determine that statement with the DESCRIBE statement and use a dynamic-management structure to hold any values that the statement sends to or receives from the database server.

These topics contain the following information about how to dynamically determine an SQL statement:

- What dynamic-management structures exist and which SQL statements access them.
- How to use the DESCRIBE statement with a dynamic-management structure.

Dynamic-management structure

If you do not know the number or data types of values sent to or received from the database server, use a *dynamic-management structure*. A dynamic-management structure allows you to pass a variable-length list of data to the database server, or receive a variable-length list of data from it.

To execute dynamic SQL statements with unknown columns, you can use either of the following dynamic-management structures in your IBM® Informix® ESQL/C program:

- A system-descriptor area is a language-independent data structure that is the X/Open standard. You allocate and manipulate it with the SQL statements ALLOCATE DESCRIPTOR, GET DESCRIPTOR, SET DESCRIPTOR, and DEALLOCATE DESCRIPTOR.
- The **sqlda** structure is a C-language data structure that you manipulate with the same types of C-language statements that you would use to allocate and manipulate other C structures (areas that have the **struct** data type).

Because this method uses a C-language structure within SQL statements, it is language-dependent and does not conform to X/Open standards.

For a given dynamic SQL statement, the dynamic-management structure can hold any of the following information:

- The number of unknown columns in the statement
- For each unknown value, the data type and length, space for the data, and information about any associated indicator variable (its data type, length, and data)

The IBM® Informix® ESQL/C program can then use this information to determine a host variable of appropriate length and type to hold the value.

A system-descriptor area


A system-descriptor area is an area of memory declared by IBM® Informix® ESQL/C to hold data either returned from or sent by a prepared statement. It is the dynamic-management structure that conforms to the X/Open standards.

A system-descriptor area has two parts:

- A fixed-size portion is made up of the COUNT field. This field contains the number of columns described in the system-descriptor area.
- A variable-length portion contains an *item descriptor* for each value in the system-descriptor area. Each item descriptor is a fixed-size structure.

The following figure shows what a system-descriptor area looks like for two values.

Figure 81. Schematic that shows system-descriptor area for two values

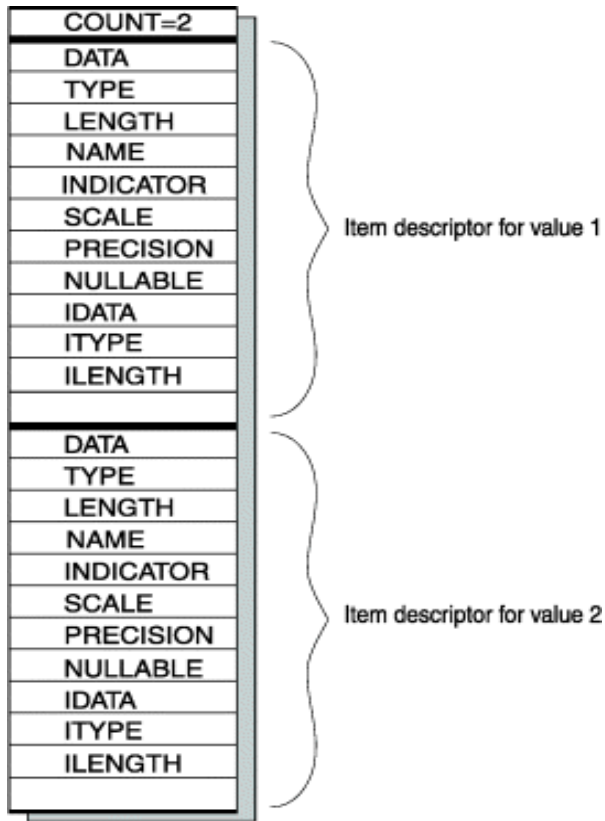

Fixed-length portion

The fixed-size portion of the system-descriptor area consists of the single field, which following table shows.

Table 75. Field in the fixed-size portion of a system-descriptor area

Field	Data type	Description
COUNT	short	The number of column values or occurrences in the system-descriptor area. This is the number of item descriptors, one for each column. The DESCRIBE...USING SQL DESCRIPTOR statement sets COUNT to the number of described columns. You must use SET DESCRIPTOR to initialize the field before you send column values to the database server.

An item descriptor

Each item descriptor in the system-descriptor area holds information about a data value that can be sent to or received from the database server.

Each item descriptor consists of the fields that the following table summarizes.

Table 76. Fields in each item descriptor of the system-descriptor area

Field	Data type	Description
DATA	char *	A pointer to the column data that is to be sent to or received from the database server.
TYPE	short	An integer that identifies the data type of the column that is being transferred. These values are defined in the <code>sqltypes.h</code> and <code>sqlxtype.h</code> header files (see Determine the data type of a column on page 452).
LENGTH	short	The length, in bytes, of CHAR type data, the encoded qualifiers of DATETIME or INTERVAL data, or the size of a DECIMAL or MONEY value.
NAME	char *	A pointer to the character array that contains the column name or display label that is being transferred.
INDICATOR	short	An indicator variable that can contain one of two values: <p style="margin-left: 40px;"><code>0</code></p> <p style="margin-left: 80px;">Requires the DATA field to contain non-null data.</p> <p style="margin-left: 40px;"><code>-1</code></p> <p style="margin-left: 80px;">Inserts a NULL when no DATA field value is specified.</p>
SCALE	short	Contains the scale of the column that is in the DATA field; defined <i>only</i> for the DECIMAL or MONEY data type.
PRECISION	short	Contains the precision of the column that is in the DATA field; defined <i>only</i> for the DECIMAL or MONEY data type.
NULLABLE	short	Specifies whether the column can contain a null value (after a DESCRIBE statement): <p style="margin-left: 40px;"><code>1</code></p> <p style="margin-left: 80px;">The column allows null values</p> <p style="margin-left: 40px;"><code>0</code></p> <p style="margin-left: 80px;">The column does not allow null values.</p> <p>Before an EXECUTE statement or a dynamic OPEN statement is executed, it must be set to <code>1</code> to indicate that an indicator value is specified in the INDICATOR field, and to <code>0</code> if it is not specified. (When you execute a dynamic FETCH statement, the NULLABLE field is ignored.)</p>

Table 76. Fields in each item descriptor of the system-descriptor area (continued)

Field	Data type	Description
IDATA	char *	User-defined indicator data or the name of a host variable that contains indicator data for the DATA field. The IDATA field is not a standard X/Open field.
ITYPE	short	The data type for a user-defined indicator variable. These values are defined in the <code>sqltypes.h</code> and <code>sqlxtype.h</code> header files. (See Determine the data type of a column on page 452 .) The ITYPE field is not a standard X/Open field.
ILENGTH	short	The length, in bytes, of the user-defined indicator. The ILENGTH field is not a standard X/Open field.
EXTYPEID	int4	The extended identifier for the user-defined (opaque or distinct) or complex (collection or row) data type. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the extended_id column of the sysxdtypes system catalog table.
EXTYPENAME	char *	The name of the user-defined (opaque or distinct) or complex (collection or row) data type. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the name column of the sysxdtypes system catalog table.
EXTYPELENGTH	short	The length, in bytes, of the string in the EXTYPENAME field.
EXTYPEOWNERNAME	char *	The name of the owner (for ANSI databases) of the user-defined (opaque or distinct) or complex (collection or row) data type. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the owner column of the sysxdtypes system catalog.
EXTYPEOWNERLENGTH	short	The length, in bytes, of the string in the EXTYPEOWNERNAME field.
SOURCETYPE	short	The data type constant (from <code>sqltypes.h</code>) of the source data type for a distinct-type column. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the type column of the sysxdtypes system catalog.
SOURCEID	int4	The extended identifier of the source data type for a distinct-type column. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the source column of the sysxdtypes system catalog.

An sqlda structure

The **sqlda** structure is a C structure (defined in the `sqlda.h` header file) that holds data returned from a prepared statement.

Each **sqlda** structure has three parts:

- A fixed-size portion is made up of the **sqld** field, which contains the number of columns described in the **sqlda** structure.
- A variable-length portion contains an **sqlvar_struct** structure for each column value. Each **sqlvar_struct** structure is a fixed-size structure.
- Descriptive information is included about the **sqlda** structure itself. For more information, see [Table 80: Descriptive fields in the sqlda structure on page 446](#).

The following figure shows what an **sqlda** structure looks like for two values.

Figure 82. Schematic that shows sqlda structure for two values

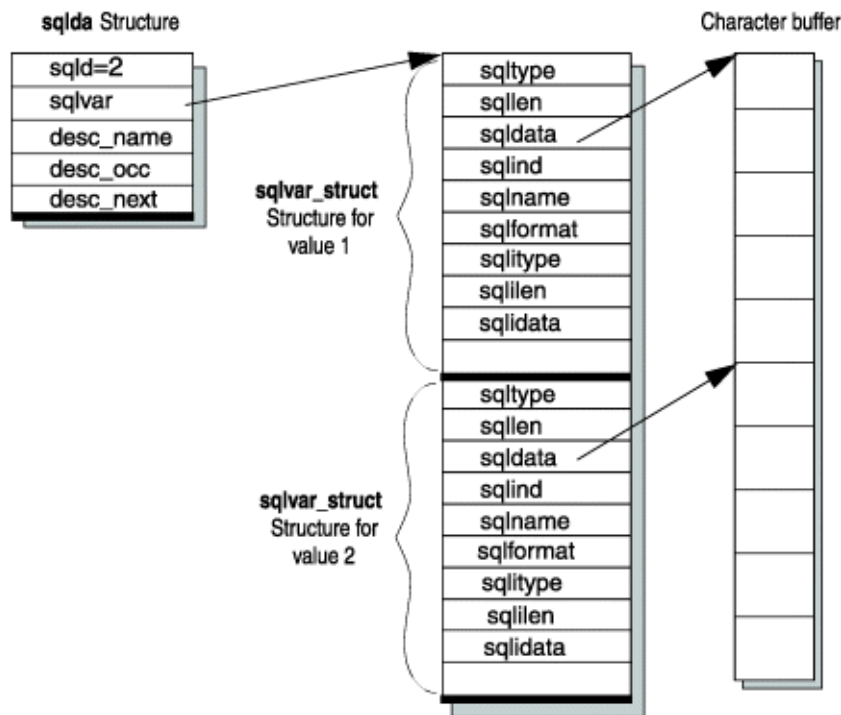


Figure 82: Schematic that shows **sqlda** structure for two values on page 443 shows the column data in the **sqldata** fields in a single data buffer. This data can also be stored in separate buffers.

Fixed-length portion

The following table describes the fixed-size portion of the **sqlda** structure, which consists of a single field.

Table 77. Field in the fixed-size portion of an **sqlda** structure

Field	Data type	Description
sqld	short	The number of column values or occurrences in the sqlda structure. This is the number of sqlvar_struct structures, one for each column. The DESCRIBE...INTO statement sets sqld to the number of described columns. You must set sqld to initialize the field before you send column values to the database server.

An sqlvar_struct structure

When all of its components are fully defined, the **sqlda** structure points to the initial address of a sequence of **sqlvar_struct** structures that contain the necessary information for each variable in the set. Each **sqlvar_struct** structure holds a data value that can be sent to or received from the database server. Your program accesses these **sqlvar_struct** structures through the **sqlvar** field of **sqlda**. [Table 78: Field to access the variable-sized portion of an sqlda structure on page 444](#) and [Table 79: Fields in the sqlvar_struct structure on page 444](#) summarize the variable-sized structure of **sqlda**.

Table 78. Field to access the variable-sized portion of an sqlda structure

Field	Data type	Description
sqlvar	struct sqlvar_struct *	A pointer to the variable-sized portion of an sqlda structure. There is one sqlvar_struct for each column value returned from or sent to the database server. The sqlvar field points to the first of the sqlvar_struct structures.

The following table shows the fields in the **sqlvar_struct** structure.

Table 79. Fields in the sqlvar_struct structure

Field	Data type	Description
sqltype	short	An integer that identifies the data type of the column that the database server sends or receives. These values are defined in the <code>sqltypes.h</code> and <code>sqlxtype.h</code> header files. (See Determine the data type of a column on page 452.)
sqllen	short	The length, in bytes, of CHAR type data, or the encoded qualifier of a DATETIME or INTERVAL value. What the length means depends on the type of information and how the sqlda is used: <ul style="list-style-type: none"> • When you retrieve the sqlda structure with a DESCRIBE statement, the value in the sqllen field is automatically set to the length of the space that is occupied by the data on disk. The value comes from the system catalog. • When you fetch data into buffers or send data through the buffers, you must set the value in the sqllen field to the size of the memory buffer that is used for the column.
sqldata	char *	A pointer to the column data that the database server sends or receives. (See Allocate memory for column data on page 524.)
sqlind	short *	A pointer to an indicator variable for the column that can contain one of two values: <p style="text-align: center;">0</p> <p style="text-align: center;">The sqldata field contains non-null data.</p>

Table 79. Fields in the `sqlvar_struct` structure (continued)

Field	Data type	Description
		-1 The <code>sqldata</code> field contains null data.
<code>sqlname</code>	<code>char *</code>	A pointer to a character array that contains the column name or display label that the database server sends or receives.
<code>sqlformat</code>	<code>char *</code>	Reserved for future use.
<code>sqltype</code>	<code>short</code>	An integer that specifies the data type of a user-defined indicator variable. These values are defined in the <code>sqltypes.h</code> and <code>sqlxtype.h</code> header files. (See Determine the data type of a column on page 452.)
<code>sqlilen</code>	<code>int4</code>	The length, in bytes, of a user-defined indicator variable.
<code>sqlidata</code>	<code>char *</code>	A pointer to the data of the user-defined indicator variable.
<code>sqlxid</code>	<code>int4</code>	The extended identifier for the user-defined (opaque or distinct) or complex (collection or row) data type. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the <code>extended_id</code> column of the <code>sysxdtypes</code> system catalog table.
<code>sqltypename</code>	<code>char *</code>	The name of the user-defined (opaque or distinct) or complex (collection or row) data type. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the <code>name</code> column of the <code>sysxdtypes</code> system catalog table.
<code>sqltypelen</code>	<code>short</code>	The length, in bytes, of the string in the <code>sqltypename</code> field.
<code>sqlownername</code>	<code>char *</code>	The name of the owner (for ANSI databases) of the user-defined (opaque or distinct) or complex (collection or row) data type. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the <code>owner</code> column of the <code>sysxdtypes</code> system catalog.
<code>sqlownerlen</code>	<code>short</code>	The length, in bytes, of the string in the <code>sqlownername</code> field.
<code>sqlsourcetype</code>	<code>short</code>	The data type constant (from <code>sqltypes.h</code>) of the source data type for a distinct-type column. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the <code>type</code> column of the <code>sysxdtypes</code> system catalog.
<code>sqlsourceid</code>	<code>int4</code>	The extended identifier of the source data type for a distinct-type column. See the <i>HCL® Informix® Guide to SQL: Reference</i> for a description of the <code>source</code> column of the <code>sysxdtypes</code> system catalog.
<code>sqlflags</code>	<code>int4</code>	This field is usually for internal use. However, if the <code>sqlda</code> structure has been initialized by a DESCRIBE statement you can determine if the column accepts nulls by using the <code>ISCOLUMNNULLABLE()</code> macro on this field. If it returns 1 then the column accepts nulls.

Table 79. Fields in the `sqlvar_struct` structure (continued)

Field	Data type	Description
The <code>ISCOLUMNNULLABLE()</code> macro is defined in <code>sqltypes.h</code> .		

Descriptive information

The following table summarizes the `sqlda` fields that describe the `sqlda` structure itself.

Table 80. Descriptive fields in the `sqlda` structure

Field	Data type	Description
<code>desc_name</code>	<code>char[19]</code>	The name of the descriptor; maximum of 18 characters
<code>desc_occ</code>	<code>short</code>	The size of the <code>sqlda</code> structure
<code>desc_next</code>	<code>struct sqlda *</code>	A pointer to the next <code>sqlda</code> structure

The DESCRIBE statement

The DESCRIBE statement obtains information about database columns or expressions in a prepared statement.

The DESCRIBE statement can put this information in one of the following dynamic-management structures:

- DESCRIBE...USING SQL DESCRIPTOR stores information in a system-descriptor area.

Each item descriptor describes a column. The COUNT field is set to the number of item descriptors (the number of columns in the column list). You can access this information with the GET DESCRIPTOR statement. For more information about the fields of a system-descriptor area, see [Figure 81: Schematic that shows system-descriptor area for two values on page 440](#) through [Table 76: Fields in each item descriptor of the system-descriptor area on page 441](#).

- DESCRIBE...INTO `sqlda_ptr` stores information in an `sqlda` structure whose address is stored in `sqlda_ptr`.

Each `sqlvar_struct` structure describes a column. The `sqlid` field is set to the number of `sqlvar_struct` structures (the number of columns in the column list). You can access this information through the fields in the `sqlvar_struct` structures. For more information about the fields of an `sqlda` structure, see [Figure 82: Schematic that shows `sqlda` structure for two values on page 443](#) through [Table 80: Descriptive fields in the `sqlda` structure on page 446](#).



Important: If the Deferred-PREPARE feature is enabled, you cannot use the DESCRIBE statement before an OPEN statement executes. For more information, see [Defer execution of the PREPARE statement on page 416](#).

If the DESCRIBE is successful, it obtains the following information about a prepared statement:

- The SQLCODE value indicates the type of statement that was prepared. For more information, see [Determine the statement type on page 447](#).
- A dynamic-management structure contains information about the number and data types of the columns in a column list of a SELECT, INSERT, or EXECUTE FUNCTION statement.

For information about the column descriptions returned by DESCRIBE, see [Handling an unknown select list on page 455](#) and [Handling an unknown column list on page 456](#) on [Handling an unknown select list on page 455](#) and [Handling an unknown column list on page 456](#). For information about the data type values returned by DESCRIBE, see [Determine the data type of a column on page 452](#).

- When the DESCRIBE statement describes a DELETE or UPDATE statement, it can indicate whether the statement includes a WHERE clause. For more information, see [Check for a WHERE clause on page 454](#).

For more information about the DESCRIBE statement, see its entry in the *HCL® Informix® Guide to SQL: Syntax*.

Determine the statement type

The `sqlstype.h` file contains the defined integer constants for the SQL statements that can be prepared. The DESCRIBE statement returns one of these values in the SQLCODE (`sqlca.sqlcode`) variable to identify a prepared statement. That is, SQLCODE indicates whether the statement was an INSERT, SELECT, CREATE TABLE, or any other SQL statement.

Within the IBM® Informix® ESQL/C program that uses dynamic SQL statements, you can use the constants that the following table shows to determine which SQL statement was prepared.

Table 81. The constants for SQL statement types that the `sqlstype.h` file defines

SQL statement	Defined <code>sqlstype.h</code> constant	Value
SELECT (no INTO TEMP clause)	None	0
DATABASE	SQ_DATABASE	1
	Reserved	2
SELECT INTO TEMP	SQ_SELINTO	3
UPDATE...WHERE	SQ_UPDATE	4
DELETE...WHERE	SQ_DELETE	5
INSERT	SQ_INSERT	6
UPDATE WHERE CURRENT OF	SQ_UPDCURR	7
DELETE WHERE CURRENT OF	SQ_DELCURR	8
	Reserved	9
LOCK TABLE	SQ_LOCK	10
UNLOCK TABLE	SQ_UNLOCK	11

Table 81. The constants for SQL statement types that the `sqlstype.h` file defines (continued)

SQL statement	Defined <code>sqlstype.h</code> constant	Value
CREATE DATABASE	SQ_CREADB	12
DROP DATABASE	SQ_DROPDB	13
CREATE TABLE	SQ_CREATAB	14
DROP TABLE	SQ_DRPTAB	15
CREATE INDEX	SQ_CREIDX	16
DROP INDEX	SQ_DRPIDX	17
GRANT	SQ_GRANT	18
REVOKE	SQ_REVOKE	19
RENAME TABLE	SQ_RENTAB	20
RENAME COLUMN	SQ_RENCOL	21
CREATE AUDIT	SQ_CREAUD	22
	Reserved	23-28
ALTER TABLE	SQ_ALTER	29
UPDATE STATISTICS	SQ_STATS	30
CLOSE DATABASE	SQ_CLSDB	31
DELETE (no WHERE clause)	SQ_DELALL	32
UPDATE (no WHERE clause)	SQ_UPDALL	33
BEGIN WORK	SQ_BEGWORK	34
COMMIT WORK	SQ_COMMIT	35
ROLLBACK WORK	SQ_ROLLBACK	36
	Reserved	37-39
CREATE VIEW	SQ_CREVIEW	40
DROP VIEW	SQ_DROPVIEW	41
	Reserved	42
CREATE SYNONYM	SQ_CREASYN	43
DROP SYNONYM	SQ_DROPSYN	44
CREATE TEMP TABLE	SQ_CTEMP	45
SET LOCK MODE	SQ_WAITFOR	46

Table 81. The constants for SQL statement types that the `sqlstype.h` file defines (continued)

SQL statement	Defined <code>sqlstype.h</code> constant	Value
ALTER INDEX	SQ_ALTIDX	47
SET ISOLATION, SET TRANSACTION	SQ_ISOLATE	48
SET LOG	SQ_SETLOG	49
SET EXPLAIN	SQ_EXPLAIN	50
CREATE SCHEMA	SQ_SCHEMA	51
SET OPTIMIZATION	SQ_OPTIM	52
CREATE PROCEDURE	SQ_CREPROC	53
DROP PROCEDURE	SQ_DRPPROC	54
SET CONSTRAINTS	SQ_CONSTRMODE	55
EXECUTE PROCEDURE, EXECUTE FUNCTION	SQ_EXECPROC	56
SET DEBUG FILE TO	SQ_DBGFILE	57
CREATE OPTICAL CLUSTER	SQ_CREOPCL	58
ALTER OPTICAL CLUSTER	SQ_ALTOPCL	59
DROP OPTICAL CLUSTER	SQ_DRPOPCL	60
RESERVE (Optical)	SQ_OPRESERVE	61
RELEASE (Optical)	SQ_OPRELEASE	62
SET MOUNTING TIMEOUT	SQ_OPTIMEOUT	63
UPDATE STATS...for procedure	SQ_PROCSTATS	64
	Reserved	65-69
CREATE TRIGGER	SQ_CRETRIG	70
DROP TRIGGER	SQ_DRPTRIG	71
	SQ_UNKNOWN	72
SET DATASKIP	SQ_SETDATASKIP	73
SET PDQPRIORITY	SQ_PDQPRIORITY	74
ALTER FRAGMENT	SQ_ALTFRAG	75
SET	SQ_SETOBJMODE	76
START VIOLATIONS TABLE	SQ_START	77
STOP VIOLATIONS TABLE	SQ_STOP	78

Table 81. The constants for SQL statement types that the `sqlstype.h` file defines (continued)


SQL statement	Defined <code>sqlstype.h</code> constant	Value
	Reserved	79
SET SESSION AUTHORIZATION	SQ_SETDAC	80
	Reserved	81-82
CREATE ROLE	SQ_CREATEROLE	83
DROP ROLE	SQ_DROPROLE	84
SET ROLE	SQ_SETROLE	85
	Reserved	86-89
CREATE ROW TYPE	SQ_CREANRT	90
DROP ROW TYPE	SQ_DROPNRT	91
CREATE DISTINCT TYPE	SQ_CREADT	92
CREATE CAST	SQ_CREACT	93
DROP CAST	SQ_DROPCT	94
DROP TYPE	SQ_DROPTYPE	96
	Reserved	97
CREATE ACCESS_METHOD	SQ_CREATEAM	98
DROP ACCESS_METHOD	SQ_DROPAM	99
	Reserved	100
CREATE OPCLASS	SQ_CREATEOPC	101
DROP OPCLASS	SQ_DROPOPC	102
SET (MEMORY/NON)_RESIDENT	SQ_SETRES	104
CREATE AGGREGATE	SQ_CREAGG	105
DROP AGGREGATE	SQ_DRPAGG	106
pload log file command	SQ_PLOADFILE	107
onutil check index command	SQ_CHKIDX	108
set schedule	SQ_SCHEDULE	109
"set environment..."	SQ_SETENV	110
	Reserved	111-114
SET STMT_CACHE	SQ_STMT_CACHE	115

Table 81. The constants for SQL statement types that the `sqlstype.h` file defines (continued)

SQL statement	Defined <code>sqlstype.h</code> constant	Value
RENAME INDEX	SQ_RENIDX	116
CREATE SEQUENCE	SQ_CRESEQ	124
DROP SEQUENCE	SQ_DRPSEQ	125
ALTER SEQUENCE	SQ_ALTERSEQ	126
RENAME SEQUENCE	SQ_RENSEQ	127
SET COLLATION	SQ_COLLATION	129
SET NO COLLATION	SQ_NOCOLLATION	130
SET ROLE DEFAULT	SQ_SETDEFROLE	131
SET ENCRYPTION	SQ_ENCRYPTION	132
save external directives	SQ_EXTD	133
CREATE XAdatasource TYPE	SQ_CRXASRCTYPE	134
CREATE XAdatasource	SQ_CRXADTSRC	135
DROP XAdatasource TYPE	SQ_DROPXATYPE	136
DROP XAdatasource	SQ_DROPXADTSRC	137
Truncate table	SQ_TRUNCATE	138
CREATE SECURITY LABEL COMPONENT	SQ_CRESECCMP	139
ALTER SECURITY LABEL COMPONENT	SQ_ALTSECCMP	140
DROP SECURITY LABEL COMPONENT	SQ_DRPSECCMP	141
RENAME SECURITY LABEL COMPONENT	SQ_RENSECCMP	142
CREATE SECURITY POLICY	SQ_CRESECPOL	143
DROP SECURITY POLICY	SQ_DRPSECPOL	144
RENAME SECURITY POLICY	SQ_RENSECPOL	145
CREATE SECURITY LABEL	SQ_CRESECLAB	146
DROP SECURITY LABEL	SQ_DRPSECLAB	147
RENAME SECURITY LABEL	SQ_RENSECLAB	148
GRANT DBSECADM	SQ_GRTSECADM	149
REVOKE DBSECADM	SQ_RVKSECADM	150
GRANT EXEMPTIONS	SQ_GRTSECEXMP	151

Table 81. The constants for SQL statement types that the `sqlstype.h` file defines (continued)

SQL statement	Defined <code>sqlstype.h</code> constant	Value
REVOKE EXEMPTIONS	SQ_RVKSECEXMP	152
GRANT SECURITY LABEL	SQ_GRTSECLAB	153
REVOKE SECURITY LABEL	SQ_RVKSECLAB	154
GRANT SETSESSIONAUTH	SQ_GRTSESAUTH	155
REVOKE SETSESSIONAUTH	SQ_RVKSESAUTH	156

 **Tip:** Check the `sqlstype.h` header file on your system for the most updated list of SQL statement-type values.

To determine the type of SQL statement that was prepared dynamically, your Informix® ESQL/C program must take the following actions:

- Use the **include** directive to include the `sqlstype.h` header file.
- Compare the value in the SQLCODE variable (**sqlca.sqlcode**) against the constants defined in the `sqlstype.h` file.

A sample program that executes an SPL function on page 492 uses the `SQ_EXECPROC` constant to verify that an EXECUTE FUNCTION statement has been prepared.

Determine the data type of a column

The DESCRIBE statement identifies the data type of a column with an integer value.


After DESCRIBE analyzes a prepared statement, it stores this value in a dynamic-management structure, as follows:

- In a system-descriptor area, in the TYPE field of the item descriptor for each column described
- In an **sqllda** structure, in the **sqltype** field of the **sqlvar_struct** structure for each column described

IBM® Informix® ESQL/C provides defined constants for these data types in the following two header files:

- The `sqltypes.h` header file contains defined constants for the SQL data types that are specific to Informix®. These values are the default that the DESCRIBE statement uses.
- The `sqlxtype.h` header file contains defined constants for the X/Open SQL data types. DESCRIBE uses these values when you compile your Informix® ESQL/C source file with the **-xopen** option of the preprocessor.

Use the SQL data type constants from `sqltypes.h` or `sqlxtype.h` to analyze the information returned by a DESCRIBE statement or to set the data type of a column before execution.

 **Tip:** When you set the data type of a column in a system-descriptor area, you assign a data type constant to the TYPE field (and optionally the ITYPE field) of an item descriptor with the SET DESCRIPTOR statement. When you set the



data type of a column in an **sqllda** structure, you assign a data type constant to the **sqltype** field (and optionally the **sqlitype** field) of an **sqlvar** structure.

SQL data types specific to Informix®

The SQL data types specific to HCL Informix® are available to a column in the Informix® database.

The *HCL® Informix® Guide to SQL: Reference* describes these data types. If you do not include the **-xopen** option when you compile your Informix® ESQL/C program, the DESCRIBE statement uses these data types to specify the data type of a column or the return value of a user-defined function. Constants for these Informix® SQL data types are defined in the Informix® ESQL/C `sqltypes.h` header file.

The following figure shows some of the SQL data type entries in `sqltypes.h`.

Figure 83. Some Informix® SQL data type constants

```
#define SQLCHAR      0
#define SQLSMINT     1
#define SQLINT       2
#define SQLFLOAT     3
#define SQLSMFLOAT   4
#define SQLDECIMAL   5
#define SQLSERIAL    6
#define SQLDATE      7
#define SQLMONEY     8
;
```

For a complete list of constants for SQL data types, see [Table 13: Constants for Informix SQL column data types on page 83](#). The integer values in [Figure 83: Some Informix SQL data type constants on page 453](#) are language-independent constants; they are the same in all HCL Informix® embedded products.

X/Open SQL data types

The X/Open standards support only a subset of the SQL data types that are specific to HCL Informix®. To conform to the X/Open standards, you must use the X/Open SQL data type constants.

The DESCRIBE statement uses these constants to specify the data type of a column (or a return value) when you compile your Informix® ESQL/C program with the **-xopen** option.

The X/Open data type constants are defined in the `sqlxtype.h` header file.

Constants for ESQL/C data types

The `sqltypes.h` header file contains defined constants for the IBM® Informix® ESQL/C data types.

The Informix® ESQL/C data types are assigned to host variables in the Informix® ESQL/C program. If your program initializes a column description, it usually obtains the column value from the Informix® ESQL/C host variable. To set the column data type for this value, the program must use the Informix® ESQL/C data types.

The following code fragment shows only some of the Informix® ESQL/C data type entries in the `sqltypes.h` header file. For a complete list of constants for Informix® ESQL/C data types, see [Table 13: Constants for Informix SQL column data types on page 83](#).

```
#define CCHARTYPE          100
#define CSHORTTYPE        101
#define CINTTYPE          102
#define CLONGTYPE         103
#define CFLOATTYPE        104
#define CDOUBLETYPE       105
...;
```

Within the Informix® ESQL/C program that uses dynamic SQL statements, you can use the constants that are shown in preceding code fragment to set the data types of the associated host variables. Use the Informix® ESQL/C data type constants to set the data types of host variables used as input parameters to a dynamically defined SQL statement or as storage for column values that are returned by the database server. [A sample program that executes a dynamic INSERT statement on page 496](#) stores a TEXT value into a database table.

Determine input parameters

You can use the DESCRIBE and DESCRIBE INPUT to return input parameter information for a prepared statement before it is executed.

The DESCRIBE INPUT statement returns the number, data types, size of the values, and the name of the column or expression that the query returns. The DESCRIBE INPUT statement can return parameter information for the following statements:

- INSERT using WHERE clause
- UPDATE using WHERE clause
- SELECT with IN, BETWEEN, HAVING, and ON clauses.
- SELECT subqueries
- SELECT INTO TEMP
- DELECT
- EXECUTE

Check for a WHERE clause

When DESCRIBE analyzes a prepared DELETE or UPDATE statement, it indicates if the statement includes a WHERE clause, as follows:

- It sets the `sqlca.sqlwarn.sqlwarn0` and `sqlca.sqlwarn.sqlwarn4` fields to `w` if the prepared statement was an UPDATE or DELETE without a WHERE clause.
- It sets the SQLSTATE variable to a warning value of `"01107"`, which is specific to HCL Informix®.

Your program can check for either of these conditions to determine the type of DELETE or UPDATE statement that was executed. If the DELETE or UPDATE does not contain a WHERE clause, the database server deletes or updates all rows in the table.

Determine statement information at run time

Consider a dynamic-management structure when you execute an SQL statement under the following conditions:

- Something is not known about the structure of an SQL statement:
 - The type of statement to execute is unknown.
 - The table name is unknown and therefore the columns to be accessed are unknown.
 - The WHERE clause is missing.
- Something is not known about the number or type of values that passes between the IBM® Informix® ESQL/C program and the database server:
 - The number and data types of columns in the select list of a SELECT or in a column list of an INSERT
 - The number and data types of input parameters in the statement are unknown
 - The number and data types of return values of a user-defined function (executed with the EXECUTE FUNCTION statement) are unknown

Handling an unknown select list


For a SELECT statement, the columns in the select list identify the column values that are received from the database server. In the SELECT statement described and illustrated in the `demo1.ec` example program (see [A sample Informix ESQL/C program on page 43](#)), the values returned from the query are placed into the host variables that are listed in an INTO *host_var* clause of the SELECT statement.

However, when your program creates a SELECT statement at run time, you cannot use an INTO clause because you do not know at compile time what host variables are needed. If the type and number of the values that your IBM® Informix® ESQL/C program receives are not known at compile time, your program must perform the following tasks:

1. Declare a dynamic-management structure to serve as storage for the select-list column definitions. This structure can be either a system-descriptor area or an **sqlda** structure.

Use of the system-descriptor area conforms to X/Open standards.

2. Use the DESCRIBE statement to examine the select list of the prepared SELECT statement and describes the columns.
3. Specify the dynamic-management structure as the location of the data fetched from the database. From the dynamic-management structure, the program can move the column values into host variables.

 **Important:** Use a dynamic-management structure only if you do not know the number and data types of the select-list columns at compile time.

For information about how to execute a SELECT if you do know the number and data types of select-list columns, see [Execute SELECT statements on page 425](#). For information about how to identify columns in the select list of a SELECT statement with a system-descriptor area, see [Handling an unknown select list on page 486](#). For more information about how to use an **sqlda** structure, see [Handling an unknown select list on page 529](#).


Handling an unknown column list

For an INSERT statement, the values in the VALUES clause identify the column values to be inserted into the new row. If the data types and number of the values that the IBM® Informix® ESQL/C program inserts are not known at compile time, you cannot simply use host variables to hold the data being inserted. Instead, your program must perform the following tasks:

1. Define a dynamic-management structure to serve as storage for the unknown column definitions. This structure can be either a system-descriptor area or an **sqlda** structure.

Use of the system-descriptor area conforms to X/Open standards.

2. Use the DESCRIBE statement to examine the column list of the prepared INSERT statement and describe the columns.
3. Specify the dynamic-management structure as the location of the data to be inserted when the INSERT statement executes.

 **Important:** Use a dynamic-management structure only if you do not know the number and data types of the column-list columns at compile time. For information about how to execute an INSERT if you do know the number and data types of column-list columns, see [Execute non-SELECT statements on page 424](#).

For information about how to identify columns in the VALUES column list of an INSERT statement with a system-descriptor area, see [Handling an unknown column list on page 496](#). To use an **sqlda** structure, see [Handling an unknown column list on page 538](#).

Determine unknown input parameters

If you know the data types and number of input parameters of an SQL statement, use the USING *host_var* clause (see [Execute statements with input parameters on page 433](#)). However, if you do not know the data types and number of these input parameters at compile time, you cannot use host variables to provide the parameter values; you do not have enough information about the parameters to declare the host variables.

Neither can you use the DESCRIBE statement to define the unknown parameters because DESCRIBE does not examine:

- A WHERE clause (for a SELECT, UPDATE, or DELETE statement)
- The arguments of a user-defined routine (for an EXECUTE FUNCTION or EXECUTE PROCEDURE statement)

Your IBM® Informix® ESQL/C program must follow these steps to define the input parameters in any of the preceding statements:

1. Determine the number and data types of the input parameters. Unless you write a general-purpose, interactive interpreter, you usually have this information. If you do not have it, you must write C code that analyzes the statement string and obtains the following information:
 - The number of input parameters [question marks (?)] that appear in the WHERE clause of the statement string or as arguments of a user-defined routine
 - The data type of each input parameter based on the column (for WHERE clauses) or parameter (for arguments) to which it corresponds
2. Store the definitions and values of the input parameters in a dynamic-management structure. This structure can be either a system-descriptor area or an **sqlda** structure.

Use of the system-descriptor area conforms to X/Open standards.

3. Specify the dynamic-management structure as the location of the input parameter values when the statement executes.



Important: Use a dynamic-management structure only if you do not know the number and data types of the input parameters at compile time. For information about how to execute a parameterized SQL statement if you do know the number and data types of column-list columns, see [Execute statements with input parameters on page 433](#).

For information about how to handle input parameters in the WHERE clause of a dynamic SELECT statement with a system-descriptor area, see [Handling a parameterized SELECT statement on page 500](#); to use an **sqlda** structure, see [Handling a parameterized SELECT statement on page 539](#). For information about how to handle input parameters as arguments of a user-defined function with a system-descriptor area, see [Handling a parameterized user-defined routine on page 505](#); to use an **sqlda** structure, see [Handling a parameterized user-defined routine on page 546](#). For information about how to handle input parameters in the WHERE clause of a dynamic UPDATE or DELETE statement with a system-descriptor area, see [Handling a parameterized UPDATE or DELETE statement on page 506](#); to use an **sqlda** structure, see [Handling a parameterized UPDATE or DELETE statement on page 547](#).

Determine return values dynamically

For an EXECUTE FUNCTION statement, the values in the INTO clause identify where to store the return values of a user-defined function. If the data types and number of the function return values are not known at compile time, you cannot use host variables in the INTO clause of EXECUTE FUNCTION to hold the values. Instead, your program must perform the following tasks:

1. Define a dynamic-management structure to serve as storage for the definitions of the value or values that the user-defined function returns.

You can use either a system-descriptor area or an **sqlda** structure to hold the return value or values.

Use of the system-descriptor area conforms to X/Open standards.

2. Use the DESCRIBE statement to examine the prepared EXECUTE FUNCTION statement and describe the return value or values.
3. Specify the dynamic-management structure as the location of the data returned by the user-defined function.

From the dynamic-management structure, the program can move the return values into host variables.



Important: Use a dynamic-management structure only if you do not know at compile time the number and data types of the return values that the user-defined function returns. If you know this information at compile time, see [Execute user-defined routines in Informix on page 430](#) for more information.

For information about how to use a system-descriptor area to hold function return values, see [Handling unknown return values on page 491](#). To use an **sqllda** structure to hold return values, see [Handling unknown return values on page 535](#).

Handling statements that contain user-defined data types

This section provides information about how to perform dynamic SQL on statements that contain columns with the following user-defined data types:

- Opaque data types: an encapsulated data type that the user can define
- Distinct data types: a data type that has the same internal storage representation as its source type, but has a different name

SQL statements with opaque-type columns

For dynamic execution of opaque-type columns, keep in mind the following items:

- You must ensure that the type and length fields of the dynamic-management structure (system-descriptor area or **sqllda** structure) match the data type of the data you insert into an opaque-type column.
- IBM® Informix® ESQL/C truncates opaque-type data at 32 kilobytes if the host variable is not large enough to hold the data.

Insert opaque-type data

When the DESCRIBE statement describes a prepared INSERT statement, it sets the type and length fields of a dynamic-management structure to the data type of the column.

The following table shows the type and length fields for the dynamic-management structures.

Table 82. Type and length fields of dynamic-management structures

Dynamic-management structure	Type field	Length field
system-descriptor area	TYPE field of an item descriptor	LENGTH field of an item descriptor
sqllda structure	sqltype field of an sqlvar_struct structure	sqllen field of an sqlvar_struct structure

If the INSERT statement contains a column whose data type is an opaque data type, the DESCRIBE statement identifies this column with one of the following type-field values:

- The SQLUDTFIXED constant for fixed-length opaque types
- The SQLUDTVAR constant for varying-length opaque types

These data type constants represent an opaque type in its internal format.

When you put opaque-type data into a dynamic-management structure, you must ensure that the type field and length field are compatible with the data type of the data that you provide for the INSERT, as follows:

- If you provide the opaque-type data in internal format, then the type and length fields that DESCRIBE sets are correct.
- If you provide the data in external format (or any format other than the internal format), you must change the type and length fields that DESCRIBE has set to be compatible with the data type of the data.

The input and output support functions for the opaque type are not on the client computer. Therefore, the client application cannot call them to convert the opaque-type data in the dynamic-management structure from its external to its internal format. To provide the opaque-type data in its external representation, set the type-field value to a character data type. When the database server receives the character data (the external representation of the opaque type), it calls the input support function to convert the external representation of the opaque type to its internal representation. If the data is some other type and valid support or casting functions exist, the database server can call these functions instead to convert the value.

For example, suppose you use a system-descriptor area to hold the insert values and you want to send the opaque-type data to the database server in its external representation. In the following code fragment, the SET DESCRIPTOR statement resets the TYPE field to SQLCHAR, so that the TYPE field matches the data type of the host variable (char) that it assigns to the DATA field:

```
EXEC SQL BEGIN DECLARE SECTION;
  char extrn_value[100];
  int extrn_length;
  int extrn_type;
EXEC SQL END DECLARE SECTION;
;

EXEC SQL allocate descriptor 'desc1' with max 100;
EXEC SQL prepare ins_stmt from
  'insert into tabl (opaque_col) values(?)';
EXEC SQL describe ins_stmt using sql descriptor 'desc1';

/* At this point the TYPE field of the item descriptor is
 * SQLUDTFIXED
 */

strcpy("(1, 2, 3, 4)", extrn_value);
extrn_length = stleng(extrn_value);
dtype = SQLCHAR;

/* This SET DESCRIPTOR statement assigns the external
 * representation of the data to the item descriptor and
 * resets the TYPE field to SQLCHAR.
```

```

*/
EXEC SQL set descriptor 'desc1' value 1
  data = :extrn_value, type = :extrn_type,
  length = :extrn_length;
EXEC SQL execute ins_stmt using sql descriptor 'desc1';

```

Truncation of opaque-type data

If you specify a host variable that is not large enough to hold the full return value from the server, IBM® Informix® ESQL/C normally truncates the data to fit the host variable and puts the actual length in an indicator variable.

This indicator variable can be one that you explicitly provide or, for dynamic SQL, one of the following fields of a dynamic-management structure.

Dynamic-management structure

Indicator field

system-descriptor area

INDICATOR field of an item descriptor

sqlda structure

sqlind field of an **sqlvar_struct** structure

However, these indicator fields are defined as a **short** integer and therefore can only store sizes up to 32 kilobytes.

This size limitation of the indicator field affects how Informix® ESQL/C handles truncation of opaque-type data that is larger than 32 KB. When Informix® ESQL/C receives opaque-type data that is larger than 32 KB and the host variable is not large enough to hold the opaque-type data, Informix® ESQL/C truncates the data to 32 KB. Informix® ESQL/C performs this truncation at 32 kilobytes even if you program a host variable that is larger than 32 KB (but still not large enough for the data).

SQL statements with distinct-type columns

For dynamic execution of distinct-type columns, the dynamic-management structures have been modified to hold the following information about a distinct type:

- The data type constant (from `sqltypes.h`) for the source type of the distinct-type column
- The extended identifier for the source type of the distinct-type column

These values are in the following fields of a dynamic-management structure.

Dynamic-management structure	Source-type field	Extended-identifier field
system-descriptor area	SOURCETYPE field of an item descriptor	SOURCEID field of an item descriptor
sqlda structure	sqlsourcetype field of an sqlvar_struct structure	sqlsourceid field of an sqlvar_struct structure

When the DESCRIBE statement describes a prepared statement, it stores information about columns of the statement in a dynamic-management structure. There is no special constant in the `sqltypes.h` file to indicate a distinct data type. Therefore, the type field of the dynamic-management structure cannot directly indicate a distinct type. (Table 82: [Type and length fields of dynamic-management structures on page 458](#) shows the type fields of the dynamic-management structures.)

Instead, the type field in the dynamic-management structure has a special value to indicate that a distinct bit is set for a distinct-type column. The type field indicates the source type of the distinct data combined with the distinct bit. The `sqltypes.h` header file provides the following data type constants and macros to identify the distinct bit for a distinct column.

Source type	Distinct-bit constant	Distinct-bit macro
LVARCHAR	SQLDLVARCHAR	ISDISTINCTLVARCHAR(<i>type_id</i>)
BOOLEAN	SQLDBOOLEAN	ISDISTINCTBOOLEAN(<i>type_id</i>)
Any other data type	SQLDISTINCT	ISDISTINCTTYPE(<i>type_id</i>)

Use the following algorithm to determine if a column is a distinct type:

```

if (one of the distinct bits is set)
{
/* Have a distinct type, now find the source type */
if (ISDISTINCTLVARCHAR(sqltype))
{
/* Is a distinct of LVARCHAR:
* type field = SQLUDTVAR + SQLDLVARCHAR
* source-type field = 0
* source-id field = extended identifier of lvarchar
*/
}
else if (ISDISTINCTBOOLEAN(sqltype))
{
/* Is a distinct of BOOLEAN
* type field = SQLUDTFIXED + SQLDBOOLEAN
* source-type field = 0
* source-id field = extended id of boolean
*/
}
else
{
/* SQLDISTINCT is set */
if (ISUDTTYPE(sqltype))
{
/* Source type is either a built-in simple type or an
* opaque data type
*/
if (source-id field > 0)
/* Is a distinct of an opaque type.
* Pick up the xtended identifier of the source type
* from the source-id field
*/
else
/* Is a distinct of a built-in simple type.

```

```

        * Pick up the type id of the source type from the
        * source-type field
        */
    }
else
    {
        /* Source type is a non-simple type, a complex type.
        * Both the source-type and source-id fields should be 0,
        * the source type is embedded in the type field:
        *   type = source type + SQLDISTINCT
        */
    }
}
}
}

```

The following table summarizes the pseudo-code of the preceding algorithm.

Source type	Type field	Source-type field	Extended-identifier field
Built-in data type	SQLUDTVAR + SQLDISTINCT	Data type constant of built-in data type	0
LVARCHAR	SQLUDTVAR + SQLDLVARCHAR	0	Extended identifier of LVARCHAR
BOOLEAN	SQLUDTFIXED + SQLDBOOLEAN	0	Extended identifier of BOOLEAN
All other data types	source type + SQLDISTINCT	0	0

A fetch array

A fetch array enables you to increase the number of rows that a single FETCH statement returns from the fetch buffer to an **sqllda** structure in your program. A fetch array is especially useful when you fetch simple-large-object (TEXT or BYTE) data.

A fetch of simple-large-object data without a fetch array requires the following two exchanges with the database server:

- When IBM® Informix® ESQL/C fetches a TEXT or BYTE column, the database server returns the descriptor for the column.
- Informix® ESQL/C then requests the database server to obtain the column data.

When you use a fetch array, Informix® ESQL/C sends a series of simple-large-object descriptors to the database server and the database server returns the corresponding column data all at one time.

Using a fetch array

About this task

To use a fetch array:

1. Declare an **sqllda** structure to hold the columns you want to fetch.

You cannot use host variables or system-descriptor areas in a FETCH statement to hold fetch arrays for columns. You must use an **sqllda** structure and the FETCH...USING DESCRIPTOR statement. For information about how to declare and use **sqllda** structures, see [An sqllda structure on page 442](#).

2. Use the DESCRIBE...INTO statement to initialize the **sqllda** structure and obtain information about the prepared query.

The DESCRIBE...INTO statement allocates memory for the **sqllda** structure and the **sqlvar_struct** structures.

3. For the **sqldata** field, allocate a buffer that is large enough to hold the fetch array for each column.

To allocate the memory for an **sqldata** field, you must set the **FetArrSize** global variable to the size of the fetch array for the associated column. For more information, see [Allocate memory for the fetch arrays on page 471](#).

4. Issue the FETCH...USING DESCRIPTOR statement to retrieve the column data into the fetch arrays.

The FETCH statement puts the retrieved rows into the **sqldata** fields of the **sqlvar_struct** structures in **sqllda**. Each FETCH statement returns into the **sqldata** fields the number of values specified by **FetArrSize**.

5. Obtain the column values from the fetch arrays of each **sqlvar_struct** structure.

You must obtain these values from the fetch arrays before you perform the next FETCH statement. You can check the **sqlca.sqlerrd[2]** field to determine the number of valid rows that the FETCH has returned. The value in **sqlerrd[2]** is equal to or smaller than the value you set in **FetArrSize**. For information about the **sqlerrd** array, see [Exception handling on page 276](#). For more information about obtaining the column values, see [Obtain values from fetch arrays on page 475](#).

6. Repeat steps 4 on page 463 and 5 on page 463 until all rows are fetched.

7. Free the memory that the **sqllda** structure uses.

As with other uses of the **sqllda** structure, IBM® Informix® ESQL/C does not release resources for this structure. Your application must free memory allocated to the **sqllda** structure when it no longer needs it. For more information, see [Free memory for a fetch array on page 477](#).

Results



Important: The **FetArrSize** feature does not work when both the Deferred-PREPARE and OPTOFC features are enabled. When these two features are enabled, Informix® ESQL/C does not know the size of a row until after the FETCH statement completes. By this time, it is too late for the fetch buffer to be adjusted with the **FetArrSize** value.

Sample fetch array program

The following sample program shows how to perform the steps in [Using a fetch array on page 462](#). It uses separate functions to initialize, print, and free the **sqllda** structure. These functions are described in the following sections.

```
#include <windows.h>
#include
#include
```

```

EXEC SQL include sqlda.h;
EXEC SQL include locator.h;
EXEC SQL include sqltypes.h;

#define BLOBSIZE 32275      /* using a predetermined length for blob */

EXEC SQL begin declare section;
    long blobsize;      /* finding the maximum blob size at runtime */
EXEC SQL end declare section;

/*****
* Function: init_sqlda()
* Purpose: With the sqlda pointer that was returned from the DESCRIBE
* statement, function allocates memory for the fetch arrays
* in the sqldata fields of each column. The function uses
* FetArrSize to determine the size to allocate.
* Returns: < 0 for error
* > 0 error with messagesize
*****/
int init_sqlda(struct sqlda *in_da, int print)
{
    int i, j,
    row_size=0,
    msglen=0,
    num_to_alloc;
    struct sqlvar_struct *col_ptr;
    ifx_loc_t *temp_loc;
    char *type;

    if (print)
    printf("columns: %d. \n", in_da->sqld);

    /* Step 1: determine row size */
    for (i = 0, col_ptr = in_da->sqlvar; i < in_da->sqld; i++, col_ptr++)
    {
        /* The msglen variable holds the sum of the column sizes in the
        * database; these are the sizes that DESCRIBE returns. This
        * sum is the amount of memory that ESQL/C needs to store
        * one row from the database. This value is <= row_size. */
        msglen += col_ptr->sqlen; /* get database sizes */

        /* calculate size for C data: string columns get extra byte added
        * to hold null terminator */
        col_ptr->sqlen = rtypmsize(col_ptr->sqltype, col_ptr->sqlen);

        /* The row_size variable holds the sum of the column sizes in
        * the client application; these are the sizes that rtypmsize()
        * returns. This sum is amount of memory that the client
        * application needs to store one row. */
        row_size += col_ptr->sqlen;
    }
    if(print)
        printf("Column %d size: %d\n", i+1, col_ptr->sqlen);
}

```

```

if (print)
{
printf("Total message size = %d\n", msglen);
printf("Total row size = %d\n", row_size);
}

EXEC SQL select max(length(cat_descr)) into :blobsize from catalog;

/* Step 2: set FetArrSize global variable to number of elements
 * in fetch array; this function calculates the FetArrSize
 * value that can fit into the existing fetch buffer.
 * If FetBufSize is not set (equals zero), the code assigns a
 * default size of 4096 bytes (4 kilobytes). Alternatively, you
 * could set FetArrSize to the number elements you wanted to
 * have and let ESQL/C size the fetch buffer. See the text in
 * "Allocating Memory for the Fetch Arrays" for more information.*/
if (FetArrSize <= 0) /* if FetArrSize not yet initialized */
{
if (FetBufSize == 0) /* if FetBufSize not set */
    FetBufSize = 4096; /* default FetBufSize */
FetArrSize = FetBufSize/msglen;
}
num_to_alloc = (FetArrSize == 0)? 1: FetArrSize;
if (print)
{
printf("Fetch Buffer Size %d\n", FetBufSize);
printf("Fetch Array Size: %d\n", FetArrSize);
}

/* set type in sqlvar_struct structure to corresponding C type */
for (i = 0, col_ptr = in_da->sqlvar; i < in_da->sqld; i++,
    col_ptr++)
{
switch(col_ptr->sqltype)
{
case SQLCHAR:
    type = "char ";
    col_ptr->sqltype = CCHARTYPE;
    break;
case SQLINT:
case SQLSERIAL:
    type = "int ";
    col_ptr->sqltype = CINTTYPE;
    break;
case SQLBYTES:
case SQLTEXT:
    if (col_ptr->sqltype == SQLBYTES)
        type = "blob ";
    else
        type = "text ";
    col_ptr->sqltype = CLOCATORTYPE;

/* Step 3 (TEXT & BLOB only): allocate memory for sqldata
 * that contains ifx_loc_t structures for TEXT or BYTE column */
temp_loc = (ifx_loc_t *)malloc(col_ptr->sqln * num_to_alloc);
if (!temp_loc)
{

```

```

fprintf(stderr, "blob sqldata malloc failed\n");
return(-1);
}
col_ptr->sqldata = (char *)temp_loc;

/* Step 4 (TEXT & BLOB only): initialize ifx_loc_t structures to
hold blob values in a user-defined buffer in memory */
byfill( (char *)temp_loc, col_ptr->sqlllen*num_to_alloc ,0);
for (j = 0; j< num_to_alloc; j++, temp_loc++)
{
/* blob data to go in memory */
temp_loc->loc_loctype = LOCMEMORY;

/* assume none of the blobs are larger than BLOBSIZE */
temp_loc->loc_bufsize = blobsize;
temp_loc->loc_buffer = (char *)malloc(blobsize+1);
if (!temp_loc->loc_buffer)
{
fprintf(stderr, "loc_buffer malloc failed\n");
return(-1);
}
temp_loc->loc_oflags = 0; /* clear flag */
} /* end for */
break;
default: /* all other data types */
fprintf(stderr, "not yet handled(%d)!\n", col_ptr->sqltype);
return(-1);
} /* switch */

/* Step 5: allocate memory for the indicator variable */
col_ptr->sqlind = (short *)malloc(sizeof(short) * num_to_alloc);
if (!col_ptr->sqlind)
{
printf("indicator malloc failed\n");
return -1;
}

/* Step 6 (other data types): allocate memory for sqldata. This
* function
* casts the pointer to this memory as a (char *). Subsequent
* accesses to the data would need to cast it back to the data
* type that corresponds to the column type. See the print_sqlda()
* function for an example of this casting. */
if (col_ptr->sqltype != CLOCATORATYPE)
{
col_ptr->sqldata = (char *) malloc(col_ptr->sqlllen *
num_to_alloc);
if (!col_ptr->sqldata)
{
printf("sqldata malloc failed\n");
return -1;
}
if (print)
printf("column %3d, type = %s(%3d), len=%d\n", i+1, type,
col_ptr->sqltype, col_ptr->sqlllen);
}
} /* end for */
return msglen;

```

```

}

/*****
* Function: print_sqlda
* Purpose: Prints contents of fetch arrays for each column that the
* sqlda structure contains. Current version only implements
* data types found in the blobtab table. Other data types
* would need to be implemented to make this function complete.
*****/
void print_sqlda(struct sqlda *sqlda, int count)
{
    void *data;
    int i, j;
    ifx_loc_t *temp_loc;
    struct sqlvar_struct *col_ptr;
    char *type;
    char buffer[512];
    int ind;
    char i1, i2;

    /* print number of columns (sqld) and number of fetch-array elements
    */
    printf("\nsqld: %d, fetch-array elements: %d.\n", sqlda->sqld,
count);

    /* Outer loop: loop through each element of a fetch array */
    for (j = 0; j < count; j++)
    {
        if (count > 1)
        {
            printf("record[%4d]:\n", j);
            printf("col | type | id | len | ind | rin | data ");
            printf("| value\n");
            printf("-----");
            printf("-----\n");
        }

        /* Inner loop: loop through each of the sqlvar_struct structures */
        for (i = 0, col_ptr = sqlda->sqlvar; i < sqlda->sqld; i++, col_ptr++)
        {
            data = col_ptr->sqldata + (j*col_ptr->sqlllen);
            switch (col_ptr->sqltype)
            {
                case CFIXCHARTYPE:
                case CCHARTYPE:
                    type = "char";
                    if (col_ptr->sqlllen > 40)
                        sprintf(buffer, " %39.39s<..", data);
                    else
                        sprintf(buffer, "%*.s", col_ptr->sqlllen,
col_ptr->sqlllen, data);
                    break;
                case CINTTYPE:
                    type = "int";
                    sprintf(buffer, " %d", *(int *) data);
                    break;
                case CLOCATORTYPE:
                    type = "byte";

```

```

        temp_loc = (ifx_loc_t *) (col_ptr->sqldata +
                                (j * sizeof(ifx_loc_t)));
        sprintf(buffer, " buf ptr: %p, buf sz: %d, blob sz: %d",
temp_loc->loc_buffer,
                temp_loc->loc_bufsize, temp_loc->loc_size);
        break;
        default:
        type = "?????";
        sprintf(buffer, " type not implemented: ",
                "can't print %d", col_ptr->sqltype);
        break;
} /* end switch */

i1 = (col_ptr->sqlind==NULL) ? 'X' :
      ((col_ptr->sqlind)[j] != 0) ? 'T' : 'F';
i2 = (risnull(col_ptr->sqltype, data)) ? 'T' : 'F';

printf("%3d | %-6.6s | %3d | %3d | %c | %c | ",
        i, type, col_ptr->sqltype, col_ptr->sqllen, i1, i2);
printf("%8p |%s\n", data, buffer);
} /* end for (i=0...) */
} /* end for (j=0...) */
}

/*****
* Function: free_sqlda
* Purpose: Frees memory used by sqlda. This memory includes:
* o loc_buffer memory (used by TEXT & BYTE)
* o sqldata memory
* o sqlda structure
*****/
void free_sqlda(struct sqlda *sqlda)
{
    int i,j, num_to_dealloc;
    struct sqlvar_struct *col_ptr;
    ifx_loc_t *temp_loc;

    for (i = 0, col_ptr = sqlda->sqlvar; i < sqlda->sqld; i++,
col_ptr++)
    {
        if ( col_ptr->sqltype == CLOCATORTYPE )
        {
            /* Free memory for blob buffer of each element in fetch array */
            num_to_dealloc = (FetArrSize == 0)? 1: FetArrSize;
            temp_loc = (ifx_loc_t *) col_ptr->sqldata;
            for (j = 0; j< num_to_dealloc; j++, temp_loc++)
            {
                free(temp_loc->loc_buffer);
            }
        }
    }
    /* Free memory for sqldata (contains fetch array) */
    free(col_ptr->sqldata);
}

/* Free memory for sqlda structure */
free(sqlda);

```



```

}

void main()
{
    int i = 0;
    int row_count, row_size;

    EXEC SQL begin declare section;
    char *db   = "stores7";
    char *uid  = "odbc";
    char *pwd  = "odbc";
    EXEC SQL end declare section;

    /*****
     * Step 1: declare an sqlda structure to hold the retrieved column
     * values
     *****/
    struct sqlda *da_ptr;

    EXEC SQL connect to :db user :uid using :pwd;
    if ( SQLCODE < 0 )
    {
        printf("CONNECT failed: %d\n", SQLCODE);
        exit(0);
    }

    /* Prepare the SELECT */
    EXEC SQL prepare selct_id from 'select catalog_num, cat_descr from
    catalog';
    if ( SQLCODE < 0 )
    {
        printf("prepare failed: %d\n", SQLCODE);
        exit(0);
    }

    /*****
     * Step 2: describe the prepared SELECT statement to allocate memory
     * for the sqlda structure and the sqlda.sqlvar structures
     * (DESCRIBE can allocate sqlda.sqlvar structures because
     * prepared statement is a SELECT)
     *****/
    EXEC SQL describe selct_id into da_ptr;
    if ( SQLCODE < 0 )
    {
        printf("describe failed: %d\n", SQLCODE);
        exit(0);
    }

    /*****
     * Step 3: initialize the sqlda structure to hold fetch arrays for
     * columns
     *****/
    row_size = init_sqlda(da_ptr, 1);

```

```

/* declare and open a cursor for the prepared SELECT */
EXEC SQL declare curs cursor for selct_id;
if ( SQLCODE < 0 )
{
printf("declare failed: %d\n", SQLCODE);
exit(0);
}
EXEC SQL open curs;
if ( SQLCODE < 0 )
{
printf("open failed: %d\n", SQLCODE);
exit(0);
}
while (1)
{
/*****
 * Step 4: perform fetch to get "FetArrSize" array of rows from
 * the database server into the sqlda structure
 *****/
EXEC SQL fetch curs using descriptor da_ptr;

/* Reached last set of matching rows? */
if ( SQLCODE == SQLNOTFOUND )
    break;

/*****
 * Step 5: obtain the values from the fetch arrays of the sqlda
 * structure; use sqlca.sqlerrd[2] to determine number
 * of array elements actually retrieved.
 *****/
printf("\n=====\n");
printf("FETCH %d\n", i++);
printf("=====");
print_sqlda(da_ptr, ((FetArrSize == 0) ? 1 : sqlca.sqlerrd[2]));

/*****
 * Step 6: repeat the FETCH until all rows have been fetched (SQLCODE
 * is SQLNOTFOUND
 *****/
}

/*****
 * Step 7: Free resources:
 * o statement id, selct_id
 * o select cursor, curs
 * o sqlda structure (with free_sqlda() function)
 * o delete sample table and its rows from database
 *****/

EXEC SQL free selct_id;
EXEC SQL close curs;
EXEC SQL free curs;
free_sqlda(da_ptr);
}

```

Allocate memory for the fetch arrays

The DESCRIBE...INTO statement allocates memory for the **sqllda** structure and its **sqlvar_struct** structures. However, it does not allocate memory for the **sqldata** field of the **sqlvar_struct** structures. The **sqldata** field holds the fetch array for a retrieved column. Therefore, you must allocate sufficient memory to each **sqldata** field to hold the elements of the fetch array.

A new global variable, **FetArrSize**, indicates the number of rows to be returned per FETCH statement. This variable is defined as a C language short integer data type. It has a default value of zero, which disables the fetch array feature. You can set **FetArrSize** to any integer value in the following range:

```
0 <= FetArrSize <= MAXSMINT
```

The MAXSMINT value is the maximum amount of the data type that IBM® Informix® ESQL/C can retrieve. Its value is 32767 bytes (32 KB). If the size of the fetch array is greater than MAXSMINT, Informix® ESQL/C automatically reduces its size to 32 KB.

You can use the following calculation to determine the appropriate size of the fetch array:

```
(fetch-array size) = (fetch-buffer size) / (row size)
```

The preceding equation uses the following information:

fetch-array size

The size of the fetch array, which the **FetArrSize** global variable indicates

fetch-buffer size

The size of the fetch buffer, which the **FetBufSize** and **BigFetBufSize** global variables indicate. For information about the size of the fetch buffer, see [Optimize cursor execution on page 409](#).

row size

The size of the row to be fetched. To determine the size of the row to be fetched, call the `rtpmsize()` function for each column of the row. This function returns the number of bytes that are needed to store the data type.

For more information about the `rtpmsize()` function, see [Informix ESQL/C data types on page 79](#).

However, if you set **FetArrSize** so that the following relationship is true,

```
(FetArrSize * row size) > FetBufSize
```

Informix® ESQL/C automatically adjusts the size of the fetch buffer (**FetBufSize**) as follows to hold the size of the fetch array:

```
FetBufSize = FetArrSize * row size
```

If the result is greater than 32 KB (MAXSMINT), Informix® ESQL/C sets **FetBufSize** to 32 KB and **FetArrSize** as follows:

```
FetArrSize = MAXSMINT / (row size)
```



Important: The **FetArrSize** global variable can be used in thread-safe Informix® ESQL/C applications.

Allocating memory for a fetch array

About this task

To allocate memory for a fetch array:

1. Determine the size of the row that you are retrieving from the database.
2. Determine the size of the fetch array and set the **FetArrSize** global variable to this value.
3. For each simple-large-object column (TEXT or BYTE), allocate a fetch array of **ifx_loc_t** structures.
4. For each simple-large-object column (TEXT or BYTE), initialize the **ifx_loc_t** data structures as follows.
 - a. Set the **loc_loctype** field to LOCMEMORY.
 - b. Set the **loc_buffer** field to the address of the buffer you allocated in step 3 on page 472.
 - c. Set the **loc_bufsize** field to the size of the buffer you allocated.

Alternatively, you can set **loc_bufsize** to **-1** to have IBM® Informix® ESQL/C automatically allocate memory for the simple-large-object columns. For more information about how to initialize a **ifx_loc_t** structure to retrieve simple large objects in memory, see [Select a simple large object into memory on page 144](#).

5. Allocate memory for the indicator variable.
6. For all other columns, allocate a fetch array that holds the data type of that column.

Example

The following example code illustrates how you would allocate memory for fetch arrays for the following prepared query:

```
SELECT * from blobtab;
```

The function is called `init_sqlda()`:

```

/*****
* Function: init_sqlda()
* Purpose: With the sqlda pointer that was returned from the DESCRIBE
* statement, function allocates memory for the fetch arrays
* in the sqldata fields of each column. The function uses
* FetArrSize to determine the size to allocate.
* Returns: < 0 for error
* > 0 error with messagesize
*****/
int init_sqlda(struct sqlda *in_da, int print)
{
    int i, j,
    row_size=0,
    msglen=0,
    num_to_alloc;
    struct sqlvar_struct *col_ptr;
    ifx_loc_t *temp_loc;
    char *type;

```

```

    if (print)
printf("columns: %d. \n", in_da->sqld);

    /* Step 1: determine row size */
    for (i = 0, col_ptr = in_da->sqlvar; i < in_da->sqld; i++,
        col_ptr++)
    {
/* The msglen variable holds the sum of the column sizes in the
 * database; these are the sizes that DESCRIBE returns. This
 * sum is the amount of memory that ESQL/C needs to store
 * one row from the database. This value is <= row_size. */
msglen += col_ptr->sqlen; /* get database sizes */

/* calculate size for C data: string columns get extra byte added
 * to hold null terminator */
col_ptr->sqlen = rtypmsize(col_ptr->sqltype, col_ptr->sqlen);

/* The row_size variable holds the sum of the column sizes in
 * the client application; these are the sizes that rtypmsize()
 * returns. This sum is amount of memory that the client
 * application needs to store one row. */
row_size += col_ptr->sqlen;
if(print)
    printf("Column %d size: %d\n", i+1, col_ptr->sqlen);
    }

    if (print)
    {
printf("Total message size = %d\n", msglen);
printf("Total row size = %d\n", row_size);
    }

EXEC SQL select max(length(cat_descr)) into :blobsize from catalog;

/* Step 2: set FetArrSize global variable to number of elements
 * in fetch array; this function calculates the FetArrSize
 * value that can fit into the existing fetch buffer.
 * If FetBufSize is not set (equals zero), the code assigns a
 * default size of 4096 bytes (4 kilobytes). Alternatively, you
 * could set FetArrSize to the number elements you wanted to
 * have and let ESQL/C size the fetch buffer. See the text in
 * "Allocating Memory for the Fetch Arrays" for more information.*/
if (FetArrSize <= 0) /* if FetArrSize not yet initialized */
{
if (FetBufSize == 0) /* if FetBufSize not set */
    FetBufSize = 4096; /* default FetBufSize */
FetArrSize = FetBufSize/msglen;
}
num_to_alloc = (FetArrSize == 0)? 1: FetArrSize;
if (print)
{
printf("Fetch Buffer Size %d\n", FetBufSize);
printf("Fetch Array Size: %d\n", FetArrSize);
}

/* set type in sqlvar_struct structure to corresponding C type */

```

```

for (i = 0, col_ptr = in_da->sqlvar; i < in_da->sqld; i++,
col_ptr++)
{
switch(col_ptr->sqltype)
{
case SQLCHAR:
type = "char ";
col_ptr->sqltype = CCHARTYPE;
break;
case SQLINT:
case SQLSERIAL:
type = "int ";
col_ptr->sqltype = CINTTYPE;
break;
case SQLBYTES:
case SQLTEXT:
if (col_ptr->sqltype == SQLBYTES)
type = "blob ";
else
type = "text ";
col_ptr->sqltype = CLOCATORTYPE;

/* Step 3 (TEXT & BLOB only): allocate memory for sqldata
* that contains ifx_loc_t structures for TEXT or BYTE column */
temp_loc = (ifx_loc_t *)malloc(col_ptr->sqlen * num_to_alloc);
if (!temp_loc)
{
fprintf(stderr, "blob sqldata malloc failed\n");
return(-1);
}
col_ptr->sqldata = (char *)temp_loc;

/* Step 4 (TEXT & BLOB only): initialize ifx_loc_t structures to
hold blob values in a user-defined buffer in memory */
byfill( (char *)temp_loc, col_ptr->sqlen*num_to_alloc ,0);
for (j = 0; j< num_to_alloc; j++, temp_loc++)
{
/* blob data to go in memory */
temp_loc->loc_loctype = LOCMEMORY;

/* assume none of the blobs are larger than BLOBSIZE */
temp_loc->loc_bufsize = blobsize;
temp_loc->loc_buffer = (char *)malloc(blobsize+1);
if (!temp_loc->loc_buffer)
{
fprintf(stderr, "loc_buffer malloc failed\n");
return(-1);
}
temp_loc->loc_oflags = 0; /* clear flag */
} /* end for */
break;
default: /* all other data types */
fprintf(stderr, "not yet handled(%d)!\n", col_ptr->sqltype);
return(-1);
} /* switch */

/* Step 5: allocate memory for the indicator variable */
col_ptr->sqlind = (short *)malloc(sizeof(short) * num_to_alloc);

```

```

if (!col_ptr->sqlind)
{
    printf("indicator malloc failed\n");
    return -1;
}

/* Step 6 (other data types): allocate memory for sqldata. This function
 * casts the pointer to this memory as a (char *). Subsequent
 * accesses to the data would need to cast it back to the data
 * type that corresponds to the column type. See the print_sqllda()
 * function for an example of this casting. */
if (col_ptr->sqltype != CLOCATORATYPE)
{
    col_ptr->sqldata = (char *) malloc(col_ptr->sqllen *
num_to_alloc);
    if (!col_ptr->sqldata)
    {
        printf("sqldata malloc failed\n");
        return -1;
    }
    if (print)
        printf("column %3d, type = %s(%3d), len=%d\n", i+1, type,
            col_ptr->sqltype, col_ptr->sqllen);
}
} /* end for */
return msglen;
}

```

For more information about how to allocate memory for the **sqldata** field, see [Allocate memory for the sqllda structure on page 521](#).

Obtain values from fetch arrays

Each FETCH attempts to return **FetArrSize** number of values into the **sqldata** fields of the **sqlvar_struct** structures of the **sqllda** structure. You can check the **sqlca.sqlerrd[2]** value to determine the actual number of rows that the FETCH did return.

Each fetch array holds the values for one column of the query. To obtain a row of values, you must access the element at the same index of each the fetch arrays. For example, to obtain the first row of values, access the first element of each of the fetch arrays.

The sample program calls the `print_sqllda()` function to obtain values from the fetch arrays for the following prepared query:

```

SELECT * from blobtab

/*****
 * Function: print_sqllda
 * Purpose: Prints contents of fetch arrays for each column that the
 * sqllda structure contains. Current version only implements
 * data types found in the blobtab table. Other data types
 * would need to me implemented to make this function complete.
 *****/
void print_sqllda(struct sqllda *sqllda, int count)
{
    void *data;
    int i, j;

```

```

ifx_loc_t *temp_loc;
struct sqlvar_struct *col_ptr;
char *type;
char buffer[512];
int ind;
char i1, i2;

/* print number of columns (sqld) and number of fetch-array elements
*/
printf("\nsqld: %d, fetch-array elements: %d.\n", sqlda->sqld,
count);

/* Outer loop: loop through each element of a fetch array */
for (j = 0; j < count; j++)
{
if (count > 1)
{
printf("record[%4d]:\n", j);
printf("col | type | id | len | ind | rin | data ");
printf("| value\n");
printf("-----");
printf("-----\n");
}
}

/* Inner loop: loop through each of the sqlvar_struct structures */
for (i = 0, col_ptr = sqlda->sqlvar; i < sqlda->sqld; i++, col_ptr++)
{
data = col_ptr->sqldata + (j*col_ptr->sqllen);
switch (col_ptr->sqltype)
{
case CFIXCHARTYPE:
case CCHARTYPE:
type = "char";
if (col_ptr->sqllen > 40)
sprintf(buffer, "%39.39s<..", data);
else
sprintf(buffer, "%*.*s", col_ptr->sqllen,
col_ptr->sqllen, data);
break;
case CINTTYPE:
type = "int";
sprintf(buffer, "%d", *(int *) data);
break;
case CLOCATORTYPE:
type = "byte";
temp_loc = (ifx_loc_t *) (col_ptr->sqldata +
(j * sizeof(ifx_loc_t)));
sprintf(buffer, " buf ptr: %p, buf sz: %d, blob sz: %d",
temp_loc->loc_buffer,
temp_loc->loc_bufsize, temp_loc->loc_size);
break;
default:
type = "?????";
sprintf(buffer, " type not implemented: ",
"can't print %d", col_ptr->sqltype);
break;
} /* end switch */
}

```



```

i1 = (col_ptr->sqlind==NULL) ? 'X' :
      ((col_ptr->sqlind)[j] != 0) ? 'T' : 'F';
i2 = (risnull(col_ptr->sqltype, data)) ? 'T' : 'F';

printf("%3d | %-6.6s | %3d | %3d | %c | %c | ",
       i, type, col_ptr->sqltype, col_ptr->sqllen, i1, i2);
printf("%8p |%s\n", data, buffer);
} /* end for (i=0...) */
} /* end for (j=0...) */
}

```

Free memory for a fetch array

IBM® Informix® ESQL/C does not release resources for the **sqllda** structure. When your application no longer needs the **sqllda** structure, it must free all memory that it uses.

The sample program calls the **free_sqllda()** function to free the memory that the **sqllda** structure uses.

```

/*****
* Function: free_sqllda
* Purpose: Frees memory used by sqllda. This memory includes:
* o loc_buffer memory (used by TEXT & BYTE)
* o sqldata memory
* o sqllda structure
*****/
void free_sqllda(struct sqllda *sqllda)
{
    int i,j, num_to_dealloc;
    struct sqlvar_struct *col_ptr;
    ifx_loc_t *temp_loc;

    for (i = 0, col_ptr = sqllda->sqlvar; i < sqllda->sqld; i++,
         col_ptr++)
    {
        if ( col_ptr->sqltype == CLOCATORATYPE )
        {
            /* Free memory for blob buffer of each element in fetch array */
            num_to_dealloc = (FetArrSize == 0)? 1: FetArrSize;
            temp_loc = (ifx_loc_t *) col_ptr->sqldata;
            for (j = 0; j < num_to_dealloc; j++, temp_loc++)
            {
                free(temp_loc->loc_buffer);
            }
        }
        /* Free memory for sqldata (contains fetch array) */
        free(col_ptr->sqldata);
    }

    /* Free memory for sqllda structure */
    free(sqllda);
}

```

A system-descriptor area

A system-descriptor area is a dynamic-management structure that can hold data that a prepared statement either returns from or sends to the database server. A system-descriptor area conforms to X/Open standards.

These topics contain the following information about how to use a system-descriptor area:

- Managing a system-descriptor area for dynamic SQL
- Using a system-descriptor area to handle unknown values in dynamic SQL statements

The end of this section presents an annotated example program called **dyn_sql** that uses a system-descriptor area to process a SELECT statement entered at run time.

Manage a system-descriptor area

Your IBM® Informix® ESQL/C program can manipulate a system-descriptor area with the SQL statements that the following tables summarize.

Table 83. SQL statements that can be used to manipulate a system-descriptor area

SQL statement	Purpose	See
ALLOCATE DESCRIPTOR	Allocates memory for a system-descriptor area	Allocate memory for a system-descriptor area on page 480
DESCRIBE...USING SQL DESCRIPTOR	Initializes the system-descriptor area with information about column-list columns	Initialize the system-descriptor area on page 480
GET DESCRIPTOR	Obtains information from the fields of the system-descriptor area	Assign and obtain values from a system-descriptor area on page 482
SET DESCRIPTOR	Places information into a system-descriptor area for the database server to access	Assign and obtain values from a system-descriptor area on page 482

Table 84. SQL statements that can be used to manipulate a system-descriptor area: SELECT and EXECUTE FUNCTION statements that use cursors

SQL statement	Purpose	See
OPEN...USING SQL DESCRIPTOR	Takes any input parameters from the specified system-descriptor area	Specify input parameter values on page 484
FETCH...USING SQL DESCRIPTOR	Puts the contents of the row into the system-descriptor area	Put column values into a system-descriptor area on page 484

Table 85. SQL statements that can be used to manipulate a system-descriptor area: SELECT and EXECUTE FUNCTION statements that return only one row

SQL statement	Purpose	See
EXECUTE...INTO SQL DESCRIPTOR	Puts the contents of the singleton row into the system-descriptor area	Put column values into a system-descriptor area on page 484

Table 86. SQL statements that can be used to manipulate a system-descriptor area: non-SELECT statements:

SQL statement	Purpose	See
EXECUTE...USING SQL DESCRIPTOR	Takes any input parameters from the specified system-descriptor area	Specify input parameter values on page 484

Table 87. SQL statements that can be used to manipulate a system-descriptor area: an INSERT statement that uses an insert cursor:

SQL statement	Purpose	See
PUT...USING SQL DESCRIPTOR	Puts a row into the insert buffer, obtaining the column values from the specified system-descriptor area	Handling an unknown column list on page 496

Table 87. SQL statements that can be used to manipulate a system-descriptor area: an INSERT statement that uses an insert cursor: (continued)

SQL statement	Purpose	See
DEALLOCATE DESCRIPTOR	Frees memory allocated for the system-descriptor area when your program is finished with it	Free memory allocated to a system-descriptor area on page 485

Allocate memory for a system-descriptor area

To allocate memory for a system-descriptor area, use the ALLOCATE DESCRIPTOR statement.

The ALLOCATE DESCRIPTOR statement performs the following tasks:

- It assigns the specified descriptor name to identify this region of memory. This name is an identifier that must be provided in all the SQL statements listed in [Table 83: SQL statements that can be used to manipulate a system-descriptor area on page 478](#) to designate the system descriptor on which to take action.
- It allocates item descriptors. By default, it allocates 100 item descriptors in the system-descriptor area. You can change this default with the WITH MAX clause.
- It initializes the COUNT field in the system-descriptor area to the number of item descriptors allocated.



Important: ALLOCATE DESCRIPTOR does not allocate memory for column data (DATA field). This memory is allocated by the DESCRIBE statement on an as-needed basis. For more information, see the next section.

Initialize the system-descriptor area

The DESCRIBE...USING SQL DESCRIPTOR statement initializes the system-descriptor area with information about the prepared statement.

The DESCRIBE...USING SQL DESCRIPTOR statement takes the following actions:

- It sets the COUNT field, which contains the number of item descriptors initialized with data.
This value is the number of columns and expressions in the column list (SELECT and INSERT) or the number of returned values (EXECUTE FUNCTION).
- It describes each unknown column in a prepared SELECT statement (without an INTO TEMP), EXECUTE FUNCTION, or INSERT statement.

The DESCRIBE statement initializes the fields of the item descriptor for each column, as follows:

- It allocates memory for the DATA field based on the TYPE and LENGTH information.
- It initializes the TYPE, LENGTH, NAME, SCALE, PRECISION, and NULLABLE fields to provide information from the database about a column.

For descriptions of these fields, see [Table 76: Fields in each item descriptor of the system-descriptor area on page 441](#).

- It returns the type of SQL statement prepared.

For more information, see [Determine the data type of a column on page 452](#).

As noted earlier, the DESCRIBE statement provides information about the columns of a column list. Therefore, you usually use this statement after a SELECT (without an INTO TEMP clause), INSERT, or EXECUTE FUNCTION statement was prepared.

The DESCRIBE statement and input parameters

When you use the system-descriptor area to hold an input parameter, you cannot use DESCRIBE to initialize the system-descriptor area. Your code must define the input parameters with the SET DESCRIPTOR statement to explicitly set the appropriate fields of the system-descriptor area.

The DESCRIBE statement and memory allocation

When you use a system-descriptor area to hold columns of prepared SQL statements, the ALLOCATE DESCRIPTOR statement allocates memory for the item descriptors of each column and the DESCRIBE...USING SQL DESCRIPTOR statement allocates memory for the DATA field of each item descriptor.

However, the DESCRIBE...USING SQL DESCRIPTOR statement does not allocate memory for the DATA field of a system-descriptor area when you describe a prepared SELECT statement that fetches data from a column into a host variable of type **lvvarchar**.

Before you fetch **lvvarchar** data into the system-descriptor area, you must explicitly assign memory to the DATA field to hold the column value, as follows:

1. Declare an **lvvarchar** host variable of the appropriate size.

Make sure that this variable is not just a pointer but has memory associated with it.

2. Assign this host variable to the DATA field with the SET DESCRIPTOR statement.

This SET DESCRIPTOR statement occurs after the DESCRIBE...USING SQL DESCRIPTOR statement but before the FETCH...USING SQL DESCRIPTOR statement.

3. Execute the FETCH...USING SQL DESCRIPTOR statement to retrieve the column data into the DATA field of the system-descriptor area.

The following code fragment shows the basic steps to allocate memory for an LVARCHAR column called **lvarch_col** in the **table1** table:

```
EXEC SQL BEGIN DECLARE SECTION;
  lvvarchar lvarch_val[50];
  int i;
EXEC SQL END DECLARE SECTION;
```

```

EXEC SQL allocate descriptor 'desc';
EXEC SQL prepare stmt1 from 'select opaque_col from table1';
EXEC SQL describe stmt1 using sql descriptor 'desc';
EXEC SQL declare cursor curs1 for stmt1;
EXEC SQL open curs1;
EXEC SQL set descriptor 'desc' value 1
    data = :lvarch_val, length = 50;

while (1)
{
EXEC SQL fetch curs1 using sql descriptor 'desc';
EXEC SQL get descriptor 'desc' value 1 :lvarch_val;
printf("Column value is %s\n", lvarch_val);

};
}

```

The preceding code fragment does not perform exception handling.

Assign and obtain values from a system-descriptor area

The following SQL statements allow your program to access the fields of the system-descriptor area:

- The SET DESCRIPTOR statement assigns values to the fields of the system-descriptor area.
- The GET DESCRIPTOR statement obtains values from the fields of the system-descriptor area.

The SET DESCRIPTOR Statement

To assign values to the system-descriptor-area fields, use the SET DESCRIPTOR statement.

You can use the SET DESCRIPTOR statement to:

- Set the COUNT field to match the number of items for which you provide descriptions in the system-descriptor area. This value is typically the number of input parameters in a WHERE clause.

```
EXEC SQL set descriptor sysdesc COUNT=:hostvar;
```

- Set the item-descriptor fields for each column value for which you provide a description.

```
EXEC SQL set descriptor sysdesc VALUE :item_num
DESCRIP_FIELD=:hostvar;
```

In this example, *item_num* is the number of the item descriptor that corresponds to the desired column, and *DESCRIP_FIELD* is one of the item-descriptor fields that is listed in [Table 76: Fields in each item descriptor of the system-descriptor area on page 441](#).

Set field values to provide values for input parameters in a WHERE clause ([Specify input parameter values on page 484](#)) or to modify the contents of an item descriptor field after you use the DESCRIBE...USING SQL DESCRIPTOR statement to fill the system-descriptor area ([Put column values into a system-descriptor area on page 484](#)).

The database server provides data type constants in the `sqltypes.h` header file to identify the data type of a column in the TYPE field (and optionally the ITYPE field) of a system-descriptor area. However, you cannot assign a data type constant directly in a SET DESCRIPTOR statement. Instead, assign the constant value to an integer host variable and specify this variable in the SET DESCRIPTOR statement, as follows:

```
EXEC SQL BEGIN DECLARE SECTION;
    int i;

:

EXEC SQL END DECLARE SECTION;

:

i = SQLINT;
EXEC SQL set descriptor 'desc1' VALUE 1
    TYPE = :i;
```

For more information about the data type constants, see [Determine the data type of a column on page 452](#). For more information about how to set individual system-descriptor fields, see the entry for the SET DESCRIPTOR statement in the *HCL® Informix® Guide to SQL: Syntax*.

An lvarchar pointer host variable with a descriptor

If you use an **lvarchar** pointer host variable with a FETCH or PUT statement that uses a system descriptor area, you must explicitly set the type to 124 (CLVCHARPTRTYPE from `incl/esql/sqltypes.h`) in the SET DESCRIPTOR statement. The following example illustrates:

```
EXEC SQL BEGIN DECLARE SECTION;
lvarchar *lv;
EXEC SQL END DECLARE SECTION;
/* where tab has lvarchar * column */
EXEC SQL prepare stmt from "select col from tab";
EXEC SQL allocate descriptor 'd';
/* The following describe will return SQLLVARCHAR for the
   type of the column */
EXEC SQL describe stmt using sql descriptor 'd';
/* You must set type for *lv variable */
EXEC SQL set descriptor 'd' value 1 DATA = :lv, TYPE = 124;
EXEC SQL declare c cursor for stmt;
EXEC SQL open c;
EXEC SQL fetch c using sql descriptor 'd';
```

The GET DESCRIPTOR statement

The GET DESCRIPTOR statement obtains values from the system-descriptor-area fields.

You can use the GET DESCRIPTOR statement to:

- Get the COUNT field to determine how many values are described in a system-descriptor area.

```
EXEC SQL get descriptor sysdesc :hostvar=COUNT;
```

- Get the item-descriptor fields for each described column.

```
EXEC SQL get descriptor sysdesc VALUE :item_num
      :hostvar=DESCRIP_FIELD;
```

In this example, *item_num* is the number of the item descriptor that corresponds to the desired column, and *DESCRIP_FIELD* is one of the item-descriptor fields listed in [Table 76: Fields in each item descriptor of the system-descriptor area on page 441](#).

These item-descriptor values are typically descriptions of columns in a SELECT, INSERT, or EXECUTE FUNCTION statement. GET DESCRIPTOR is also used after a FETCH...USING SQL DESCRIPTOR to copy a column value that is returned by the database server from the system-descriptor area into a host variable ([Put column values into a system-descriptor area on page 484](#)).

The data type of the host variable must be compatible with the type of the associated system-descriptor area field. When you interpret the TYPE field, make sure that you use the data type values that match your environment. For some data types, X/Open values differ from HCL Informix® values. For more information, see [Determine the data type of a column on page 452](#).

For more information about how to get individual system-descriptor fields, see the entry for the GET DESCRIPTOR statement in the *HCL® Informix® Guide to SQL: Syntax*.

Specify input parameter values

Because the DESCRIBE...USING SQL DESCRIPTOR statement does not analyze a WHERE clause, your program must store the number, data types, and values of the input parameters in the fields of the system-descriptor area to explicitly describe these parameters.

When you execute a parameterized statement, you must specify the system-descriptor area as the location of input parameter values with the USING SQL DESCRIPTOR clause, as follows:

- For input parameters in the WHERE clause of a SELECT, use the OPEN...USING SQL DESCRIPTOR statement. This statement handles a sequential, scrolling, hold, or update cursor. If you are certain that the SELECT returns only *one* row, you can use the EXECUTE...INTO...USING SQL DESCRIPTOR statement instead of a cursor.
- For input parameters in the WHERE clause of a non-SELECT statement such as DELETE or UPDATE, use the EXECUTE...USING SQL DESCRIPTOR statement.
- For input parameters in the VALUES clause of an INSERT statement, use the EXECUTE...USING SQL DESCRIPTOR statement. If the INSERT statement is associated with an insert cursor, use the PUT...USING SQL DESCRIPTOR statement instead.

Put column values into a system-descriptor area

When you create a SELECT statement dynamically, you cannot use the INTO *host_var* clause of FETCH because you cannot name the host variables in the prepared statement. To fetch column values into a system-descriptor area, use the USING SQL DESCRIPTOR clause of FETCH instead of the INTO clause. The FETCH...USING SQL DESCRIPTOR statement puts each column value into the DATA field of its item descriptor.

Use of the FETCH...USING SQL DESCRIPTOR statement assumes the existence of a cursor associated with the prepared statement. You must always use a cursor for SELECT statements and cursor functions (EXECUTE FUNCTION statements that return multiple rows). However, if the SELECT (or EXECUTE FUNCTION) returns only one row, you can omit the cursor and retrieve the column values into a system-descriptor area with the EXECUTE...INTO SQL DESCRIPTOR statement.

! **Important:** If you execute a SELECT statement or user-defined function that returns more than one row and do not associate the statement with a cursor, your program generates a runtime error. When you associate a singleton SELECT (or EXECUTE FUNCTION) statement with a cursor, IBM® Informix® ESQL/C does not generate an error. Therefore, it is a good practice to always associate a dynamic SELECT or EXECUTE FUNCTION statement with a cursor and to use a FETCH...USING SQL DESCRIPTOR statement to retrieve the column values from this cursor into the system-descriptor area.

When the column values are in the system-descriptor area, you can use the GET DESCRIPTOR statement to transfer these values from their DATA fields to the appropriate host variables. You must use the LENGTH and TYPE fields to determine, at run time, the data types for these host variables. You might need to perform data type or length conversions between the SQL data types in the TYPE fields and the Informix® ESQL/C data types that are needed for host variables that hold the return value.

For more information about how to execute SELECT statements dynamically, see [Handling an unknown select list on page 486](#). For more information about how to execute user-defined functions dynamically, see [Handling unknown return values on page 491](#).

Free memory allocated to a system-descriptor area

The DEALLOCATE DESCRIPTOR statement deallocates, or frees, memory that the specified system-descriptor area uses. The freed memory includes memory used by the item descriptors to hold data (in the DATA fields). Make sure that you deallocate a system-descriptor area only after you no longer have need of it. A deallocated system-descriptor area cannot be reused.

For more information about DEALLOCATE DESCRIPTOR, see the *HCL® Informix® Guide to SQL: Syntax*.

Using a system-descriptor area

Use a system-descriptor area to execute SQL statements that contain unknown values.

The following table summarizes the types of dynamic statements that the remaining sections of this chapter cover.

Table 88. Using a system-descriptor area to execute dynamic SQL statements

Purpose of a system-descriptor area	See
Holds select-list column values retrieved by a SELECT statement	Handling an unknown select list on page 486
Holds returned values from user-defined functions	Handling unknown return values on page 491

Table 88. Using a system-descriptor area to execute dynamic SQL statements (continued)

Purpose of a system-descriptor area	See
Describes unknown columns in an INSERT statement	Handling an unknown column list on page 496
Describes input parameters in the WHERE clause of a SELECT statement	Handling a parameterized SELECT statement on page 500
Describes input parameters in the WHERE clause of a DELETE or UPDATE statement	Handling a parameterized UPDATE or DELETE statement on page 506

Handling an unknown select list

About this task

This section describes how to use a system-descriptor area to handle a SELECT statement.

To use a system-descriptor area to handle unknown select-list columns:

1. Prepare the SELECT statement with the PREPARE statement to give it a statement identifier.
The SELECT statement cannot include an INTO TEMP clause. For more information, see [Assemble and prepare the SQL statement on page 400](#).
2. Allocate a system-descriptor area with the ALLOCATE DESCRIPTOR statement.
For more information, see [Allocate memory for a system-descriptor area on page 480](#).
3. Determine the number and data types of the select-list columns with the DESCRIBE...USING SQL DESCRIPTOR statement.
DESCRIBE fills an item descriptor for each column in the select list. For more information about DESCRIBE, see [Initialize the system-descriptor area on page 480](#).
4. Save the number of select-list columns in a host variable with the GET DESCRIPTOR statement to obtain the value of the COUNT field.
5. Declare and open a cursor and then use the FETCH...USING SQL DESCRIPTOR statement to fetch column values, one row at a time, into an allocated system-descriptor area.
See [Put column values into a system-descriptor area on page 484](#).
6. Retrieve the row data from the system-descriptor area into host variables with the GET DESCRIPTOR statement to access the DATA field.
For more information about GET DESCRIPTOR, see [Assign and obtain values from a system-descriptor area on page 482](#).
7. Deallocate the system-descriptor area with the DEALLOCATE DESCRIPTOR statement.
For more information, see [Free memory allocated to a system-descriptor area on page 485](#).

Results

! **Important:** If the SELECT statement has unknown input parameters in the WHERE clause, your program must also handle these input parameters with a system-descriptor area.

Execute a SELECT that returns multiple rows

The `demo4.ec` sample program shows how to execute a dynamic SELECT statement with the following conditions:

- The SELECT returns more than one row.

The SELECT must be associated with a cursor, executed with the OPEN statement, and have its return values retrieved with the FETCH...USING SQL DESCRIPTOR statement.

- The SELECT has either no input parameters or no WHERE clause.

The OPEN statement does not need to include the USING clause.

- The SELECT has unknown columns in its select list.

The FETCH statement includes the USING SQL DESCRIPTOR clause to store the return values in an `sqllda` structure.

The demo4.ec sample program

This **demo4** program is a version of the **demo3** sample program ([The demo3.ec sample program on page 531](#)) that uses a system-descriptor area to hold select-list columns. The **demo4** program does not include exception handling.

```
=====
1. #include <stdio.h>
2. EXEC SQL define NAME_LEN      15;
3. main()
4. {
5. EXEC SQL BEGIN DECLARE SECTION;
6.     mint i;
7.     mint desc_count;
8.     char demoquery[80];
9.     char colname[19];
10.    char result[ NAME_LEN + 1 ];
11. EXEC SQL END DECLARE SECTION;
=====
```

Lines 5 - 11

These lines declare host variables to hold the data that is obtained from the user and the column values that are retrieved from the system-descriptor area.

```
=====
12.    printf("DEMO4 Sample ESQL program running.\n\n");
13.    EXEC SQL connect to 'stores7';
14. /* These next three lines have hard-wired both the query and
15.    * the value for the parameter. This information could have been
16.    * been entered from the terminal and placed into the strings
17.    * demoquery and the query value string (queryvalue),
18.    * respectively.
```

```

18.    */
19.    sprintf(demoquery, "%s %s",
20.        "select fname, lname from customer",
21.        "where lname < 'C' ");
22.    EXEC SQL prepare demo4id from :demoquery;
23.    EXEC SQL declare demo4cursor cursor for demo4id;
24.    EXEC SQL allocate descriptor 'demo4desc' with max 4;
25.    EXEC SQL open demo4cursor;
=====

```

Lines 14 - 22

These lines assemble the character string for the statement (in **demoquery**) and prepare it as the **demo4id** statement identifier. For more information about these steps, see [Assemble and prepare the SQL statement on page 400](#).

Line 23

This line declares the **demo4cursor** cursor for the prepared statement identifier, **demo4id**. All non-singleton SELECT statements must have a declared cursor.

Line 24

To be able to use a system-descriptor area for the select-list columns, you must first allocate it. This ALLOCATE DESCRIPTOR statement allocates the **demo4desc** system-descriptor area with four item descriptors.

Line 25

The database server executes the SELECT statement when it opens the **demo4cursor** cursor. If the WHERE clause of your SELECT statement contains input parameters, you also need to specify the USING SQL DESCRIPTOR clause of the OPEN statement. (See [Handling a parameterized SELECT statement on page 500](#).)

```

=====
26.    EXEC SQL describe demo4id using sql descriptor 'demo4desc';
27.    EXEC SQL get descriptor 'demo4desc' :desc_count = COUNT;
28.    printf("There are %d returned columns:\n", desc_count);
29.    /* Print out what DESCRIBE returns */
30.    for (i = 1; i <= desc_count; i++)
31.        prsysdesc(i);
32.    printf("\n\n");
=====

```

Line 26

The DESCRIBE statement describes the select-list columns for the prepared statement in the **demo4id** statement identifier. For this reason, the DESCRIBE must follow the PREPARE. This DESCRIBE includes the USING SQL DESCRIPTOR clause to specify the **demo4desc** system-descriptor area as the location for these column descriptions.

Lines 27 and 28

Line 27 uses the GET DESCRIPTOR statement to obtain the number of select-list columns found by the DESCRIBE. This number is read from the COUNT field of the **demo4desc** system-descriptor area and saved in the **desc_count** host variable. Line 28 displays this information to the user.

Lines 29 - 31

This **for** loop goes through the item descriptors for the columns of the select list. It uses the **desc_count** host variable to determine the number of item descriptors initialized by the DESCRIBE statement. For each item descriptor, the **for** loop calls the `prsysdesc()` function (line 31) to save information such as the data type, length, and name of the column in host variables. See [Lines 58 - 76 on page 491](#) for a description of `prsysdesc()`.

```

=====
33.   for (;;)
34.   {
35.       EXEC SQL fetch demo4cursor using sql descriptor 'demo4desc';
36.       if (strncmp(SQLSTATE, "00", 2) != 0)
37.           break;
38.       /* Print out the returned values */
39.       for (i = 1; i <= desc_count; i++)
40.           {
41.               EXEC SQL get descriptor 'demo4desc' VALUE :i
42.                   :colname=NAME, :result = DATA;
43.               printf("Column: %s\tValue:%s\n ", colname, result);
44.           }
45.       printf("\n");
46.   }
=====

```

Lines 33 - 46

This inner **for** loop executes for each row fetched from the database. The FETCH statement (line 35) includes the USING SQL DESCRIPTOR clause to specify the **demo4desc** system-descriptor area as the location of the column values. After this FETCH executes, the column values are stored in the specified system-descriptor area.

The **if** statement (lines 36 and 37) tests the value of the SQLSTATE variable to determine if the FETCH was successful. If SQLSTATE contains a class code other than "00", then the FETCH generates a warning ("01"), the NOT FOUND condition ("02"), or an error (> "02"). In any of these cases, line 37 ends the **for** loop.

Lines 39 - 45 access the fields of the item descriptor for each column in the select list. After each FETCH statement, the GET DESCRIPTOR statement (lines 41 and 42) loads the contents of the DATA field into a host variable of the appropriate type and length. The second **for** loop (lines 39 - 44) ensures that GET DESCRIPTOR is called for each column in the select list.



Important: In this GET DESCRIPTOR statement, the demo4 program assumes that the returned columns are of the CHAR data type. If the program did not make this assumption, it would need to check the TYPE and LENGTH fields to determine the appropriate data type for the host variable to hold the DATA value.

```
=====
47.  if(strncmp(SQLSTATE, "02", 2) != 0)
48.      printf("SQLSTATE after fetch is %s\n", SQLSTATE);
49.  EXEC SQL close demo4cursor;
50.  /* free resources for prepared statement and cursor*/
51.  EXEC SQL free demo4id;
52.  EXEC SQL free demo4cursor;
53.  /* free system-descriptor area */
54.  EXEC SQL deallocate descriptor 'demo4desc';
55.  EXEC SQL disconnect current;
56.  printf("\nDEM04 Sample Program Over.\n\n");
57.  }
=====
```

Lines 47 and 48

Outside the **for** loop, the program tests the SQLSTATE variable again so that it can notify the user in the event of successful execution, a runtime error, or a warning (class code not equal to "02").

Line 49

After all the rows are fetched, the CLOSE statement closes the **demo4cursor** cursor.

Lines 50 - 54

These FREE statements release the resources that are allocated for the prepared statement (line 51) and the database cursor (line 52).

The DEALLOCATE DESCRIPTOR statement (line 54) releases the memory allocated to the **demo4desc** system-descriptor area. For more information, see [Free memory allocated to a system-descriptor area on page 485](#).

```
=====
58. prsysdesc(index)
59. EXEC SQL BEGIN DECLARE SECTION;
60.     PARAMETER mint index;
61. EXEC SQL END DECLARE SECTION;
62. {
63.     EXEC SQL BEGIN DECLARE SECTION;
64.         mint type;
65.         mint len;
66.         mint nullable;
67.         char name[40];
68. EXEC SQL END DECLARE SECTION;
69. EXEC SQL get descriptor 'demo4desc' VALUE :index
70.     :type = TYPE,
71.     :len = LENGTH,
72.     :nullable = NULLABLE,
73.     :name = NAME;
74. printf("    Column %d: type = %d, len = %d, nullable=%d, name =
```

```

        %s\n",
75.         index, type, len, nullable, name);
76. }
=====

```

Lines 58 - 76

The `prsysdesc()` function displays information about a select-list column. It uses the GET DESCRIPTOR statement to access one item descriptor from the **demo4desc** system-descriptor area.

The GET DESCRIPTOR statement (lines 70 - 74) accesses the TYPE, LENGTH, NULLABLE, and NAME fields from an item descriptor in **demo4desc** to provide information about a column. It stores this information in host variables of appropriate lengths and data types. The VALUE keyword indicates the number of the item descriptor to access.

Execute a singleton SELECT

The **demo4** program assumes that the SELECT statement returns more than one row and therefore the program associates the statement with a cursor. If you know at the time that you write the program that the dynamic SELECT always returns just one row, you can omit the cursor and use the EXECUTE...INTO SQL DESCRIPTOR statement instead of the FETCH...USING SQL DESCRIPTOR. You need to use the DESCRIBE statement to define the select-list columns.

Handling unknown return values

This section describes how to use a system-descriptor area to save values that a dynamically executed user-defined function returns.

To use a system-descriptor area to handle unknown function return values:

1. Assemble and prepare an EXECUTE FUNCTION statement.

The EXECUTE FUNCTION statement cannot include an INTO clause. For more information, see [Assemble and prepare the SQL statement on page 400](#).

2. Allocate a system-descriptor area with the ALLOCATE DESCRIPTOR statement.

For more information, see [Allocate memory for a system-descriptor area on page 480](#).

3. Determine the number and data type (or data types) of the return value (or values) with the DESCRIBE...USING SQL DESCRIPTOR statement.

The DESCRIBE...USING SQL DESCRIPTOR statement fills an item descriptor for each value that the user-defined function returns. For more information about DESCRIBE, see [Initialize the system-descriptor area on page 480](#).

4. After the DESCRIBE statement, you can test the SQLCODE variable (**sqlca.sqlcode**) for the SQ_EXECPROC defined constant to check for a prepared EXECUTE FUNCTION statement.

This constant is defined in the `sqlstype.h` header file. For more information, see [Determine the statement type on page 447](#).

5. Execute the EXECUTE FUNCTION statement and store the return values in the system-descriptor area.

The statement you use to execute a user-defined function depends on whether the function is a noncursor function or a cursor function. The following sections discuss how to execute each type of function.

6. Deallocate the system-descriptor area with the DEALLOCATE DESCRIPTOR statement.

See [Free memory allocated to a system-descriptor area on page 485](#).

Execute a noncursor function

A noncursor function returns only one row of return values to the application. Use the EXECUTE...INTO SQL DESCRIPTOR statement to execute the function and save the return value or values in a system-descriptor area.

An external function that is not explicitly defined as an iterator function returns only a single row of data. Therefore, you can use EXECUTE...INTO SQL DESCRIPTOR to execute most external functions dynamically. This single row of data consists of only one value because external function can only return a single value. The system-descriptor area contains only one item descriptor with the single return value.

An SPL function whose RETURN statement does not include the WITH RESUME keywords returns only a single row of data. Therefore, you can use EXECUTE...INTO SQL DESCRIPTOR to execute most SPL functions dynamically. An SPL function can return one or more values at one time so the system-descriptor area contains one or more item descriptors.



Important: Because you usually do not know the number of returned rows that a user-defined function returns, you cannot guarantee that only one row is returned. If you do not use a cursor to execute cursor function, IBM® Informix® ESQL/C generates a runtime error. Therefore, it is a good practice to always associate a user-defined function with a function cursor.

The following program fragment dynamically executes an SPL function called **items_pct**. This SPL function calculates the percentage that the items of a given manufacturer represent out of the total price of all items in the **items** table. It accepts one argument, the **manu_code** value for the chosen manufacturer, and it returns the percentage as a decimal value. The following figure shows the **items_pct** SPL function.

Figure 84. Code for items_pct SPL function

```
create function items_pct(mac char(3)) returning decimal;
  define tp money;
  define mc_tot money;
  define pct decimal;
  let tp = (select sum(total_price) from items);
  let mc_tot = (select sum(total_price) from items
               where manu_code = mac);
  let pct = mc_tot / tp;
  return pct;
end function;
```

A sample program that executes an SPL function

The sample program fragment uses a system-descriptor area to dynamically execute an SPL function that returns more than one set of return values.


```

=====
1. #include <stdio.h>
2. #include <ctype.h>
3. EXEC SQL include sqltypes;
4. EXEC SQL include sqlstyp;
5. EXEC SQL include decimal;
6. EXEC SQL include datetime;
7. extern char statement[80];
8. main()
9. {
10. EXEC SQL BEGIN DECLARE SECTION;
11.     int sp_cnt, desc_count;
12.     char dyn_stmt[80], rout_name[30];
13. EXEC SQL END DECLARE SECTION;
14. int whenexp_chk();
15.     printf("Sample ESQL program to execute an SPL function
        running.\n\n");
16. EXEC SQL whenever sqlerror call whenexp_chk;
17. EXEC SQL connect to 'stores7';
18.     printf("Connected to stores7 database.\n");
19.     /* These next five lines hard-wire the execute function
20.     * statement. This information could have been entered
21.     * by the user and placed into the string dyn_stmt.
22.     */
23.     strcpy("items_pct(\"HSK\")", rout_name);
24.     sprintf(dyn_stmt, "%s %s",
25.             "execute function", rout_name);
=====

```

Lines 19 - 25

The call to `sprintf()` (line 24) assembles the character string for the EXECUTE FUNCTION statement that executes the `items_pct()` SPL function.

```

=====
26. EXEC SQL prepare spid from :dyn_stmt;
27. EXEC SQL allocate descriptor 'spdesc';
28. EXEC SQL describe spid using sql descriptor 'spdesc';
29. if(SQLCODE != SQ_EXECPROC)
30.     {
31.     printf("\nPrepared statement is not EXECUTE FUNCTION.\n");
32.     exit();
33.     }
=====

```

Line 26

The PREPARE statement then creates the **spid** statement identifier for the EXECUTE FUNCTION statement. For more information about these steps, see [Assemble and prepare the SQL statement on page 400](#).

Line 27

The ALLOCATE DESCRIPTOR statement allocates the **spdesc** system-descriptor area. For more information, see [Allocate memory for a system-descriptor area on page 480](#).

Lines 28 - 33

The DESCRIBE statement determines the number and data types of values that the **items_pct** SPL function returns. This DESCRIBE includes the USING SQL DESCRIPTOR clause to specify the **spdesc** system-descriptor area as the location for these descriptions.

On line 28, the program tests the value of the SQLCODE variable (**sqlca.sqlcode**) against the constant values defined in the `sqlstype.h` file to verify that the EXECUTE FUNCTION statement was prepared. For more information, see [Determine the statement type on page 447](#).

```

=====
34. EXEC SQL get descriptor 'spdesc' :sp_cnt = COUNT;
35.  if(sp_cnt == 0)
36.  {
37.      sprintf(dyn_stmnt, "%s %s", "execute procedure", rout_name);
38.      EXEC SQL prepare spid from :dyn_stmnt;
39.      EXEC SQL execute spid;
40.  }
41.  else
42.  {
43.      EXEC SQL declare sp_curs cursor for spid;
44.      EXEC SQL open sp_curs;
45.      while(getrow("spdesc"))
46.          disp_data(:sp_cnt, "spdesc");
47.      EXEC SQL close sp_curs;
48.      EXEC SQL free sp_curs;
49.  }
=====

```

Lines 34 - 40

To obtain the number of return values in a host variable, the GET DESCRIPTOR statement retrieves the value of the COUNT field into a host variable. This value is useful when you need to determine how many values the SPL routine returns. If the SPL routine does not return values, that is, the value of COUNT is zero, the SPL routine is a procedure, not a function. Therefore, the program prepares an EXECUTE PROCEDURE statement (line 38) and then uses the EXECUTE statement (line 39) to execute the procedure. The EXECUTE statement does not need to use the system-descriptor area because the SPL procedure does not have any return values.

Lines 41 - 49

If the SPL routine does return values, that is, if the value of COUNT is greater than zero, the program declares and opens the **sp_curs** cursor for the prepared SPL function.

A **while** loop (lines 45 and 46) executes for each set of values that is returned by the SPL function. This loop calls the `getrow()` function to fetch one set of values into the **spdesc** system-descriptor area. It then calls the `disp_data()` function to display the returned values. For descriptions of the `getrow()` and `disp_data()` functions, see [Guide to the `dyn_sql.ec` file on page 507](#).

After all the sets of return values are returned, the CLOSE statement (line 47) closes the **sp_curs** cursor and the FREE statement (line 48) releases the resources allocated to the cursor.

```

=====
50.      EXEC SQL free spid;
51.      EXEC SQL deallocate descriptor 'spdesc';
52.      EXEC SQL disconnect current;
53. }
=====

```

Lines 50 and 51

This FREE statement releases the resources allocated for the prepared statement. The DEALLOCATE DESCRIPTOR statement releases the memory allocated to the **spdesc** system-descriptor area. For more information, see [Free memory allocated to a system-descriptor area on page 485](#).

Executing a cursor function

A cursor function can return one or more rows of return values to the application. To execute a cursor function, you must associate the EXECUTE FUNCTION statement with a function cursor and use the FETCH...INTO SQL DESCRIPTOR statement to save the return value or values in a system-descriptor area.

About this task

To use a system-descriptor area to hold cursor-function return values:

1. Declare a function cursor for the user-defined function.

Use the DECLARE statement to associate the EXECUTE FUNCTION statement with a function cursor.

2. Use the OPEN statement to execute the function and open the cursor.
3. Use the FETCH...USING SQL DESCRIPTOR statement to retrieve the return values from the cursor into the system-descriptor area.

For more information, see [Put column values into a system-descriptor area on page 484](#).

4. Use the GET DESCRIPTOR statement to retrieve the return values from the system-descriptor area into host variables.

The DATA field of each item descriptor contains the return values. For more information, see [Assign and obtain values from a system-descriptor area on page 482](#).

5. Deallocate the system-descriptor area with the DEALLOCATE DESCRIPTOR statement.

For more information, see [Free memory allocated to a system-descriptor area on page 485](#).

Results

Only an external function that is defined as an iterator function can return more than one row of data. Therefore, you must define a function cursor to execute an iterator function dynamically. Each row of data consists of only one value because an external function can only return a single value. For each row, the system-descriptor area contains only one item descriptor with the single return value.

An SPL function whose RETURN statement includes the WITH RESUME keywords can return one or more rows of data. Therefore, you must define a function cursor to execute these SPL functions dynamically. Each row of data can consists of

one or more values because an SPL function can return one or more values at one time. For each row, the system-descriptor area contains an item descriptor for each return value.

Handling an unknown column list

For an introduction on how to handle columns in a VALUES clause of an INSERT, see [Handling an unknown column list on page 456](#). This section describes how to use a system-descriptor area to handle the INSERT...VALUES statement.

To use a system-descriptor area to handle input parameters in an INSERT:

1. Prepare the INSERT statement (with the PREPARE statement) to give it a statement identifier. For more information, see [Assemble and prepare the SQL statement on page 400](#).
2. Allocate a system-descriptor area with the ALLOCATE DESCRIPTOR statement. For more information, see [Allocate memory for a system-descriptor area on page 480](#).
3. Determine the number and data types of the columns with the DESCRIBE...USING SQL DESCRIPTOR statement. The DESCRIBE statement fills an item descriptor for each column in the select list. For more information about DESCRIBE, see [Initialize the system-descriptor area on page 480](#).
4. Save the number of unknown columns in a host variable with the GET DESCRIPTOR statement, which obtains the value of the COUNT field.
5. Set the columns to their values with the SET DESCRIPTOR statement, which sets the appropriate DATA and VALUE fields. The column values must be compatible with the data type of their associated column. If you want to insert a NULL value, set the INDICATOR field to -1, and do not specify any DATA field in the SET DESCRIPTOR statement. For more information about SET DESCRIPTOR, see [Assign and obtain values from a system-descriptor area on page 482](#).
6. Execute the INSERT statement to insert the values into the database.

The following sections demonstrate how to execute a simple INSERT statement that inserts only one row and one that uses an insert cursor to insert several rows from an insert buffer.

7. Deallocate the system-descriptor area with the DEALLOCATE DESCRIPTOR statement. See [Free memory allocated to a system-descriptor area on page 485](#).

Execute a simple insert

The following steps outline how to execute a simple INSERT statement with a system-descriptor area:

1. Prepare the INSERT statement (with the PREPARE statement) and give it a statement identifier.
2. Set the columns to their values with the SET DESCRIPTOR statement.
3. Execute the INSERT statement with the EXECUTE...USING SQL DESCRIPTOR statement.

A sample program that executes a dynamic INSERT statement

This sample program shows how to execute a dynamic INSERT statement. This INSERT statement is not associated with an insert cursor.

The program inserts two TEXT values into the `txt_a` table. It reads the text values from a named file called `desc_ins.txt`. The program then selects columns from this table and stores the TEXT values in two named files, `txt_out1` and `txt_out2`. The program illustrates the use of a system-descriptor area to handle the columns that are in the column list.

```
=====
1. EXEC SQL include locator;
2. EXEC SQL include sqltypes;
3. main()
4. {
5.     EXEC SQL BEGIN DECLARE SECTION;
6.         int ;
7.         int cnt;
8.         ifx_loc_t loc1;
9.         ifx_loc_t loc2;
10.    EXEC SQL END DECLARE SECTION;
11.    EXEC SQL create database txt_test;
12.    chkerr("CREATE DATABASE txt_test");
13.    EXEC SQL create table txt_a (t1 text not null, t2 text);
14.    chkerr("CREATE TABLE t1");
15.    /* The INSERT statement could have been created at runtime. */
16.    EXEC SQL prepare sid from 'insert into txt_a values (?, ?)';
17.    chkerr("PREPARE sid");
=====
```

Lines 5 - 10

These lines declare host variables to hold the column values to insert (obtained from the user).

Lines 15 - 17

These lines assemble the character string for the statement and prepare it as the `sid` statement identifier. The input parameter specifies the missing columns of the INSERT statement. The INSERT statement is hard coded here, but it can be created at run time. For more information about these steps, see [Assemble and prepare the SQL statement on page 400](#).

```
=====
18.    EXEC SQL allocate descriptor 'desc';
19.    chkerr("ALLOCATE DESCRIPTOR desc");
20.    EXEC SQL describe sid using sql descriptor 'desc';
21.    chkerr("DESCRIBE sid");
22.    EXEC SQL get descriptor 'desc' :cnt = COUNT;
23.    chkerr("GET DESCRIPTOR desc");
24.    for (i = 1; i <= cnt; i++)
25.        prsysdesc(i);
=====
```

Lines 18 and 19

To be able to use a system-descriptor area for the columns, you must first allocate the system-descriptor area. This `ALLOCATE DESCRIPTOR` statement allocates a system-descriptor area named `desc`.

Line 20 and 21

The DESCRIBE statement describes the columns for the prepared INSERT that **sid** identifies. This DESCRIBE statement includes the USING SQL DESCRIPTOR clause to specify the **desc** system-descriptor area as the location for these column descriptions.

Lines 22 and 23

The GET DESCRIPTOR statement obtains the number of columns (COUNT field) found by the DESCRIBE. This number is stored in the **cnt** host variable.

Lines 24 and 25

This **for** loop goes through the item descriptors for the columns of the INSERT statement. It uses the **cnt** variable to determine the number of item descriptors that are initialized by the DESCRIBE. For each item descriptor, the `prsysdesc()` function saves information such as the data type, length, and name in host variables. For a description of `prsysdesc()`, see [The `ifx_int8add\(\)` function on page 640](#).

```

=====
26.  loc1.loc_loctype = loc2.loc_loctype = LOCFNAME;
27.  loc1.loc_fname = loc2.loc_fname = "desc_ins.txt";
28.  loc1.loc_size = loc2.loc_size = -1;
29.  loc1.loc_oflags = LOC_RDONLY;
30.  i = CLOCATORTYPE;
31.  EXEC SQL set descriptor 'desc' VALUE 1
32.      TYPE = :i, DATA = :loc1;
33.  chkerr("SET DESCRIPTOR 1");
34.  EXEC SQL set descriptor 'desc' VALUE 2
35.      TYPE = :i, DATA = :loc2;
36.  chkerr("SET DESCRIPTOR 2");
37.  EXEC SQL execute sid using sql descriptor 'desc';
38.  chkerr("EXECUTE sid");
=====

```

Lines 26 - 29

To insert a TEXT value, the program must first locate the value with the IBM® Informix® ESQL/C locator structure. The **loc1** locator structure stores a TEXT value for the **t1** column of the **txt_a** table; **loc2** is the locator structure for the **t2** column of **txt_a**. (See line 13.) The program includes the Informix® ESQL/C `locator.h` header file (line 1) to define the **ifx_loc_t** structure.

Both TEXT values are located in a named file (**loc_loctype** = LOCFNAME) called **desc_ins.txt**. When you set the **loc_size** fields to **-1**, the locator structure tells Informix® ESQL/C to send the TEXT value to the database server in a single operation. For more information about how to locate TEXT values in named files, see [Insert a simple large object from a named file on page 156](#).

Lines 30 - 36

The first SET DESCRIPTOR statement sets the TYPE and DATA fields in the item descriptor of the **t1** column (VALUE 1). The data type is CLOCATORTYPE (defined in the Informix® ESQL/C `sqltypes.h` header file) to indicate that the column value is

stored in the Informix® ESQL/C locator structure; the data is set to the **loc1** locator structure. The second SET DESCRIPTOR statement performs this same task for the **t2** column value; it sets its DATA field to the **loc2** locator structure.

Lines 37 and 38

The database server executes the INSERT statement with the EXECUTE...USING SQL DESCRIPTOR statement to obtain the new column values from the **desc** system-descriptor area.

```

=====
39.  loc1.loc_loctype = loc2.loc_loctype = LOCFNAME;
40.  loc1.loc_fname = "txt_out1";
41.  loc2.loc_fname = "txt_out2";
42.  loc1.loc_oflags = loc2.loc_oflags = LOC_WONLY;
43.  EXEC SQL select * into :loc1, :loc2 from a;
44.  chkerr("SELECT");
45.  EXEC SQL free sid;
46.  chkerr("FREE sid");
47.  EXEC SQL deallocate descriptor 'desc';
48.  chkerr("DEALLOCATE DESCRIPTOR desc");
49.  EXEC SQL close database;
50.  chkerr("CLOSE DATABASE txt_test");
51.  EXEC SQL drop database txt_test;
52.  chkerr("DROP DATABASE txt_test");
53.  EXEC SQL disconnect current;
54. }
55. chkerr(s)
56. char *s;
57. {
58. if (SQLCODE)
59.   printf("%s error %d\n", s, SQLCODE);
60. }
=====

```

Lines 39 - 44

The program uses the **loc1** and **loc2** locator structures to select the values inserted. These TEXT values are read into named files: the **t1** column (in **loc1**) into **txt_out1** and the **t2** column (in **loc2**) into **txt_out2**. The **loc_oflags** value of LOC_WONLY means that this TEXT data overwrites any existing data in these output files.

Lines 45 - 48

The FREE statement (line 45) releases the resources allocated for the **sid** prepared statement. Once a prepared statement was freed, it cannot be used again in the program. The DEALLOCATE DESCRIPTOR statement (line 46) releases the memory allocated to the **desc** system-descriptor area. For more information, see [Free memory allocated to a system-descriptor area on page 485](#).

Lines 55 - 60

The `chkerr()` function is a simple exception-handling routine. It checks the global SQLCODE variable for a nonzero value. Since zero indicates successful execution of an SQL statement, the `printf()` (line 58) executes whenever a runtime error occurs. For more detailed exception-handling routines, see [Exception handling on page 276](#).

Execute an INSERT that is associated with a cursor

Your IBM® Informix® ESQL/C program must still use the DESCRIBE and SET DESCRIPTOR statements ([Handling an unknown column list on page 496](#)) to use a system-descriptor area for column-list values of an INSERT statement that inserts rows from an insert buffer. It must also use the PUT...USING SQL DESCRIPTOR statement with an insert cursor, as follows:

1. Prepare the INSERT statement and associate it with an insert cursor with the DECLARE statement. All multirow INSERT statements *must* have a declared insert cursor.
2. Create the cursor for the INSERT statement with the OPEN statement.
3. Insert the first set of column values into the insert buffer with a PUT statement and its USING SQL DESCRIPTOR clause. After this PUT statement, the column values stored in the specified system-descriptor area are stored in the insert buffer. Repeat the PUT statement within a loop until there are no more rows to insert.
4. After all the rows are inserted, exit the loop and flush the insert buffer with the FLUSH statement.
5. Close the insert cursor with the CLOSE statement.

You handle the insert cursor in much the same way as you handle the cursor associated with a SELECT statement ([Handling an unknown select list on page 486](#)). For more information about how to use an insert cursor, see the PUT statement in the *HCL® Informix® Guide to SQL: Syntax*.

Handling a parameterized SELECT statement

For an introduction on how to determine input parameters, see [Determine unknown input parameters on page 456](#). This section describes how to handle a parameterized SELECT statement with a system-descriptor area. If a prepared SELECT statement has a WHERE clause with input parameters of unknown number and data type, your IBM® Informix® ESQL/C program must use a system-descriptor area to define the input parameters.

To use a system-descriptor area to define input parameters for a WHERE clause:

1. Determine the number and data types of the input parameters of the SELECT statement. For more information, see [Determine unknown input parameters on page 456](#).
2. Allocate a system-descriptor area and assign it a name with the ALLOCATE DESCRIPTOR statement. For more information about ALLOCATE DESCRIPTOR, see [Allocate memory for a system-descriptor area on page 480](#).
3. Indicate the number of input parameters in the WHERE clause with the SET DESCRIPTOR statement, which sets the COUNT field.
4. Store the definition and value of each input parameter with the SET DESCRIPTOR statement, which sets the DATA, TYPE, and LENGTH fields in the appropriate item descriptor:
 - The TYPE field must use the Informix® ESQL/C data type constants defined in the `sqltypes.h` header file to represent the data types of the input parameters. For more information, see [Determine the data type of a column on page 452](#).
 - For a CHAR or VARCHAR value, LENGTH is the size, in bytes, of the character array; for a DATETIME or INTERVAL value, the LENGTH field stores the encoded qualifiers.



Important: If you use X/Open code (and compile with the **-xopen** flag), you must use the X/Open data type values for the TYPE and ITYPE fields. For more information, see [Determine the data type of a column on page 452](#).

If you use an indicator variable, you also need to set the INDICATOR field and perhaps the IDATA, ILENGTH, and ITYPE fields (for non-X/Open applications only). Use the VALUE keyword of SET DESCRIPTOR to identify the item descriptor. For more information about SET DESCRIPTOR, see [Assign and obtain values from a system-descriptor area on page 482](#).

5. Pass the defined input parameters from the system-descriptor area to the database server with the USING SQL DESCRIPTOR clause.

The statement that provides the input parameters depends on how many rows that the SELECT statement returns. The following sections discuss how to execute each type of SELECT statement.

6. Deallocate the system-descriptor area with the DEALLOCATE DESCRIPTOR statement. For more information, see [Free memory allocated to a system-descriptor area on page 485](#).



Important: If the SELECT statement has unknown columns in the select list, your program must also handle these columns with a system-descriptor area. For more information, see [Handling an unknown select list on page 486](#).

Execute a parameterized SELECT that returns multiple rows

The following sample program shows how to use a dynamic SELECT statement with the following conditions:

- The SELECT returns more than row.

The SELECT must be associated with a cursor, executed with the OPEN statement, and have its return values retrieved with the FETCH...USING SQL DESCRIPTOR statement.

- The SELECT has input parameters in its WHERE clause.

The OPEN statement includes the USING SQL DESCRIPTOR clause to provide the parameter values in a system-descriptor area.

- The SELECT has unknown columns in the select list.

The FETCH statement includes the USING SQL DESCRIPTOR clause to store the return values in a system-descriptor area.

A sample program that uses a dynamic SELECT statement

The program is a version of the **demo4.ec** sample program; **demo4** uses a system-descriptor area for select-list columns while this modified version of **demo4** uses a system-descriptor area for both select-list columns and input parameters of a WHERE clause.

```

=====
1. #include <stdio.h>
2. EXEC SQL include sqltypes;
3.
4. EXEC SQL define NAME_LEN 15;
5. EXEC SQL define MAX_IDESC 4;
6. main()
7. {
8. EXEC SQL BEGIN DECLARE SECTION;
9.     int i;
10.    int desc_count;
11.    char demoquery[80];
12.    char queryvalue[2];
13.    char result[ NAME_LEN + 1 ];
14. EXEC SQL END DECLARE SECTION;
15.    printf("Modified DEMO4 Sample ESQL program running.\n\n");
16.    EXEC SQL connect to 'stores7';
=====

```

Lines 8 - 14

These lines declare host variables to hold the data obtained from the user and the column values retrieved from the system descriptor.

```

=====
17.  /* These next three lines have hard-wired both the query and
18.   * the value for the parameter. This information could have
19.   * been entered from the terminal and placed into the strings
20.   * demoquery and queryvalue, respectively.
21.   */
22.  sprintf(demoquery, "%s %s",
23.         "select fname, lname from customer",
24.         "where lname < ? ");
25.  EXEC SQL prepare demoid from :demoquery;
26.  EXEC SQL declare democursor cursor for demoid;
27.  EXEC SQL allocate descriptor 'demodesc' with max MAX_IDESC;
=====

```

Lines 17 - 25

The lines assemble the character string for the statement (in **demoquery**) and prepare it as the **demoid** statement identifier. The question mark (?) indicates the input parameter in the WHERE clause. For more information about these steps, see [Assemble and prepare the SQL statement on page 400](#).

Line 26

This line declares the **democursor** cursor for the prepared statement identifier **demoid**. All non-singleton SELECT statements must have a declared cursor.

Line 27

To be able to use a system-descriptor area for the input parameters, you must first allocate the system-descriptor area. This `ALLOCATE DESCRIPTOR` statement allocates the **demodesc** system-descriptor area. For more information about `ALLOCATE DESCRIPTOR`, see [Allocate memory for a system-descriptor area on page 480](#).

```

=====
28.  /* This section of the program must evaluate :demoquery
29.  *   to count how many question marks are in the where
30.  *   clause and what kind of data type is expected for each
31.  *   question mark.
32.  *   For this example, there is one parameter of type
33.  *   char(15). It would then obtain the value for
34.  *   :queryvalue. The value of queryvalue is hard-wired in
35.  *   the next line.
36.  */
37.  sprintf(queryvalue, "C");
38.  desc_count = 1;
39.  if(desc_count > MAX_IDESC)
40.  {
41.      EXEC SQL deallocate descriptor 'demodesc';
42.      EXEC SQL allocate descriptor 'demodesc' with max :desc_count;
43.  }
44.  /* number of parameters to be held in descriptor is 1 */
45.  EXEC SQL set descriptor 'demodesc' COUNT = :desc_count;
=====

```

Lines 28 - 38

These lines simulate the dynamic entry of the input parameter value. Although the parameter value is hard-coded here (line 37), the program would more likely obtain the value from user input. Line 38 simulates code that would determine how many input parameters exist in the statement string. If you did not know this value, you would need to include C code to parse the statement string for the question mark (?) character.

Lines 39 - 43

This `if` statement determines if the **demodesc** system-descriptor area contains enough item descriptors for the parameterized `SELECT` statement. It compares the number of input parameters in the statement string (**desc_count**) with the number of item descriptors currently allocated (`MAX_IDESC`). If the program has not allocated enough item descriptors, the program deallocates the existing system-descriptor area (line 41) and allocates a new one (line 42); it uses the actual number of input parameters in the `WITH MAX` clause to specify the number of item descriptors to allocate.

Lines 44 and 45

This `SET DESCRIPTOR` statement stores the number of input parameters in the `COUNT` field of the **demodesc** system-descriptor area.

```

=====
46.  /* Put the value of the parameter into the descriptor */
47.  i = SQLCHAR;
48.  EXEC SQL set descriptor 'demodesc' VALUE 1
49.      TYPE = :i, LENGTH = 15, DATA = :queryvalue;
=====

```

```

50.  /* Associate the cursor with the parameter value */
51.  EXEC SQL open democursor using sql descriptor :demodesc;
52.  /*Reuse the descriptor to determine the contents of the Select-
   * list*/
53.  EXEC SQL describe qid using sql descriptor 'demodesc';
54.  EXEC SQL get descriptor 'demodesc' :desc_count = COUNT;
55.  printf("There are %d returned columns:\n", desc_count);
56.  /* Print out what DESCRIBE returns */
57.  for (i = 1; i <= desc_count; i++)
58.      prsysdesc(i);
59.  printf("\n\n");
=====

```

Lines 47 - 49

This SET DESCRIPTOR statement sets the TYPE, LENGTH (for a CHAR value), and DATA fields for each of the parameters in the WHERE clause. The program only calls SET DESCRIPTOR once because it assumes that the SELECT statement has only one input parameter. If you do not know the number of input parameters at compile time, put the SET DESCRIPTOR in a loop for which the **desc_count** host variable controls the number of iterations.

Lines 50 and 51

The database server executes the SELECT statement when it opens the **democursor** cursor. This OPEN statement includes the USING SQL DESCRIPTOR clause to specify the **demodesc** system-descriptor area as the location of the input-parameter values.

Lines 52 - 59

The program also uses the **demodesc** system-descriptor area to hold the columns that are returned by the SELECT statement. The DESCRIBE statement (line 53) examines the select list to determine the number and data types of these columns. The GET DESCRIPTOR statement (line 54) then obtains the number of described columns from the COUNT field of **demodesc**. Lines 55 - 58 then display the column information for each returned column. For more information about how to use a system-descriptor area to receive column values, see [Handling an unknown select list on page 486](#).

```

=====
60.  for (;;)
61.  {
62.      EXEC SQL fetch democursor using sql descriptor 'demodesc';
63.      if (sqlca.sqlcode != 0) break;
64.      for (i = 1; i <= desc_count; i++)
65.      {
66.          EXEC SQL get descriptor 'demodesc' VALUE :i :result = DATA;
67.          printf("%s ", result);
68.      }
69.      printf("\n");
70.  }
71.  if(strncmp(SQLSTATE, "02", 2) != 0)
72.      printf("SQLSTATE after fetch is %s\n", SQLSTATE);
73.  EXEC SQL close democursor;
74.  EXEC SQL free demoid; /* free resources for statement */
75.  EXEC SQL free democursor; /* free resources for cursor */
76.  /* free system-descriptor area */
77.  EXEC SQL deallocate descriptor 'demodesc';

```

```

78. EXEC SQL disconnect current;
79. printf("\nModified DEMO4 Program Over.\n\n");
80. }
=====

```

Lines 60 - 70

These lines access the fields of the item descriptor for each column in the select list. After each FETCH statement, the GET DESCRIPTOR statement loads the contents of the DATA field into the **result** host variable.

Line 73

After all the rows are fetched, the CLOSE statement frees the resources allocated to the active set of the **democursor** cursor.

Lines 74 - 77

The FREE statement on line 74 frees the resources allocated to the **demoid** statement identifier while the FREE statement on line 75 frees the resources to the **democursor** cursor. The DEALLOCATE DESCRIPTOR statement frees the resources allocated to the **demodesc** system-descriptor area. For more information, see [Free memory allocated to a system-descriptor area on page 485](#).

Execute a parameterized singleton SELECT statement

The instructions in the preceding section assume that the parameterized SELECT statement returns more than one row and, therefore, is associated with a cursor. If you know that at the time you write the program that the parameterized SELECT statement will always return just one row, you can omit the cursor and use the EXECUTE...USING SQL DESCRIPTOR...INTO statement instead of the OPEN...USING SQL DESCRIPTOR statement to specify parameter values from a system-descriptor area.

Handling a parameterized user-defined routine

For an introduction on how to determine input parameters, see [Determine unknown input parameters on page 456](#). This section describes how to handle a parameterized user-defined routine with a system-descriptor area. The following statements execute user-defined routines:

- The EXECUTE FUNCTION statement executes a user-defined function (external and SPL).
- The EXECUTE PROCEDURE statement executes a user-defined procedure (external and SPL).

If a prepared EXECUTE PROCEDURE or EXECUTE FUNCTION statement has arguments specified as input parameters of unknown number and data type, your Informix® ESQL/C program can use a system-descriptor area to define the input parameters.

Execute a parameterized function

You handle the input parameters of a user-defined function in the same way you handle input parameters in the WHERE clause of a SELECT statement, as follows:

- Execute a noncursor function in the same way as a singleton SELECT statement.

If you know at the time that you write the program that the dynamic user-defined function always returns just one row, you can use the EXECUTE...USING SQL DESCRIPTOR...INTO statement to provide the argument values from a system-descriptor area and to execute the function.

- Execute a cursor function in the same way as a SELECT statement that returns one or more rows.

If you are not sure at the time that you write the program that the dynamic user-defined function always returns just one row, define a function cursor and use the OPEN...USING SQL DESCRIPTOR statement to provide the argument values from a system-descriptor area.

The only difference between the execution of these EXECUTE FUNCTION and SELECT statements is that you prepare the EXECUTE FUNCTION statement for the noncursor function, instead of the SELECT statement.

Execute a parameterized procedure

To execute a parameterized user-defined procedure, you can use the EXECUTE...USING SQL DESCRIPTOR statement to provide the argument values from a system-descriptor area and to execute the procedure. You handle the input parameters of a user-defined procedure in the same way you handle input parameters in a noncursor function. The only difference between the execution of the EXECUTE PROCEDURE statement and the EXECUTE FUNCTION statement (for a noncursor function) is that you do not need to specify the INTO clause of the EXECUTE...USING SQL DESCRIPTOR statement for the user-defined procedure.

Handling a parameterized UPDATE or DELETE statement

How you determine the input parameters in the WHERE clause of a DELETE or UPDATE statement is similar to how you determine them in the WHERE clause of a SELECT statement. For more information, see [Handling a parameterized SELECT statement on page 500](#). The major differences between these two types of dynamic parameterized statements are as follows:

- You do not need to use a cursor to handle a DELETE or UPDATE statement. Therefore, you provide the parameter values from a system-descriptor area with the USING SQL DESCRIPTOR clause of the EXECUTE statement instead of the OPEN statement.
- You can use the DESCRIBE...USING SQL DESCRIPTOR statement to determine if the DELETE or UPDATE statement has a WHERE clause. For more information, see [Check for a WHERE clause on page 454](#).

The dyn_sql program

The `dyn_sql.ec` program is the IBM® Informix® ESQL/C demonstration program that uses dynamic SQL. The program prompts the user to enter a SELECT statement for the **stores7** demonstration database and then uses a system-descriptor area to execute the SELECT dynamically.

By default, the program opens the **stores7** database. If the demonstration database was given a name other than **stores7**, however, you can specify the database name on the command line. The following command runs the **dyn_sql** executable on the **mystores7** database:

```
dyn_sql mystores7
```

Compile the program

Use the following command to compile the **dyn_sql** program:

```
esql -o dyn_sql dyn_sql.ec
```

The **-o dyn_sql** option causes the executable program to be named **dyn_sql**. Without the **-o** option, the name of the executable program defaults to `a.out`.

Guide to the dyn_sql.ec file

```
=====
1. /*
2.  This program prompts the user to enter a SELECT statement
3.  for the stores7 database. It processes the statement using
4.  dynamic sql
5.  and system descriptor areas and displays the rows returned by the
6.  database server.
7. */
8. #include <stdio.h>
9. #include <stdlib.h>
10. #include <ctype.h>
11. EXEC SQL include sqltypes;
12. EXEC SQL include locator;
13. EXEC SQL include datetime;
14. EXEC SQL include decimal;
15. #define WARNNOTIFY      1
16. #define NOWARNNOTIFY    0
17. #define LCASE(c) (isupper(c) ? tolower(c) : (c))
18. #define BUFFSZ 256
19. extern char statement[80];
=====
```

Lines 7 - 13

These lines specify C and Informix® ESQL/C files to include in the program. The `stdio.h` file enables **dyn_sql** to use the standard C I/O library. The `stdlib.h` file contains string-to-number conversion functions, memory allocation functions, and other miscellaneous standard library functions. The `ctypes.h` file contains macros that check the attributes of a character. For example, one macro determines whether a character is uppercase or lowercase.

The `sqltypes.h` header file contains symbolic constants that correspond to the data types that are found in Informix® databases. The program uses these constants to determine the data types of columns that the dynamic SELECT statement returns.

The `locator.h` file contains the definition of the locator structure (**ifx_loc_t**), which is the type of host variable needed for TEXT and BYTE columns. The `datetime.h` file contains definitions of the **datetime** and **interval** structures, which are the data types of host variables for DATETIME and INTERVAL columns. The `decimal.h` file contains the definition of the **dec_t** structure, which is the type of host variable needed for DECIMAL columns.

Lines 14 - 17

The `exp_chk()` exception-handling function uses the `WARNNOTIFY` and `NOWARNNOTIFY` constants (lines 14 and 15). The second argument of `exp_chk()` tells the function to display information in the `SQLSTATE` and `SQLCODE` variables for warnings (`WARNNOTIFY`) or not to display information for warnings (`NOWARNNOTIFY`). The `exp_chk()` function is in the `exp_chk.ec` source file. For a description, see [Guide to the exp_chk.ec file on page 309](#).

Line 16 defines `LCASE`, a macro that converts an uppercase character to a lowercase character. Line 17 defines `BUFFSZ` to be the number 256. The program uses `BUFFSZ` to specify the size of arrays that store input from the user.

Line 18

Line 18 declares `statement` as an external global variable to hold the name of the last SQL statement that the program asked the database server to execute. The exception-handling functions use this information. (See lines 399 - 406.)

```

=====
19. EXEC SQL BEGIN DECLARE SECTION;
20.     ifx_loc_t lcat_descr;
21.     ifx_loc_t lcat_picture;
22. EXEC SQL END DECLARE SECTION;
23. mint whenexp_chk();
24. main(argc, argv)
25. mint argc;
26. char *argv[];
27. {
28.     int4 ret, getrow();
29.     short data_found = 0;
30. EXEC SQL BEGIN DECLARE SECTION;
31.     char ans[BUFFSZ], db_name[30];
32.     char name[40];
33.     mint sel_cnt, i;
34.     short type;
35. EXEC SQL END DECLARE SECTION;
36.     printf("DYN_SQL Sample ESQL Program running.\n\n");
37.     EXEC SQL whenever sqlerror call whenexp_chk;
38.     if (argc > 2)             /* correct no. of args? */
39.     {
40.         printf("\nUsage: %s [database]\n\nIncorrect no. of
         argument(s)\n",
41.             argv[0]);
42.         printf("\nDYN_SQL Sample Program over.\n\n");
43.         exit(1);
44.     }
45.     strcpy(db_name, "stores7");
46.     if(argc == 2)
47.         strcpy(db_name, argv[1]);
48.     sprintf(statement,"CONNECT TO %s",db_name);
49.     EXEC SQL connect to :db_name;
50.     printf("Connected to %s\n", db_name);
51.     ++argv;
=====

```


Lines 19 - 23

Lines 19 - 23 define the global host variables that are used in SQL statements. Lines 20 and 21 define the locator structures that are the host variables for the **cat_descr** and **cat_picture** columns of the **catalog** table. Line 23 declares the `whenexp_chk()` function, which the program calls when an error occurs on an SQL statement.

Lines 24 - 27

The `main()` function is the point where the program begins to execute. The **argc** parameter gives the number of arguments from the command line when the program was invoked. The **argv** parameter is an array of pointers to command-line arguments. This program expects only one argument (the name of the database to be accessed), and it is optional.

Lines 28 - 51

Line 28 defines an **int4** data type (**ret**) to receive a return value from the `getrow()` function. Line 28 also declares that the `getrow` function returns a **int4** data type. Lines 30 - 35 define the host variables that are local to the `main()` program block. Line 37 executes the **WHENEVER** statement to transfer control to `whenexp_chk()` if any errors occur in SQL statements. For more information about the `whenexp_chk()` function, see [Guide to the `exp_chk.ec` file on page 309](#).

Lines 38 - 51 establish a connection to a database. If **argc** equals 2, the program assumes that the user entered a database name on the command line (by convention the first argument is the name of the program), and the program opens this database. If the user did not enter a database name on the command line, the program opens the **stores7** database (see line 45), which is the default. In both cases, the program connects to the default database server that is specified by the **INFORMIXSERVER** environment variable because no database server is specified.

```

=====
52.  while(1)
53.  {
54.      /* prompt for SELECT statement */
55.      printf("\nEnter a SELECT statement for the %s database",
56.          db_name);
57.      printf("\n\t(e.g.  select * from customer;)\n");
58.      printf("\tOR a ';' to terminate program:\n>> ");
59.      if(!getans(ans, BUFFSZ))
60.          continue;
61.      if (*ans == ';')
62.          {
63.              strcpy(statement, "DISCONNECT");
64.              EXEC SQL disconnect current;
65.              printf("\nDYN_SQL Sample Program over.\n\n");
66.              exit(1);
67.          }
68.      /* prepare statement id */
69.      printf("\nPreparing statement (%s)...\n", ans);
70.      strcpy(statement, "PREPARE sel_id");
71.      EXEC SQL prepare sel_id from :ans;
72.      /* declare cursor */
73.      printf("Declaring cursor 'sel_curs' for SELECT...\n");
74.      strcpy(statement, "DECLARE sel_curs");
75.      EXEC SQL declare sel_curs cursor for sel_id;
76.      /* allocate descriptor area */
77.      printf("Allocating system-descriptor area...\n");

```

```

78.     strcpy(statement, "ALLOCATE DESCRIPTOR selcat");
79.     EXEC SQL allocate descriptor 'selcat';
80.     /* Ask the database server to describe the statement */
81.     printf("Describing prepared SELECT...\n");
82.     strcpy(statement,
83.         "DESCRIBE sel_id USING SQL DESCRIPTOR selcat");
84.     EXEC SQL describe sel_id using sql descriptor 'selcat';
85.     if (SQLCODE != 0)
86.     {
87.         printf("** Statement is not a SELECT.\n");
88.         free_stuff();
89.         strcpy(statement, "DISCONNECT");
90.         EXEC SQL disconnect current;
91.         printf("\nDYN_SQL Sample Program over.\n\n");
92.         exit(1);
93.     }
=====

```

Lines 52 - 67

The **while(1)** on line 52 begins a loop that continues to the end of the `main()` function. Lines 55 - 58 prompt the user to enter either a SELECT statement or, to terminate the program, a semicolon. The `getans()` function receives the input from the user. If the first character is not a semicolon, the program continues to process the input.

Lines 68 - 75

The PREPARE statement prepares the SELECT statement (which the user enters) from the array `ans[]` and assigns it the statement identifier `sel_id`. The PREPARE statement enables the database server to parse, validate, and generate an execution plan for the statement.

The DECLARE statement (lines 72 - 75) creates the `sel_curs` cursor for the set of rows that the SELECT statement returns, in case it returns more than one row.

Lines 76 - 79

The ALLOCATE DESCRIPTOR statement allocates the `selcat` system-descriptor area in memory. The statement does not include the WITH MAX clause and, therefore, uses the default memory allocation, which is for 100 columns.

Lines 80 - 93

The DESCRIBE statement obtains information from the database server about the statement that is in the `sel_id` statement identifier. The database server returns the information in the `selcat` system-descriptor area, which the preceding ALLOCATE DESCRIPTOR statement creates. The information that DESCRIBE puts into the system-descriptor area includes the number, names, data types, and lengths of the columns in the select list.

The DESCRIBE statement also sets the SQLCODE variable to a number that indicates the type of statement that was described. To check whether the statement type is SELECT, line 85 compares the value of SQLCODE to 0 (the value defined in the `sqlstypes.h` file for a SELECT statement with no INTO TEMP clause). If the statement is not a SELECT, line 87 displays a message to that effect and the program frees the cursor and the resources that have been allocated. Then it closes the connection and exits.

```

=====
94.  /* Determine the number of columns in the select list */
95.      printf("Getting number of described values from ");
96.      printf("system-descriptor area...\n");
97.      strcpy(statement, "GET DESCRIPTOR selcat: COUNT field");
98.      EXEC SQL get descriptor 'selcat' :sel_cnt = COUNT;
99.  /* open cursor; process select statement */
100.     printf("Opening cursor 'sel_curs'...\n");
101.     strcpy(statement, "OPEN sel_curs");
102.     EXEC SQL open sel_curs;
103.  /*
104.     * The following loop checks whether the cat_picture or
105.     * cat_descr columns are described in the system-descriptor area.
106.     * If so, it initializes a locator structure to read the simple
107.     * large-object data into memory and sets the address of the
108.     * locator structure in the system-descriptor area.
109.     */
110.     for(i = 1; i <= sel_cnt; i++)
111.     {
112.         strcpy(statement,
113.             "GET DESCRIPTOR selcat: TYPE, NAME fields");
114.         EXEC SQL get descriptor 'selcat' VALUE :i
115.             :type = TYPE,
116.             :name = NAME;
117.         if (type == SQLTEXT && !strcmp(name, "cat_descr",
118.             strlen("cat_descr")))
119.         {
120.             lcat_descr.loc_loctype = LOCMEMORY;
121.             lcat_descr.loc_bufsize = -1;
122.             lcat_descr.loc_oflags = 0;
123.             strcpy(statement, "SET DESCRIPTOR selcat: DATA field");
124.             EXEC SQL set descriptor 'selcat' VALUE :i
125.                 DATA = :lcat_descr;
126.         }
127.         if (type == SQLBYTES && !strcmp(name, "cat_picture",
128.             strlen("cat_picture")))
129.         {
130.             lcat_picture.loc_loctype = LOCMEMORY;
131.             lcat_picture.loc_bufsize = -1;
132.             lcat_picture.loc_oflags = 0;
133.             strcpy(statement, "SET DESCRIPTOR selcat: DATA field");
134.             EXEC SQL set descriptor 'selcat' VALUE :i
135.                 DATA = :lcat_picture;
136.         }
137.     }
=====

```

Lines 94 - 98

The GET DESCRIPTOR statement retrieves the COUNT value from the **selcat** system-descriptor area. The COUNT value indicates how many columns are described in the system-descriptor area.

Lines 99 - 102

The OPEN statement begins execution of the dynamic SELECT statement and activates the **sel_curs** cursor for the set of rows that it returns.

Lines 114 - 137

This section of the code uses the GET DESCRIPTOR statement to determine whether the simple large-object columns from the **catalog** table (**cat_descr** and **cat_picture**) are included in the select list. If you dynamically select a simple large-object column, you must set the address of a locator structure into the DATA field of the item descriptor to tell the database server where to return the locator structure.

First, however, the program initializes the locator structure, as follows:

- The data is returned in a memory buffer (**loc_loctype = LOCMEMORY**).
- The database server allocates the memory buffer (**loc_bufsize = -1**).

Then the program uses the SET DESCRIPTOR statement to load the address of the locator structure into the DATA field of the descriptor area.

For more information about how to work with the TEXT and BYTE data types, see [Simple large objects on page 135](#).

```

=====
138.     while(ret = getrow("selcat"))           /* fetch a row */
139.     {
140.         data_found = 1;
141.         if (ret < 0)
142.         {
143.             strcpy(statement, "DISCONNECT");
144.             EXEC SQL disconnect current;
145.             printf("\nDYN_SQL Sample Program over.\n\n");
146.             exit(1);
147.         }
148.         disp_data(sel_cnt, "selcat");         /* display the data */
149.     }
150.     if (!data_found)
151.         printf("*** No matching rows found.\n");
152.     free_stuff();
153.     if (!more_to_do())                       /* More to do? */
154.         break;                               /* no, terminate loop */
155.     }
156. }
157. /* fetch the next row for selected items */
158. int4 getrow(sysdesc)
159. EXEC SQL BEGIN DECLARE SECTION;
160.     PARAMETER char *sysdesc;
161. EXEC SQL END DECLARE SECTION;
162. {
163.     int4 exp_chk();
164.     sprintf(statement, "FETCH %s", sysdesc);
165.     EXEC SQL fetch sel_curs using sql descriptor :sysdesc;
166.     return((exp_chk(statement)) == 100 ? 0 : 1);
167. }
=====

```

Lines 138 - 149

The `getrow()` function retrieves the selected rows one by one. Each iteration of the **while** loop retrieves one row, which the program then processes with the `disp_data()` function (line 148). When all the rows are retrieved, `getrow()` returns a `0` (zero) and the **while** loop terminates. For more information about the `getrow()` function, see [Lines 157 - 167 on page 513](#).

Line 152

The `free_stuff()` function frees resources that were allocated when the dynamic SELECT statement was processed. See [Lines 381 - 387 on page 518](#).

Lines 153 - 156

When all the selected rows are processed, the program calls the `more_to_do()` function, which asks whether the user would like to process more SELECT statements. If the answer is no, `more_to_do()` returns `0` and the **break** statement terminates the **while** loop that began on line 52. If the answer is yes, the program begins the next iteration of the **while** statement on line 52 to accept and process another SELECT statement.

Lines 157 - 167

The `getrow()` function moves the cursor to and then fetches the next row in the set of rows that are returned by the dynamic SELECT statement. It fetches the row values into the system-descriptor area that is specified in the **sysdesc** variable. If there are no more rows to fetch (`exp_chk()` returns `100`), `getrow()` returns `0`. If the FETCH encounters a runtime error, `getrow()` returns `1`.

```

=====
168. {/*
169.  * This function loads a column into a host variable of the correct
170.  * type and displays the name of the column and the value, unless
171.  * the
172.  * value is NULL.
173.  */
174.  mint col_cnt;
175.  EXEC SQL BEGIN DECLARE SECTION;
176.  PARAMETER char *sysdesc;
177.  EXEC SQL END DECLARE SECTION;
178.  EXEC SQL BEGIN DECLARE SECTION;
179.  mint int_data, i;
180.  char *char_data;
181.  int4 date_data;
182.  datetime dt_data;
183.  interval intvl_data;
184.  decimal dec_data;
185.  short short_data;
186.  char name[40];
187.  short char_len, type, ind;
188.  EXEC SQL END DECLARE SECTION;
189.  int4 size;
190.  unsigned amount;
191.  mint x;
192.  char shdesc[81], str[40], *p;

```

```

193.     printf("\n\n");
194.     /* For each column described in the system descriptor area,
195.      * determine its data type. Then retrieve the column name and its
196.      * value, storing the value in a host variable defined for the
197.      * particular data type. If the column is not NULL, display the
198.      * name and value.
199.      */
200.     for(i = 1; i <= col_cnt; i++)
201.     {
202.         strcpy(statement, "GET DESCRIPTOR: TYPE field");
203.         EXEC SQL get descriptor :sysdesc VALUE :i
204.             :type = TYPE;
205.         switch(type)
206.         {
207.             case SQLSERIAL:
208.             case SQLINT:
209.                 strcpy(statement,
210.                     "GET DESCRIPTOR: NAME, INDICATOR, DATA fields");
211.                 EXEC SQL get descriptor :sysdesc VALUE :i
212.                     :name = NAME,
213.                     ind = INDICATOR,
214.                     :int_data = DATA;
215.                 if(ind == -1)
216.                     printf("\n%.20s: NULL", name);
217.                 else
218.                     printf("\n%.20s: %d", name, int_data);
219.                 break;
220.             case SQLSMINT:
221.                 strcpy(statement,
222.                     "GET DESCRIPTOR: NAME, INDICATOR, DATA fields");
223.                 EXEC SQL get descriptor :sysdesc VALUE :i
224.                     :name = NAME,
225.                     :ind = INDICATOR,
226.                     :short_data = DATA;
227.                 if(ind == -1)
228.                     printf("\n%.20s: NULL", name);
229.                 else
230.                     printf("\n%.20s: %d", name, short_data);
231.                 break;
232.             case SQLDECIMAL:
233.             case SQLMONEY:
234.                 strcpy(statement,
235.                     "GET DESCRIPTOR: NAME, INDICATOR, DATA fields");
236.                 EXEC SQL get descriptor :sysdesc VALUE :i
237.                     :name = NAME,
238.                     :ind = INDICATOR,
239.                     :dec_data = DATA;
240.                 if(ind == -1)
241.                     printf("\n%.20s: NULL", name);
242.                 else
243.                 {
244.                     if(type == SQLDECIMAL)
245.                         rfmtdec(&dec_data, "###,###,###.##", str);
246.                     else
247.                         rfmtdec(&dec_data, "$$$,$$$,$$$.$$$", str);
248.                     printf("\n%.20s: %s", name, str);
249.                 }
250.                 break;

```

```

251.     case SQLDATE:
252.         strcpy(statement,
253.             "GET DESCRIPTOR: NAME, INDICATOR, DATA fields");
254.         EXEC SQL get descriptor :sysdesc VALUE :i
255.             :name = NAME,
256.             :ind = INDICATOR,
257.             :date_data = DATA;
258.         if(ind == -1)
259.             printf("\n%.20s: NULL", name);
260.         else
261.             {
262.                 if((x = rfmtdate(date_data, "mmm. dd, yyyy",
263.                     str)) < 0)
264.                     printf("\ndisp_data() - DATE - fmt error");
265.                 else
266.                     printf("\n%.20s: %s", name, str);
267.             }
268.         break;
269.     case SQLDTIME:
270.         strcpy(statement,
271.             "GET DESCRIPTOR: NAME, INDICATOR, DATA fields");
272.         EXEC SQL get descriptor :sysdesc VALUE :i
273.             :name = NAME,
274.             :ind = INDICATOR,
275.             :dt_data = DATA;
276.         if(ind == -1)
277.             printf("\n%.20s: NULL", name);
278.         else
279.             {
280.                 x = dttofmtasc(&dt_data, str, sizeof(str), 0);
281.                 printf("\n%.20s: %s", name, str);
282.             }
283.         break;
284.     case SQLINTERVAL:
285.         strcpy(statement,
286.             "GET DESCRIPTOR: NAME, INDICATOR, DATA fields");
287.         EXEC SQL get descriptor :sysdesc VALUE :i
288.             :name = NAME,
289.             :ind = INDICATOR,
290.             :intvl_data = DATA;
291.         if(ind == -1)
292.             printf("\n%.20s: NULL", name);
293.         else
294.             {
295.                 if((x = intofmtasc(&intvl_data, str,
296.                     sizeof(str),
297.                     "%3d days, %2H hours, %2M minutes"))
298.                     < 0)
299.                     printf("\nINTRVL - fmt error %d", x);
300.                 else
301.                     printf("\n%.20s: %s", name, str);
302.             }
303.         break;
304.     case SQLVCHAR:
305.     case SQLCHAR:
306.         strcpy(statement,
307.             "GET DESCRIPTOR: LENGTH, NAME fields");
308.         EXEC SQL get descriptor :sysdesc VALUE :i

```

```

309.         :char_len = LENGTH,
310.         :name = NAME;
311.     amount = char_len;
312.     if(char_data = (char *) (malloc(amount + 1)))
313.     {
314.         strcpy(statement,
315.             "GET DESCRIPTOR: NAME, INDICATOR, DATA fields");
316.         EXEC SQL get descriptor :sysdesc VALUE :i
317.             :char_data = DATA,
318.             :ind = INDICATOR;
319.         if(ind == -1)
320.             printf("\n%.20s: NULL", name);
321.         else
322.             printf("\n%.20s: %s", name, char_data);
323.     }
324.     else
325.     {
326.         printf("\n%.20s: ", name);
327.         printf("Can't display: out of memory");
328.     }
329.     break;
330. case SQLTEXT:
331.     strcpy (statement,
332.         "GET DESCRIPTOR: NAME, INDICATOR, DATA fields");
333.     EXEC SQL get descriptor :sysdesc VALUE :i
334.         :name = NAME,
335.         :ind = INDICATOR,
336.         :lcat_descr = DATA;
337.     size = lcat_descr.loc_size;    /* get size of data */
338.     printf("\n%.20s: ", name);
339.     if(ind == -1)
340.     {
341.         printf("NULL");
342.         break;
343.     }
344.     p = lcat_descr.loc_buffer;    /* set p to buf addr */
345.     /* print buffer 80 characters at a time */
346.     while(size >= 80)
347.     {
348.         /* mv from buffer to shdesc */
349.         ldchar(p, 80, shdesc);
350.         printf("\n%80s", shdesc);    /* display it */
351.         size -= 80;    /* decrement length */
352.         p += 80;    /* bump p by 80 */
353.     }
354.     strncpy(shdesc, p, size);
355.     shdesc[size] = '\0';
356.     printf("%-s\n", shdesc);    /* dsply last segment */
357.     break;
358. case SQLBYTES:
359.     strcpy (statement,
360.         "GET DESCRIPTOR: NAME, INDICATOR fields");
361.     EXEC SQL get descriptor :sysdesc VALUE :i
362.         :name = NAME,
363.         :ind = INDICATOR;
364.     if(ind == -1)
365.         printf("%%.20s: NULL", name);
366.     else

```



```

367.         {
368.             printf("%.20s: ", name);
369.             printf("Can't display BYTE type value");
370.         }
371.         break;
372.     default:
373.         printf("\nUnexpected data type: %d", type);
374.         EXEC SQL disconnect current;
375.         printf("\nDYN_SQL Sample Program over.\n\n");
376.         exit(1);
377.     }
378. }
379. printf("\n");
380.}
=====

```

Lines 168 - 380

The `disp_data()` function displays the values that are stored in each row that the `SELECT` statement returns. The function must be able to receive and process any data type within the scope of the dynamic `SELECT` statement (in this case, any column within the **stores7** database). This function accepts two arguments: `col_cnt` contains the number of columns that are contained in the system-descriptor area, and `sysdesc` contains the name of the system-descriptor area that contains the column information. This second argument must be declared with the `PARAMETER` keyword because the argument is used in the `FETCH` statement.

The `disp_data()` function first defines host variables for each of the data types that are found in the **stores7** database (lines 178 - 188), except for the locator structures that have been globally defined already for the **cat_descr** and **cat_picture** columns of the **catalog** table (lines 19 - 22).

For each column that is described in the system-descriptor area, `disp_data()` retrieves its data type with a `GET DESCRIPTOR` statement. Next, `disp_data()` executes a **switch** on that data type and, for each type (column), it executes another `GET DESCRIPTOR` statement to retrieve the name of the column, the indicator flag, and the data. Unless the column is null, `disp_data()` moves the column data from the `DATA` field of the system-descriptor area to a corresponding host variable. Then it displays the column name and the content of the host variable.

The `disp_data()` function uses the symbolic constants defined in `sqltypes.h` to compare data types. It also uses the Informix® ESQL/C library functions `rfmtdec()`, `rfmtdate()`, `dttofmtasc()`, and `intofmtosc()` to format the `DECIMAL` and `MONEY`, `DATE`, `DATETIME`, and `INTERVAL` data types for display.

For the `TEXT` and `BYTE` data types, you can retrieve the value of the column with the following two-stage process, because the database server returns a locator structure rather than the data:

- The `GET DESCRIPTOR` statement (lines 333 and 361) retrieves the locator structure from the system-descriptor area and moves it to the **ifx_loc_t** host variable.
- The `disp_data()` function obtains the address of the data buffer from the locator structure, in **loc_buffer**, and retrieves the data from there.

Regarding the `BYTE` data type, for the sake of brevity `disp_data()` retrieves the locator structure but does not display the data. For an example of the type of logic required to display a `BYTE` column, see [Guide to the `dispcat_pic.ec` File on page 168](#).

```

=====
381. free_stuff()
382. {
383.     EXEC SQL free sel_id;    /* free resources for statement */
384.     EXEC SQL free sel_curs;  /* free resources for cursor */
385.     /* free system descriptor area */
386.     EXEC SQL deallocate descriptor 'selcat';
387. }
388. /*
389.  * The inpfuncs.c file contains the following functions used in
390.  * this
391.  * program:
392.  *   more_to_do() - asks the user to enter 'y' or 'n' to indicate
393.  *                 whether to run the main program loop again.
394.  *   getans(ans, len) - accepts user input, up to 'len' number of
395.  *                     characters and puts it in 'ans'
396.  */
397. #include "inpfuncs.c"
398. /*
399.  * The exp_chk.ec file contains the exception handling functions to
400.  * check the SQLSTATE status variable to see if an error has
401.  * occurred
402.  * following an SQL statement. If a warning or an error has
403.  * occurred, exp_chk() executes the GET DIAGNOSTICS statement and
404.  * displays the detail for each exception that is returned.
405.  */
405. EXEC SQL include exp_chk.ec;
=====

```

Lines 381 - 387

The `free_stuff()` function frees resources that were allocated to process the dynamic statement. Line 383 frees resources that were allocated by the application when it prepared the dynamic `SELECT` statement. Line 384 releases resources allocated by the database server to process the `sel_curs` cursor. The `DEALLOCATE DESCRIPTOR` statement releases the memory allocated for the `selcat` system-descriptor area and its associated data areas.

Lines 388 - 397

Several of the Informix® ESQL/C demonstration programs also call the `more_to_do()` and `getans()` functions. Therefore, these functions are also broken out into a separate C source file and included in the appropriate demonstration program. Neither of these functions contain Informix® ESQL/C, so the program can use the C `#include` preprocessor statement to include the file. For a description of these functions, see [Guide to the inpfuncs.c file on page 176](#).

Lines 398 - 405

As a result of the `WHENEVER` statement on line 37, the `whenexp_chk()` function is called if an error occurs during the execution of an SQL statement. The `whenexp_chk()` function examines the `SQLSTATE` status variable to determine the outcome of an SQL statement. Because several demonstration programs use this function with the `WHENEVER` statement for exception handling, the `whenexp_chk()` function and its supporting functions have been broken out into a separate `exp_chk.ec` source file. The `dyn_sql` program must include this file with the Informix® ESQL/C `include` directive because

the exception-handling functions use Informix® ESQL/C statements. The `exp_chk.ec` source file is described in [Exception handling on page 276](#).



Tip: In a production environment, you would put functions such as `more_to_do()`, `getans()`, and `whenexp_chk()` into a library and include them on the command line when you compile the Informix® ESQL/C program.

An `sqlda` structure

An `sqlda` structure is a dynamic-management structure that can hold data that is either returned from or sent to the database server by a prepared statement. It is a C structure defined in the `sqlda.h` header file.



Important: The `sqlda` structure does not conform to the X/Open standards. It is the HCL Informix® extension to Informix® ESQL/C.

These topics describe the following information about how to use an `sqlda` structure:

- Using an `sqlda` structure to hold unknown values
- Managing an `sqlda` structure
- Using an `sqlda` structure to handle unknown values in dynamic SQL statements

Manage an `sqlda` structure

Your Informix® ESQL/C program can manipulate an `sqlda` structure with the SQL statements that the following tables summarize.

Table 89. SQL statements that can be used to manipulate an `sqlda` structure

SQL Statement	Purpose	See
DESCRIBE...INTO	Allocates an <code>sqlda</code> structure and initializes this structure with information about column-list columns	Allocate memory for the <code>sqlda</code> structure on page 521 Initialize the <code>sqlda</code> structure on page 521

Table 90. SQL statements that can be used to manipulate an `sqlda` structure: SELECT and EXECUTE FUNCTION statements that use cursors

SQL Statement	Purpose	See
OPEN...USING DESCRIPTOR	Takes any input parameters from the specified <code>sqlda</code> structure	Specify input parameter values on page 527
FETCH...USING DESCRIPTOR		

Table 90. SQL statements that can be used to manipulate an `sqllda` structure: SELECT and EXECUTE FUNCTION statements that use cursors (continued)

SQL Statement	Purpose	See
	Puts the contents of the row into the <code>sqllda</code> structure	Put column values into an <code>sqllda</code> structure on page 527

Table 91. SQL statements that can be used to manipulate an `sqllda` structure: SELECT and EXECUTE FUNCTION statements that return only one row

SQL Statement	Purpose	See
EXECUTE...INTO DESCRIPTOR	Puts the contents of the singleton row into the <code>sqllda</code> structure	Put column values into an <code>sqllda</code> structure on page 527

Table 92. SQL statements that can be used to manipulate an `sqllda` structure: non-SELECT statements

SQL Statement	Purpose	See
EXECUTE...USING DESCRIPTOR	Takes any input parameters from the specified <code>sqllda</code> structure	Specify input parameter values on page 527

Table 93. SQL statements that can be used to manipulate an `sqllda` structure: an INSERT statement that uses an insert cursor

SQL Statement	Purpose	See
PUT...USING DESCRIPTOR	Puts a row into the insert buffer after it obtains the column values from the specified <code>sqllda</code> structure	Handling an unknown column list on page 538

In addition, your IBM® Informix® ESQL/C program can manage an `sqllda` structure in the following ways:

- Declare a variable pointer to an `sqllda` structure.
- Assign values to the `sqllda` fields to provide the database server with missing column information.
- Obtain information from the `sqllda` fields to access column information that is received from the database server.
- Free the memory allocated to the `sqllda` structure when your program is finished with it.

Define an `sqllda` structure

The IBM® Informix® ESQL/C `sqllda.h` header file defines the `sqllda` structure.

To define an **sqlda** structure, the Informix® ESQL/C program must take the following actions:

- Include the `sqlda.h` header file to provide the declaration for **sqlda** in your program

The Informix® ESQL/C preprocessor automatically includes the `sqlhdr.h` file, which includes the `sqlda.h` header file.

- Declare a variable name as a pointer to the **sqlda** structure

The following line of code declares the **da_ptr** variable as an **sqlda** pointer:

```
struct sqlda *da_ptr;
```



Important: The pointer to an **sqlda** structure is not the Informix® ESQL/C host variable. Therefore, you do not need to precede the statement declaration with either the keywords EXEC SQL or a dollar (\$) symbol. Furthermore, in the program blocks you do not precede any references to the pointer with a colon (:) or a dollar (\$) symbol.

Allocate memory for the sqlda structure

After you define a host variable as a pointer to an **sqlda** structure, you must ensure that memory is allocated for all parts of this structure, as follows:

- To allocate memory for the **sqlda** structure itself, use the DESCRIBE...INTO statement.

The following DESCRIBE statement obtains information about the prepared statement **st_id**, allocates memory for an **sqlda** structure, and puts the address of the **sqlda** structure in the pointer **da_ptr**:

```
EXEC SQL describe st_id into da_ptr;
```

- To allocate memory for the **sqlvar_struct** structures, take the following actions:
 - If the prepared statement is a SELECT (with no INTO TEMP clause), INSERT, or EXECUTE FUNCTION statement, the DESCRIBE...INTO statement can allocate space for **sqlvar_struct** structures.
 - If some other SQL statement was prepared and you need to send or receive columns in the database server, your program must allocate space for the **sqlvar_struct** structures.
- To allocate memory for the data of the **sqldata** fields, make sure that you align the data types with proper word boundaries.

If you use the **sqlda** structure to define input parameters, you cannot use a DESCRIBE statement. Therefore, your program must explicitly allocate memory for both the **sqlda** structure and the **sqlvar_struct** structures.

Initialize the sqlda structure

To send or receive column values in the database, your Informix® ESQL/C program must initialize the **sqlda** structure so that it describes the unknown columns of the prepared statement.

To initialize the **sqlda** structure, you must perform the following steps:

- Set the **sqlvar** field to the address of the initialized **sqlvar_struct** structures.
- Set the **sqllda** field to indicate the number of unknown columns (and associated **sqlvar_struct** structures).

In addition to allocating memory for the **sqllda** structure (see [Allocate memory for the sqllda structure on page 521](#)), the DESCRIBE...INTO statement also initializes this structure with information about the prepared statement. The information that DESCRIBE...INTO can provide depends on which SQL statement it has described.

If the prepared statement is a SELECT (with no INTO TEMP clause), INSERT, or EXECUTE FUNCTION statement, the DESCRIBE...INTO statement can determine information about columns in the column list. Therefore, the DESCRIBE...INTO statement takes the following actions to initialize an **sqllda** structure:

- It allocates memory for the **sqllda** structure. For more information, see [Allocate memory for the sqllda structure on page 521](#).
- It sets the **sqllda.sqllda** field, which contains the number of **sqlvar_struct** structures initialized with data. This value is the number of columns and expressions in the column list (SELECT and INSERT) or the number of returned values (EXECUTE FUNCTION).
- It allocates memory for component **sqlvar_struct** structures, one **sqlvar_struct** structure for each column or expression in the column list (SELECT and INSERT) or for each of the returned values (EXECUTE FUNCTION).
- It sets the **sqllda.sqlvar** field to the initial address of the memory that DESCRIBE allocates for the **sqlvar_struct** structures.
- It describes each unknown column in the prepared SELECT (without an INTO TEMP), EXECUTE FUNCTION, or INSERT statement. The DESCRIBE...INTO statement initializes the fields of the **sqlvar_struct** structure for each column, as follows:
 - It initializes the **sqltype**, **sqllen**, and **sqlname** fields (for CHAR type data or for the qualifier of DATETIME or INTERVAL data) to provide information from the database about the column.

For most data types, the **sqllen** field holds the length, in bytes, of the column. If the column is a collection type (SET, MULTISSET, or LIST), a row type (named or unnamed), or an opaque type, the **sqllen** field is zero.

- It initializes the **sqldata** and **sqlind** fields to null.

For descriptions of these fields, see [Table 79: Fields in the sqlvar_struct structure on page 444](#).



Important: Unlike with a system-descriptor area, DESCRIBE with an **sqllda** pointer does not allocate memory for the column data (the **sqldata** fields). Before your program receives column values from the database server, it must allocate this data space.

For more information, see [Allocate memory for column data on page 524](#).

The DESCRIBE statement provides information about the columns of a column list. Therefore, you usually use DESCRIBE...INTO *after* a SELECT (without an INTO TEMP clause), INSERT, or EXECUTE FUNCTION statement was prepared. The DESCRIBE...INTO statement not only initializes the **sqllda** structure, but also returns the type of SQL statement prepared. For more information, see [Determine the statement type on page 447](#).


The following DESCRIBE statement also allocates memory for an **sqllda** structure and for two **sqlvar_struct** data structures (one for the **customer_num** column and another for the **company** column) and then initializes the pointer **da_ptr->sqlvar** with the initial address of the memory that is allocated to the **sqlvar_struct** structure:

```
EXEC SQL prepare st_id
  'select customer_num, company from customer
  where customer_num = ?';
EXEC SQL describe st_id into da_ptr;
```

The preceding DESCRIBE...INTO statement returns an SQLCODE value of 0 to indicate that the prepared statement was a SELECT statement.

The following figure shows a sample **sqllda** structure that this DESCRIBE...INTO statement might initialize.

Figure 85. Sample sqllda Structure for Two Columns

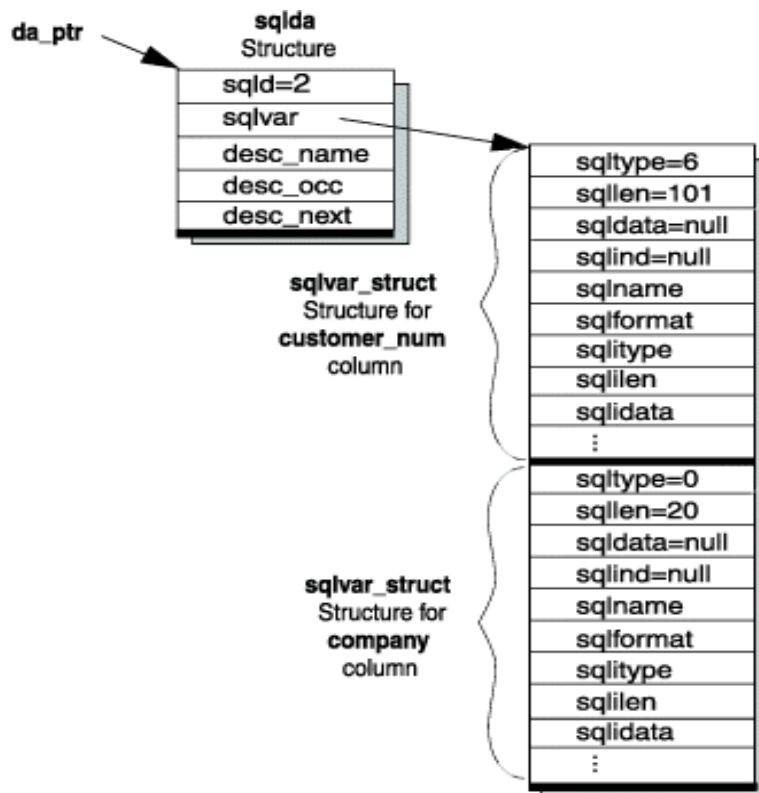

If some other SQL statement was prepared, the DESCRIBE...INTO statement cannot initialize the **sqllda** structure. To send or receive column values in the database, your program must perform this initialization explicitly, as follows:

- Allocate memory for component **sqlvar_struct** structures, one **sqlvar_struct** structure for each column.

You can use system memory-allocation functions such as `malloc()` or `calloc()` and assign the address to **sqlvar**, as follows:

```
da_ptr->sqlvar = (struct sqlvar_struct *)
  calloc(count, sizeof(struct sqlvar_struct));
```

- Perform the following tasks to describe each unknown column:

- Set the **sqlda.sqld** field, which contains the number of **sqlvar_struct** structures initialized with data. This value is the number of unknown columns in the prepared statement.
- Initialize the fields of each **sqlvar_struct** structure.

Set the **sqltype**, **sqllen**, and **sqlname** fields (for CHAR type data or for the qualifier for DATETIME or INTERVAL data) to provide information about a column to the database server.

To provide the column data, your program must also allocate space for this data and set the **sqldata** field of each **sqlvar_struct** structure to the appropriate location within this space. For more information, see [Allocate memory for column data on page 524](#). If you send column data to the database server, be sure to set the **sqlind** field appropriately.

If you use the **sqlda** structure to define input parameters, you cannot use a DESCRIBE statement to initialize the **sqlda** structure. Your code must explicitly set the appropriate fields of the **sqlda** structure to define the input parameters. (See [Specify input parameter values on page 527](#).)

Allocate memory for column data

The **sqlda** structure stores a pointer to the data for each column in the **sqldata** field of an **sqlvar_struct** structure. Unlike the DESCRIBE...USING SQL DESCRIPTOR statement, the DESCRIBE...INTO statement does not allocate memory for this data. When the DESCRIBE...INTO statement allocates memory for the **sqlda** pointer, it initializes the **sqldata** fields of each **sqlvar_struct** structure to null.

To send or receive column data in the database, your IBM® Informix® ESQL/C program must perform the following tasks:

- Allocate memory for the column data.
- Set the **sqldata** field for the **sqlvar_struct** structure associated with the column to the address of the memory allocated for the column data.

To allocate memory for the **sqldata** fields, you can use a system memory-allocation function such as `malloc()` or `calloc()`. As an alternative to the `malloc()` system memory-allocation function, your program can declare a static character buffer for the data buffer. The following figure shows a code fragment that allocates column data from a static character buffer called **data_buff**.

Figure 86. Allocating column data from a static character buffer

```

static char data_buff[1024];
struct sqlda *sql_descp;
struct sqlvar_struct * col_ptr;
short cnt, pos;
int size;
;

for(col_ptr=sql_descp->sqlvar, cnt=pos=0; cnt < sql_descp->sqld;
    cnt++, col_ptr++)
{
    pos = (short)rtpalign(pos, col_ptr->sqltype);
    col_ptr->sqldata = &data_buff[pos];
    size = rtpmsize(col_ptr->sqltype, col_ptr->sqlllen);
    pos += size;
}

```

You can replace the code fragment in [Figure 86: Allocating column data from a static character buffer on page 525](#) with a series of system memory-allocation calls within the **for** loop. However, system memory-allocation calls can be expensive so it is often more efficient to have a single memory allocation and then align pointers into that memory area.

When you allocate the column data, make sure that the allocated memory is formatted for the column data type. This data type is one of the Informix® ESQL/C or SQL data types defined in the `sqltypes.h` header file. (See [Determine the data type of a column on page 452](#).) Make the allocated memory large enough to accommodate the maximum size of the data in the column.

You must also ensure that the data for each column begins on a proper word boundary in memory. On many hardware platforms, integer and other numeric data types must begin on a word boundary. The C language memory-allocation routines allocate memory that is suitably aligned for any data type, including structures, but the routines do not perform alignment for the constituent components of the structure.

Using the proper word boundaries assures that data types are machine independent. To assist you in this task, Informix® ESQL/C provides the following memory-management functions:

- The `rtpalign()` function returns the position of the next proper word boundary for a specified data type.

This function accepts two arguments: the current position in the data buffer and the integer Informix® ESQL/C or SQL data type for which you want to allocate space.

- The `rtpmsize()` function returns the number of bytes of memory that you must allocate for the specified Informix® ESQL/C or SQL data type.

This function accepts two arguments: the integer Informix® ESQL/C or SQL data type (in **sqltype**) and the length (in **sqlllen**) for each column value.

When you allocate memory for the DATETIME or INTERVAL data types, you can take any of the following actions to set the qualifiers in the **dttime_t** and **intrvl_t** structures:

- Use the value that is in the associated **sqlen** field of **sqlda**.
- Compose a different qualifier with the values and macros that the **datetime.h** header file defines.
- Set the data type qualifier to 0 and have the database server set this qualifier during the fetch. For DATETIME values, the data type qualifier is the **dt_qual** field of the **dtime_t** structure. For INTERVAL values, the data type qualifier is the **in_qual** field of the **intrvl_t** structure.

For examples that allocate memory for the **sqldata** fields, see the `demo3.ec` and `unload.ec` demonstration programs that are supplied with Informix® ESQL/C.

Assign and obtain values from an sqlda structure

When you use the **sqlda** structure with dynamic SQL, you must transfer information in and out of it with C-language statements.

Assign values

To assign values to fields in the **sqlda** and **sqlvar_struct** structures, use regular C-language assignment to fields of the appropriate structure. For example:

```
da_ptr->sqld = 1;
da_ptr->sqlvar[0].sqldata = compny_data;
da_ptr->sqlvar[0].sqltype = SQLCHAR; /* CHAR data type */
da_ptr->sqlvar[0].sqlen = 21; /* column is CHAR(20) */
```

Set **sqlda** fields to provide values for input parameters in a WHERE clause ([Specify input parameter values on page 527](#)) or to modify the contents of a field after you use the DESCRIBE...INTO statement to fill the **sqlda** structure ([Allocate memory for column data on page 524](#)).

Obtain values

To obtain values from the **sqlda** fields, you must also use regular C-language assignment from fields of the structure. For example:

```
count = da_ptr->sqld;
/* Allow for the trailing null character in C character arrays */
if (da_ptr->sqlvar[0].sqltype == SQLCHAR)
    a_ptr->sqlvar[0].sqlen += 1;
/* Allocate a separate buffer per column */
da_ptr->sqlvar[0].sqldata = malloc(col_ptr->sqlen);
```

Typically, you obtain **sqlda** field values to examine descriptions of columns in a SELECT, INSERT, or EXECUTE FUNCTION statement. You might also need to access these fields to copy a column value that is returned by the database server from the **sqlda** structure into a host variable ([Put column values into an sqlda structure on page 527](#)). In the latter case, you might need to change **sqlen** to account for the correct buffer length. For example, you must increment **sqlen** for a CHAR data type. If you do not increment **sqlen**, the last character of the fetched data will be truncated because the FETCH statement will assume that the **sqlen** value is the size of the buffer, and will use the last position in the buffer for the zero termination of the string.

The data type of the host variable must be compatible with the type of the associated field in the **sqllda** structure. When you interpret the **sqltype** field, make sure that you use the data type values that match your environment. For some data types, X/Open values differ from HCL Informix® values. For more information, see [Determine the data type of a column on page 452](#).

Specify input parameter values

Since the DESCRIBE...INTO statement does not analyze the WHERE clause, your program must explicitly allocate an **sqllda** structure and the **sqlvar_struct** structures (see [Allocate memory for the sqllda structure on page 521](#)). To describe the input parameters you must determine the number of input parameters and their data types and store this information in the allocated **sqllda** structure. For general information about how to define input parameters dynamically, see [Determine unknown input parameters on page 456](#).

When you execute a parameterized statement, you must include the USING DESCRIPTOR clause to specify the **sqllda** structure as the location of input parameter values, as follows:

- For input parameters in the WHERE clause of a SELECT statement, use the OPEN...USING DESCRIPTOR statement. This statement handles a sequential, scrolling, hold, or update cursor. If you are certain that the SELECT returns only one row, you can use the EXECUTE...INTO...USING SQL DESCRIPTOR statement instead of a cursor. For more information, see [Handling a parameterized SELECT statement on page 539](#).
- For input parameters in the WHERE clause of a non-SELECT statement such as DELETE or UPDATE, use the EXECUTE...USING DESCRIPTOR statement. For more information, see [Handling a parameterized UPDATE or DELETE statement on page 547](#).
- For input parameters in the VALUES clause of an INSERT statement, use the EXECUTE...USING SQL DESCRIPTOR statement. If the INSERT is associated with an insert cursor, use the PUT...USING DESCRIPTOR statement. For more information, see [Handling an unknown column list on page 538](#).

Put column values into an sqllda structure

When you create a SELECT statement dynamically, you cannot use the INTO *host_var* clause of FETCH because you cannot name the host variables in the prepared statement. To fetch column values into an **sqllda** structure, use the USING DESCRIPTOR clause of FETCH instead of the INTO clause. The FETCH...USING DESCRIPTOR statement puts each column value into the **sqldata** field of its **sqlvar_struct** structure.

Using the FETCH...USING DESCRIPTOR statement assumes that a cursor is associated with the prepared statement. You must always use a cursor for SELECT statements and cursor functions (EXECUTE FUNCTION statements that return multiple rows). However, if either of these statements returns only one row, you can omit the cursor and retrieve the column values into an **sqllda** structure with the EXECUTE...INTO DESCRIPTOR statement.



Important: If you execute a SELECT statement or user-defined function that returns more than one row and do not associate the statement with a cursor, your program generates a runtime error. When you associate a singleton SELECT (or EXECUTE FUNCTION) statement with a cursor, IBM® Informix® ESQL/C does not generate an error. Therefore, it is a good practice always to associate a dynamic SELECT or EXECUTE FUNCTION statement with a



cursor and to use a `FETCH...USING DESCRIPTOR` statement to retrieve the column values from this cursor into the `sqllda` structure.

Once the column values are in the `sqllda` structure, you can transfer the values from the `sqldata` fields to the appropriate host variables. You must use the `sqlllen` and `sqltype` fields to determine, at run time, the data types for the host variables. You might need to perform data type or length conversions between the SQL data types in the `sqltype` fields and the Informix® ESQL/C data types that are needed for host variables that hold the returned value.

Free memory allocated to an `sqllda` structure

Once you finish with an `sqllda` structure, free the associated memory. If you execute multiple `DESCRIBE` statements and you neglect to free the memory allocated by these statements, your application might run into memory constraints and the database server might exit.

If your application runs on a Windows™ operating system and uses the multi-threading library, use the IBM® Informix® ESQL/C function `SqlFreeMem()` to release the memory that the `sqllda` structure occupies as in this example:

```
SqlFreeMem(sqllda_ptr, SQLDA_FREE);
```

Otherwise, use the standard C library `free()` function, as shown in this example:

```
free(sqllda_ptr);
```

If your Informix® ESQL/C program executes a `DESCRIBE` statement multiple times for the same prepared statement and allocates a separate `sqllda` structure for each `DESCRIBE`, it must explicitly deallocate each `sqllda` structure. The following figure shows an example.

Figure 87. Deallocating multiple `sqllda` structures for the same prepared statement

```
EXEC SQL prepare qid from 'select * from customer';
EXEC SQL describe qid into sqldaptr1;
EXEC SQL describe qid into sqldaptr2;
EXEC SQL describe qid into sqldaptr3;
;;

free(sqldaptr1);
free(sqldaptr2);
free(sqldaptr3);
```

If your program allocated space for column data, you must also deallocate the memory allocated to the `sqldata` fields.

An `sqllda` structure to execute SQL statements

Use an SQL descriptor-area (`sqllda`) structure to execute SQL statements that contain unknown values.

The following table summarizes the types of dynamic statements that covered in this section.

Table 94. Using an `sqllda` structure to execute dynamic SQL statements

Purpose of the <code>sqllda</code> structure	See
Holds select-list column values retrieved by a SELECT	Handling an unknown select list on page 529
Holds returned values from user-defined functions	Handling unknown return values on page 535
Describes unknown columns in an INSERT	Handling an unknown column list on page 538
Describes input parameters in the WHERE clause of a SELECT	Handling a parameterized SELECT statement on page 539
Describes input parameters in the WHERE clause of a DELETE or UPDATE	Handling a parameterized UPDATE or DELETE statement on page 547

Handling an unknown select list

About this task

For an introduction on how to handle unknown columns in an unknown select list, see [Handling an unknown select list on page 455](#). This section describes how to use an `sqllda` structure to handle a SELECT statement.

To use an `sqllda` structure to handle unknown select-list columns:

1. Declare a variable to hold the address of an `sqllda` structure.
For more information, see [Define an `sqllda` structure on page 520](#).
2. Prepare the SELECT statement (with the PREPARE statement) to give it a statement identifier.
The SELECT statement cannot include an INTO TEMP clause. For more information, see [Assemble and prepare the SQL statement on page 400](#).
3. Use the DESCRIBE...INTO statement to perform two tasks:

- a. Allocate an **sqllda** structure.
The address of the allocated structure is stored in the **sqllda** pointer that you declare. For more information, see [Allocate memory for the sqllda structure on page 521](#).
 - b. Determine the number and data types of select-list columns.
The DESCRIBE statement fills an **sqlvar_struct** structure for each column of the select list. For more information, see [Initialize the sqllda structure on page 521](#).
4. Examine the **sqltype** and **sqlllen** fields of **sqllda** for each select-list column to determine the amount of memory that is required to allocate for the data.
For more information, see [Allocate memory for column data on page 524](#).
 5. Save the number of select-list columns stored in the **sqlld** field in a host variable.
 6. Declare and open a cursor and then use the FETCH...USING DESCRIPTOR statement to fetch column values, one row at a time, into an allocated **sqllda** structure.
See [Put column values into an sqllda structure on page 527](#).
 7. Retrieve the row data from the **sqllda** structure into host variables with C-language statements that access the **sqlldata** field for each select-list column.
For more information, see [Assign and obtain values from an sqllda structure on page 526](#).
 8. Release memory allocated to the **sqlldata** fields and the **sqllda** structure.
For more information, see [Free memory allocated to an sqllda structure on page 528](#).

Results



Important: If the SELECT statement has input parameters of an unknown number and type in the WHERE clause, your program must also handle these input parameters with an **sqllda** structure.

For more information, see [Handling a parameterized SELECT statement on page 539](#).

Execute a SELECT that returns multiple rows

The demo3.ec sample program executes a dynamic SELECT statement with the following conditions:

- The SELECT returns more than one row.

The SELECT must be associated with a cursor, executed with the OPEN statement, and have its return values retrieved with the FETCH...USING DESCRIPTOR statement.

- The SELECT has either no input parameters or no WHERE clause.

The OPEN statement does not need to include the USING clause.

- The SELECT has unknown columns in its select list.

The FETCH statement includes the USING DESCRIPTOR clause to store the return values in an **sqllda** structure.

The demo3.ec sample program

The **demo4** sample program ([The demo4.ec sample program on page 487](#)) assumes these same conditions. While **demo4** uses a system-descriptor area to define the select-list columns, **demo3** uses an **sqlda** structure. The **demo3** program does not perform exception handling.

```

=====
1. #include <stdio.h>
2. EXEC SQL include sqlda;
3. EXEC SQL include sqltypes;
4. main()
5. {
6. struct sqlda *demo3_ptr;
7. struct sqlvar_struct *col_ptr;
8. static char data_buff[1024];
9. int pos, cnt, size;
10. EXEC SQL BEGIN DECLARE SECTION;
11.     int2 i, desc_count;
12.     char demoquery[80];
13. EXEC SQL END DECLARE SECTION;
14.     printf("DEM03 Sample ESQL program running.\n\n");
15.     EXEC SQL connect to 'stores7';
=====

```

Line 2

The program must include the IBM® Informix® ESQL/C `sqlda.h` header file to provide a definition for the **sqlda** structure.

Lines 6 - 13

Lines 6 and 7 declare **sqlda** variables that are needed by the program. The **demo3_ptr** variable points to the **sqlda** structure that will hold the data that is fetched from the database. The **col_ptr** variable points to an **sqlvar_struct** structure so that the code can step through each of the **sqlvar_struct** structures in the variable-length portion of **sqlda**. Neither of these variables is declared as the Informix® ESQL/C host variable. Lines 10 - 13 declare host variables to hold the data that is obtained from the user and the data that is retrieved from the **sqlda** structure.

```

=====
16.     /* These next four lines have hard-wired both the query and
17.      * the value for the parameter. This information could have
18.      * been entered from the terminal and placed into the strings
19.      * demoquery and a query value string (queryvalue), respectively.
20.      */
21.     sprintf(demoquery, "%s %s",
22.            "select fname, lname from customer",
23.            "where lname < 'C' ");
24.     EXEC SQL prepare demo3id from :demoquery;
25.     EXEC SQL declare demo3cursor cursor for demo3id;
26.     EXEC SQL describe demo3id into demo3_ptr;
=====

```

Lines 16 - 24

These lines assemble the character string for the SELECT statement (in **demoquery**) and prepare it as the **demo3id** statement identifier. For more information about these steps, see [Assemble and prepare the SQL statement on page 400](#).

Line 25

This line declares the **demo3cursor** for the prepared statement identifier, **demo3id**.

Line 26

The DESCRIBE statement describes the select-list columns for the prepared statement that is in the **demo3id** statement identifier. For this reason, you must prepare the statement before you use DESCRIBE. This DESCRIBE includes the INTO clause to specify the **sqllda** structure to which **demo3_ptr** points as the location for these column descriptions. The DESCRIBE...INTO statement also allocates memory for an **sqllda** structure and stores the address of this structure in the **demo3_ptr** variable.

The **demo3** program assumes that the following SELECT statement is assembled at run time and stored in the **demoquery** string:

```
SELECT fname, lname FROM customer WHERE lname < 'C'
```

After the DESCRIBE statement in line 26, the components of the **sqllda** structure contain the following:

- The **sqllda** component, **demo3_ptr->sqllda**, has the value **2**, since two columns were selected from the **customer** table.
- The component **demo3_ptr->sqlvar[0]**, an **sqlvar_struct** structure, contains information about the **fname** column of the **customer** table. The **demo3_ptr->sqlvar[0].sqlname** component, for example, gives the name of the first column (**fname**).
- The component **demo3_ptr->sqlvar[1]**, an **sqlvar_struct** structure, contains information about the **lname** column of the **customer** table.

```
=====
27. desc_count = demo3_ptr->sqllda;
28. printf("There are %d returned columns:\n", desc_count);
29. /* Print out what DESCRIBE returns */
30. for (i = 1; i <= desc_count; i++)
31.     prsqllda(i, demo3_ptr->sqlvar[i-1]);
32. printf("\n\n");
=====
```

Lines 27 and 28

Line 27 assigns the number of select-list columns that are found by the DESCRIBE statement to the **desc_count** host variable. Line 28 displays this information to the user.

Lines 29 - 32

This **for** loop goes through the **sqlvar_struct** structures for the columns of the select list. It uses the **desc_count** host variable to determine the number of these structures that are initialized by the DESCRIBE statement. For each **sqlvar_struct** structure, the **prsqlda()** function (line 31) displays information such as the data type, length, and name. For a description of **prsqlda()**, see the description of lines 75 - 81.

```

=====
33.   for(col_ptr=demo3_ptr->sqlvar, cnt=pos=0; cnt < desc_count;
34.       cnt++, col_ptr++)
35.   {
36.       /* Allow for the trailing null character in C
37.          character arrays */
38.       if(col_ptr->sqltype==SQLCHAR)
39.           col_ptr->sqlllen += 1;
40.       /* Get next word boundary for column data and
41.          assign buffer position to sqldata */
42.       pos = (int)rtypalign(pos, col_ptr->sqltype);
43.       col_ptr->sqldata = &data_buff[pos];
44.       /* Determine size used by column data and increment
45.          buffer position */
46.       size = rtypmsize(col_ptr->sqltype, col_ptr->sqlllen);
47.       pos += size;
48.   }
=====

```

Lines 33 - 48

This second **for** loop allocates memory for the **sqldata** fields and sets the **sqldata** fields to point to this memory.

Lines 40 - 47 examine the **sqltype** and **sqlllen** fields of **sqlda** for each select-list column to determine the amount of memory you need to allocate for the data. The program does not use **malloc()** to allocate space dynamically. Instead, it uses a static data buffer (the **data_buff** variable defined on line 8) to hold the column data. The Informix® ESQL/C **rtypalign()** function (line 42) returns the position of the next word boundary for the column data type (in **col_ptr->sqltype**). Line 43 then assigns the address of this position within the **data_buff** data buffer to the **sqldata** field (for columns that receive values returned by the query).

The Informix® ESQL/C **rtypmsize()** function (line 46) returns the number of bytes required for the SQL data type that is specified by the **sqltype** and **sqlllen** fields. Line 47 then increments the data buffer pointer (**pos**) by the size required for the data. For more information, see [Allocate memory for column data on page 524](#).

```

=====
49.   EXEC SQL open demo3cursor;
50.   for (;;)
51.   {
52.       EXEC SQL fetch demo3cursor using descriptor demo3_ptr;
53.       if (strncmp(SQLSTATE, "00", 2) != 0)
54.           break;
55.       /* Print out the returned values */
56.       for (i=0; i<desc_count; i++)
57.           printf("Column: %s\tValue:%s\n", demo3_ptr->
58.                  sqlvar[i].sqlname,
                    demo3_ptr->sqlvar[i].sqldata);

```

```

59.     printf("\n");
60.     }
=====

```

Line 49

The database server executes the SELECT statement when it opens the **demo3cursor** cursor. If the WHERE clause of your SELECT statement contains input parameters, you also need to specify the USING DESCRIPTOR clause of OPEN (see [Handling an unknown column list on page 538](#)).

Lines 50 - 60

This inner **for** loop executes for each row that is fetched from the database. The FETCH statement (line 52) includes the USING DESCRIPTOR clause to specify the **sqlda** structure to which **demo3_ptr** points as the location of the column values. After this FETCH, the column values are stored in the specified **sqlda** structure.

The **if** statement (lines 53 and 54) tests the value of the SQLSTATE variable to determine the success of the FETCH. If SQLSTATE indicates any status other than success, line 54 executes and ends the **for** loop. Lines 56 - 60 display the contents of the **sqlname** and **sqldata** fields for each column of the select list.



Important: The **demo3** program assumes that the returned columns are of character data type. If the program did not make this assumption, it would need to check the **sqltype** and **sqllen** fields to determine the appropriate data type for the host variable that holds the **sqldata** value.

```

=====
61.     if (strncmp(SQLSTATE, "02", 2) != 0)
62.         printf("SQLSTATE after fetch is %s\n", SQLSTATE);
63.     EXEC SQL close demo3cursor;
=====

```

Lines 61 and 62

Outside the **for** loop, the program tests the SQLSTATE variable again so that it can notify the user in the event of a successful execution, a runtime error, or a warning (class code not equal to "02").

Line 63

After all the rows are fetched, the CLOSE statement closes the **demo3cursor** cursor.

```

=====
64.     EXEC SQL free demo3id;
65.     EXEC SQL free demo3cursor;
66.     /* No need to explicitly free data buffer in this case because
67.      * it wasn't allocated with malloc(). Instead, it is a static char
68.      * buffer
69.      */
70.     /* Free memory assigned to sqlda pointer. */
71.     free(demo3_ptr);
72.     EXEC SQL disconnect current;
73.     printf("\nDEM03 Sample Program Over.\n\n");
74. }

```

```

75. prsqlda(index, sp)
76. int2 index;
77. register struct sqlvar_struct *sp;
78. {
79.     printf("    Column %d: type = %d, len = %d, data = %s\n",
80.         index, sp->sqltype, sp->sqllen, sp->sqldata, sp->sqlname);
81. }
=====

```

Lines 64 and 65

These FREE statements release the resources that are allocated for the **demo3id** prepared statement and the **demo3cursor** database cursor.

Lines 66 - 71

At the end of the program, free the memory allocated to the **sqlda** structure. Because this program does not use `malloc()` to allocate the data buffer, it does not use the `free()` system call to free the **sqldata** pointers. Although the allocation of memory from a static buffer is straightforward, it has the disadvantage that this buffer remains allocated until the program ends. For more information, see [Free memory allocated to an sqlda structure on page 528](#).

The `free()` system call (line 71) frees the **sqlda** structure to which **demo3_ptr** points.

Lines 75 - 81

The `prsqlda()` function displays information about a select-list column. It reads this information from the **sqlvar_struct** structure whose address is passed into the function (**sp**).



Tip: The Informix® ESQL/C demonstration programs `unload.ec` and `dyn_sql.ec` (described in [The dyn_sql program on page 506](#)) also use **sqlda** to describe columns of a select list. Also see the PREPARE statement in the *HCL® Informix® Guide to SQL: Syntax*.

Execute a singleton SELECT

The **demo3** program assumes that the SELECT statement returns more than one row and therefore the program associates the statement with a cursor. If you know at the time that you write the program that the dynamic SELECT always returns just one row, you can omit the cursor and use the EXECUTE...INTO DESCRIPTOR statement instead of the FETCH...USING DESCRIPTOR. You must still use the DESCRIBE statement to define the select-list columns.

Handling unknown return values

You can use an **sqlda** structure to save values that a dynamically executed user-defined function returns.

About this task

For an introduction on how to handle unknown return values from a user-defined function, see [Determine return values dynamically on page 457](#).

To use an **sqlda** structure to handle unknown-function return values:

1. Declare a variable to hold the address of an **sqlda** structure.

For more information, see [Define an sqlda structure on page 520](#).

2. Assemble and prepare an EXECUTE FUNCTION statement.

The EXECUTE FUNCTION statement cannot contain the INTO clause. For more information, see [Assemble and prepare the SQL statement on page 400](#).

3. Use the DESCRIBE...INTO statement to perform two tasks:

- a. Allocate an **sqlda** structure.

The address of the allocated structure is stored in the **sqlda** pointer that you declare. For more information, see [Allocate memory for the sqlda structure on page 521](#).

- b. Determine the number and data types of function return values.

The DESCRIBE statement fills an **sqlvar_struct** structure for each return value. For more information, see [Initialize the sqlda structure on page 521](#).

4. After the DESCRIBE statement, you can test the SQLCODE variable (**sqlca.sqlcode**) for the defined constant SQ_EXECPROC to check for a prepared EXECUTE FUNCTION statement.

The SQ_EXECPROC constant is defined in the `sqlstype.h` header file. For more information, see [Determine the statement type on page 447](#).

5. Examine the **sqltype** and **sqllen** fields of **sqlda** for each return value to determine the amount of memory that is required to allocate for the data.

For more information, see [Allocate memory for column data on page 524](#).

6. Execute the EXECUTE FUNCTION statement and store the return values in the **sqlda** structure.

The statement you use to execute a user-defined function depends on whether the function is a noncursor function or a cursor function.

7. Deallocate any memory you allocated to the **sqlda** structure.


For more information, see [Free memory allocated to an sqlda structure on page 528](#).

Execute a noncursor function

A noncursor function returns only one row of return values to the application. Use the EXECUTE...INTO DESCRIPTOR statement to execute the function and save the return value or values in an **sqlda** structure.

An external function that is not explicitly defined as an iterator function returns only a single row of data. Therefore, you can use EXECUTE...INTO DESCRIPTOR to execute most external functions dynamically and save their return values into an **sqlda** structure. This single row of data consists of only one value because an external function can only return a single value. The **sqlda** structure contains only one item descriptor with the single return value.

An SPL function whose RETURN statement does not include the WITH RESUME keywords returns only a single row of data. Therefore, you can use EXECUTE...INTO DESCRIPTOR to execute most SPL functions dynamically and save their return values into an **sqlda** structure. An SPL function can return one or more values at one time so the **sqlda** structure contains one or more item descriptors.

 **Important:** Because you usually do not know the number of returned rows that a user-defined function returns, you cannot guarantee that only one row is returned. If you do not use a cursor to execute cursor function, IBM® Informix® ESQL/C generates a runtime error. Therefore, it is a good practice to always associate a user-defined function with a function cursor.

Executing a cursor function

A cursor function can return one or more rows of return values to the application. To execute a cursor function, you must associate the EXECUTE FUNCTION statement with a function cursor and use the FETCH...INTO DESCRIPTOR statement to save the return value or values in an **sqlda** structure.

About this task

To use an **sqlda** structure to hold cursor-function return values:

1. Declare a function cursor for the user-defined function.

Use the DECLARE statement to associate the EXECUTE FUNCTION statement with a function cursor.

2. Use the OPEN statement to execute the function and open the cursor.
3. Use the FETCH...USING DESCRIPTOR statement to retrieve the return values from the cursor into the **sqlda** structure.

For more information, see [Put column values into an sqlda structure on page 527](#).

4. Retrieve the row data from the **sqlda** structure into host variables with C-language statements that access the **sqldata** field for each select-list column.

For more information, see [Assign and obtain values from an sqlda structure on page 526](#).

5. Release memory allocated to the **sqldata** fields and the **sqlda** structure.

For more information, see [Free memory allocated to an sqlda structure on page 528](#).

Results

Only an external function that is defined as an iterator function can return more than one row of data. Therefore, you must define a function cursor to execute an iterator function dynamically. Each row of data consists of only one value because an external function can only return a single value. For each row, the **sqlda** structure contains only one **sqlvar_struct** structure with the single return value.

An SPL function whose RETURN statement includes the WITH RESUME keywords returns can return one or more rows of data. Therefore, you must define a function cursor to execute these SPL functions dynamically. Each row of data can consist

of one or more values because an SPL function can return one or more values at one time. For each row, the **sqllda** structure contains an **sqlvar_struct** structure for each return value.

Handling an unknown column list

You can use an **sqllda** structure to handle the INSERT...VALUES statement

About this task

For an introduction on how to handle columns in a VALUES clause of an INSERT, see [Handling an unknown column list on page 456](#).

To use an **sqllda** structure to handle input parameters in an INSERT:

1. Declare a variable to hold the address of an **sqllda** structure.
For more information, see [Define an sqllda structure on page 520](#).
2. Prepare the INSERT statement (with the PREPARE statement) and give it a statement identifier.
For more information, see [Assemble and prepare the SQL statement on page 400](#).
3. Use the DESCRIBE...INTO statement to perform two tasks:
 - a. Allocate an **sqllda** structure.
The address of the allocated structure is stored in the **sqllda** pointer that you declare. For more information, see [Allocate memory for the sqllda structure on page 521](#).
 - b. Determine the number and data types of columns in the table with the DESCRIBE...INTO statement.
The DESCRIBE statement fills an **sqlvar_struct** structure for each item of the column list. For more information, see [Initialize the sqllda structure on page 521](#).
4. Examine the **sqltype** and **sqlllen** fields of **sqllda** for each column to determine the amount of memory that is required to allocate for the data.
For more information, see [Allocate memory for column data on page 524](#).
5. Save the number of columns stored in the **sqlld** field in a host variable.
6. Set the columns to their values with C-language statements that set the appropriate **sqlldata** fields in the **sqlvar_struct** structures of **sqllda**.
A column value must be compatible with the data type of its associated column. If you insert a null value, make sure to set the appropriate **sqlind** field to the address of an indicator variable that contains `-1`.
7. Execute the INSERT statement to insert the values into the database.
8. Release the memory that is allocated to the **sqlldata** fields and the **sqllda** structure.
For more information, see [Free memory allocated to an sqllda structure on page 528](#).

Execute a simple insert

The following steps outline how to execute a simple INSERT statement with an **sqllda** structure:

1. Prepare the INSERT statement (with the PREPARE statement) and give it a statement identifier.
2. Set the columns to their values with C-language statements that set the appropriate **sqldata** fields in the **sqlvar_struct** structures of **sqlda**.
3. Execute the INSERT statement with the EXECUTE...USING DESCRIPTOR statement.

These steps are basically the same as those that handle an unknown select list of a SELECT statement. The major difference is that because the statement is a not a SELECT statement, the INSERT does not require a cursor.

Execute an INSERT that is associated with a cursor

You can also use an **sqlda** structure to handle an INSERT that is associated with an insert cursor. In this case, you do not execute the statement with the EXECUTE...USING DESCRIPTOR statement. Instead, you must declare and open an insert cursor and execute the insert cursor with the PUT...USING DESCRIPTOR statement, as follows:

1. Prepare the INSERT statement and associate it with an insert cursor with the DECLARE statement. All multirow INSERT statements must have a declared insert cursor.
2. Create the cursor for the INSERT statement with the OPEN statement.
3. Insert the first set of column values into the insert buffer with a PUT statement and its USING DESCRIPTOR clause. After this PUT statement, the column values stored in the specified **sqlda** structure are stored in the insert buffer. Repeat the PUT statement within a loop until there are no more rows to insert.
4. After all the rows are inserted, exit the loop and flush the insert buffer with the FLUSH statement.
5. Close the insert cursor with the CLOSE statement.

You handle the insert cursor in much the same way as you handle the cursor associated with a SELECT statement. For more information about how to use an insert cursor, see the PUT statement in the *HCL® Informix® Guide to SQL: Syntax*.

Handling a parameterized SELECT statement

You can handle a parameterized SELECT statement with an **sqlda** structure.

About this task

If a prepared SELECT statement has a WHERE clause with input parameters of unknown number and data type, your IBM® Informix® ESQL/C program must use an **sqlda** structure to define the input parameters.

For an introduction on how to determine input parameters, see [Determine unknown input parameters on page 456](#).

To use an **sqlda** structure to define input parameters for a WHERE clause:

1. Declare a variable to hold the address of an **sqlda** structure.
For more information, see [Define an sqlda structure on page 520](#).
2. Determine the number and data types of the input parameters of the SELECT statement.
For more information, see [Determine unknown input parameters on page 456](#).
3. Allocate an **sqlda** structure with a system memory-allocation function such as malloc().

For more information, see [Specify input parameter values on page 527](#) and [Allocate memory for the `sqlda` structure on page 521](#).

4. Indicate the number of input parameters in the WHERE clause with C-language statements that set the `sqld` field of the `sqlda` structure.
5. Store the definitions and values of each input parameter with C-language statements that set the `sqltype`, `sqllen`, and `sqldata` fields in the appropriate `sqlvar_struct` of the `sqlda` structure:
 - The `sqltype` field uses the Informix® ESQL/C data type constants, which the `sqltypes.h` header file defines, to represent the data type of the input parameter. For more information, see [Determine the data type of a column on page 452](#).
 - For a CHAR or VARCHAR value, `sqllen` is the size, in bytes, of the character array. For a DATETIME or INTERVAL value, this field stores the encoded qualifiers.
 - The `sqldata` field of each `sqlvar_struct` structure contains the address of the memory allocated for the input parameter value. You might need to use the `sqltype` and `sqllen` fields for each input parameter to determine the amount of memory that is required to allocate. For more information, see [Allocate memory for column data on page 524](#).

If you use an indicator variable, also set the `sqlind` field and perhaps the `sqlidata`, `sqlilen`, and `sqlitype` fields (for non-X/Open applications only).

Use an index into the `sqlda.sqlvar` array to identify the `sqlvar_struct` structure. For more information, see [Assign and obtain values from an `sqlda` structure on page 526](#).

6. Pass the defined input parameters from the `sqlda` structure to the database server with the USING DESCRIPTOR clause.

The statement that provides the input parameters depends on how many rows the SELECT statement returns.

7. Release the memory that you allocated for the `sqlvar_struct` fields, the `sqldata` fields, and the `sqlda` structure itself with the `free()` system call.
- For more information, see [Free memory allocated to an `sqlda` structure on page 528](#).

Results



Important: If the SELECT statement has unknown columns in the select list, your program must also handle these columns with an `sqlda` structure. For more information, see [Handling an unknown select list on page 529](#).

Execute a parameterized SELECT that returns multiple rows

The following sample program described is a modified version of the `demo4.ec` example program. It shows how to use a dynamic SELECT statement with the following conditions:

- The SELECT returns more than row.

The SELECT must be associated with a cursor, executed with the OPEN statement, and have its return values retrieved with the FETCH...USING DESCRIPTOR statement.

- The SELECT has input parameters in its WHERE clause.

The OPEN statement includes the USING DESCRIPTOR clause to provide the parameter values in an **sqlda** structure.

- The SELECT has unknown columns in the select list.

The FETCH statement includes the USING DESCRIPTOR clause to store the return values in an **sqlda** structure.

A sample program that uses an sqlda structure

The program illustrates how to use an **sqlda** structure to handle both input parameters of a WHERE clause and the columns in the select list.

```
=====
1. #include <stdio.h>
2. EXEC SQL include sqlda;
3. EXEC SQL include sqltypes;
4. #define FNAME 15
5. #define LNAME 15
6. #define PHONE 18
=====
```

Line 2

The program must include the IBM® Informix® ESQL/C `sqlda.h` header file to use an **sqlda** structure.

```
=====
7. main()
8. {
9.   char fname[ FNAME + 1 ];
10.  char lname[ LNAME + 1 ];
11.  char phone[ PHONE + 1 ];
12.  int count, customer_num, i;
13.  struct sqlvar_struct *pos;
14.  struct sqlda *sqlda_ptr;
15.  printf("Sample ESQL program running.\n\n");
16.  EXEC SQL connect to 'stores7';
17.  stcopy("Carole", fname);
18.  stcopy("Sadler", lname);
19.  EXEC SQL prepare sql_id from
20.    'select * from customer where fname=? and lname=?';
21.  EXEC SQL declare slct_cursor cursor for sql_id;
=====
```

Lines 9 - 14

Lines 9 - 11 declare variables to hold the data that is obtained from the user. The **sqlda_ptr** variable (line 14) is the pointer to an **sqlda** structure. The **pos** variable (line 13) points to an **sqlvar_struct** structure so that the code can proceed through each of the **sqlvar_struct** structures in the variable-length portion of **sqlda**. Neither of these variables is defined as the Informix® ESQL/C host variable.

Lines 17 - 20

These lines assemble the character string for the SELECT statement and prepare the SELECT string. This program assumes the number and data types of the input parameters. Therefore, no C code needs to determine this information at run time.

The question mark (?) indicates the input parameters in the WHERE clause. For more information about these steps, see [Assemble and prepare the SQL statement on page 400](#).

Line 21

This line declares the **slct_cursor** cursor for the prepared statement identifier, **sql_id**.

```
=====
22.  count=2;
23.  whereClauseMem(&sqlda_ptr, count, fname, lname);
24.  EXEC SQL open slct_cursor using descriptor sqlda_ptr;
25.  free(sqlda_ptr->sqlvar);
26.  free(sqlda_ptr);
=====
```

Lines 22 and 23

These lines initialize the **sqlda** structure with the input parameter information. The program assumes two input parameters (line 22). If the number of input parameters is unknown, the program needs to parse the SELECT character string (not the prepared version) and count the number of characters that it contains.

The program then calls the whereClauseMem() function to allocate and initialize the **sqlda** structure. For more information, see lines 69 - 77.

Line 24

The database server executes the SELECT statement when it opens the cursor. You must include the USING DESCRIPTOR clause of OPEN to specify the **sqlda** structure as the location of the input parameter values.

Lines 25 and 26

Once the OPEN...USING DESCRIPTOR statement has executed, these input parameter values have been used. Deallocate this **sqlda** structure because it is no longer needed and so that it does not conflict with the **sqlda** that contains the retrieved values. Keep in mind that this second **sqlda** must have memory allocated before it can be used.

```
=====
27.  EXEC SQL describe sql_id into sqlda_ptr;
28.  selectListMem(sqlda_ptr);
29.  while(1)
30.  {
31.  EXEC SQL fetch slct_cursor using descriptor sqlda_ptr;
32.  if(SQLCODE != 0)
33.  {
34.  printf("fetch SQLCODE %d\n", SQLCODE);
35.  break;
36.  }
=====
```

Line 27

For demonstration purposes, this program assumes that the number and data types of the select-list columns are also unknown at compile time. It uses the DESCRIBE...INTO statement (line 27) to allocate an **sqllda** structure, and puts information about the select-list columns into the structure to which **sqllda_ptr** points.

Lines 28

The selectListMem() function handles the allocation of memory for column values. For more information about selectListMem(), see [Lines 85 - 102 on page 545](#).

Lines 29 - 31

The **while** loop executes for each row fetched from the database. The FETCH statement (line 31) includes the USING DESCRIPTOR clause to specify an **sqllda** structure as the location for the returned column values. For more information about how to handle unknown select-list columns, see [Handling an unknown select list on page 529](#).

Lines 32 - 36

These lines test the value of the SQLCODE variable to determine if the FETCH was successful. If SQLCODE contains a nonzero value, then the FETCH generates the NOT FOUND condition (100) or an error (< 0). In any of these cases, line 34 prints out the SQLCODE value. To determine if the FETCH statement generated warnings, you need to examine the **sqlca.sqlwarn** structure.

```

=====
37.     for(i=0; i<sqllda_ptr->sqld; i++)
38.     {
39.         printf("\ni=%d\n", i);
40.         prsqlda(sqllda_ptr->sqlvar[i]);
41.         switch (i)
42.         {
43.             case 0:
44.                 customer_num = *(int *) (sqllda_ptr->sqlvar[i].sqldata);
45.                 break;
46.             case 1:
47.                 stcopy(sqllda_ptr->sqlvar[i].sqldata, fname);
48.                 break;
49.             case 2:
50.                 stcopy(sqllda_ptr->sqlvar[i].sqldata, lname);
51.                 break;
52.             case 9:
53.                 stcopy(sqllda_ptr->sqlvar[i].sqldata, phone);
54.                 break;
55.         }
56.     }
57.     printf("%d ==> |%s|, |%s|, |%s|\n",
58.         customer_num, fname, lname, phone);
59. }
60. EXEC SQL close slct_cursor;
61. EXEC SQL free slct_cursor;
62. EXEC SQL free sql_id;
=====

```

Lines 37 - 59

These lines access the fields of the **sqlvar_struct** structure for each column in the select list. The `prsqlda()` function (see lines 75 - 81) displays the column name (from **sqlvar_struct.sqlname**) and its value (from the **sqlvar_struct.sqldata** field). The **switch** (lines 41 - 55) transfers the column values from the **sqlda** structure into host variables of the appropriate lengths and data types.

Lines 60 - 62

These lines free resources after all the rows are fetched. Line 60 closes the **slct_cursor** cursor and line 61 frees it. Line 62 frees the **sql_id** statement ID.

```

=====
63.   free(sqlda_ptr->sqlvar);
64.   free(sqlda_ptr);
65.   EXEC SQL close database;
66.   EXEC SQL disconnect current;
67.   printf("\nProgram Over.\n");
68. }
69. whereClauseMem(descp, count, fname, lname)
70.   struct sqlda **descp;
71.   int count;
72.   char *fname, *lname;
73. {
74.   (*descp)=(struct sqlda *) malloc(sizeof(struct sqlda));
75.   (*descp)->sqlid=count;
76.   (*descp)->sqlvar=(struct sqlvar_struct *)
77.     calloc(count, sizeof(struct sqlvar_struct));
=====

```

Lines 63 and 64

These `free()` system calls release the memory that is associated with the **sqlda** structure. Line 63 releases the memory allocated to the **sqlvar_struct** structures. Line 64 releases the memory allocated for the **sqlda** structure. The program does not need to deallocate memory associated with the **sqldata** fields because these fields have used space that is in a data buffer. For more information, see [Free memory allocated to an sqlda structure on page 528](#).

Lines 69 - 77

The `whereClauseMem()` function initializes the **sqlda** structure with the input-parameter definitions. Line 74 allocates memory for an **sqlda** structure to hold the input parameters in the WHERE clause. Use of a `DESCRIBE...INTO` statement to allocate an **sqlda** results in an **sqlda** that holds information about the select-list columns of the `SELECT`. Because you want to describe the input parameters in the WHERE clause, do not use `DESCRIBE` here.

Line 75 sets the **sqlid** field of the **sqlda** structure to the value of **count** (2) to indicate the number of parameters that are in the WHERE clause. Lines 76 and 77 use the `calloc()` system function to allocate the memory so that each input parameter in the WHERE clause has an **sqlvar_struct** structure. These lines then set the **sqlvar** field of the **sqlda** structure so that it points to this **sqlvar_struct** memory.

```

=====
78.  (*descp)->sqlvar[0].sqltype = CCHARTYPE;
79.  (*descp)->sqlvar[0].sqlllen = FNAME + 1;
80.  (*descp)->sqlvar[0].sqldata = fname;
81.  (*descp)->sqlvar[1].sqltype = CCHARTYPE;
82.  (*descp)->sqlvar[1].sqlllen = LNAME + 1;
83.  (*descp)->sqlvar[1].sqldata = lname;
84.  }
85.  selectListMem(descp)
86.  struct sqlda *descp;
87.  {
88.  struct sqlvar_struct *col_ptr;
89.  static char buf[1024];
90.  int pos, cnt, size;
91.  printf("\nWITHIN selectListMem: \n");
92.  printf("number of parms: %d\n", descp->sqld);
93.  for(col_ptr=descp->sqlvar, cnt=pos=0; cnt < descp->sqld;
94.     cnt++, col_ptr++)
95.  {
96.     prsqlda(col_ptr);
97.     pos = rtypalign(pos, col_ptr->sqltype);
98.     col_ptr->sqldata = &buf[pos];
99.     size = rtypmsize(col_ptr->sqltype, col_ptr->sqlllen);
100.    pos += size;
101.    }
102.  }
=====

```

Lines 78 - 84

Lines 78 - 80 set the **sqltype**, **sqlllen**, and **sqldata** fields of the **sqlvar_struct** structure to describe the first input parameter: a character (CCHARTYPE) host variable of length 16 (FNAME + 1) whose data is stored in the **fname** buffer. The **fname** buffer is a character buffer declared in the main() program and passed as an argument to whereClauseMem().

Lines 81 - 83 set the **sqltype**, **sqlllen**, and **sqldata** fields of the **sqlvar_struct** structure to describe the second input parameter. This parameter is for the **lname** column. It is defined in the same way as the **fname** column (lines 78 - 80) but it receives its data from the **lname** buffer [also passed from main() to whereClauseMem()].

Lines 85 - 102

The selectListMem() function allocates the memory and initializes the **sqlda** structure for the unknown select-list columns of the parameterized SELECT statement. For more information about how to use an **sqlda** structure for select-list columns, see [Handling a parameterized SELECT statement on page 539](#).

Execute a parameterized singleton SELECT statement

The instructions in the previous topic assume that the parameterized SELECT statement returns more than one row and, therefore, is associated with a cursor. If you know at the time that you write the program that the parameterized SELECT statement always returns just one row, you can omit the cursor and use the EXECUTE...USING DESCRIPTOR...INTO statement instead of the OPEN...USING DESCRIPTOR statement to specify parameters values from an **sqlda** structure.

Handling a parameterized user-defined routine

For an introduction on how to determine input parameters, see [Determine unknown input parameters on page 456](#). This section describes how to handle a parameterized user-defined routine with an **sqllda** structure. The following statements execute user-defined routines:

- The EXECUTE FUNCTION statement executes a user-defined function (external and SPL).
- The EXECUTE PROCEDURE statement executes a user-defined procedure (external and SPL).

If a prepared EXECUTE PROCEDURE or EXECUTE FUNCTION statement has arguments specified as input parameters of unknown number and data type, your IBM® Informix® ESQL/C program can use an **sqllda** structure to define the input parameters.

Execute a parameterized function

You handle the input parameters of a user-defined function in the same way that you handle input parameters in the WHERE clause of a SELECT statement, as follows:

- Execute a noncursor function in the same way as a singleton SELECT statement.

If you know at the time that you write the program that the dynamic user-defined function always returns just one row, you can use the EXECUTE...USING DESCRIPTOR...INTO statement to provide the argument values from an **sqllda** structure and to execute the function. For more information, see [Execute a parameterized singleton SELECT statement on page 545](#).

- Execute a cursor function in the same way as a SELECT statement that returns one or more rows.

If you are not sure at the time that you write the program that the dynamic user-defined function always returns just one row, define a function cursor and use the OPEN...USING DESCRIPTOR statement to provide the argument values from an **sqllda** structure. For more information, see [Execute a parameterized SELECT that returns multiple rows on page 540](#).

The only difference between the execution of these EXECUTE FUNCTION and SELECT statements is that you prepare the EXECUTE FUNCTION statement for the noncursor function, instead of the SELECT statement.

Execute a parameterized procedure

To execute a parameterized user-defined procedure, you can use the EXECUTE...USING DESCRIPTOR statement to provide the argument values from an **sqllda** structure and to execute the procedure. You handle the input parameters of a user-defined procedure in the same way that you handle input parameters in a noncursor function. The only difference between the execution of the EXECUTE PROCEDURE statement and the EXECUTE FUNCTION statement (for a noncursor function) is that you do not need to specify the INTO clause of the EXECUTE...USING DESCRIPTOR statement for the user-defined procedure.

Handling a parameterized UPDATE or DELETE statement

The way to determine the input parameters in the WHERE clause of a DELETE or UPDATE statement is similar to the way to determine them in the WHERE clause of a SELECT statement. The major differences between these two types of dynamic parameterized statements are as follows:

- You do not need to use a cursor to handle a DELETE or UPDATE statement. You provide the parameter values from an **sqlda** structure with the USING DESCRIPTOR clause of the EXECUTE statement instead of with the OPEN statement.
- You can use the DESCRIBE...INTO statement to determine if the DELETE or UPDATE statement has a WHERE clause.

Appendixes

This section contains additional reference information.

The ESQL/C example programs

Your HCL Informix® software includes demonstration databases. HCL Informix® ESQL/C also includes source files for many of the demonstration programs and examples in this publication, some of which access the demonstration databases.

In Windows™ environments, you can find the source files for Informix® ESQL/C example programs in the %INFORMIXDIR%\demo\esqldemo directory.

On UNIX™ operating systems, you can find the source files for Informix® ESQL/C example programs in the \$INFORMIXDIR/demo/esqlc directory. The **esqldemo** script, which is included with Informix® ESQL/C, copies the source files from the \$INFORMIXDIR/demo/esqlc directory into the current directory.

For information about creating demonstration databases, see the *HCL® Informix® DB-Access User's Guide*.

The ESQL/C function library

These topics describe the syntax and behavior of all the library functions provided with HCL Informix® ESQL/C.

Informix® ESQL/C library functions

The following table lists the IBM® Informix® ESQL/C library functions in alphabetical order.

Function name	Description	See
bigintcvasc()	Converts a C char type value to a BIGINT type number.	The bigintcvasc() function on page 558
bigintcvdbl()	Converts a double type number to a BIGINT type number.	The bigintcvdbl() function on page 558
bigintcvdec()	Converts a decimal type number to a BIGINT type number.	The bigintcvdec() function on page 559

Function name	Description	See
<code>bigintcvflt()</code>	Converts a float type number to a BIGINT type number.	The bigintcvflt() function on page 559
<code>bigintcvifx_int8()</code>	Converts and int8 type number to a BIGINT type number.	The bigintcvifx_int8() function on page 560
<code>bigintcvint2()</code>	Converts an int2 type number to a BIGINT type number.	The bigintcvint2() function on page 560
<code>bigintcvint4()</code>	Converts an int4 type number to a BIGINT type number.	The bigintcvint4() function on page 561
<code>biginttoasc()</code>	Converts a BIGINT type value to a C char type value.	The biginttoasc() function on page 561
<code>biginttodbl()</code>	Converts a BIGINT type number to a double type number.	The biginttodbl() function on page 562
<code>biginttodec()</code>	Converts a BIGINT type number to a decimal type number.	The biginttodec() function on page 563
<code>biginttoflt()</code>	Converts a BIGINT type number to a float type number.	The biginttoflt() function on page 563
<code>biginttoifx_int8()</code>	Converts a BIGINT type number to an int8 type number.	The biginttoifx_int8() function on page 563
<code>biginttoint2()</code>	Converts a BIGINT type number to an int2 type number.	The biginttoint2() function on page 564
<code>biginttoint4()</code>	Converts a BIGINT type number to an int4 type number.	The biginttoint4() function on page 564
<code>bycmpr()</code>	Compares two groups of contiguous bytes	The bycmpr() function on page 565
<code>bycopy()</code>	Copies bytes from one area to another	The bycopy() function on page 567
<code>byfill()</code>	Fills the specified area with a character	The byfill() function on page 568
<code>byleng()</code>	Counts the number of bytes in a string	The byleng() function on page 570
<code>decadd()</code>	Adds two decimal numbers	The decadd() function on page 571

Function name	Description	See
<code>deccmp()</code>	Compares two decimal numbers	The <code>deccmp()</code> function on page 573
<code>deccopy()</code>	Copies a decimal number	The <code>deccopy()</code> function on page 575
<code>deccvasc()</code>	Converts a C char type to a decimal type	The <code>deccvasc()</code> function on page 576
<code>deccvdbl()</code>	Converts a C double type to a decimal type	The <code>deccvdbl()</code> function on page 578
<code>deccvint()</code>	Converts a C int2 type to a decimal type	The <code>deccvint()</code> function on page 582
<code>deccvlong()</code>	Converts a C int4 type to a decimal type	The <code>deccvlong()</code> function on page 583
<code>decddiv()</code>	Divides two decimal numbers	The <code>decddiv()</code> function on page 585
<code>dececv()</code>	Converts a decimal value to an ASCII string	The <code>dececv()</code> and <code>decfcvt()</code> functions on page 587
<code>decfcvt()</code>	Converts a decimal value to an ASCII string	The <code>dececv()</code> and <code>decfcvt()</code> functions on page 587
<code>decmul()</code>	Multiplies two decimal numbers	The <code>decmul()</code> function on page 591
<code>decdound()</code>	Rounds a decimal number	The <code>decdound()</code> function on page 593
<code>decsub()</code>	Subtracts two decimal numbers	The <code>decsub()</code> function on page 595
<code>dectoasc()</code>	Converts a decimal type to an ASCII string	The <code>dectoasc()</code> function on page 597
<code>dectodbl()</code>	Converts a decimal type to a C double type	The <code>dectodbl()</code> function on page 599
<code>dectoint()</code>	Converts a decimal type to a C int type	The <code>dectoint()</code> function on page 601
<code>dectolong()</code>	Converts a decimal type to a C long type	The <code>dectolong()</code> function on page 603

Function name	Description	See
detrunc()	Truncates a decimal number	The detrunc() function on page 604
dtaddinv()	Adds an interval value to a datetime value	The dtaddinv() function on page 606
dtcurrent()	Gets current date and time	The dtcurrent() function on page 608
dctvasc()	Converts an ANSI-compliant character string to datetime	The dctvasc() function on page 609
dctvfmtasc()	Converts a character string to a datetime value	The dctvfmtasc() function on page 612
dtextend()	Changes the qualifier of a datetime	The dtextend() function on page 615
dtsub()	Subtracts one datetime value from another	The dtsub() function on page 616
dtsubinv()	Subtracts an interval value from a datetime value	The dtsubinv() function on page 619
dttoasc()	Converts a datetime value to an ANSI-compliant character string	The dttoasc() function on page 620
dttofmtasc()	Converts a datetime value to a character string	The dttofmtasc() function on page 622
GetConnect()	Requests an explicit connection and returns a pointer to the connection information	The GetConnect() function (Windows) on page 625
ifx_cl_card()	Returns the cardinality of the specified collection type host variable	The ifx_cl_card() function on page 627
ifx_dececvvt()	Converts a decimal value to an ASCII string (thread-safe version)	The ifx_dececvvt() and ifx_decfvvt() function on page 628
ifx_decfvvt()	Converts a decimal value to an ASCII string (thread-safe version)	The ifx_dececvvt() and ifx_decfvvt() function on page 628
ifx_getcur_conn_name()	Returns the name of the current connection	The ifx_getcur_conn_name() function on page 639
ifx_getenv()	Retrieves the value of an environment variable	The ifx_getenv() function on page 638

Function name	Description	See
<code>ifx_getserial8()</code>	Returns an inserted SERIAL8 value	The ifx_getserial8() function on page 639
<code>ifx_int8add()</code>	Adds two int8 numbers	The ifx_int8add() function on page 640
<code>ifx_int8cmp()</code>	Compares two int8 numbers	The ifx_int8cmp() function on page 642
<code>ifx_int8copy()</code>	Copies an int8 number	The ifx_int8copy() function on page 644
<code>ifx_int8cvasc()</code>	Converts a C char type value to an int8 type value	The ifx_int8cvasc() function on page 646
<code>ifx_int8cvdbl()</code>	Converts a C double type value to an int8 type value	The ifx_int8cvdbl() function on page 648
<code>ifx_int8cvdec()</code>	Converts a C decimal type value to an int8 type value	The ifx_int8cvdec() function on page 650
<code>ifx_int8cvflt()</code>	Converts a C float type value to an int8 type value	The ifx_int8cvflt() function on page 652
<code>ifx_int8cvint()</code>	Converts a C int2 type value to an int8 type value	The ifx_int8cvint() function on page 654
<code>ifx_int8cvlong()</code>	Converts a C int4 type value to an int8 type value	The ifx_int8cvlong() function on page 656
<code>ifx_int8div()</code>	Divides two int8 numbers	The ifx_int8div() function on page 657
<code>ifx_int8mul()</code>	Multiplies two int8 numbers	The ifx_int8mul() function on page 659
<code>ifx_int8sub()</code>	Subtracts two int8 numbers	The ifx_int8sub() function on page 661
<code>ifx_int8toasc()</code>	Converts an int8 type value to a text string	The ifx_int8toasc() function on page 663
<code>ifx_int8todbl()</code>	Converts an int8 type value to a C double type value	The ifx_int8todbl() function on page 666
<code>ifx_int8todec()</code>	Converts an int8 type value to a decimal type value	The ifx_int8todec() function on page 668

Function name	Description	See
<code>ifx_int8toflt()</code>	Converts an int8 type value to a C float type value	The ifx_int8toflt() function on page 671
<code>ifx_int8toint()</code>	Converts an int8 type value to a C int2 type value	The ifx_int8toint() function on page 674
<code>ifx_int8tolong()</code>	Converts an int8 type value to a C int4 type value	The ifx_int8tolong() function on page 676
<code>ifx_lo_alter()</code>	Alters the storage characteristics of an existing smart large object	The ifx_lo_alter() function on page 679
<code>ifx_lo_close()</code>	Closes an open smart large object	The ifx_lo_close() function on page 680
<code>ifx_lo_col_info()</code>	Obtains column-level storage characteristics into an LO-specification structure	The ifx_lo_col_info() function on page 680
<code>ifx_lo_copy_to_file()</code>	Copies a smart large object to an operating-system file	The ifx_lo_copy_to_file() function on page 681
<code>ifx_lo_copy_to_lo()</code>	Copies an operating-system file to an open smart large object	The ifx_lo_copy_to_lo() function on page 683
<code>ifx_lo_create()</code>	Creates an LO descriptor for a smart large object	The ifx_lo_create() function on page 684
<code>ifx_lo_def_create_spec()</code>	Allocates an LO-specification structure and initializes its fields to null values	The ifx_lo_def_create_spec() function on page 685
<code>ifx_lo_filename()</code>	Returns the generated file name, given an LO descriptor and a file specification	The ifx_lo_filename() function on page 686
<code>ifx_lo_from_buffer()</code>	Copies bytes from a user-defined buffer to a smart large object	The ifx_lo_from_buffer() function on page 687
<code>ifx_lo_open()</code>	Opens an existing smart large object	The ifx_lo_open() function on page 689
<code>ifx_lo_read()</code>	Reads a specified number of bytes from an open smart large object	The ifx_lo_read() function on page 691
<code>ifx_lo_readwithseek()</code>	Seeks to a specified position in an open smart large object and reads a specified number of bytes	The ifx_lo_readwithseek() function on page 692
<code>ifx_lo_release()</code>	Releases resources associated with a temporary smart large object	The ifx_lo_release() function on page 693

Function name	Description	See
<code>ifx_lo_seek()</code>	Sets the seek position for the next read or write on an open smart large object	The <code>ifx_lo_seek()</code> function on page 694
<code>ifx_lo_spec_free()</code>	Frees the resources allocated to an LO-specification structure	The <code>ifx_lo_spec_free()</code> function on page 695
<code>ifx_lo_specget_estbytes()</code>	Gets the estimated number of bytes from the LO-specification structure	The <code>ifx_lo_specget_estbytes()</code> function on page 696
<code>ifx_lo_specget_extsz()</code>	Gets the allocation extent size from the LO-specification structure	The <code>ifx_lo_specget_extsz()</code> function on page 697
<code>ifx_lo_specget_flags()</code>	Gets the create-time flags from the LO-specification structure	The <code>ifx_lo_specget_flags()</code> function on page 698
<code>ifx_lo_specget_maxbytes()</code>	Gets the maximum number of bytes from the LO-specification structure	The <code>ifx_lo_specget_maxbytes()</code> function on page 699
<code>ifx_lo_specget_sbospace()</code>	Gets the name of the sbospace from the LO-specification structure	The <code>ifx_lo_specget_sbospace()</code> function on page 699
<code>ifx_lo_specset_estbytes()</code>	Sets the estimated number of bytes from the LO-specification structure	The <code>ifx_lo_specset_estbytes()</code> function on page 701
<code>ifx_lo_specset_extsz()</code>	Sets the allocation extent size in the LO-specification structure	The <code>ifx_lo_specset_extsz()</code> function on page 702
<code>ifx_lo_specset_flags()</code>	Sets the create-time flags in the LO-specification structure	The <code>ifx_lo_specset_flags()</code> function on page 703
<code>ifx_lo_specset_maxbytes()</code>	Sets the maximum number of bytes in the LO-specification structure	The <code>ifx_lo_specset_maxbytes()</code> function on page 703
<code>ifx_lo_specset_sbospace()</code>	Sets the name of the sbospace in the LO-specification structure	The <code>ifx_lo_specset_sbospace()</code> function on page 704
<code>ifx_lo_stat()</code>	Returns status information about an open smart large object	The <code>ifx_lo_stat()</code> function on page 705
<code>ifx_lo_stat_atime()</code>	Returns the last access time for a smart large object	The <code>ifx_lo_stat_atime()</code> function on page 705
<code>ifx_lo_stat_cspect()</code>	Returns the storage characteristics into the LO-specification structure for a specified smart large object	The <code>ifx_lo_stat_cspect()</code> function on page 706
<code>ifx_lo_stat_ctime()</code>	Returns the last change-in-status time for the smart large object	The <code>ifx_lo_stat_ctime()</code> function on page 707

Function name	Description	See
<code>ifx_lo_stat_free()</code>	Frees the resources allocated to an LO-status structure	The <code>ifx_lo_stat_free()</code> function on page 707
<code>ifx_lo_stat_mtime_sec()</code>	Returns the last modification time, in seconds, for the smart large object	The <code>ifx_lo_stat_mtime_sec()</code> function on page 708
<code>ifx_lo_stat_refcnt()</code>	Returns the reference count for the smart large object	The <code>ifx_lo_stat_refcnt()</code> function on page 708
<code>ifx_lo_stat_size()</code>	Returns the size of the smart large object	The <code>ifx_lo_stat_size()</code> function on page 709
<code>ifx_lo_tell()</code>	Returns the current seek position of an open smart large object	The <code>ifx_lo_tell()</code> function on page 710
<code>ifx_lo_to_buffer</code>	Copies bytes from a smart large object into a user-defined buffer	The <code>ifx_lo_to_buffer()</code> function on page 710
<code>ifx_lo_truncate()</code>	Truncates a smart large object to a specific offset	The <code>ifx_lo_truncate()</code> function on page 711
<code>ifx_lo_write()</code>	Writes a specified number of bytes to an open smart large object	The <code>ifx_lo_write()</code> function on page 713
<code>ifx_lo_writewithseek()</code>	Seeks to a specified position in an open smart large object and writes a specified number of bytes	The <code>ifx_lo_writewithseek()</code> function on page 714
<code>ifx_lvar_alloc()</code>	Specifies whether to allocate memory when fetching lvarchar data	The <code>ifx_lvar_alloc()</code> function on page 715
<code>ifx_putenv()</code>	Modifies or removes an existing environment variable or creates a new one	The <code>ifx_putenv()</code> function on page 716
<code>ifx_var_alloc()</code>	Allocates memory for the data buffer	The <code>ifx_var_alloc()</code> function on page 718
<code>ifx_var_dealloc()</code>	Deallocates memory for the data buffer	The <code>ifx_var_dealloc()</code> function on page 719
<code>ifx_var_flag()</code>	Determines whether Informix® ESQL/C or the application handles memory allocation for the data buffer	The <code>ifx_var_flag()</code> function on page 720
<code>ifx_var_getdata()</code>	Returns the contents of the data buffer	The <code>ifx_var_getdata()</code> function on page 722
<code>ifx_var_getlen()</code>	Returns the length of the data buffer	The <code>ifx_var_getlen()</code> function on page 723

Function name	Description	See
<code>ifx_var_isspace()</code>	Checks whether the data in the data buffer is null	The <code>ifx_var_isspace()</code> function on page 723
<code>ifx_var_setdata()</code>	Sets the data for the data buffer	The <code>ifx_var_setdata()</code> function on page 724
<code>ifx_var_setlen()</code>	Sets the length of the data buffer	The <code>ifx_var_setlen()</code> function on page 725
<code>ifx_var_setnull()</code>	Sets the data in the data buffer to a null value	The <code>ifx_var_setnull()</code> function on page 726
<code>incvasc()</code>	Converts an ANSI-compliant character string to an interval value	The <code>incvasc()</code> function on page 726
<code>incvfmtasc()</code>	Converts a character string to an interval value	The <code>incvfmtasc()</code> function on page 729
<code>intoasc()</code>	Converts an interval value to an ANSI-compliant character string	The <code>intoasc()</code> function on page 731
<code>intofmtasc()</code>	Converts an interval value to a string	The <code>intofmtasc()</code> function on page 733
<code>invdivdbl()</code>	Divides an interval value by a numeric value	The <code>invdivdbl()</code> function on page 736
<code>invdivinv()</code>	Divides an interval value by an interval value	The <code>invdivinv()</code> function on page 738
<code>invxtend()</code>	Copies an interval value under a different qualifier	The <code>invxtend()</code> function on page 740
<code>invmuldbl()</code>	Multiplies an interval value by a numeric value	The <code>invmuldbl()</code> function on page 742
<code>ldchar()</code>	Copies a fixed-length string to a null-terminated string	The <code>ldchar()</code> function on page 744
<code>rdatestr()</code>	Converts an internal format to string	The <code>rdatestr()</code> function on page 745
<code>rdayofweek()</code>	Returns the day of the week	The <code>rdayofweek()</code> function on page 747
<code>rdefmtdate()</code>	Converts a string to an internal format	The <code>rdefmtdate()</code> function on page 749

Function name	Description	See
<code>rdownshift()</code>	Converts all letters to lowercase	The <code>rdownshift()</code> function on page 752
<code>ReleaseConnect()</code>	Closes an established explicit connection	The <code>ReleaseConnect()</code> function (Windows) on page 753
<code>rfmtdate()</code>	Converts an internal format to a string	The <code>rfmtdate()</code> function on page 754
<code>rfmtdec()</code>	Converts a decimal type to a formatted string	The <code>rfmtdec()</code> function on page 758
<code>rfmtdouble()</code>	Converts a double type to a string	The <code>rfmtdouble()</code> function on page 761
<code>rfmtlong()</code>	Converts an int4 to a formatted string	The <code>rfmtlong()</code> function on page 763
<code>rgetlmsg()</code>	Retrieves the error message for a large error number	The <code>rgetlmsg()</code> function on page 766
<code>rgetmsg()</code>	Retrieves the error message for an error number	The <code>rgetmsg()</code> function on page 768
<code>risnull()</code>	Checks whether a C variable is null	The <code>risnull()</code> function on page 770
<code>rjulmdy()</code>	Returns month, day, and year from an internal format	The <code>rjulmdy()</code> function on page 772
<code>rleapyear()</code>	Determines whether a specified year is a leap year	The <code>rleapyear()</code> function on page 774
<code>rmdyjul()</code>	Returns an internal format from month, day, and year	The <code>rmdyjul()</code> function on page 776
<code>rsetnull()</code>	Sets a C variable to null	The <code>rsetnull()</code> function on page 777
<code>rstod()</code>	Converts a string to a double type	The <code>rstod()</code> function on page 780
<code>rstoi()</code>	Converts a null-terminated string to an int2	The <code>rstoi()</code> function on page 781
<code>rstol()</code>	Converts a string to an int4	The <code>rstol()</code> function on page 783

Function name	Description	See
<code>rstrdate()</code>	Converts a string to an internal format	The <code>rstrdate()</code> function on page 785
<code>rtoday()</code>	Returns a system date in internal format	The <code>rtoday()</code> function on page 787
<code>rtypalign()</code>	Aligns data on a proper type boundary	The <code>rtypalign()</code> function on page 788
<code>rtypmsize()</code>	Gives the byte size of SQL data types	The <code>rtypmsize()</code> function on page 791
<code>rtypname()</code>	Returns the name of a specified SQL type	The <code>rtypname()</code> function on page 794
<code>rtypwidth()</code>	Gives minimum conversion byte size	The <code>rtypwidth()</code> function on page 797
<code>rupshift()</code>	Converts all letters to uppercase	The <code>rtypmsize()</code> function on page 791
<code>SetConnect()</code>	Switches the connection to an established (dormant) explicit connection	The <code>SetConnect()</code> function (Windows) on page 800
<code>sqgetdbs()</code>	Returns the names of the databases that a database server can access	The <code>sqgetdbs()</code> function on page 802
<code>sqlbreak()</code>	Sends the database server a request to stop processing	The <code>sqlbreak()</code> function on page 805
<code>sqlbreakcallback()</code>	Provides a method of returning control to the application while it is waiting for the database server to process an SQL request	The <code>sqlbreakcallback()</code> function on page 806
<code>sqldetach()</code>	Detaches a child process from a parent process	The <code>sqldetach()</code> function on page 808
<code>sqldone()</code>	Determines whether the database server is currently processing an SQL request	The <code>sqldone()</code> function on page 814
<code>sqlexit()</code>	Terminates a database server process	The <code>sqlexit()</code> function on page 814
<code>sqlsignal()</code>	Performs signal handling and child-processes cleanup	The <code>sqlsignal()</code> function on page 815
<code>sqlstart()</code>	Starts a database server process	The <code>sqlstart()</code> function on page 816

Function name	Description	See
stcat()	Concatenates one string to another	The stcat() function on page 817
stchar()	Copies a null-terminated string to a fixed-length string	The stchar() function on page 819
stcmp()	Compares two strings	The stcmp() function on page 820
stcopy()	Copies one string to another string	The stcopy() function on page 821
stleng()	Counts the number of bytes in a string	The stleng() function on page 822

The bigintcvasc() function

The bigintcvasc() function converts a C char type value to a BIGINT type number.

Syntax

```
mint bigintcvasc(strng_val, len, bigintp)
const char *strng_val
mint len
bigint *bigintp
```

strng_val

A pointer to a string.

len

The length of the *strng_val* string.

bigintp

A pointer to a bigint variable to contain the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

The bigintcvdbl() function

The bigintcvdbl() function converts a double type number to a BIGINT type number.

Syntax

```

mint bigintcvdbl(dbl, bigintp)
const double dbl
bigint *bigintp

```

dbl

The double value to convert to bigint.

bigintp

A pointer to a bigint variable to contain the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

The bigintcvdec() function

The bigintcvdec() function converts a decimal type number to a BIGINT type number.

Syntax

```

mint bigintcvdec(decp, bigintp)
const dec_t *decp
bigint *bigintp

```

decp

A pointer to the decimal structure that contains the value to convert to a bigint value.

bigintp

A pointer to a bigint variable to contain the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

The bigintcvflt() function

The bigintcvflt() function converts a float type number to a BIGINT type number.

Syntax

```
mint bigintcvflt(dbl, bigintp)
const double dbl
bigint *bigintp
```

dbl

The float value to convert to bigint.

bigintp

A pointer to a bigint value to contain the result of the conversion.

Return codes**0**

The conversion was successful.

<0

The conversion failed.

The bigintcvifx_int8() function

The bigintcvifx_int8() function converts an int8 type number to a BIGINT type number.

Syntax

```
mint bigintcvifx_int8(int8p, bigintp)
const ifx_int8_t *int8p
bigint *bigintp
```

int8p

The int8 value to convert to a bigint value.

bigintp

A pointer to a bigint variable to contain the result of the conversion.

Return codes**0**

The conversion was successful.

<0

The conversion failed.

The bigintcvint2() function

The bigintcvint2() function converts an int2 type number to a BIGINT type number.

Syntax

```
mint bigintcvint2(int2v, bigintp)
const int2 int2v
bigint *bigintp
```

int2v

The int2 value to convert to a bigint value.

bigintp

A pointer to a bigint variable to contain the result of the conversion.

Return codes**0**

The conversion was successful.

<0

The conversion failed.

The bigintcvint4() function

The bigintcvint4() function converts an int4 type number to a BIGINT type number.

Syntax

```
mint bigintcvint4(int4v, bigintp)
const int4 int4v
bigint *bigintp
```

int4v

The int4 value to convert to a bigint value.

bigintp

A pointer to a bigint variable to contain the result of the conversion.

Return codes**0**

The conversion was successful.

<0

The conversion failed.

The biginttoasc() function

The biginttoasc() function converts a BIGINT type value to a C char type value.

Syntax

```
mint biginttoasc(bigintv, strng_val, len, base)
const bigint bigintv
```

```
char *strng_val
mint len
mint base
```

bigintv

A bigint value to convert to a text string.

strng_val

A pointer to the first byte of the character buffer to contain the text string.

len

The size of *strng_val*, in bytes, minus 1 for the null terminator.

base

The numeric base of the output. Base 10 and 16 are supported. Other values result in base 10.

Return codes**0**

The conversion was successful.

<0

The conversion failed.

The biginttodbl() function

The biginttodbl() function converts a BIGINT type number to a double type number.

Syntax

```
mint biginttodbl(bigintv, dbl)
const bigint bigintv
double *dbl
```

bigintv

A bigint value to convert to double.

dbl

A pointer to a double variable to contain the result of the conversion.

Return codes**0**

The conversion was successful.

<0

The conversion failed.

The biginttodec() function

The biginttodec() function converts a BIGINT type number to a decimal type number.

Syntax

```
mint biginttodec(bigintv, decp)
const bigint bigintv
dec_t *decp
```

bigintv

A bigint value to convert to decimal.

decp

A pointer to a decimal variable to contain the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

The biginttoflt() function

The biginttoflt() function converts a BIGINT type number to a float type number.

Syntax

```
mint biginttoflt(bigintv, fltp)
const bigint bigintv
float *fltp
```

bigintv

A bigint value to convert to float.

fltp

A pointer to a float variable to contain the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

The biginttoifx_int8() function

The biginttoifx_int8() function converts a BIGINT type number to an int8 type number.

Syntax

```
void biginttoifx_int8(bigintv, int8p)
const bigint bigintv
ifx_int8_t *int8p
```

bigintv

A bigint value to convert to int8.

int8p

A pointer to an int8 structure to contain the result of the conversion.

The biginttoint2() function

The biginttoint2() function converts a BIGINT type number to an int2 type number.

Syntax

```
mint biginttoint2(bigintv, int2p)
const bigint bigintv
int2 *int2p
```

bigintv

A bigint value to convert to an int2 integer value.

int2p

A pointer to an int variable to contain the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

The biginttoint4() function

The biginttoint4() function converts a BIGINT type number to an int4 type number.

Syntax

```
mint biginttoint4(bigintv, int4p)
const bigint bigintv
int4 *int4p
```

bigintv

A bigint value to convert to an int4 integer value.

int4p

A pointer to an int4 variable to contain the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

The bycmpr() function

The bycmpr() function compares two groups of contiguous bytes for a given length. It returns the result of the comparison as its value.

Syntax

```

mint bycmpr(byte1, byte2, length)
char *byte1;
char *byte2;
mint length;

```

byte1

A pointer to the location at which the first group of contiguous bytes starts.

byte2

A pointer to the location at which the second group of contiguous bytes starts.

length

The number of bytes that you want bycmpr() to compare.

Usage

The bycmpr() function performs a byte-by-byte comparison of the two groups of contiguous bytes until it finds a difference or until it compares *length* number of bytes. The bycmpr() function returns an integer whose value (0, -1, or +1) indicates the result of the comparison between the two groups of bytes.

The bycmpr() function subtracts the bytes of the *byte2* group from those of the *byte1* group to accomplish the comparison.

Return codes

0

The two groups are identical.

-1

The *byte1* group is less than the *byte2* group.

+1

The *byte1* group is greater than the *byte2* group.

Example

This sample program is in the `bycmp.r.ec` file in the `demo` directory.

```

/*
 * bycmp.r.ec *

The following program performs three different byte comparisons with
bycmp.r() and displays the results.
*/

#include <stdio.h>

main()
{
    mint x;

    static char string1[] = "abcdef";
    static char string2[] = "abcdeg";

    static mint number1 = 12345;
    static mint number2 = 12367;

    static char string3[] = {0x00, 0x07, 0x45, 0x32, 0x00};
    static char string4[] = {0x00, 0x07, 0x45, 0x31, 0x00};

    printf("BYCMP.R Sample ESQL Program running.\n\n");

        /* strings */
    printf("Comparing strings: String 1=%s\tString 2=%s\n", string1, string2);
    printf(" Executing: bycmp.r(string1, string2, sizeof(string1))\n");
    x = bycmp.r(string1, string2, sizeof(string1));
    printf(" Result = %d\n", x);

        /* ints */
    printf("Comparing numbers: Number 1=%d\tNumber 2=%d\n", number1, number2);
    printf(" Executing: bycmp.r( (char *) &number1, (char *) &number2, ");
    printf("sizeof(number1))\n");
    x = bycmp.r( (char *) &number1, (char *) &number2, sizeof(number1));
    printf(" Result = %d\n", x);

        /* non printable */
    printf("Comparing strings with non-printable characters:\n");
    printf(" Octal string 1=%o\tOctal string 2=%o\n", string3, string4);
    printf(" Executing: bycmp.r(string3, string4, sizeof(string3))\n");
    x = bycmp.r(string3, string4, sizeof(string3));
    printf(" Result = %d\n", x);

        /* bytes */
    printf("Comparing bytes: Byte string 1=%c%c\tByte string 2=%c%c\n");
    printf(" Executing: bycmp.r(&string1[2], &string2[2], 2)\n");
    x = bycmp.r(&string1[2], &string2[2], 2);
    printf(" Result = %d\n", x);

    printf("\nBYCMP.R Sample ESQL Program over.\n\n");
}

```

Output

```

BYCMPR Sample ESQL Program running.

Comparing strings: String1=abcdef      String 2=abcdeg
  Executing: bycmpr(string1, string2, sizeof(string1))
  Result = -1
Comparing numbers: Number 1=12345      Number 2=12367
  Executing: bycmpr( (char *) &number1, (char *) &number2, sizeof(number1))
  Result = -1
Comparing strings with non-printable characters:
  Octal string 1=40300   Octal string 2=40310
  Executing: bycmpr(string3, string4, sizeof(string3))
  Result = 1
Comparing bytes: Byte string 1=cd      Byte string 2=cd
  Executing: bycmpr(&string1[2], &string2[2], 2)
  Result = 0

BYCMPR Sample ESQL Program over.

```

The bycopy() function

The `bycopy()` function copies a given number of bytes from one location to another.

Syntax

```

void bycopy(from, to, length)
  char *from;
  char *to;
  mint length;

```

from

A pointer to the first byte of the group of bytes that you want `bycopy()` to copy.

to

A pointer to the first byte of the destination group of bytes. The memory area to which `to` points can overlap the area to which the `from` argument points. In this case, IBM® Informix® ESQL/C does not preserve the value to which `from` points.

length

The number of bytes that you want `bycopy()` to copy.



Important: Take care not to overwrite areas of memory next to the destination area.

Example

This sample program is in the `bycopy.ec` file in the `demo` directory.

```

/*
 * bycopy.ec *

The following program shows the results of bycopy() for three copy
operations.

```

```

*/

#include <stdio.h>

char dest[20];

main()
{
    mint number1 = 12345;
    mint number2 = 0;
    static char string1[] = "abcdef";
    static char string2[] = "abcdefghijklmn";

    printf("BYCOPY Sample ESQL Program running.\n\n");

    printf("String 1=%s\tString 2=%s\n", string1, string2);
    printf(" Copying String 1 to destination string:\n");
    bycopy(string1, dest, strlen(string1));
    printf(" Result = %s\n\n", dest);

    printf(" Copying String 2 to destination string:\n");
    bycopy(string2, dest, strlen(string2));
    printf(" Result = %s\n\n", dest);

    printf("Number 1=%d\tNumber 2=%d\n", number1, number2);
    printf(" Copying Number 1 to Number 2:\n");
    bycopy( (char *) &number1, (char *) &number2, sizeof(int));
    printf(" Result = number1(hex) %08x, number2(hex) %08x\n",
           number1, number2);

    printf("\nBYCOPY Sample Program over.\n\n");
}

```

Output

```

BYCOPY Sample ESQL Program running.

String 1=abcdef String2=abcdefghijklmn
Copying String 1 to destination string:
Result = abcdef

Copying String 2 to destination string:
Result = abcdefghijklmn

Number 1=12345 Number2=0
Copying Number 1 to Number 2:
Result = number1(hex) 00003039, number2(hex) 00003039

BYCOPY Sample Program over.

```

The byfill() function

The byfill() function fills a specified area with one character.

Syntax

```
void byfill(to, length, ch)
  char *to;
  mint length;
  char ch;
```

to

A pointer to the first byte of the memory area that you want `byfill()` to fill.

length

The number of times that you want `byfill()` to repeat the character within the area.

ch

The character that you want `byfill()` to use to fill the area.



Important: Take care not to overwrite areas of memory next to the area that you want `byfill()` to fill.

Example

This sample program is in the `byfill.ec` file in the `demo` directory.

```
/*
 * byfill.ec *

The following program shows the results of three byfill() operations on
an area that is initialized to x's.
*/

#include <stdio.h>

main()
{
  static char area[20] = "xxxxxxxxxxxxxxxxxxxx";

  printf("BYFILL Sample ESQL Program running.\n\n");

  printf("String = %s\n", area);

  printf("\nFilling string with five 's' characters:\n");
  byfill(area, 5, 's');
  printf("Result = %s\n", area);

  printf("\nFilling string with two 's' characters starting at ");
  printf("position 16:\n");
  byfill(&area[16], 2, 's');
  printf("Result = %s\n", area);

  printf("Filling entire string with 'b' characters:\n");
  byfill(area, sizeof(area)-1, 'b');
  printf("Result = %s\n", area);

  printf("\nBYFILL Sample Program over.\n\n");
}
```

Output

```

BYFILL Sample ESQL Program running.

String = xxxxxxxxxxxxxxxxxxxx

Filling string with five 's' characters:
Result = sssssxxxxxxxxxxxxxxxx

Filling string with two 's' characters starting at position 16:
Result = sssssxxxxxxxxxxxxssx

Filling entire string with 'b' characters:
Result = bbbbbbbbbbbbbbbbbbbb

BYFILL Sample Program over.

```

The byleng() function

The `byleng()` function returns the number of significant characters in a string, not counting trailing blanks.

Syntax

```

mint byleng(from, count)
char *from;
mint count;

```

from

A pointer to a fixed-length string (not null-terminated).

count

The number of bytes in the fixed-length string. This does not include trailing blanks.

Example

This sample program is in the `byleng.ec` file in the `demo` directory.

```

/*
 * byleng.ec *

The following program uses byleng() to count the significant characters
in an area.
*/

#include <stdio.h>

main()
{
    mint x;
    static char area[20] = "xxxxxxxxx      ";

    printf("BYLENG Sample Program running.\n\n");

    /* initial length */

```

```

printf("Initial string:\n");
x = byleng(area, 15);
printf(" Length = %d, String = '%s'\n", x, area);

    /* after copy */
printf("\nAfter copying two 's' characters starting ");
printf("at position 16:\n");
bycopy("ss", &area[16], 2);
x = byleng(area, 19);
printf(" Length = %d, String = '%s'\n", x, area);

printf("\nBYLENG Sample Program over.\n\n");
}

```

Output

```

BYLENG Sample Program running.

Initial string:
Length = 10, String = 'xxxxxxxxx      '

After copying two 's' characters starting at position 16:
Length = 18, String = 'xxxxxxxxx      ss '

BYLENG Sample Program over.

```

The decadd() function

The `decadd()` function adds two **decimal** type values.

Syntax

```

mint decadd(n1, n2, sum)
    dec_t *n1;
    dec_t *n2;
    dec_t *sum;

```

n1

A pointer to the **decimal** structure of the first operand.

n2

A pointer to the **decimal** structure of the second operand.

sum

A pointer to the **decimal** structure that contains the sum ($n1 + n2$).

Usage

The *sum* can be the same as either *n1* or *n2*.

Return codes

0

The operation was successful.

-1200

The operation resulted in overflow.

-1201

The operation resulted in underflow.

Example

The file `decadd.ec` in the `demo` directory contains the following sample program.

```

/*
 * decadd.ec *

The following program obtains the sum of two DECIMAL numbers.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string1[] = " 1000.6789"; /* leading spaces will be ignored */
char string2[] = "80";
char result[41];

main()
{
    mint x;
    dec_t num1, num2, sum;

    printf("DECADD Sample ESQL Program running.\n\n");

    if (x = deccvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to DECIMAL\n", x);
        exit(1);
    }
    if (x = deccvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to DECIMAL\n", x);
        exit(1);
    }
    if (x = decadd(&num1, &num2, &sum))
    {
        printf("Error %d in adding DECIMALs\n", x);
        exit(1);
    }
    if (x = dectoasc(&sum, result, sizeof(result), -1))
    {
        printf("Error %d in converting DECIMAL result to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf("\t%s + %s = %s\n", string1, string2, result); /* display result */

    printf("\nDECADD Sample Program over.\n\n");
}

```



```
    exit(0);
}
```

Output

```
DECADD Sample ESQL Program running.

    1000.6789 + 80 = 1080.6789

DECADD Sample Program over.
```

The deccmp() function

The deccmp() function compares two **decimal** type numbers.

Syntax

```
mint deccmp(n1, n2)
    dec_t *n1;
    dec_t *n2;
```

n1

A pointer to a **decimal** structure of the first number to compare.

n2

A pointer to a **decimal** structure of the second number to compare.

Return codes

-1

The first value is less than the second value.

0

The two values are identical.

1

The first value is greater than the second value.

DECUNKNOWN

Either value is null.

Example

The file `deccmp.ec` in the `demo` directory contains the following sample program.

```
/*
 * deccmp.ec *

    The following program compares DECIMAL numbers and displays the results.
*/

#include <stdio.h>
```

```

EXEC SQL include decimal;

char string1[] = "-12345.6789"; /* leading spaces will be ignored */
char string2[] = "12345.6789";
char string3[] = "-12345.6789";
char string4[] = "-12345.6780";

main()
{
    mint x;
    dec_t num1, num2, num3, num4;

    printf("DECCOPY Sample ESQL Program running.\n\n");

    if (x = deccvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to DECIMAL\n", x);
        exit(1);
    }
    if (x = deccvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to DECIMAL\n", x);
        exit(1);
    }
    if (x = deccvasc(string3, strlen(string3), &num3))
    {
        printf("Error %d in converting string3 to DECIMAL\n", x);
        exit(1);
    }
    if (x = deccvasc(string4, strlen(string4), &num4))
    {
        printf("Error %d in converting string4 to DECIMAL\n", x);
        exit(1);
    }

    printf("Number 1 = %s\tNumber 2 = %s\n", string1, string2);
    printf("Number 3 = %s\tNumber 4 = %s\n", string3, string4);
    printf("\nExecuting: deccmp(&num1, &num2)\n");
    printf("  Result = %d\n", deccmp(&num1, &num2));
    printf("Executing: deccmp(&num2, &num3)\n");
    printf("  Result = %d\n", deccmp(&num2, &num3));
    printf("Executing: deccmp(&num1, &num3)\n");
    printf("  Result = %d\n", deccmp(&num1, &num3));
    printf("Executing: deccmp(&num3, &num4)\n");
    printf("  Result = %d\n", deccmp(&num3, &num4));

    printf("\nDECCMP Sample Program over.\n\n");
    exit(0);
}

```

Output

```

DECCMP Sample ESQL Program running.

Number 1 = -12345.6789      Number 2 = 12345.6789
Number 3 = -12345.6789      Number 4 = -12345.6780

```

```

Executing: deccmp(&num1, &num2)
  Result = -1
Executing: deccmp(&num2, &num3)
  Result = 1
Executing: deccmp(&num1, &num3)
  Result = 0
Executing: deccmp(&num3, &num4)
  Result = -1

DECCMP Sample Program over.

```

The deccopy() function

The deccopy() function copies one **decimal** structure to another.

Syntax

```

void deccopy(source, target)
  dec_t *source;
  dec_t *target;

```

source

A pointer to the value held in the source **decimal** structure.

target

A pointer to the target **decimal** structure.

The deccopy() function does not return a status value. To determine the success of the copy operation, look at the contents of the **decimal** structure to which the *target* argument points.

Example

The file `deccopy.ec` in the `demo` directory contains the following sample program.

```

/*
 * deccopy.ec *

  The following program copies one DECIMAL number to another.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string1[] = "12345.6789";
char result[41];

main()
{
  int x;
  dec_t num1, num2;

  printf("DECCOPY Sample ESQL Program running.\n\n");

```

```

printf("String = %s\n", string1);
if (x = deccvasc(string1, strlen(string1), &num1))
{
    printf("Error %d in converting string1 to DECIMAL\n", x);
    exit(1);
}
printf("Executing: deccopy(&num1, &num2)\n");
deccopy(&num1, &num2);
if (x = dectoasc(&num2, result, sizeof(result), -1))
{
    printf("Error %d in converting num2 to string\n", x);
    exit(1);
}
result[40] = '\0';
printf("Destination = %s\n", result);

printf("\nDECCOPY Sample Program over.\n\n");
exit(0);
}

```

Output

```

DECCOPY Sample ESQL Program running.

String = 12345.6789
Executing: deccopy(&num1, &num2)
Destination = 12345.6789

DECCOPY Sample Program over.

```

The deccvasc() function

The deccvasc() function converts a value held as printable characters in a C **char** type into a **decimal** type number.

Syntax

```

mint deccvasc(strng_val, len, dec_val)
char *strng_val;
mint len;
dec_t *dec_val;

```

strng_val

A pointer to a string whose value deccvasc() converts to a **decimal** value.

len

The length of the strng_val string.

dec_val

A pointer to the **decimal** structure where deccvasc() places the result of the conversion.

Usage

The character string, *strng_val*, can contain the following symbols:

- A leading sign, either a plus (+) or minus (-)
- A decimal point, and digits to the right of the decimal point
- An exponent that is preceded by either `e` or `E`. You can precede the exponent by a sign, either a plus (+) or minus (-).

The `deccvasc()` function ignores leading spaces in the character string.

Return codes

0

The conversion was successful.

-1200

The number is too large to fit into a **decimal** type structure (overflow).

-1201

The number is too small to fit into a **decimal** type structure (underflow).

-1213

The string has non-numeric characters.

-1216

The string has a bad exponent.

Example

The `deccvasc.ec` file in the `demo` directory contains the following sample program.

```

/*
 * deccvasc.ec *

The following program converts two strings to DECIMAL numbers and displays
the values stored in each field of the decimal structures.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string1[] = "-12345.6789";
char string2[] = "480";

main()
{
    mint x;
    dec_t num1, num2;

    printf("DECCVASC Sample ESQL Program running.\n\n");

    if (x = deccvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to DECIMAL\n", x);
        exit(1);
    }
}

```

```

    }
    if (x = deccvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to DECIMAL\n", x);
        exit(1);
    }
    /*
    * Display the exponent, sign value and number of digits in num1.
    */
    printf("\tstring1 = %s\n", string1);
    disp_dec("num1", &num1);

    /*
    * Display the exponent, sign value and number of digits in num2.
    */
    printf("\tstring2 = %s\n", string2);
    disp_dec("num2", &num2);

    printf("\nDECCVASC Sample Program over.\n\n");
    exit(0);
}

disp_dec(s, num)
char *s;
dec_t *num;
{
    mint n;

    printf("%s dec_t structure:\n", s);
    printf("\tdec_exp = %d, dec_pos = %d, dec_ndgts = %d, dec_dgts: ",
        num->dec_exp, num->dec_pos, num->dec_ndgts);
    n = 0;
    while(n < num->dec_ndgts)
        printf("%02d ", num->dec_dgts[n++]);
    printf("\n\n");
}

```

Output

```

DECCVASC Sample ESQL Program running.

string1 = -12345.6789
num1 dec_t structure:
    dec_exp = 3, dec_pos = 0, dec_ndgts = 5, dec_dgts: 01 23 45 67 89

string2 = 480
num2 dec_t structure:
    dec_exp = 2, dec_pos = 1, dec_ndgts = 2, dec_dgts: 04 80

DECCVASC Sample Program over.

```

The deccvdbl() function

The deccvdbl() function converts a C **double** type number into a **decimal** type number.

Syntax

```
mint deccvdbl(dbl_val, np)
double dbl_val;
dec_t *dec_val;
```

dbl_val

The **double** value that `deccvdbl()` converts to a **decimal** type value.

dec_val

A pointer to a **decimal** structure where `deccvdbl()` places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The `deccvdbl.ec` file in the `demo` directory contains the following sample program.

```
/*
 * deccvdbl.ec *

The following program converts two double type numbers to DECIMAL numbers
and displays the results.
*/

#include <stdio.h>

EXEC SQL include decimal;

char result[41];

main()
{
    mint x;
    dec_t num;
    double d = 2147483647;

    printf("DECCVDBL Sample ESQL Program running.\n\n");

    printf("Number 1 (double) = 1234.5678901234\n");
    if (x = deccvdbl((double)1234.5678901234, &num))
    {
        printf("Error %d in converting double1 to DECIMAL\n", x);
        exit(1);
    }
    if (x = dectoasc(&num, result, sizeof(result), -1))
    {
```

```

    printf("Error %d in converting DECIMAL1 to string\n", x);
    exit(1);
}
result[40] = '\0';
printf(" String Value = %s\n", result);

printf("Number 2 (double) = %.1f\n", d);
if (x = deccvdbl(d, &num))
{
    printf("Error %d in converting double2 to DECIMAL\n", x);
    exit(1);
}
if (x = dectoasc(&num, result, sizeof(result), -1))
{
    printf("Error %d in converting DECIMAL2 to string\n", x);
    exit(1);
}
result[40] = '\0';
printf(" String Value = %s\n", result);

printf("\nDECCVDBL Sample Program over.\n\n");
exit(0);
}

```

Output

```

DECCVDBL Sample ESQL Program running.

Number 1 (double) = 1234.5678901234
String Value = 1234.5678901234
Number 2 (double) = 2147483647.0
String Value = 2147483647.0

DECCVDBL Sample Program over.

```

The deccvflt() function

The `deccvflt()` function converts a C float type number into an ESQL/C decimal type number.

Syntax

```

int deccvflt(float_val, dec_val)

float float_val;

dec_t *dec_val;

```

float_val

The float value that `deccvflt()` converts to a decimal type value.

dec_val

A pointer to a decimal structure where `deccvflt()` places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The following example program converts two float type numbers to DECIMAL numbers and displays the results.

```
#include <stdio.h>
EXEC SQL include decimal;
char result[41];
main()
{
    int x;
    dec_t num;
    float f = 2147483674;
    printf("DECCVFLT Sample ESQL Program Running.\n\n");
    if (x = deccvflt((float)1234.5678901234, &num))
    {
        printf("Error %d in converting double1 to DECIMAL\n", x);
        exit(1);
    }
    if (x = dectoasc(&num, result, sizeof(result), -1))
    {
        printf("Error %d in converting DECIMAL1 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf(" String Value = %s\n", result);
    printf(" Number 2 (float) = %.1f\n", f);
    if (x = deccvflt(f, &num))
    {
        printf("Error %d in converting float2 to DECIMAL\n", x);
        exit(1);
    }
    if (x = dectoasc(&num, result, sizeof(result), -1))
    {
        printf("Error %d in converting DECIMAL2 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf(" String Value = %s\n", result);
    printf("\n DECCVFLT Sample Program Over.\n\n");
    exit(0);
}
```

Output

```
DECCVFLT Sample ESQL Program running.

Number 1 (float) = 1234.5678901234
String Value = 1234.56787
```

```
Number 2 (float) = 2147483647.0
String Value = 2147483647.0
```

```
DECCVFLT Sample Program over.
```

The deccvint() function

The deccvint() function converts a C **int** type number into a **decimal** type number.

Syntax

```
mint deccvint(int_val, dec_val)
mint int_val;
dec_t *dec_val;
```

int_val

The **mint** value that deccvint() converts to a **decimal** type value.

dec_val

A pointer to a **decimal** structure where deccvint() places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The `deccvint.ec` file in the `demo` directory contains the following sample program.

```
/*
 * deccvint.ec *

The following program converts two integers to DECIMAL numbers and displays
the results.
*/

#include <stdio.h>

EXEC SQL include decimal;

char result[41];

main()
{
    mint x;
    dec_t num;

    printf("DECCVINT Sample ESQL Program running.\n\n");

    printf("Integer 1 = 129449233\n");
```

```

if (x = deccvint(129449233, &num))
{
printf("Error %d in converting int1 to DECIMAL\n", x);
exit(1);
}
if (x = dectoasc(&num, result, sizeof(result), -1))
{
printf("Error %d in converting DECIMAL to string\n", x);
exit(1);
}
result[40] = '\0';
printf(" String for Decimal Value = %s\n", result);

printf("Integer 2 = 33\n");
if (x = deccvint(33, &num))
{
printf("Error %d in converting int2 to DECIMAL\n", x);
exit(1);
}
result[40] = '\0';
printf(" String for Decimal Value = %s\n", result);

printf("\nDECCVINT Sample Program over.\n\n");
exit(0);
}

```

Output

```

DECCVINT Sample ESQL Program running.

Integer 1 = 129449233
String for Decimal Value = 129449233.0
Integer 2 = 33
String for Decimal Value = 33.0

DECCVINT Sample Program over.

```

The deccvlong() function

The `deccvlong()` function converts a C **long** type value into a **decimal** type value.

Syntax

```

mint deccvlong(lng_val, dec_val)
int4 lng_val;
dec_t *dec_val;

```

lng_val

The **int4** value that `deccvlong()` converts to a **decimal** type value.

dec_val

A pointer to a **decimal** structure where `deccvlong()` places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The file `deccvlong.ec` in the `demo` directory contains the following sample program.

```

/*
 * deccvlong.ec *

The following program converts two longs to DECIMAL numbers and displays
the results.
*/

#include <stdio.h>

EXEC SQL include decimal;

char result[41];
main()
{
    mint x;
    dec_t num;

    int4 n;

    printf("DECCVLONG Sample ESQL Program running.\n\n");

    printf("Long Integer 1 = 129449233\n");
    if (x = deccvlong(129449233L, &num))
    {
        printf("Error %d in converting long to DECIMAL\n", x);
        exit(1);
    }
    if (x = dectoasc(&num, result, sizeof(result), -1))
    {
        printf("Error %d in converting DECIMAL to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf(" String for Decimal Value = %s\n", result);

    n = 2147483646; /* set n */
    printf("Long Integer 2 = %d\n", n);
    if (x = deccvlong(n, &num))
    {
        printf("Error %d in converting long to DECIMAL\n", x);
        exit(1);
    }
    if (x = dectoasc(&num, result, sizeof(result), -1))
    {

```

```

    printf("Error %d in converting DECIMAL to string\n", x);
    exit(1);
}
result[40] = '\0';
printf(" String for Decimal Value = %s\n", result);

printf("\nDECCVLONG Sample Program over.\n\n");
exit(0);
}

```

Output

```

DECCVLONG Sample ESQL Program running.

Long Integer 1 = 129449233
String for Decimal Value = 129449233.0
Long Integer 2 = 2147483646
String for Decimal Value = 2147483646.0

DECCVLONG Sample Program over.

```

The decdiv() function

The `decdiv()` function divides two **decimal** type values.

Syntax

```

mint decdiv(n1, n2, result) /* result = n1 / n2 */
    dec_t *n1;
    dec_t *n2;
    dec_t *result;

```

n1

A pointer to the **decimal** structure of the first operand.

n2

A pointer to the **decimal** structure of the second operand.

quotient

A pointer to the **decimal** structure that contains the quotient of *n1* divided by *n2*.

Usage

The *quotient* can be the same as either *n1* or *n2*.

Return codes

0

The operation was successful.

-1200

The operation resulted in overflow.

-1201

The operation resulted in underflow.

-1202

The operation attempted to divide by zero.

Example

The file `decdiv.ec` in the `demo` directory contains the following sample program.

```

/*
 * decdiv.ec *

The following program divides two DECIMAL numbers and displays the result.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string1[] = "480";
char string2[] = "80";
char result[41];

main()
{
    mint x;
    dec_t num1, num2, dvd;

    printf("DECDIV Sample ESQL Program running.\n\n");

    if (x = deccvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to DECIMAL\n", x);
        exit(1);
    }
    if (x = deccvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to DECIMAL\n", x);
        exit(1);
    }
    if (x = decdiv(&num1, &num2, &dvd))
    {
        printf("Error %d in converting divide num1 by num2\n", x);
        exit(1);
    }
    if (x = dectoasc(&dvd, result, sizeof(result), -1))
    {
        printf("Error %d in converting dividend to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf("\t%s / %s = %s\n", string1, string2, result);

    printf("\nDECDIV Sample Program over.\n\n");
}

```

```

    exit(0);
}

```

Output

```

DECDIV Sample ESQL Program running.

    480 / 80 = 6.0

DECDIV Sample Program over.

```

The dececvt() and decfcvt() functions

The `dececvt()` and `decfcvt()` functions are analogous to the subroutines under `ECVT(3)` in section three of the UNIX™ Programmer's Manual. The `dececvt()` function works in the same fashion as the `ecvt(3)` function, and the `decfcvt()` function works in the same fashion as the `fcvt(3)` function. They both convert a **decimal** type number to a C **char** type value.

Syntax

```

char *dececvt(dec_val, ndigit, decpt, sign)
    dec_t *dec_val;
    mint ndigit;
    mint *decpt;
    mint *sign;

char *decfcvt(dec_val, ndigit, decpt, sign)
    dec_t *dec_val;
    mint ndigit;
    mint *decpt;
    mint *sign;

```

dec_val

A pointer to a **decimal** structure that contains the **decimal** value you want these functions to convert.

ndigit

The length of the ASCII string for `dececvt()`. It is the number of digits to the right of the decimal point for `decfcvt()`.

decpt

A pointer to an integer that is the position of the decimal point relative to the start of the string. A negative or zero value for `*decpt` means to the left of the returned digits.

sign

A pointer to the sign of the result. If the sign of the result is negative, `*sign` is nonzero; otherwise, `*sign` is zero.

Usage

The `dececvt()` function converts the **decimal** value to which `np` points into a null-terminated string of `ndigit` ASCII digits and returns a pointer to the string. A subsequent call to this function overwrites the string.

The `dececvt()` function rounds low-order digits.

The `decfcvt()` function is identical to `dececv()`, except that *ndigit* specifies the number of digits to the right of the decimal point instead of the total number of digits.

Let *dec_val* point to a **decimal** value of 12345.67 and suppress all arguments except *ndigit*. The following table shows the values that the `dececv()` function returns for four different *ndigit* values.

<i>ndigit</i> value	Return string	*decpt value	*sign
4	"1235"	5	0
10	"1234567000"	5	0
1	"1"	5	0
3	"123"	5	0

For more examples of *dec_val* and *ndigit* values, see the sample output of the `dececvt.ec` demonstration program on [Example of `dececv\(\)` on page 588](#).



Important: When you write thread-safe IBM® Informix® ESQL/C applications, do not use the `dececv()` or `decfcvt()` library functions. Instead, use their thread-safe equivalents, [The `ifx_dececv\(\)` and `ifx_decfcvt\(\)` function on page 628](#) For more information, see [Informix libraries on page 365](#)

Example of `dececv()`

The file `dececvt.ec` in the `demo` directory contains the following sample program.

```

/*
 * dececvt.ec *

The following program converts a series of DECIMAL numbers to fixed
strings of 20 ASCII digits. For each conversion it displays the resulting
string, the decimal position from the beginning of the string and the
sign value.
*/

#include <stdio.h>

EXEC SQL include decimal;

char *strings[] =
{
    "210203.204",
    "4894",
    "443.334899312",
    "-12344455",
    "12345.67",
    ".001234",
    0
};

char result[40];

```



```

main()
{
    mint x;
    mint i = 0, f, sign;
    dec_t num;
    char *dp, *dececvt();

    printf("DECECVT Sample ESQL Program running.\n\n");
    while(strings[i])
    {
        if (x = deccvasc(strings[i], strlen(strings[i]), &num))
        {
            printf("Error %d in converting string [%s] to DECIMAL\n",
                x, strings[i]);
            break;
        }
        printf("\Input string[%d]: %s\n", i, strings[i]);

        dp = dececvt(&num, 20, &f, &sign); /* to 20-char ASCII string */
        printf(" Output of dececvt(&num, 20, ...): %c%s decpt: %d sign: %d\n",
            (sign ? '-' : '+'), dp, f, sign);

        dp = dececvt(&num, 10, &f, &sign); /* to 10-char ASCII string */
        /* display result */
        printf(" Output of dececvt(&num, 10, ...): %c%s decpt: %d sign: %d\n",
            (sign ? '-' : '+'), dp, f, sign);

        dp = dececvt(&num, 4, &f, &sign); /* to 4-char ASCII string */
        /* display result */
        printf(" Output of dececvt(&num, 4, ...): %c%s decpt: %d sign: %d\n",
            (sign ? '-' : '+'), dp, f, sign);

        dp = dececvt(&num, 3, &f, &sign); /* to 3-char ASCII string */
        /* display result */
        printf(" Output of dececvt(&num, 3, ...): %c%s decpt: %d sign: %d\n",
            (sign ? '-' : '+'), dp, f, sign);
        dp = dececvt(&num, 1, &f, &sign); /* to 1-char ASCII string */
        /* display result */
        printf(" Output of dececvt(&num, 1, ...): %c%s decpt: %d sign: %d\n",
            (sign ? '-' : '+'), dp, f, sign);

        ++i; /* next string */
    }

    printf("\nDECECVT Sample Program over.\n\n");
}

```

Output of dececvt()

```
DECECVT Sample ESQL Program running.
```

```

Input string[0]: 210203.204
Output of dececvt: +2102 decpt: 6 sign: 0
Output of dececvt: +2102032040 decpt: 6 sign: 0
Output of dececvt: +2 decpt: 6 sign: 0

```

```

Output of dececvt: +210 decpt: 6 sign: 0

Input string[1]: 4894
Output of dececvt: +4894 decpt: 4 sign: 0
Output of dececvt: +4894000000 decpt: 4 sign: 0
Output of dececvt: +5 decpt: 4 sign: 0
Output of dececvt: +489 decpt: 4 sign: 0

Input string[2]: 443.334899312
Output of dececvt: +4433 decpt: 3 sign: 0
Output of dececvt: +4433348993 decpt: 3 sign: 0
Output of dececvt: +4 decpt: 3 sign: 0
Output of dececvt: +443 decpt: 3 sign: 0

Input string[3]: -12344455
Output of dececvt: -1234 decpt: 8 sign: 1
Output of dececvt: -1234445500 decpt: 8 sign: 1
Output of dececvt: -1 decpt: 8 sign: 1
Output of dececvt: -123 decpt: 8 sign: 1

Input string[4]: 12345.67
Output of dececvt: +1235 decpt: 5 sign: 0
Output of dececvt: +1234567000 decpt: 5 sign: 0
Output of dececvt: +1 decpt: 5 sign: 0
Output of dececvt: +123 decpt: 5 sign: 0

Input string[5]: .001234
Output of dececvt: +1234 decpt: -2 sign: 0
Output of dececvt: +1234000000 decpt: -2 sign: 0
Output of dececvt: +1 decpt: -2 sign: 0
Output of dececvt: +123 decpt: -2 sign: 0

DECECVT Sample Program over.

```

Example of decfcvt()

The file `decfcvt.ec` in the `demo` directory contains the following sample program.

```

/*
 * decfcvt.ec *

The following program converts a series of DECIMAL numbers to strings
of ASCII digits with 3 digits to the right of the decimal point. For
each conversion it displays the resulting string, the position of the
decimal point from the beginning of the string and the sign value.
*/

#include <stdio.h>

EXEC SQL include decimal;

char *strings[] =
{
    "210203.204",
    "4894",
    "443.334899312",
    "-12344455",

```

```

0
};

main()
{
    mint x;
    dec_t num;
    mint i = 0, f, sign;
    char *dp, *decfcvt();

    printf("DECFCVT Sample ESQL Program running.\n\n");

    while(strings[i])
    {
        if (x = deccvasc(strings[i], strlen(strings[i]), &num))
        {
            printf("Error %d in converting string [%s] to DECIMAL\n",
                x, strings[i]);
            break;
        }

        dp = decfcvt(&num, 3, &f, &sign);          /* to ASCII string */

        /* display result */
        printf("Input string[%d]: %s\n", i, strings[i]);
        printf(" Output of decfcvt: %c%.*s.%s decpt: %d sign: %d\n\n",
            (sign ? '-' : '+'), f, f, dp, dp+f, f, sign);
        ++i;                                       /* next string */
    }

    printf("\nDECFCVT Sample Program over.\n\n");
}

```

Output of decfcvt()

```

DECFCVT Sample ESQL Program running.

Input string[0]: 210203.204
Output of decfcvt: +210203.204 decpt: 6 sign: 0

Input string[1]: 4894
Output of decfcvt: +4894.000 decpt: 4 sign: 0

Input string[2]: 443.334899312
Output of decfcvt: +443.335 decpt: 3 sign: 0

Input string[3]: -12344455
Output of decfcvt: -12344455.000 decpt: 8 sign: 1

DECFCVT Sample Program over.

```

The decmul() function

The decmul() function multiplies two **decimal** type values.

Syntax

```
mint decmul(n1, n2, product)
    dec_t *n1;
    dec_t *n2;
    dec_t *product;
```

n1

A pointer to the **decimal** structure of the first operand.

n2

A pointer to the **decimal** structure of the second operand.

product

A pointer to the **decimal** structure that contains the product of *n1* times *n2*.

Usage

The *product* can be the same as either *n1* or *n2*.

Return codes

0

The operation was successful.

-1200

The operation resulted in overflow.

-1201

The operation resulted in underflow.

Example

The `decmul.ec` file in the `demo` directory contains the following sample program.

```
/*
 * decmul.ec *

 This program multiplies two DECIMAL numbers and displays the result.
 */

#include <stdio.h>

EXEC SQL include decimal;

char string1[] = "80.2";
char string2[] = "6.0";
char result[41];

main()
{
    mint x;
    dec_t num1, num2, mpx;
```

```

printf("DECMUL Sample ESQL Program running.\n\n");

if (x = deccvasc(string1, strlen(string1), &num1))
{
    printf("Error %d in converting string1 to DECIMAL\n", x);
    exit(1);
}
if (x = deccvasc(string2, strlen(string2), &num2))
{
    printf("Error %d in converting string2 to DECIMAL\n", x);
    exit(1);
}
if (x = decmul(&num1, &num2, &mpx))
{
    printf("Error %d in converting multiply\n", x);
    exit(1);
}
if (x = dectoasc(&mpx, result, sizeof(result), -1))
{
    printf("Error %d in converting mpx to display string\n", x);
    exit(1);
}
result[40] = '\0';
printf("\t%s * %s = %s\n", string1, string2, result);

printf("\nDECMUL Sample Program over.\n\n");
exit(0);
}

```

Output

```

DECMUL Sample ESQL Program running.

    80.2 * 6.0 = 481.2

DECMUL Sample Program over.

```

The decround() function

The `decround()` function rounds a **decimal** type number to fractional digits.

Syntax

```

void decround(d, s)
    dec_t *d;
    mint s;

```

d

A pointer to a **decimal** structure whose value the `decround()` function rounds.

s

The number of fractional digits to which `decround()` rounds *d*. Use a positive number for the *s* argument.

Usage

The rounding factor is $5 \times 10^{-s-1}$. To round a value, the `deccround()` function adds the rounding factor to a positive number or subtracts this factor from a negative number. It then truncates to `s` digits, as the following table shows.

Value before round	Value of <code>s</code>	Rounded value
1.4	0	1.0
1.5	0	2.0
1.684	2	1.68
1.685	2	1.69
1.685	1	1.7
1.685	0	2.0

Return codes

The file `deccround.ec` in the `demo` directory contains the following sample program.

```

/*
 * deccround.ec *

The following program rounds a DECIMAL type number six times and displays
the result of each operation.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string[] = "-12345.038572";
char result[41];

main()
{
    mint x;
    mint i = 6;          /* number of decimal places to start with */
    dec_t num1;

    printf("DECCROUND Sample ESQL Program running.\n\n");

    printf("String = %s\n", string);
    while(i)
    {
        if (x = deccvasc(string, strlen(string), &num1))
        {
            printf("Error %d in converting string to DECIMAL\n", x);
            break;
        }
        deccround(&num1, i);
        if (x = dectoasc(&num1, result, sizeof(result), -1))
        {

```

```

    printf("Error %d in converting result to string\n", x);
    break;
}
result[40] = '\0';
printf("  Rounded to %d Fractional Digits: %s\n", i--, result);
}
printf("\nDECROUND Sample Program over.\n\n");
}

```

Output

```

DECROUND Sample ESQL Program running.

String = -12345.038572
  Rounded to 6 Fractional Digits: -12345.038572
  Rounded to 5 Fractional Digits: -12345.03857
  Rounded to 4 Fractional Digits: -12345.0386
  Rounded to 3 Fractional Digits: -12345.039
  Rounded to 2 Fractional Digits: -12345.04
  Rounded to 1 Fractional Digits: -12345.

DECROUND Sample Program over.

```

The decsub() function

The `decsub()` function subtracts two **decimal** type values.

Syntax

```

mint decsub(n1, n2, difference)
  dec_t *n1;
  dec_t *n2;
  dec_t *difference;

```

n1

A pointer to the **decimal** structure of the first operand.

n2

A pointer to the **decimal** structure of the second operand.

difference

A pointer to the **decimal** structure that contains the difference of *n1* minus *n2*.

Usage

The *difference* can be the same as either *n1* or *n2*.

Return codes

0

The operation was successful.

-1200

The operation resulted in overflow.

-1201

The operation resulted in underflow.

Example

The file `decsub.ec` in the `demo` directory contains the following sample program.

```

/*
 * decsub.ec *

The following program subtracts two DECIMAL numbers and displays the result.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string1[] = "1000.038782";
char string2[] = "480";
char result[41];

main()
{
    mint x;
    dec_t num1, num2, diff;

    printf("DECSUB Sample ESQL Program running.\n\n");

    if (x = deccvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to DECIMAL\n", x);
        exit(1);
    }
    if (x = deccvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to DECIMAL\n", x);
        exit(1);
    }
    if (x = decsub(&num1, &num2, &diff))
    {
        printf("Error %d in subtracting decimals\n", x);
        exit(1);
    }
    if (x = dectoasc(&diff, result, sizeof(result), -1))
    {
        printf("Error %d in converting result to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf("\t%s - %s = %s\n", string1, string2, result);

    printf("\nDECSUB Sample Program over.\n\n");
}

```



```
    exit(0);
}
```

Output

```
DECSUB Sample ESQL Program running.

1000.038782 - 480 = 520.038782

DECSUB Sample Program over.
```

The dectoaasc() function

The dectoaasc() function converts a **decimal** type number to a C **char** type value.

Syntax

```
mint dectoaasc(dec_val, strng_val, len, right)
    dec_t *dec_val;
    char *strng_val;
    mint len;
    mint right;
```

dec_val

A pointer to the **decimal** structure whose value dectoaasc() converts to a text string.

strng_val

A pointer to the first byte of the character buffer where the dectoaasc() function places the text string.

len

The size of strng_val, in bytes, minus 1 for the null terminator.

right

An integer that indicates the number of decimal places to the right of the decimal point.

Usage

If *right* = -1, the decimal value of *dec_val* determines the number of decimal places.

If the **decimal** number does not fit into a character string of length *len*, **dectoaasc()** converts the number to an exponential notation. If the number still does not fit, dectoaasc() fills the string with asterisks. If the number is shorter than the string, dectoaasc() left-justifies the number and pads it on the right with blanks.

Because the character string that **dectoaasc()** returns is not null terminated, your program must add a null character to the string before you print it.

Return codes

0

The conversion was successful.

-1

The conversion failed.

Example

The file `dectoasc.ec` in the `demo` directory contains the following sample program.

```

/*
 * dectoasc.ec *

The following program converts DECIMAL numbers to strings of varying sizes.
*/

#include <stdio.h>

EXEC SQL include decimal;

#define END sizeof(result)

char string1[] = "-12345.038782";
char string2[] = "480";
char result[40];

main()
{
    mint x;
    dec_t num1, num2;

    printf("DECTOASC Sample ESQL Program running.\n\n");

    printf("String Decimal Value 1 = %s\n", string1);
    if (x = deccvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to DECIMAL\n", x);
        exit(1);
    }
    printf("String Decimal Value 2 = %s\n", string2);
    if (x = deccvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to DECIMAL\n", x);
        exit(1);
    }

    printf("\nConverting Decimal back to ASCII\n");
    printf(" Executing: dectoasc(&num1, result, 5, -1)\n");
    if (x = dectoasc(&num1, result, 5, -1))
        printf("\tError %d in converting DECIMAL1 to string\n", x);
    else
    {
        result[5] = '\0'; /* null terminate */
        printf("\tResult = '%s'\n", result);
    }

    printf("Executing: dectoasc(&num1, result, 10, -1)\n");
    if (x = dectoasc(&num1, result, 10, -1))
        printf("Error %d in converting DECIMAL1 to string\n", x);
}

```

```

else
{
    result[10] = '\0';                /* null terminate */
    printf("\tResult = '%s'\n", result);
}

printf("Executing: dectodbl(&num2, result, END, 3)\n");
if (x = dectodbl(&num2, result, END, 3))
    printf("\tError %d in converting DECIMAL2 to string\n", x);
else
{
    result[END-1] = '\0';            /* null terminate */
    printf("\tResult = '%s'\n", result);
}

printf("\nDECTOASC Sample Program over.\n\n")
}

```

Output

```

DECTOASC Sample ESQL Program running.

String Decimal Value 1 = -12345.038782
String Decimal Value 2 = 480

Converting Decimal back to ASCII
Executing: dectodbl(&num1, result, 5, -1)
Error -1 in converting decimal1 to string
Executing: dectodbl(&num1, result, 10, -1)
Result = '-12345.039'
Executing: dectodbl(&num2, result, END, 3)
Result = '480.000'

DECTOASC Sample Program over.

```

The dectodbl() function

The dectodbl() function converts a **decimal** type number into a C **double** type number.

Syntax

```

mint dectodbl(dec_val, dbl_val)
    dec_t *dec_val;
    double *dbl_val;

```

dec_val

A pointer to a **decimal** structure whose value dectodbl() converts to a **double** type value.

dbl_val

A pointer to a **double** type where dectodbl() places the result of the conversion.

Usage

The floating-point format of the host computer can result in loss of precision in the conversion of a **decimal** type number to a **double** type number.

Return codes**0**

The conversion was successful.

<0

The conversion failed.

Example

The `dectodbl.ec` file in the `demo` directory contains the following sample program.

```

/*
 * dectodbl.ec *

The following program converts two DECIMAL numbers to doubles and displays
the results.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string1[] = "2949.3829398204382";
char string2[] = "3238299493";
char result[40];

main()
{
    mint x;
    double d = 0;
    dec_t num;

    printf("DECTODBL Sample ESQL Program running.\n\n");

    if (x = deccvasc(string1, strlen(string1), &num))
    {
        printf("Error %d in converting string1 to DECIMAL\n", x);
        exit(1);
    }
    if (x = dectodbl(&num, &d))
    {
        printf("Error %d in converting DECIMAL1 to double\n", x);
        exit(1);
    }
    printf("String 1 = %s\n", string1);
    printf("Double value = %.15f\n", d);

    if (x = deccvasc(string2, strlen(string2), &num))
    {
        printf("Error %d in converting string2 to DECIMAL\n", x);
        exit(1);
    }
    if (x = dectodbl(&num, &d))
    {
        printf("Error %d in converting DECIMAL2 to double\n", x);
    }
}

```

```

    exit(1);
}
printf("String 2 = %s\n", string2);
printf("Double value = %f\n", d);

printf("\nDECTODBL Sample Program over.\n\n");
exit(0);
}

```

Output

```

DECTODBL Sample ESQL Program running.

String 1 = 2949.3829398204382
Double value = 2949.382939820438423

String 2 = 3238299493
Double value = 3238299493.000000

DECTODBL Sample Program over.

```

The dectoint() function

The dectoint() function converts a **decimal** type number into a C **int** type number.

Syntax

```

mint dectoint(dec_val, int_val)
    dec_t *dec_val;
    mint *int_val;

```

dec_val

A pointer to a **decimal** structure whose value dectoint() converts to a **mint** type value.

int_val

A pointer to a **mint** value where dectoint() places the result of the conversion.

Usage

The dectoint() library function converts a **decimal** value to a C integer. The size of a C integer depends on the hardware and operating system of the computer you are using. Therefore, the **dectoint()** function equates an integer value with the SQL SMALLINT data type. The valid range of a SMALLINT is between 32767 and -32767. To convert larger **decimal** values to larger integers, use the dectoint() library function.

Return codes

0

The conversion was successful.

<0

The conversion failed.

-1200

The magnitude of the **decimal** type number is greater than 32767.

Example

The file `dectoint.ec` in the `demo` directory contains the following sample program.

```

/*
 * dectoint.ec *

The following program converts two DECIMAL numbers to integers and
displays the result of each conversion.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string1 [] = "32767";
char string2 [] = "32768";

main()
{
    mint x;
    mint n = 0;
    dec_t num;

    printf("DECTOINT Sample ESQL Program running.\n\n");

    printf("String 1 = %s\n", string1);
    if (x = deccvasc(string1, strlen(string1), &num))
    {
        printf(" Error %d in converting string1 to decimal\n", x);
        exit(1);
    }
    if (x = dectoint(&num, &n))
        printf(" Error %d in converting decimal to int\n", x);
    else
        printf(" Result = %d\n", n);

    printf("\nString 2 = %s\n", string2);
    if (x = deccvasc(string2, strlen(string2), &num))
    {
        printf(" Error %d in converting string2 to decimal\n", x);
        exit(1);
    }
    if (x = dectoint(&num, &n))
        printf(" Error %d in converting decimal to int\n", x);
    else
        printf(" Result = %d\n", n);

    printf("\nDECTOINT Sample Program over.\n\n");
    exit(0);
}

```

Output

```
DECTOINT Sample ESQL Program running.

String 1 = 32767
  Result = 32767

String 2 = 32768
  Error -1200 in converting decimal to int

DECTOINT Sample Program over.
```

The dectolong() function

The dectolong() function converts a **decimal** type number into an **int4** type number.

Syntax

```
mint dectolong(dec_val, lng_val)
  dec_t *dec_val;
  int4 *lng_val;
```

dec_val

A pointer to a **decimal** structure whose value dectolong() converts to an **int4** integer.

lng_val

A pointer to an **int4** integer where dectolong() places the result of the conversion.

Return codes

0

The conversion was successful.

-1200

The magnitude of the **decimal** type number is greater than 2,147,483,647.

Example

The file `dectolong.ec` in the `demo` directory contains the following sample program.

```
/*
 * dectolong.ec *

The following program converts two DECIMAL numbers to longs and displays
the return value and the result for each conversion.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string1[] = "2147483647";
char string2[] = "2147483648";
```

```

main()
{
    int x;
    long n = 0;
    dec_t num;

    printf("DECTOLONG Sample ESQL Program running.\n\n");

    printf("String 1 = %s\n", string1);
    if (x = deccvasc(string1, strlen(string1), &num))
    {
        printf(" Error %d in converting string1 to DECIMAL\n", x);
        exit(1);
    }
    if (x = dectolong(&num, &n))
        printf(" Error %d in converting DECIMAL1 to long\n", x);
    else
        printf(" Result = %ld\n", n);

    printf("\nString 2 = %s\n", string2);
    if (x = deccvasc(string2, strlen(string2), &num))
    {
        printf(" Error %d in converting string2 to DECIMAL\n", x);
        exit(1);
    }
    if (x = dectolong(&num, &n))
        printf(" Error %d in converting DECIMAL2 to long\n", x);
    else
        printf(" Result = %ld\n", n);

    printf("\nDECTOLONG Sample Program over.\n\n");
    exit(0);
}

```

Output

```

DECTOLONG Sample ESQL Program running.

String 1 = 2147483647
Result = 2147483647

String 2 = 2147483648
Error -1200 in converting DECIMAL2 to long

DECTOLONG Sample Program over.

```

The dectrunc() function

The dectrunc() function truncates a rounded **decimal** type number to fractional digits.

Syntax

```

void dectrunc(d, s)
    dec_t *d;
    mint s;

```


d

A pointer to a **decimal** structure for a rounded number whose value `dectrunc()` truncates.

s

The number of fractional digits to which `dectrunc()` truncates the number. Use a positive number or zero for this argument.

Usage

The following table shows the sample output from `dectrunc()` with various inputs.

Value before truncation	Value of s	Truncated value
1.4	0	1.0
1.5	0	1.0
1.684	2	1.68
1.685	2	1.68
1.685	1	1.6
1.685	0	1.0

Example

The file `dectrunc.ec` in the `demo` directory contains the following sample program.

```

/*
 * dectrunc.ec *

The following program truncates a DECIMAL number six times and displays
each result.
*/

#include <stdio.h>

EXEC SQL include decimal;

char string[] = "-12345.038572";
char result[41];

main()
{
    mint x;
    mint i = 6;          /* number of decimal places to start with */
    dec_t num1;

    printf("DECTRUNC Sample ESQL Program running.\n\n");

    printf("String = %s\n", string);
    while(i)
    {

```

```

    if (x = deccvasc(string, strlen(string), &num1))
    {
        printf("Error %d in converting string to DECIMAL\n", x);
        break;
    }
    dectrunc(&num1, i);
    if (x = dectoasc(&num1, result, sizeof(result), -1))
    {
        printf("Error %d in converting result to string\n", x);
        break;
    }
    result[40] = '\0';
    printf(" Truncated to %d Fractional Digits: %s\n", i--, result);
}

printf("\nDECTRUNC Sample Program over.\n\n");
}

```

Output

```
DECTRUNC Sample ESQL Program running.
```

```
String = -12345.038572
```

```
Truncated to 6 Fractional Digits: -12345.038572
```

```
Truncated to 5 Fractional Digits: -12345.03857
```

```
Truncated to 4 Fractional Digits: -12345.0385
```

```
Truncated to 3 Fractional Digits: -12345.038
```

```
Truncated to 2 Fractional Digits: -12345.03
```

```
Truncated to 1 Fractional Digits: -12345.0
```

```
DECTRUNC Sample Program over.
```

The dtaddinv() function

The `dtaddinv()` function adds an **interval** value to a **datetime** value. The result is a **datetime** value.

Syntax

```

mint dtaddinv(dt, inv, res)
    dtm_t *dt;
    intrvl_t *inv;
    dtm_t *res;

```

dt

A pointer to the initialized **datetime** host variable.

inv

A pointer to the initialized **interval** host variable.

res

A pointer to the **datetime** host variable that contains the result.

Usage

The `dtaddinv()` function adds the **interval** value in *inv* to the **datetime** value in *dt* and stores the **datetime** value in *res*. This result inherits the qualifier of *dt*.

The **interval** value must be in either the **year to month** or **day to fraction(5)** ranges.

The **datetime** value must include all the fields present in the **interval** value.

If you do not initialize the variables *dt* and *inv*, the function might return an unpredictable result.

Return codes

0

The addition was successful.

<0

Error in addition.

Example

The `demo` directory contains this sample program in the `dtaddinv.ec` file.

```

/*
 * dtaddinv.ec *

The following program adds an INTERVAL value to a DATETIME value and
displays the result.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    char out_str[16];

    EXEC SQL BEGIN DECLARE SECTION;
        datetime year to minute dt_var, result;
        interval day to minute intvl;
    EXEC SQL END DECLARE SECTION;

    printf("DTADDINV Sample ESQL Program running.\n\n");

    printf("datetime year to minute value=2006-11-28 11:40\n");
    dtcvsc("2006-11-28 11:40", &dt_var);
    printf("interval day to minute value = 50 10:20\n");
    incvasc("50 10:20", &intvl);

    dtaddinv(&dt_var, &intvl, &result);

    /* Convert to ASCII for displaying */
    dttoasc(&result, out_str);

```

```

printf("-----\n");
printf("                Sum=%s\n", out_str);

printf("\nDTADDINV Sample Program over.\n\n");
}

```

Output

```

DTADDINV Sample ESQL Program running.

datetime year to minute value=2006-11-28 11:40
interval day to minute value =          50 10:20
-----
                Sum=2007-01-17 22:00

DTADDINV Sample Program over.

```

The dtcurrent() function

The dtcurrent() function assigns the current date and time to a **datetime** variable.

Syntax

```

void dtcurrent(d)
    dttime_t *d;

```

d

A pointer to the initialized **datetime** host variable.

Usage

When the variable qualifier is set to zero (or any invalid qualifier), the dtcurrent() function initializes it with the **year to fraction(3)** qualifier.

When the variable contains a valid qualifier, the dtcurrent() function extends the current date and time to agree with the qualifier.

Example calls

The following statements set the host variable **timewarp** to the current date:

```

EXEC SQL BEGIN DECLARE SECTION;
    datetime year to day timewarp;
EXEC SQL END DECLARE SECTION;

dtcurrent(&timewarp);

```

The following statements set the variable **now** to the current time, to the nearest millisecond:

```

now.dt_qual = TU_DTENCODE(TU_HOUR,TU_F3);
dtcurrent(&now);

```

Example

The `demo` directory contains this sample program in the `dtcurrent.ec` file.

```

/*
 * dtcurrent.ec *

The following program obtains the current date from the system, converts
it to ASCII and prints it.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    mint x;
    char out_str[20];

    EXEC SQL BEGIN DECLARE SECTION;
        datetime year to hour dt1;
    EXEC SQL END DECLARE SECTION;

    printf("DTCURRENT Sample ESQL Program running.\n\n");

    /* Get today's date */
    dtcurrent(&dt1);

    /* Convert to ASCII for displaying */
    dttoasc(&dt1, out_str);
    printf("\tToday's datetime (year to minute) value is %s\n", out_str);

    printf("\nDTCURRENT Sample Program over.\n\n");
}

```

Output

```

DTCURRENT Sample ESQL Program running.

    Today's datetime (year to minute) value is 2007-09-16 14:49

DTCURRENT Sample Program over.

```

The `dtcvasc()` function

The `dtcvasc()` function converts a string that conforms to ANSI SQL standard for a DATETIME value to a **datetime** value.

For information about the ANSI SQL DATETIME standard, see [ANSI SQL standards for DATETIME and INTERVAL values on page 132](#).

Syntax

```

mint dtcvasc(inbuf, dtvalue)
char *inbuf;
dttime_t *dtvalue;

```

inbuf

A pointer to the buffer that contains an ANSI-standard DATETIME string.

dtvalue

A pointer to an initialized **datetime** variable.

Usage

You must initialize the **datetime** variable in *dtvalue* with the qualifier that you want this variable to have.

The character string in *inbuf* must have values that conform to the **year to second** qualifier in the ANSI SQL format. The *inbuf* string can have leading and trailing spaces. However, from the first significant digit to the last, *inbuf* can only contain characters that are digits and delimiters that conform to the ANSI SQL standard for DATETIME values.

If you specify a year value as one or two digits, the *dctvasc()* function assumes that the year is in the present century. You can set the **DBCENTURY** environment variable to determine which century *dctvasc()* uses when you omit a century from the date.

If the character string is an empty string, the *dctvasc()* function sets to null the value to which *dtvalue* points. If the character string is acceptable, the function sets the value in the **datetime** variable and returns zero. Otherwise, the function leaves the variable unchanged and returns a negative error code.

Return codes

0

Conversion was successful.

-1260

It is not possible to convert between the specified types.

-1261

Too many digits in the first field of **datetime** or **interval**.

-1262

Non-numeric character in **datetime** or **interval**.

-1263

A field in a **datetime** or **interval** value is out of range or incorrect.

-1264

Extra characters exist at the end of a **datetime** or **interval**.

-1265

Overflow occurred on a **datetime** or **interval** operation.

-1266

A **datetime** or **interval** value is incompatible with the operation.

-1267

The result of a **datetime** computation is out of range.

-1268

A parameter contains an invalid **datetime** qualifier.

Example

The `demo` directory contains this sample program in the `dtcvasc.ec` file.

```

/*
 * dtcvasc.ec *

The following program converts ASCII datetime strings in ANSI SQL format
into datetime (datetime_t) structure.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    mint x;

    EXEC SQL BEGIN DECLARE SECTION;
        datetime year to second dt1;
    EXEC SQL END DECLARE SECTION;

    printf("DTCVASC Sample ESQL Program running.\n\n");

    printf("Datetime string #1 = 2007-02-11 3:10:35\n");
    if (x = dtcvasc("2007-02-11 3:10:35", &dt1))
        printf("Result = failed with conversion error: %d\n", x);
    else
        printf("Result = successful conversion\n");

    /*
     * Note that the following literal string has a 26 in the hours place
     */
    printf("\nDatetime string #2 = 2007-02-04 26:10:35\n");
    if (x = dtcvasc("2007-02-04 26:10:35", &dt1))
        printf("Result = failed with conversion error: %d\n", x);
    else
        printf("Result = successful conversion\n");

    printf("\nDTCVASC Sample Program over.\n\n");
}

```

Output

```

DTCVASC Sample ESQL Program running.

Datetime string #1 = 2007-02-11 3:10:35
Result = successful conversion

```

```
Datetime string #2 = 2007-02-04 26:10:35
Result = failed with conversion error:-1263

DTCVASC Sample Program over.
```

The dtcvfmtasc() function

The dtcvfmtasc() function uses a formatting mask to convert a character string to a **datetime** value.

Syntax

```
mint dtcvfmtasc(inbuf, fmtstring, dtvalue)
char *inbuf;
char *fmtstring;
dttime_t *dtvalue;
```

inbuf

A pointer to the buffer that contains the string to convert.

fmtstring

A pointer to the buffer that contains the formatting mask to use for the *inbuf* string. This time-formatting mask contains the same formatting directives that the **DBTIME** environment variable supports. (For a list of these directives, see the description of **DBTIME** in the *HCL® Informix® Guide to SQL: Reference*).

dtvalue

A pointer to the initialized **datetime** variable.

Usage

You must initialize the **datetime** variable in *dtvalue* with the qualifier that you want this variable to have. The **datetime** variable does not need to specify the same qualifier that the formatting mask implies. When the **datetime** qualifier is different from the implied formatting-mask qualifier, dtcvfmtasc() extends the **datetime** value (as if it had called the dtextend() function).

All qualifier fields in the character string in *inbuf* must be contiguous. In other words, if the qualifier is **hour to second**, you must specify all values for **hour**, **minute**, and **second** somewhere in the string, or the dtcvfmtasc() function returns an error.

The *inbuf* character string can have leading and trailing spaces. However, from the first significant digit to the last, *inbuf* can contain only digits and delimiters that are appropriate for the qualifier fields that the formatting mask implies. For more information about acceptable digits and delimiters for a DATETIME value, see the [ANSI SQL standards for DATETIME and INTERVAL values on page 132](#).

The dtcvfmtasc() function returns an error if the formatting mask, *fmtstring*, is an empty string. If *fmtstring* is a null pointer, the dtcvfmtasc() function must determine the format to use when it reads the character string in *inbuf*. When you use the default locale, the function uses the following precedence:

1. The format that the **DBTIME** environment variable specifies (if **DBTIME** is set). For more information about **DBTIME**, see the *HCL® Informix® Guide to SQL: Reference*.
2. The format that the **GL_DATETIME** environment variable specifies (if **GL_DATETIME** is set). For more information about **GL_DATETIME**, see the *HCL® Informix® GLS User's Guide*.
3. The default date format conforms to the standard ANSI SQL format:

```
%iY-%m-%d %H:%M:%S
```

The ANSI SQL format specifies a qualifier of **year to second** for the output. You can express the year as four digits (2007) or as two digits (07). When you use a two-digit year (**%y**) in a formatting mask, the `dtecvfmtasc()` function uses the value of the **DBCENTURY** environment variable to determine which century to use. If you do not set **DBCENTURY**, `dtecvfmtasc()` assumes the present century for two-digit years. For information about how to set **DBCENTURY**, see the *HCL® Informix® Guide to SQL: Reference*.

When you use a nondefault locale (one other than US English) and do not set the **DBTIME** or **GL_DATETIME** environment variables, `dtecvfmtasc()` uses the default DATETIME format that the locale defines. For more information, see the *HCL® Informix® GLS User's Guide*.

When the character string and the formatting mask are acceptable, the `dtecvfmtasc()` function sets the **datetime** variable in `dtvalue` and returns zero. Otherwise, it returns an error code and the **datetime** variable contains an unpredictable value.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The `demo` directory contains this sample program in the file `dtecvfmtasc.ec`. The code initializes the variable **birthday** to a fictitious birthday.

```
/* *dtecvfmtasc.ec*
   The following program illustrates the conversion of several ascii strings
   into datetime values.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    char out_str[17], out_str2[17], out_str3[17]; mint x;

    EXEC SQL BEGIN DECLARE SECTION;
        datetime month to minute birthday;
        datetime year to minute birthday2;
```

```

        datetime year to minute birthday3;
EXEC SQL END DECLARE SECTION;

printf("DTCVFMTASC Sample ESQL Program running.\n\n");

/* Initialize birthday to "09-06 13:30" */
printf("Birthday #1 = September 6 at 01:30 pm\n");
x = dtcvfmtasc("September 6 at 01:30 pm", "%B %d at %I:%M %p",
    &birthday);

/*Convert the internal format to ascii in ANSI format, for displaying. */
x = dttoasc(&birthday, out_str);
printf("Datetime (month to minute) value = %s\n\n", out_str);
/* Initialize birthday2 to "07-14-88 09:15" */
printf("Birthday #2 = July 14, 1988. Time: 9:15 am\n");
x = dtcvfmtasc("July 14, 1988. Time: 9:15am",
    "%B %d, %Y. Time: %I:38p", &birthday2);

/*Convert the internal format to ascii in ANSI format, for displaying. */
x = dttoasc(&birthday2, out_str2);
printf("Datetime (year to minute) value = %s\n\n", out_str2);
/* Initialize birthday3 to "07-14-XX 09:15" where XX is current year.
 * Note that birthday3 is year to minute but this initialization only
 * provides month to minute. dtcvfmtasc provides current information
 * for the missing year.
 */
printf("Birthday #3 = July 14. Time: 9:15 am\n");
x = dtcvfmtasc("July 14. Time: 9:15am", "%B %d. Time: %I:%M %p",
    &birthday3);

/* Convert the internal format to ascii in ANSI format, for displaying. */
x = dttoasc(&birthday3, out_str3);
printf("Datetime (year to minute) value with current year = %s\n",
    out_str3);

printf("\nDTCVFMTASC Sample Program over.\n\n");
}

```

Output

```

DTCVFMTASC Sample ESQL Program running.

Birthday #1 = September 6 at 01:30 pm
Datetime (month to minute) value = 09-06 13:30

Birthday #2 = July 14, 1988 Time: 9:15 am
Datetime (year to minute) value = 2007-07-14 09:15

Birthday #3 = July 14. Time: 9:15 am
Datetime (year to minute) value with current year = 2007-07-14 09:15

DTCVFMTASC Sample Program over.

```

The dtextend() function

The dtextend() function extends a **datetime** value to a different qualifier. Extending is the operation of adding or dropping fields of a DATETIME value to make it match a given qualifier.

Syntax

```
mint dtextend(in_dt, out_dt)
    dtime_t *in_dt, *out_dt;
```

in_dt

A pointer to the **datetime** variable to extend.

out_dt

A pointer to the **datetime** variable with a valid qualifier to use for the extension.

Usage

The dtextend() function copies the qualifier-field digits of the *in_dt* **datetime** variable to the *out_dt* **datetime** variable. The qualifier of the *out_dt* variable controls the copy.

The function discards any fields in *in_dt* that the *out_dt* variable does not include. The function completes any fields in *out_dt* that are not present in *in_dt*, as follows:

- It completes fields to the left of the most-significant field in *in_dt* from the current time and date.
- It completes fields to the right of the least-significant field in *in_dt* with zeros.

In the following example, a variable **fiscal_start** is set up with the first day of a fiscal year that begins on June 1. The dtextend() function generates the current year.

```
EXEC SQL BEGIN DECLARE SECTION;
    datetime work, fiscal_start;
EXEC SQL END DECLARE SECTION;

work.dt_qual = TU_DTENCODE(TU_MONTH,TU_DAY);
dtcvasc("06-01",&work);
fiscal_start.dt_qual = TU_DTENCODE(TU_YEAR,TU_DAY);
dtextend(&work,&fiscal_start);
```

Return codes

0

The operation was successful.

-1268

A parameter contains an invalid **datetime** qualifier.

Example

The demo directory contains this sample program in the file dtextend.ec.

```

/*
 * dtextend.ec *

The following program illustrates the results of datetime extension.
The fields to the right are filled with zeros,
and the fields to the left are filled in from current date and time.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    mint x;
    char year_str[20];

    EXEC SQL BEGIN DECLARE SECTION;
        datetime month to day month_dt;
        datetime year to minute year_min;
    EXEC SQL END DECLARE SECTION;

    printf("DTEXTEND Sample ESQL Program running.\n\n");

    /* Assign value to month_dt and extend */
    printf("Datetime (month to day) value = 12-07\n");
    if(x = dtcvasc("12-07", &month_dt))
        printf("Result = Error %d in dtcvasc()\n", x);
else
    {
        if (x = dtextend(&month_dt, &year_min))
            printf("Result = Error %d in dtextend()\n", x);
        else
            {
                dttoasc(&year_min, year_str);
                printf("Datetime (year to minute) extended value =%s\n",
                    year_str);
            }
    }

    printf("\nDTEXTEND Sample Program over.\n\n");
}

```

Output

```

DTEXTEND Sample ESQL Program running.

Datetime (month to day) value = 12-07
Datetime (year to minute) extended value = 2006-12-07 00:00

DTEXTEND Sample Program over.

```

The dtsub() function

The dtsub() function subtracts one **datetime** value from another. The result is an **interval** value.

Syntax

```
mint dtsub(d1, d2, inv)
    dtime_t *d1, *d2;
    intrvl_t *inv;
```

d1

A pointer to an initialized **datetime** host variable.

d2

A pointer to an initialized **datetime** host variable.

inv

A pointer to the **interval** host variable that contains the result.

Usage

The `dtsub()` function subtracts the **datetime** value *d2* from *d1* and stores the **interval** result in *inv*. The result can be either a positive or a negative value. If necessary, the function extends *d2* to match the qualifier for *d1*, before the subtraction.

Initialize the qualifier for *inv* with a value in either the **year to month** or **day to fraction(5)** classes. When *d1* contains fields in the **day to fraction** class, the **interval** qualifier must also be in the **day to fraction** class.

Return codes

0

The subtraction was successful.

<0

An error occurred while performing the subtraction.

Example

The `demo` directory contains this sample program in the file `dtsub.ec`. The program performs **datetime** subtraction that returns equivalent **interval** results in the range of **year to month** and **month to month** and attempts to return an **interval** result in the range **day to hour**.

```
/*
 * dtsub.ec *

The following program subtracts one DATETIME value from another and
displays the resulting INTERVAL value or an error message.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    mint x;
    char out_str[16];
```

```

EXEC SQL BEGIN DECLARE SECTION;
    datetime year to month dt_var1, dt_var2;
    interval year to month i_ytm;
    interval month to month i_mtm;
    interval day to hour i_dth;
EXEC SQL END DECLARE SECTION;

printf("DTSUB Sample ESQL Program running.\n\n");

printf("Datetime (year to month) value #1 = 2007-10\n");
dctvasc("2007-10", &dt_var1);
printf("Datetime (year to month) value #2 = 2001-08\n");
dctvasc("2001-08", &dt_var2);

printf("-----\n");

/* Determine year-to-month difference */
printf("Difference (year to month)          = ");
if(x = dtsub(&dt_var1, &dt_var2, &i_ytm))
    printf("Error from dtsub(): %d\n", x);
else
    {
        /* Convert to ASCII for displaying */
        intoasc(&i_ytm, out_str);
        printf("%s\n", out_str);
    }

/* Determine month-to-month difference */
printf("Difference (month to month)        = ");
if(x = dtsub(&dt_var1, &dt_var2, &i_mtm))
    printf("Error from dtsub(): %d\n", x);
else
    {
        /* Convert to ASCII for displaying */
        intoasc(&i_mtm, out_str);
        printf("%s\n", out_str);
    }

/* Determine day-to-hour difference: Error - Can't convert
 * year-to-month to day-to-hour
 */
printf("Difference (day to hour)           = ");
if(x = dtsub(&dt_var1, &dt_var2, &i_dth))
    printf("Error from dtsub(): %d\n", x);
else
    {
        /* Convert to ASCII for displaying */
        intoasc(&i_dth, out_str);
        printf("%s\n", out_str);
    }

printf("\nDTSUB Sample Program over.\n\n");
}

```

Output

```
DTSUB Sample ESQL Program running.

Datetime (year to month) value #1 = 2007-10
Datetime (year to month) value #2 = 2001-08
-----
Difference (year to month)      = 0006-02
Difference (month to month)     = 86
Difference (day to hour)        = Error from dtsub(): -1266

DTSUB Sample Program over.
```

The dtsubinv() function

The dtsubinv() function subtracts an **interval** value from a **datetime** value. The result is a **datetime** value.

Syntax

```
mint dtsubinv(dt, inv, res)
    dtime_t *dt;
    intrvl_t *inv;
    dtime_t *res;
```

dt

A pointer to an initialized **datetime** host variable.

inv

A pointer to an initialized **interval** host variable.

res

A pointer to the **datetime** host variable that contains the result.

Usage

The dtsubinv() function subtracts the **interval** value in *inv* from the **datetime** value in *dt* and stores the **datetime** value in *res*. This result inherits the qualifier of *dt*.

The **datetime** value must include all the fields present in the **interval** value. When you do not initialize the variables *dt* and *inv*, the function might return an unpredictable result.

Return codes

0

The subtraction was successful.

<0

An error occurred while performing the subtraction.

Example

The `demo` directory contains this sample program in the file `dtsubinv.ec`.

```

/*
 * dtsubinv.ec *

The following program subtracts an INTERVAL value from a DATETIME value and
displays the result.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    char out_str[16];

    EXEC SQL BEGIN DECLARE SECTION;
        datetime year to minute dt_var, result;
        interval day to minute intvl;
    EXEC SQL END DECLARE SECTION;

    printf("DTSUBINV Sample ESQL Program running.\n\n");

    printf("Datetime (year to month) value = 2007-11-28\n");
    dtcvasc("2007-11-28 11:40", &dt_var);
    printf("Interval (day to minute) value = 50 10:20\n");
    incvasc("50 10:20", &intvl);

    printf("-----\n");
    dtsubinv(&dt_var, &intvl, &result);

    /* Convert to ASCII for displaying */
    dttoasc(&result, out_str);
    printf("Difference (year to hour) = %s\n", out_str);

    printf("\nDTSUBINV Sample Program over.\n\n");
}

```

Output

```

DTSUBINV Sample ESQL Program running.

Datetime (year to month) value = 2007-11-28
Interval (day to minute) value = 50 10:20
-----
Difference (year to hour) = 2007-10-09 01:20

DTSUBINV Sample Program over.

```

The dttoasc() function

The `dttoasc()` function converts the field values of a **datetime** variable to an ASCII string that conforms to ANSI SQL standards.

For information about the ANSI SQL DATETIME standard, see [ANSI SQL standards for DATETIME and INTERVAL values on page 132](#).

Syntax

```
mint dttoasc(dtvalue, outbuf)
    dttime_t *dtvalue;
    char *outbuf;
```

dtvalue

A pointer to the initialized **datetime** variable to convert.

outbuf

A pointer to the buffer that receives the ANSI-standard DATETIME string for the value in *dtvalue*.

Usage

The `dttoasc()` function converts the digits of the fields in the **datetime** variable to their character equivalents and copies them to the *outbuf* character string with delimiters (hyphen, space, colon, or period) between them. You must initialize the **datetime** variable in *dtvalue* with the qualifier that you want the character string to have.

The character string does not include the qualifier or the parentheses that SQL statements use to delimit a DATETIME literal. The *outbuf* string conforms to ANSI SQL standards. It includes one character for each delimiter, plus the fields, which are of the following sizes.

Field

Field size

Year

Four digits

Fraction of DATETIME

As specified by precision

All other fields

Two digits

A **datetime** value with the **year to fraction(5)** qualifier produces the maximum length of output. The string equivalent contains 19 digits, 6 delimiters, and the null terminator, for a total of 26 bytes:

```
YYYY-MM-DD HH:MM:SS.FFFFF
```

If you do not initialize the qualifier of the **datetime** variable, the `dttoasc()` function returns an unpredictable value, but this value does not exceed 26 bytes.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The `demo` directory contains this sample program in the file `dttoasc.ec`.

```

/*
 * dttoasc.ec *

The following program illustrates the conversion of a datetime value
into an ASCII string in ANSI SQL format
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    char out_str[16];

    EXEC SQL BEGIN DECLARE SECTION;
        datetime year to hour dt1;
    EXEC SQL END DECLARE SECTION;

    printf("DTTOASC Sample ESQL Program running.\n\n");

    /* Initialize dt1 */
    dtcurrent(&dt1);

    /* Convert the internal format to ascii for displaying */
    dttoasc(&dt1, out_str);

    /* Print it out*/
    printf("\tToday's datetime (year to hour) value is %s\n", out_str);

    printf("\nDTTOASC Sample Program over.\n\n");
}

```

Output

```

DTTOASC Sample ESQL Program running.

    Today's datetime (year to hour) value is 2007-09-19 08

DTTOASC Sample Program over.

```

The dttofmtasc() function

The `dttofmtasc()` function uses a formatting mask to convert a **datetime** variable to a character string.

Syntax

```

mint dttofmtasc(dtvalue, outbuf, buflen, fmtstring)
    dttime_t *dtvalue;
    char *outbuf;
    mint buflen;
    char *fmtstring;

```

dtvalue

A pointer to the initialized **datetime** variable to convert.

outbuf

A pointer to the buffer that receives the string for the value in *dtvalue*.

buflen

The length of the *outbuf* buffer.

fmtstring

A pointer to the buffer that contains the formatting mask to use for the *outbuf* string. This time-formatting mask contains the same formatting directives that the **DBTIME** environment variable supports. (For a list of these directives, see the description of **DBTIME** in the *HCL® Informix® Guide to SQL: Reference*).

Usage

You must initialize the **datetime** variable in *dtvalue* with the qualifier that you want the character string to have. If you do not initialize the **datetime** variable, the function returns an unpredictable value. The character string in *outbuf* does *not* include the qualifier or the parentheses that SQL statements use to delimit a DATETIME literal.

The formatting mask, *fmtstring*, does not need to imply the same qualifiers as the **datetime** variable. When the implied formatting-mask qualifier is different from the **datetime** qualifier, `dttofmtasc()` extends the **datetime** value (as if it called the `dtextend()` function).

If the formatting mask is an empty string, the function sets character string, *outbuf*, to an empty string. If *fmtstring* is a null pointer, the `dttofmtasc()` function must determine the format to use for the character string in *outbuf*. When you use the default locale, the function uses the following precedence:

1. The format that the **DBTIME** environment variable specifies (if **DBTIME** is set). For more information about **DBTIME**, see the *HCL® Informix® Guide to SQL: Reference*.
2. The format that the **GL_DATETIME** environment variable specifies (if **GL_DATETIME** is set). For more information about **GL_DATETIME**, see the *HCL® Informix® GLS User's Guide*.
3. The default date format that conforms to the standard ANSI SQL format:

```
%1Y-%m-%d %H:%M:%S
```

When you use a two-digit year (**%y**) in a formatting mask, the `dttofmtasc()` function uses the value of the **DBCENTURY** environment variable to determine which century to use. If you do not set **DBCENTURY**, `dttofmtasc()` assumes the present century for two-digit years. For information about how to set **DBCENTURY**, see the *HCL® Informix® Guide to SQL: Reference*.

When you use a nondefault locale (one other than US English) and do not set the **DBTIME** or **GL_DATETIME** environment variables, `dttofmtasc()` uses the default DATETIME format that the client locale defines. For more information, see the *HCL® Informix® GLS User's Guide*.

Return codes

0

The conversion was successful.

<0

The conversion failed. Check the text of the error message.

Example

The `demo` directory contains this sample program in the file `dttofmtasc.ec`.

```

/* *dttofmtasc.ec*
   The following program illustrates the conversion of a datetime
   value into strings of different formats.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    char out_str1[25];
    char out_str2[25];
    char out_str3[30];
    mint x;

    EXEC SQL BEGIN DECLARE SECTION;
        datetime month to minute birthday;
    EXEC SQL END DECLARE SECTION;

    printf("DTTOFMTASC Sample ESQL Program running.\n\n");

    /* Initialize birthday to "09-06 13:30" */
    printf("Birthday datetime (month to minute) value = ");
    printf("September 6 at 01:30 pm\n");
    x = dtcvfmtasc("September 6 at 01:30 pm", "%B %d at %I:%M %p",
        &birthday);

    /* Convert the internal format to ascii for 3 given display formats.
     * Note that the second format does not include the minutes field and
     * that the last format includes a year field even though birthday was
     * not initialized as year to minute.
     */

    x = dttofmtasc(&birthday, out_str1, sizeof(out_str1),
        "%d %B at %H:%M");
    x = dttofmtasc(&birthday, out_str2, sizeof(out_str2),
        "%d %B at %H");
    x = dttofmtasc(&birthday, out_str3, sizeof(out_str3),
        "%d %B, %Y at %H:%M"); /* Print out the three forms of the same date */
    printf("\tFormatted value (%d %B at %H:%M) = %s\n", out_str1);
    printf("\tFormatted value (%d %B at %H) = %s\n", out_str2);
    printf("\tFormatted value (%d %B, %Y at %H:%M) = %s\n", out_str3);

```

```
printf("\nDTTOFMTASC Sample Program over.\n\n");
}
```

Output

```
DTTOFMTASC Sample ESQL Program running.

Birthday datetime (month to minute) value = September 6 at 01:30 pm
Formatted value (%d %B at %H:%M) = 06 September at 13:30
Formatted value (%d %B at %H)) = 06 September at 13
Formatted value (%d %B, %Y at %H:%M)) = 06 September, 2007 at 13:30

DTTOFMTASC Sample Program over.
```

The GetConnect() function (Windows™)

The GetConnect() function is available only in Windows™ environments and establishes a new explicit connection to a database server.



Important: IBM® Informix® ESQL/C supports the GetConnect() connection library function for compatibility with Version 5.01 Informix® ESQL/C for Windows™ applications. When you write new Informix® ESQL/C applications for Windows™ environments, use the SQL CONNECT statement to establish an explicit connection.

Syntax

```
void *GetConnect ( )
```

Usage

The GetConnect() function call *by itself* is equivalent to the following SQL statement:

```
EXEC SQL connect to '@dbservername' with concurrent transaction;
```

In this example, *dbservername* is the name of a defined database server. All database servers that the client application specifies must be defined in *at least one* of the following places:

- The **INFORMIXSERVER** environment variable in the Registry contains the name of the *default* database server. The Setnet32 utility sets the Registry values.
- The **InfxServer** field in the **InetLogin** structure can contain the name of the *default* database server or a *specified* database server. The client application sets the **InetLogin** fields.

For more information about the default and specified database server, see [Sources of connection information in a Windows environment on page 321](#)

For example, the following code fragment uses GetConnect() to establish an explicit connection to the **stores7** database on the **mainsrvr** database server:

```
void *cnctHndl;
;;
strcpy(InetLogin.InfxServer, "mainsrvr");
;;
```

```
cnctHndl = GetConnect();
EXEC SQL database stores7;
```

In the preceding example, if you had omitted the assignment to the **InetLogin.InfxServer** field, Informix® ESQL/C would establish an explicit connection to the **stores7** database in the default database server (the database server that the **INFORMIXSERVER** environment variable in the Registry indicates).

After any call to `GetConnect()`, use the SQL `DATABASE` statement (or some other SQL statement that opens a database) to open the desired database. In the previous code fragment, the combination of the `GetConnect()` function and the `DATABASE` statement is equivalent to the following `CONNECT` statement:

```
EXEC SQL connect to 'stores7@mainsrvr' with concurrent transaction;
```

! **Important:** Because the `GetConnect()` function maps to a `CONNECT` statement, it sets the `SQLCODE` and `SQLSTATE` status codes to indicate the success or failure of the connection request. This behavior differs from `GetConnect()` in Version 5.01 Informix® ESQL/C for Windows™, in which this function did not set the `SQLCODE` and `SQLSTATE` values.

The following table shows the differences between the use of the `GetConnect()` function and the SQL `CONNECT` statement.

Situation	GetConnect() library function	SQL CONNECT statement
Connection name	Internally generated and stored in the connection handle structure for the connection	Internally generated unless <code>CONNECT</code> includes the <code>AS</code> clause; therefore, to switch to other connections, specify the <code>AS</code> clause when you create the connection.
Opening a database	Only establishes an explicit connection to a database server; therefore, the application must use <code>DATABASE</code> (or some other valid SQL statement) to open the database.	Can establish an explicit connection to a database server <i>and</i> open a database when provided with names of both the database server and the database

! **Important:** Because the `GetConnect()` function maps to a `CONNECT` statement with the `WITH CONCURRENT TRANSACTION` clause, it allows an explicit connection with open transactions to become dormant. Your Informix® ESQL/C application does not need to ensure that the current transaction was committed or rolled back before it calls the `SetConnect()` function to switch to another explicit connection.

For each connection that you establish with `GetConnect()`, call `ReleaseConnect()` to close the connection and deallocate resources.

Return codes

CnctHndl

The call to `GetConnect()` was successful, and the function has returned a connection handle for the new connection.

null pointer

The call to GetConnect() was unsuccessful.

The ifx_cl_card() function

The ifx_cl_card() function returns the cardinality of the specified collection type host variable.

Syntax

```
mint ifx_cl_card(collp, isnull)
    ifx_collection_t *collp;
    mint *isnull;
```

collp

A pointer to the name of the **collection** host variable in the application.

isnull

Set to `1` if the collection is null, `0` otherwise

Usage

The ifx_cl_card() function enables you to determine the number of elements in a collection, whether the collection is empty, and whether the collection is null.

Return codes

0

The collection is empty.

>0

The number of elements in the collection.

<0

An error occurred.

Example

This sample program is in the ifx_cl_card.ec file in the demo directory.

```
/*
 * Check the cardinality of the collection variable when
 * the data is returned from the server
 */

main()
{
    exec sql begin declare section;
    client collection myset;
    exec sql end declare section;
    mint numelems = 0;
    mint isnull = 0;
```

```

exec sql allocate collection ::myset;
exec sql create database newdb;
exec sql create table tab (col set(int not null));
exec sql insert into tab values ("set{1}");
exec sql select * into :myset from tab;
if ((ifx_cl_card(myset, &isnull) == 0) && isnull == 0)
    printf("collection is empty\n");
else if ((ifx_cl_card(myset, &isnull) == 0) && isnull == 1)
    printf("collection is null\n");
else if ((numelems = ifx_cl_card(myset, &isnull)) > 0)
    printf("number of elements is %d\n", numelems);
else
    printf("error occurred\n");

exec sql update tab set col = 'set{1,2,3}';
exec sql select * into :myset from tab;
if ((ifx_cl_card(myset, &isnull) == 0) && isnull == 0)
    printf("collection is empty\n");

else if ((ifx_cl_card(myset, &isnull) == 0) && isnull == 1)
    printf("collection is null\n");
else if ((numelems = ifx_cl_card(myset, &isnull)) > 0)
    printf("number of elements is %d\n", numelems);
else
    printf("error occurred\n");

exec sql update tab set col = NULL;
exec sql select * into :myset from tab;
if ((ifx_cl_card(myset, &isnull) == 0) && isnull == 0)
    printf("collection is empty\n");
else if ((ifx_cl_card(myset, &isnull) == 0) && isnull == 1)
    printf("collection is null\n");
else if ((numelems = ifx_cl_card(myset, &isnull)) > 0)
    printf("number of elements is %d\n", numelems);
else
    printf("error occurred\n");
}

```

Output

```

collection is empty
number of elements is 3
collection is null

```

The ifx_dececv() and ifx_decfcvt() function

The ifx_dececv() and ifx_decfcvt() functions are the thread-safe versions of the dececv() and decfcvt() IBM® Informix® ESQL/C library functions.

Syntax

```

mint ifx_dececv(np, ndigit, decpt, sign, decstr, decstrlen)
    register dec_t *np;
    register mint ndigit;
    mint *decpt;
    mint *sign;
    char *decstr;

```



```

mint decstrlen;

mint ifx_decfcvt(np, ndigit, decpt, sign, decstr, decstrlen)
  register dec_t *np;
  register mint ndigit;
  mint *decpt;
  mint *sign;
  char *decstr;
  mint decstrlen;

```

np

A pointer to a **decimal** structure that contains the **decimal** value to be converted.

ndigit

The length of the ASCII string for `ifx_dececv()`. It is the number of digits to the right of the decimal point for `ifx_decfcvt()`.

decpt

A pointer to an integer that is the position of the decimal point relative to the beginning of the string. A negative or zero value for `*decpt` means that the position is located to the left of the returned digits.

sign

A pointer to the sign of the result. If the sign of the result is negative, `*sign` is nonzero; otherwise, it is zero.

decstr

The user-defined buffer where the function returns the converted decimal value.

decstrlen

The length, in bytes, of the `decstr` buffer that the user defines.

Usage

The `ifx_dececv()` function is the thread-safe version of the `dececv()` function. The `ifx_decfcvt()` function is the thread-safe version of `decfcvt()` function. Each function returns a character string that cannot be overwritten when two threads simultaneously call the function. For information about how to use `dececv()` and `decfcvt()`, see [The `dececv\(\)` and `decfcvt\(\)` functions on page 587](#).

Return codes**0**

The conversion was successful.

<0

The conversion was not successful.

-1273

Output buffer is null or too small to hold the result.

The ifx_defmtdate() function

The ifx_defmtdate() function uses a formatting mask to convert a character string to an internal DATE format.

Syntax

```
mint ifx_defmtdate(jdate, fmtstring, instring, dbcentury)
    int4 *jdate;
    char *fmtstring;
    char *instring;
    char dbcentury;
```

jdate

A pointer to an **int4** integer value that receives the internal DATE value for the *inbuf* string.

fmtstring

A pointer to the buffer that contains the formatting mask to use for the *inbuf* string.

instring

A pointer to the buffer that contains the date string to convert.

dbcentury

Can be one of the following characters, which determines which century to apply to the year portion of the date:

R

Present. The function uses the two high-order digits of the current year to expand the year value.

P

Past. The function uses the present and past centuries to expand the year value. It compares these two dates against the current date and uses the century that is before the current century. If both dates are before the current date, the function uses the century closest to the current date.

F

Future. The function uses the present and next centuries to expand the year value. It compares these centuries against the current date and uses the century that is later than the current date. If both dates are later than the current date, the function uses the date closest to the current date.

C

Closest. The function uses the present, past, and next centuries to expand the year value. It chooses the century that is closest to the current date.

Usage

The *fmtstring* argument points to the date-formatting mask, which contains formats that describe how to interpret the date string. For more information about these date formats, see [Format date strings on page 125](#).

The *input* string and the *fmtstring* must be in the same sequential order in terms of month, day, and year. They need not, however, contain the same literals or the same representation for month, day, and year.

You can include the weekday format (_{ww}), in *fmtstring*, but the database server ignores that format. Nothing from the *inbuf* corresponds to the weekday format.

The following combinations of *fmtstring* and *input* are valid.

Formatting mask

Input

mmddy

Dec. 25th, 2007

mmddyyyy

Dec. 25th, 2007

mmm. dd. yyyy

dec 25 2007

mmm. dd. yyyy

DEC-25-2007

mmm. dd. yyyy

122507

mmm. dd. yyyy

12/25/07

yy/mm/dd

07/12/25

yy/mm/dd

2007, December 25

yy/mm/dd

In the year 2007, the month of December, it is the 25th day

dd-mm-yy

This 25th day of December 2007

If the value stored in *inbuf* is a four-digit year, the *ifx_defmtdate()* function uses that value. If the value stored in *inbuf* is a two-digit year, the *ifx_defmtdate()* function uses the value of the *dbcentury* argument to determine which century to use. If you do not set the *dbcentury* argument, *ifx_defmtdate()* uses the **DBCENTURY** environment variable to determine which century to use. If you do not set **DBCENTURY**, *ifx_strdate()* assumes the current century for two-digit years. For information about how to set **DBCENTURY**, see the *HCL® Informix® Guide to SQL: Reference*.

When you use a nondefault locale whose dates contain eras, you can use extended-format strings in the *fmtstring* argument of *ifx_defmtdate()*.

Return codes

If you use an invalid date-string format, `ifx_defmtdate()` returns an error code and sets the internal DATE to the current date. The following are possible return codes.

0

The operation was successful.

-1204

The **input* parameter specifies an invalid year.

-1205

The **input* parameter specifies an invalid month.

-1206

The **input* parameter specifies an invalid day.

-1209

Because **input* does not contain delimiters between the year, month, and day, the length of **input* must be exactly 6 or 8 bytes.

-1212

**fmtstring* does not specify a year, a month, and a day.

The `ifx_dtcvasc()` function

The `ifx_dtcvasc()` function converts a string that conforms to ANSI SQL standard for a DATETIME value to a **datetime** value.

Syntax

```
mint dtcvasc(str, d, dbcentury)
char *str;
dtime_t *d;
char dbcentury;
```

str

A pointer to the buffer that contains an ANSI-standard DATETIME string.

d

A pointer to an initialized **datetime** variable.

dbcentury

Can be one of the following characters, which determines which century to apply to the year portion of the date:

R

Present. The function uses the two high-order digits of the current year to expand the year value.

P

Past. The function uses the past and present centuries to expand the year value. It compares these two dates against the current date and uses the century that is before the current century. If both dates are before the current date, the function uses the century closest to the current date.

F

Future. The function uses the present and the next centuries to expand the year value. It compares these against the current date and uses the century that is later than the current date. If both dates are later than the current date, the function uses the date closest to the current date.

C

Closest. The function uses the past, present, and next centuries to expand the year value. It chooses the century that is closest to the current date.

Usage

You must initialize the **datetime** variable in *d* with the qualifier that you want this variable to have.

The character string in *str* must have values that conform to the **year to second** qualifier in the ANSI SQL format. The *str* string can have leading and trailing spaces. However, from the first significant digit to the last, *str* can only contain characters that are digits and delimiters that conform to the ANSI SQL standard for DATETIME values.

If you specify a year value as one or two digits, the `ifx_dtcvasc()` function uses the value of the *dbcentury* argument to determine which century to use. If you do not set the *dbcentury* argument, `ifx_dtcvasc()` uses the **DBCENTURY** environment variable to determine which century to use. If you do not set **DBCENTURY**, `ifx_dtcvasc()` assumes the current century for two-digit years. For information about the **DBCENTURY** environment variable, see the *HCL® Informix® Guide to SQL: Reference*.

If the character string is an empty string, the `ifx_dtcvasc()` function sets to null the value to which *d* points. If the character string is acceptable, the function sets the value in the **datetime** variable and returns zero. Otherwise, the function leaves the variable unchanged and returns a negative error code.

Return codes**0**

Conversion was successful.

-1260

It is not possible to convert between the specified types.

-1261

Too many digits in the first field of **datetime** or **interval**.

-1262

Non-numeric character in **datetime** or **interval**.

-1263

A field in a **datetime** or **interval** value is out of range or incorrect.

-1264

Extra characters exist at the end of a **datetime** or **interval**.

-1265

Overflow occurred on a **datetime** or **interval** operation.

-1266

A **datetime** or **interval** value is incompatible with the operation.

-1267

The result of a **datetime** computation is out of range.

-1268

A parameter contains an invalid **datetime** qualifier.

The ifx_dtcvfmtasc() function

The ifx_dtcvfmtasc() function uses a formatting mask to convert a character string to a **datetime** value.

Syntax

```
mint ifx_dtcvfmtasc(input, fmtstring, d, dbcentury)
char *input;
char *fmtstring;
dtime_t *d;

char dbcentury;
```

input

A pointer to the buffer that contains the string to convert.

fmtstring

A pointer to the buffer that contains the formatting mask to use for the input string. This time-formatting mask contains the same formatting directives that the **DBTIME** environment variable supports. (For a list of these directives, see the description of **DBTIME** in the *HCL® Informix® Guide to SQL: Reference*).

d

A pointer to the initialized **datetime** variable.

dbcentury

Can be one of the following characters, which determines which century to apply to the year portion of the date:

R

Present. The function uses the two high-order digits of the current year to expand the year value.

P

Past. The function uses the past and present centuries to expand the year value. It compares these two dates against the current date and uses the century that is before the current century. If both dates are before the current date, the function uses the century closest to the current date.

F

Future. The function uses the present and the next centuries to expand the year value. It compares these centuries against the current date and uses the century that is later than the current date. If both dates are later than the current date, the function uses the date closest to the current date.

C

Closest. The function uses the past, present, and next centuries to expand the year value. It chooses the century that is closest to the current date.

Usage

You must initialize the **datetime** variable in *d* with the qualifier that you want this variable to have. The **datetime** variable does not need to specify the same qualifier that the formatting mask implies. When the **datetime** qualifier is different from the implied formatting-mask qualifier, `ifx_dtcvfmtasc()` extends the **datetime** value (as if it had called the `dtextend()` function).

All qualifier fields in the character string in *input* must be contiguous. In other words, if the qualifier is **hour to second**, you must specify all values for **hour**, **minute**, and **second** somewhere in the string, or the `ifx_dtcvfmtasc()` function returns an error.

The *input* character string can have leading and trailing spaces. However, from the first significant digit to the last, *input* can contain only digits and delimiters that are appropriate for the qualifier fields that the formatting mask implies. For more information about acceptable digits and delimiters for a DATETIME value, see the [ANSI SQL standards for DATETIME and INTERVAL values on page 132](#).

The `ifx_dtcvfmtasc()` function returns an error if the formatting mask, *fmtstring*, is an empty string. If *fmtstring* is a null pointer, the `ifx_dtcvfmtasc()` function must determine the format to use when it reads the character string in *input*. When you use the default locale, the function uses the following precedence:

1. The format that the **DBTIME** environment variable specifies (if **DBTIME** is set). For more information about **DBTIME**, see the *HCL® Informix® Guide to SQL: Reference*.
2. The format that the **GL_DATETIME** environment variable specifies (if **GL_DATETIME** is set). For more information about **GL_DATETIME**, see the *HCL® Informix® GLS User's Guide*.
3. The default date format conforms to the standard ANSI SQL format:

```
%iY-%m-%d %H:%M:%S
```

The ANSI SQL format specifies a qualifier of **year to second** for the output. You can express the year as four digits (2007) or as two digits (07). When you use a two-digit year (**%y**) in a formatting mask, the `ifx_dtcvfmtasc()` function uses the value of the *dbcentury* argument to determine which century to use. If you do not set the *dbcentury* argument, `ifx_dtcvfmtasc()` uses

the **DBCENTURY** environment variable to determine which century to use. If you do not set **DBCENTURY**, `ifx_dtcvfmtasc()` assumes the current century for two-digit years. For information about the **DBCENTURY** environment variable, see the *HCL® Informix® Guide to SQL: Reference*.

When you use a nondefault locale (one other than US English) and do not set the **DBTIME** or **GL_DATETIME** environment variables, `ifx_dtcvfmtasc()` uses the default DATETIME format that the locale defines. For more information, see the *HCL® Informix® GLS User's Guide*.

When the character string and the formatting mask are acceptable, the `ifx_dtcvfmtasc()` function sets the **datetime** variable in *d* and returns zero. Otherwise, it returns an error code and the **datetime** variable contains an unpredictable value.

Return codes

0

The conversion was successful.

<0

The conversion failed.

The `ifx_dttofmtasc()` function

The `ifx_dttofmtasc()` function uses a formatting mask to convert a **datetime** variable to a character string.

Syntax

```
mint dttofmtasc(dtvalue, output, str_len, fmtstring, dbcentury)
    dttime_t *dtvalue;
    char *outbuf;
    mint buflen;
    char *fmtstring;
```

d

A pointer to the initialized **datetime** variable to convert.

output

A pointer to the buffer that receives the string for the value in *d*.

str_len

The length of the output buffer.

fmtstring

A pointer to the buffer that contains the formatting mask to use for the output string. This time-formatting mask contains the same formatting directives that the **DBTIME** environment variable supports. (For a list of these directives, see the description of **DBTIME** in the *HCL® Informix® Guide to SQL: Reference*).

dbcentury

Can be one of the following characters, which determines which century to apply to the year portion of the date:

R

Present. The function uses the two high-order digits of the current year to expand the year value.

P

Past. The function uses the past and present centuries to expand the year value. It compares these two dates against the current date and uses the century that is before the current century. If both dates are before the current date, the function uses the century closest to the current date.

F

Future. The function uses the present and the next centuries to expand the year value. It compares these centuries against the current date and uses the century that is later than the current date. If both dates are later than the current date, the function uses the date closest to the current date.

C

Closest. The function uses the past, present, and next centuries to expand the year value. It chooses the century that is closest to the current date.

Usage

You must initialize the **datetime** variable in *dtvalue* with the qualifier that you want the character string to have. If you do not initialize the **datetime** variable, the function returns an unpredictable value. The character string in *outbuf* does not include the qualifier or the parentheses that SQL statements use to delimit a DATETIME literal.

The formatting mask, *fmtstring*, does not need to imply the same qualifiers as the **datetime** variable. When the implied formatting-mask qualifier is different from the **datetime** qualifier, `dttofmtasc()` extends the **datetime** value (as if it called the `dttofmtasc()` function).

If the formatting mask is an empty string, the function sets character string, *outbuf*, to an empty string. If *fmtstring* is a null pointer, the `dttofmtasc()` function must determine the format to use for the character string in *outbuf*. When you use the default locale, the function uses the following precedence:

1. The format that the **DBTIME** environment variable specifies (if **DBTIME** is set). For more information about **DBTIME**, see the *HCL® Informix® Guide to SQL: Reference*.
2. The format that the **GL_DATETIME** environment variable specifies (if **GL_DATETIME** is set). For more information about **GL_DATETIME**, see the *HCL® Informix® GLS User's Guide*.
3. The default date format that conforms to the standard ANSI SQL format:

```
%iY-%m-%d %H:%M:%S
```

When you use a two-digit year (**%y**) in a formatting mask, the `dttofmtasc()` function uses the value of the **DBCENTURY** environment variable to determine which century to use. If you do not set **DBCENTURY**, `dttofmtasc()` assumes the present century for two-digit years. For information about how to set **DBCENTURY**, see the *HCL® Informix® Guide to SQL: Reference*.

When you use a nondefault locale (one other than US English) and do not set the **DBTIME** or **GL_DATETIME** environment variables, `dttofmtasc()` uses the default DATETIME format that the client locale defines. For more information, see the *HCL® Informix® GLS User's Guide*.

Return codes

0

The conversion was successful.

<0

The conversion failed. Check the text of the error message.

The `ifx_getenv()` function

The `ifx_getenv()` function retrieves the value of a current environment variable.

Syntax

```
char *ifx_getenv( varname );
const char *varname;
```

varname

A pointer to a buffer that contains the name of an environment variable.

Usage

The `ifx_getenv()` function searches for the environment variable in the following order:

1. Table of HCL Informix® environment variables that the application has modified or defined with the `ifx_putenv()` function or directly (the **InetLogin** structure)
2. Table of Informix® environment variables that the user has defined in the Registry with the Setnet32 utility
3. Non-Informix® environment variables retrieved from the C runtime environment variables
4. Table of defined defaults for Informix® environment variables

The `ifx_getenv()` function is not case sensitive. You can specify the name of the environment variable in any case.

The `ifx_getenv()` function operates only on the data structures accessible to the C runtime library and not on the environment segment that the operating system creates for the process. Therefore, programs that use `ifx_getenv()` might retrieve invalid information.

The `ifx_putenv()` and `ifx_getenv()` functions use the copy of the environment to which the global variable **_environ** points to access the environment.

The following program fragment uses `ifx_getenv()` to retrieve the current value of the **INFORMIXDIR** environment variable:


```
char InformixDirVal[100];

/* Get current value of INFORMIXDIR */
InformixDirVal = ifx_getenv( "informixdir" );
/* Check if INFORMIXDIR is set */
```

```
If( InformixDirVal != NULL )
    printf( "Current INFORMIXDIR value is %\n", InformixDirVal );
```

Return codes

The `ifx_getenv()` function returns a pointer to the Informix® environment table entry that contains *varname*, or returns NULL if the function does not find *varname* in the table.

 **Restriction:** Do not use the returned pointer to modify the value of the environment variable. Use the `ifx_putenv()` function instead. If `ifx_getenv()` does not find "varname" in the Informix® environment table, the return value is NULL.

The `ifx_getcur_conn_name()` function

The `ifx_getcur_conn_name()` function returns the name of the current connection.

Syntax

```
char *ifx_getcur_conn_name(void);
```

Usage

The current connection is the active database server connection that is currently sending SQL requests to the database server and possibly receiving data from the database server. In a callback function, the current connection is the current connection at the time when the callback was registered with a call to the `sqlbreakcallback()` function. The current connection name is the explicit name of the current connection. If the CONNECT statement that establishes a connection does not include the AS clause, the connection does not have an explicit name.

Return codes

Name of current connection

Successfully obtained current connection name

Null pointer

Unable to obtain current connection name or current connection does not have an explicit name

The `ifx_getserial8()` function

The `ifx_getserial8()` function returns the SERIAL8 value of the last inserted row into an **int8** host variable.

Syntax

```
void ifx_getserial8(serial8_val)
    ifx_int8_t *serial8_val;
```

serial8_val

A pointer to the **int8** structure where `ifx_getserial8()` places the newly inserted SERIAL8 value.

Usage

Use the `ifx_getserial8()` function after you insert a row that contains a SERIAL8 column. The function returns the new SERIAL8 value in the **int8** variable, *serial8_val*, which you declare. If the INSERT statement generated a new SERIAL8 value, the *serial8_val* points to a value greater than zero. A SERIAL8 value of zero or null indicates an invalid INSERT; the INSERT might have failed or might not have been performed.

Example

```
EXEC SQL BEGIN DECLARE SECTION;
    int8 order_num;
    int8 rep_num;
    char str[20];
EXEC SQL END DECLARE SECTION;

EXEC SQL create table order2
(
    order_number SERIAL8(1001),
    order_date DATE,
    customer_num INTEGER,
    backlog CHAR(1),
    po_num CHAR(10),
    paid_date DATE,
    sales_rep INT8
);
EXEC SQL insert into order2 (order_number, sales_rep)
values (0, :rep_num);
if (SQLCODE == 0)
{
    ifx_getserial8(order_num);
    if (ifx_int8toasc(&order_num, str, 20) == 0)
        printf("New order number is %s\n", str);
}
```

The ifx_int8add() function

The `ifx_int8add()` function adds two **int8** type values.

Syntax

```
mint ifx_int8add(n1, n2, sum)
    ifx_int8_t *n1;
    ifx_int8_t *n2;
    ifx_int8_t *sum;
```

n1

A pointer to the **int8** structure that contains the first operand.

n2

A pointer to the **int8** structure that contains the second operand.

sum

A pointer to the **int8** structure that contains the sum of *n1* + *n2*.

Usage

The *sum* can be the same as either *n1* or *n2*.

Return codes

0

The operation was successful.

-1284

The operation resulted in overflow or underflow.

Example

The file `int8add.ec` in the `demo` directory contains the following sample program.

```
*int8add.ec *

    The following program obtains the sum of two INT8 type values.
*/

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "6";
char string2[] = "9,223,372,036,854,775";
char string3[] = "999,999,999,999,999,999,999,999";
char result[41];

main()
{
    mint x;
    ifx_int8_t num1, num2, num3, sum;

    printf("INT8 Sample ESQL Program running.\n\n");

    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8add(&num1, &num2, &sum)) /* adding the first two INT8s */
    {
        printf("Error %d in adding INT8s\n", x);
        exit(1);
    }
    if (x = ifx_int8toasc(&sum, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 result to string\n", x);
    }
}
```

```

        exit(1);
    }
    result[40] = '\0';
    printf("\t%s + %s = %s\n", string1, string2, result); /* display result */

/* attempt to convert to INT8 value that is too large*/

    if (x = ifx_int8cvasc(string3, strlen(string3), &num3))
    {
        printf("Error %d in converting string3 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8add(&num2, &num3, &sum))
    {
        printf("Error %d in adding INT8s\n", x);
        exit (1);
    }
    if (x = ifx_int8toasc(&sum, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 result to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf("\t%s + %s = %s\n", string2, string3, result); /* display result */

    printf("\nINT8 Sample Program over.\n\n");
    exit(0);
}

```

Output

```

INT8 Sample ESQL Program running.

    6 + 9,223,372,036,854,775 = 9223372036854781
Error -1284 in converting string3 to INT8

```

The ifx_int8cmp() function

The ifx_int8cmp() function compares two **int8** type numbers.

Syntax

```

mint ifx_int8cmp(n1, n2)
    ifx_int8_t *n1;
    ifx_int8_t *n2;

```

n1

A pointer to the **int8** structure that contains the first number to compare.

n2

A pointer to the **int8** structure that contains the second number to compare.

Return codes**-1**

The first value is less than the second value.

0

The two values are identical.

1

The first value is greater than the second value.

INT8UNKNOWN

Either value is null.

Example

The file `int8cmp.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8cmp.ec *

The following program compares INT8s types and displays
the results.
*/

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "-999,888,777,666";
char string2[] = "-12,345,678,956,546";
char string3[] = "123,456,780,555,224,456";
char string4[] = "123,456,780,555,224,456";
char string5[] = "";

main()
{
    mint x;
    ifx_int8_t num1, num2, num3, num4, num5;

    printf("IFX_INT8CMP Sample ESQL Program running.\n\n");

    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to int8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to int8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string3, strlen(string3), &num3))
    {
        printf("Error %d in converting string3 to int8\n", x);
    }
}

```

```

        exit(1);
    }
    if (x = ifx_int8cvasc(string4, strlen(string4), &num4))
    {
        printf("Error %d in converting string4 to int8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string5, strlen(string5), &num5))
    {
        printf("Error %d in converting string5 to int8\n", x);
        exit(1);
    }
    printf("num1 = %s\nnum2 = %s\n", string1, string2);
    printf("num3 = %s\nnum4 = %s\n", string3, string4);
    printf("num5 = %s\n", "NULL");
    printf("\nExecuting: ifx_int8cmp(&num1, &num2)\n");
    printf("  Result = %d\n", ifx_int8cmp(&num1, &num2));
    printf("Executing: ifx_int8cmp(&num2, &num3)\n");
    printf("  Result = %d\n", ifx_int8cmp(&num2, &num3));
    printf("Executing: ifx_int8cmp(&num1, &num3)\n");
    printf("  Result = %d\n", ifx_int8cmp(&num1, &num3));
    printf("Executing: ifx_int8cmp(&num3, &num4)\n");
    printf("  Result = %d\n", ifx_int8cmp(&num3, &num4));
    printf("Executing: ifx_int8cmp(&num1, &num5)\n");
    x = ifx_int8cmp(&num1, &num5);
    if(x == INT8UNKNOWN)
        printf("RESULT is INT8UNKNOWN. One of the INT8 values in null.\n");
    else
        printf("  Result = %d\n", x);
    printf("\nIFX_INT8CMP Sample Program over.\n\n");
    exit(0);
}

```

Output

```

IFX_INT8CMP Sample ESQL Program running.

Number 1 = -999,888,777,666   Number 2 = -12,345,678,956,546
Number 3 = 123,456,780,555,224,456   Number 4 = 123,456,780,555,224,456
Number 5 =

Executing: ifx_int8cmp(&num1, &num2)
  Result = 1
Executing: ifx_int8cmp(&num2, &num3)
  Result = -1
Executing: ifx_int8cmp(&num1, &num3)
  Result = -1
Executing: ifx_int8cmp(&num3, &num4)
  Result = 0
Executing: ifx_int8cmp(&num1, &num5)
RESULT is INT8UNKNOWN. One of the INT8 values in null.

IFX_INT8CMP Sample Program over.

```

The ifx_int8copy() function

The ifx_int8copy() function copies one **int8** structure to another.

Syntax

```
void ifx_int8copy(source, target)
    ifx_int8_t *source;
    ifx_int8_t *target;
```

source

A pointer to the **int8** structure that contains the source **int8** value to copy.

target

A pointer to the target **int8** structure.

The `ifx_int8copy()` function does not return a status value. To determine the success of the copy operation, look at the contents of the **int8** structure to which the *target* argument points.

Example

The file `int8copy.ec` in the `demo` directory contains the following sample program.

```
/*
 * ifx_int8copy.ec *

 The following program copies one INT8 number to another.
 */

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "-12,888,999,555,333";
char result[41];

main()
{
    mint x;
    ifx_int8_t num1, num2;

    printf("IFX_INT8COPY Sample ESQL Program running.\n\n");

    printf("String = %s\n", string1);
    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to INT8\n", x);
        exit(1);
    }
    printf("Executing: ifx_int8copy(&num1, &num2)\n");
    ifx_int8copy(&num1, &num2);
    if (x = ifx_int8toasc(&num2, result, sizeof(result)))
    {
        printf("Error %d in converting num2 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf("Destination = %s\n", result);
```

```
printf("\nIFX_INT8COPY Sample Program over.\n\n");
exit(0);
}
```

Output

```
IFX_INT8COPY Sample ESQL Program running.

String = -12,888,999,555,333
Executing: ifx_int8copy(&num1, &num2)
Destination = -12888999555333

IFX_INT8COPY Sample Program over
```

The ifx_int8cvasc() function

The `ifx_int8cvasc()` function converts a value held as printable characters in a C **char** type into an **int8** type number.

Syntax

```
mint ifx_int8cvasc(strng_val, len, int8_val)
char *strng_val
mint len;
ifx_int8_t *int8_val;
```

strng_val

A pointer to a string.

len

The length of the *strng_val* string.

int8_val

A pointer to the **int8** structure where `ifx_int8cvasc()` places the result of the conversion.

Usage

The character string, *strng_val*, can contain the following symbols:

- A leading sign, either a plus (+) or minus (-).
- An exponent that is preceded by either e or E . You can precede the exponent by a sign, either a plus (+) or minus (-).

The *strng_val* character string does not contain a decimal separator or digits to the right of the decimal separator.

The `ifx_int8cvasc()` function truncates the decimal separator and any digits to the right of the decimal separator. The `ifx_int8cvasc()` function ignores leading spaces in the character string.

When you use a nondefault locale (one other than US English), `ifx_int8cvasc()` supports non-ASCII characters in the *strng_val* character string. For more information, see the *HCL® Informix® GLS User's Guide*.

Return codes

0

The conversion was successful.

-1213

The string has non-numeric characters.

-1284

The operation resulted in overflow or underflow.

Example

The file `int8cvasc.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_in8cvasc.ec *

The following program converts three strings to INT8
types and displays the values stored in each field of
the INT8 structures.
*/

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "-12,555,444,333,786,456";
char string2[] = "480";
char string3[] = "5.2";
main()
{
    mint x;
    ifx_int8_t num1, num2, num3;
    void nullterm(char *, mint);

    printf("IFX_INT8CVASC Sample ESQL Program running.\n\n");

    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string3, strlen(string3), &num3))
    {
        printf("Error %d in converting string3 to INT8\n", x);
        exit(1);
    }

    /* Display the exponent, sign value and number of digits in num1. */

```

```

ifx_int8toasc(&num1, string1, sizeof(string1));
nullterm(string1, sizeof(string1));
printf("The value of the first INT8 is = %s\n", string1);

/* Display the exponent, sign value and number of digits in num2. */

ifx_int8toasc(&num2, string2, sizeof(string2));
nullterm(string2, sizeof(string2));
printf("The value of the 2nd INT8 is = %s\n", string2);

/* Display the exponent, sign value and number of digits in num3. */
/* Note that the decimal is truncated */

ifx_int8toasc(&num3, string3, sizeof(string3));
nullterm(string3, sizeof(string3));
printf("The value of the 3rd INT8 is = %s\n", string3);

printf("\nIFX_INT8CVASC Sample Program over.\n\n");
exit(0);
}
void nullterm(char *str, mint size)
{
    char *end;

    end = str + size;
    while(*str && *str > ' ' && str <= end)
        ++str;
    *str = '\0';
}

```

Output

```

IFX_INT8CVASC Sample ESQL Program running.

The value of the first INT8 is = -12555444333786456
The value of the 2nd INT8 is = 480
The value of the 3rd INT8 is = 5

IFX_INT8CVASC Sample Program over.

```

The ifx_int8cvdbl() function

The ifx_int8cvdbl() function converts a C **double** type number into an **int8** type number.

Syntax

```

mint ifx_int8cvdbl(dbl_val, int8_val)
double dbl_val;
ifx_int8_t *int8_val;

```

dbl_val

The **double** value that ifx_int8cvdbl() converts to an **int8** type value.

int8_val

A pointer to the **int8** structure where `ifx_int8cvdbl()` places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The file `int8cvdbl.ec` in the `demo` directory contains the following sample program.

```

/*
 * int8cvdbl.ec *

  The following program converts two double type numbers to
  INT8 types and displays the results.
*/

#include <stdio.h>

EXEC SQL include "int8.h";

char result[41];

main()
{
    mint x;
    ifx_int8_t num;
    double d = 2147483647;

    printf("IFX_INT8CVDBL Sample ESQL Program running.\n\n");

    printf("Number 1 (double) = 1234.5678901234\n");
    if (x = ifx_int8cvdbl((double)1234.5678901234, &num))
    {
        printf("Error %d in converting double1 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8toasc(&num, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf(" String Value = %s\n", result);

    /* notice that the ifx_int8cvdbl function truncates digits to the
    right of a decimal separator. */

    printf("Number 2 (double) = %.1f\n", d);

```

```

if (x = ifx_int8cvdbl(d, &num))
{
printf("Error %d in converting double2 to INT8\n", x);
exit(1);
}
if (x = ifx_int8toasc(&num, result, sizeof(result)))
{
printf("Error %d in converting second INT8 to string\n", x);
exit(1);
}
result[40] = '\0';
printf(" String Value = %s\n", result);

printf("\nIFX_INT8CVDBL Sample Program over.\n\n");
exit(0);
}

```

Output

```

IFX_INT8CVDBL Sample ESQL Program running.

Number 1 (double) = 1234.5678901234
String Value = 1234
Number 2 (double) = 2147483647.0
String Value = 2147483647

IFX_INT8CVDBL Sample Program over.

```

The ifx_int8cvdec() function

The ifx_int8cvdec() function converts a **decimal** type value into an **int8** type value.

Syntax

```

mint ifx_int8cvdec(dec_val, int8_val)
dec_t *dec_val;
ifx_int8_t *int8_val;

```

dec_val

A pointer to the **decimal** structure that ifx_int8cvdec() converts to an **int8** type value.

int8_val

A pointer to the **int8** structure where ifx_int8cvdec() places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The file `int8cdec.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8cvdec.ec *

The following program converts two INT8s types to DECIMALS and displays
the results.
*/

#include <stdio.h>

EXEC SQL include decimal;
EXEC SQL include "int8.h";

char string1[] = "2949.3829398204382";
char string2[] = "3238299493";
char result[41];

main()
{
    mint x;
    ifx_int8_t n;
    dec_t num;

    printf("IFX_INT8CVDEC Sample ESQL Program running.\n\n");

    if (x = deccvasc(string1, strlen(string1), &num))
    {
        printf("Error %d in converting string1 to DECIMAL\n", x);
        exit(1);
    }
    if (x = ifx_int8cvdec(&num, &n))
    {
        printf("Error %d in converting DECIMAL1 to INT8\n", x);
        exit(1);
    }

    /* Convert the INT8 to ascii and display it. Note that the
    digits to the right of the decimal are truncated in the
    conversion.
    */

    if (x = ifx_int8toasc(&n, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf("String 1 Value = %s\n", string1);
    printf(" INT8 type value = %s\n", result);

    if (x = deccvasc(string2, strlen(string2), &num))
    {
        printf("Error %d in converting string2 to DECIMAL\n", x);
    }
}

```

```

        exit(1);
    }
    if (x = ifx_int8cvdec(&num, &n))
    {
        printf("Error %d in converting DECIMAL2 to INT8\n", x);
        exit(1);
    }
    printf("String 2 = %s\n", string2);

/* Convert the INT8 to ascii to display value. */

    if (x = ifx_int8toasc(&n, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf(" INT8 type value = %s\n", result);

    printf("\nIFX_INT8CVDEC Sample Program over.\n\n");
    exit(0);
}

```

Output

```

IFX_INT8CVDEC Sample ESQL Program running.

String 1 Value = 2949.3829398204382
INT8 type value = 2949
String 2 = 3238299493
INT8 type value = 3238299493

IFX_INT8CVDEC Sample Program over.

```

The ifx_int8cvflt() function

The ifx_int8cvflt() function converts a C **float** type number into an **int8** type number.

Syntax

```

mint ifx_int8cvflt(flt_val, int8_val)
double flt_val;
ifx_int8_t *int8_val;

```

flt_val

The **float** value that ifx_int8cvflt() converts to an **int8** type value.

int8_val

A pointer to the **int8** structure where ifx_int8cvflt() places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The file `int8cvflt.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8cvflt.ec *

The following program converts two floats to INT8 types and displays
the results.
*/

#include <stdio.h>

EXEC SQL include "int8.h";

char result[41];

main()
{
    mint x;
    ifx_int8_t num;

    printf("IFX_INT8CVFLT Sample ESQL Program running.\n\n");

    printf("Float 1 = 12944.321\n");

    /* Note that in the following conversion, the digits to the
    right of the decimal are ignored. */

    if (x = ifx_int8cvflt(12944.321, &num))
    {
        printf("Error %d in converting float1 to INT8\n", x);
        exit(1);
    }

    /* Convert int8 to ascii to display value. */

    if (x = ifx_int8toasc(&num, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf(" The INT8 type value is = %s\n", result);
    printf("Float 2 = -33.43\n");

    /* Note that in the following conversion, the digits to the
    right of the decimal are ignored. */

    if (x = ifx_int8cvflt(-33.43, &num))
    {
        printf("Error %d in converting float2 to INT8\n", x);
        exit(1);
    }

```

```

    }
    if (x = ifx_int8toasc(&num, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf(" The second INT8 type value is = %s\n", result);

    printf("\nIFX_INT8CVFLT Sample Program over.\n\n");
    exit(0);
}

```

Output

```

IFX_INT8CVFLT Sample ESQL Program running.

Float 1 = 12944.321
The INT8 type value is = 12944
Float 2 = -33.43
The second INT8 type value is = -33

IFX_INT8CVFLT Sample Program over.

```

The ifx_int8cvint() function

The `ifx_int8cvint()` function converts a C `int` type number into an `int8` type number.

Syntax

```

mint ifx_int8cvint(int_val, int8_val)
    mint int_val;
    ifx_int8_t *int8_val;

```

int_val

The `mint` value that `ifx_int8cvint()` converts to an `int8` type value.

int8_val

A pointer to the `int8` structure where `ifx_int8cvint()` places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The file `int8cvint.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8cvint.ec *

```

```

    The following program converts two integers to INT8
    types and displays the results.
*/

#include <stdio.h>

EXEC SQL include "int8.h";

char result[41];

main()
{
    mint x;
    ifx_int8_t num;

    printf("IFX_INT8CVINT Sample ESQL Program running.\n\n");

    printf("Integer 1 = 129449233\n");
    if (x = ifx_int8cvint(129449233, &num))
    {
        printf("Error %d in converting int1 to INT8\n", x);
        exit(1);
    }

    /* Convert int8 to ascii to display value. */

    if (x = ifx_int8toasc(&num, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf(" The INT8 type value is = %s\n", result);

    printf("Integer 2 = -33\n");
    if (x = ifx_int8cvint(-33, &num))
    {
        printf("Error %d in converting int2 to INT8\n", x);
        exit(1);
    }

    /* Convert int8 to ascii to display value. */

    if (x = ifx_int8toasc(&num, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf(" The second INT8 type value is = %s\n", result);

    printf("\nIFX_INT8CVINT Sample Program over.\n\n");
    exit(0);
}

```

Output

```

IFX_INT8CVINT Sample ESQL Program running.

Integer 1 = 129449233
  The INT8 type value is = 129449233
Integer 2 = -33
  The second INT8 type value is = -33

IFX_INT8CVINT Sample Program over.

```

The ifx_int8cvlong() function

The `ifx_int8cvlong()` function converts a C **long** type value into an **int8** type value.

Syntax

```

mint ifx_int8cvlong(lng_val, int8_val)
  int4 lng_val;
  ifx_int8_t *int8_val;

```

lng_val

The **int4** integer that `ifx_int8cvlong()` converts to an **int8** type value.

int8_val

A pointer to the **int8** structure where `ifx_int8cvlong()` places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The file `int8cvlong.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8cvlong.ec *

  The following program converts two longs to INT8
  types and displays the results.
*/

#include <stdio.h>

EXEC SQL include "int8.h";

char result[41];

main()
{

```

```

mint x;
ifx_int8_t num;
int4 n;

printf("IFX_INT8CVLONG Sample ESQL Program running.\n\n");

printf("Long Integer 1 = 129449233\n");
if (x = ifx_int8cvlong(129449233L, &num))
{
    printf("Error %d in converting long to INT8\n", x);
    exit(1);
}
if (x = ifx_int8toasc(&num, result, sizeof(result)))
{
    printf("Error %d in converting INT8 to string\n", x);
    exit(1);
}
result[40] = '\0';
printf(" String for INT8 type value = %s\n", result);

n = 2147483646;          /* set n */
printf("Long Integer 2 = %d\n", n);
if (x = ifx_int8cvlong(n, &num))
{
    printf("Error %d in converting long to INT8\n", x);
    exit(1);
}
if (x = ifx_int8toasc(&num, result, sizeof(result)))
{
    printf("Error %d in converting INT8 to string\n", x);
    exit(1);
}
result[40] = '\0';
printf(" String for INT8 type value = %s\n", result);

printf("\nIFX_INT8CVLONG Sample Program over.\n\n");
exit(0);
}

```

Output

```

IFX_INT8CVLONG Sample ESQL Program running.

Long Integer 1 = 129449233
String for INT8 type value = 129449233
Long Integer 2 = 2147483646
String for INT8 type value = 2147483646

IFX_INT8CVLONG Sample Program over.

```

The ifx_int8div() function

The ifx_int8div() function divides two **int8** type values.

Syntax

```
mint ifx_int8div(n1, n2, quotient)
    ifx_int8_t *n1;
    ifx_int8_t *n2;
    ifx_int8_t *quotient;
```

n1

A pointer to the **int8** structure that contains the dividend.

n2

A pointer to the **int8** structure that contains the divisor.

quotient

A pointer to the **int8** structure that contains the quotient of $n1/n2$.

Usage

The *quotient* can be the same as either *n1* or *n2*.

Return codes

0

The operation was successful.

-1202

The operation attempted to divide by zero.

Example

The file `int8div.ec` in the `demo` directory contains the following sample program.

```
/*
 * ifx_int8div.ec *

 The following program divides two INT8 numbers and displays the result.
 */

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "480,999,777,666,345,567";
char string2[] = "80,765,456,765,456,654";
char result[41];

main()
{
    mint x;
    ifx_int8_t num1, num2, dvd;

    printf("IFX_INT8DIV Sample ESQL Program running.\n\n");
```

```

if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
{
    printf("Error %d in converting string1 to INT8\n", x);
    exit(1);
}
if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
{
    printf("Error %d in converting string2 to INT8\n", x);
    exit(1);
}
if (x = ifx_int8div(&num1, &num2, &dvd))
{
    printf("Error %d in dividing num1 by num2\n", x);
    exit(1);
}
if (x = ifx_int8toasc(&dvd, result, sizeof(result)))
{
    printf("Error %d in converting dividend to string\n", x);
    exit(1);
}
result[40] = '\0';
printf("\t%s / %s = %s\n", string1, string2, result);

printf("\nIFX_INT8DIV Sample Program over.\n\n");
exit(0);
}

```

Output

```

IFX_INT8DIV Sample ESQL Program running.

480,999,777,666,345,567 / 80,765,456,765,456,654 = 5

IFX_INT8DIV Sample Program over.

```

The ifx_int8mul() function

The ifx_int8mul() function multiplies two **int8** type values.

Syntax

```

mint ifx_int8mul(n1, n2, product)
    ifx_int8_t *n1;
    ifx_int8_t *n2;
    ifx_int8_t *product;

```

n1

A pointer to the **int8** structure that contains the first operand.

n2

A pointer to the **int8** structure that contains the second operand.

product

A pointer to the **int8** structure that contains the product of $n1 * n2$.

Usage

The *product* can be the same as either *n1* or *n2*.

Return codes

0

The operation was successful.

-1284

The operation resulted in overflow or underflow.

Example

The file `int8mul.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8mul.ec *

  The following program multiplies two INT8 numbers and
  displays the result.
*/

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "480,999,777,666,345";
char string2[] = "80";
char result[41];

main()
{
  mint x;
  ifx_int8_t num1, num2, prd;

  printf("IFX_INT8MUL Sample ESQL Program running.\n\n");

  if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
  {
    printf("Error %d in converting string1 to INT8\n", x);
    exit(1);
  }
  if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
  {
    printf("Error %d in converting string2 to INT8\n", x);
    exit(1);
  }
  if (x = ifx_int8mul(&num1, &num2, &prd))
  {
    printf("Error %d in multiplying num1 by num2\n", x);
    exit(1);
  }
  if (x = ifx_int8toasc(&prd, result, sizeof(result)))
  {

```



```

        printf("Error %d in converting product to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf("\t%s * %s = %s\n", string1, string2, result);

    printf("\nIFX_INT8MUL Sample Program over.\n\n");
    exit(0);
}

```

Output

```

IFX_INT8MUL Sample ESQL Program running.

480,999,777,666,345 * 80 = 38479982213307600

IFX_INT8MUL Sample Program over.

```

The ifx_int8sub() function

The `ifx_int8sub()` function subtracts two **int8** type values.

Syntax

```

mint ifx_int8sub(n1, n2, difference)
    ifx_int8_t *n1;
    ifx_int8_t *n2;
    ifx_int8_t *difference;

```

n1

A pointer to the **int8** structure that contains the first operand.

n2

A pointer to the **int8** structure that contains the second operand.

difference

A pointer to the **int8** structure that contains the difference of *n1* and *n2* ($n1 - n2$).

Usage

The *difference* can be the same as either *n1* or *n2*.

Return codes

0

The subtraction was successful.

-1284

The subtraction resulted in overflow or underflow.

Example

The file `int8sub.ec` in the `demo` directory contains the following sample program.

```

/*
 *int8sub.ec *

The following program obtains the difference of two INT8
type values.
*/

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "6";
char string2[] = "9,223,372,036,854,775";
char string3[] = "999,999,999,999,999.5";
char result[41];

main()
{
    mint x;
    ifx_int8_t num1, num2, num3, sum;

    printf("IFX_INT8SUB Sample ESQL Program running.\n\n");

    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to INT8\n", x);
        exit(1);
    }

    /* subtract num2 from num1 */

    if (x = ifx_int8sub(&num1, &num2, &sum))
    {
        printf("Error %d in subtracting INT8s\n", x);
        exit(1);
    }
    if (x = ifx_int8toasc(&sum, result, sizeof(result)))
    {
        printf("Error %d in converting INT8 result to string\n", x);
        exit(1);
    }
    result[40] = '\0';
    printf("\t%s - %s = %s\n", string1, string2, result); /* display result */

    if (x = ifx_int8cvasc(string3, strlen(string3), &num3))
    {
        printf("Error %d in converting string3 to INT8\n", x);
        exit(1);
    }

    /* notice that digits right of the decimal are truncated. */

```

```

if (x = ifx_int8sub(&num2, &num3, &sum))
{
    printf("Error %d in subtracting INT8s\n", x);
    exit (1);
}
if (x = ifx_int8toasc(&sum, result, sizeof(result)))
{
    printf("Error %d in converting INT8 result to string\n", x);
    exit(1);
}
result[40] = '\0';
printf("\t%s - %s = %s\n", string2, string3, result); /* display result */

printf("\nIFX_INT8SUB Sample Program over.\n\n");
exit(0);
}

```

Output

```

IFX_INT8SUB Sample ESQL Program running.

6 - 9,223,372,036,854,775 = -9223372036854769
9,223,372,036,854,775 - 999,999,999,999,999.5 = 8223372036854776

IFX_INT8SUB Sample Program over.

```

The ifx_int8toasc() function

The `ifx_int8toasc()` function converts an **int8** type number to a C **char** type value.

Syntax

```

mint ifx_int8toasc(int8_val, strng_val, len)
    ifx_int8_t *int8_val;
    char *strng_val;
    mint len;

```

int8_val

A pointer to the **int8** structure whose value `ifx_int8toasc()` converts to a text string.

strng_val

A pointer to the first byte of the character buffer where the `ifx_int8toasc()` function places the text string.

len

The size of **strng_val**, in bytes, minus 1 for the null terminator.

Usage

If the **int8** number does not fit into a character string of length *len*, `ifx_int8toasc()` converts the number to an exponential notation. If the number still does not fit, `ifx_int8toasc()` fills the string with asterisks. If the number is shorter than the string, `ifx_int8toasc()` left-justifies the number and pads it on the right with blanks.

Because the character string that `ifx_int8toasc()` returns is not null terminated, your program must add a null character to the string before you print it.

When you use a nondefault locale (one other than US English), `ifx_int8toasc()` supports non-ASCII characters in the `strng_val` character string. For more information, see the *HCL® Informix® GLS User's Guide*.

Return codes

0

The conversion was successful.

-1207

The converted value does not fit into the allocated space.

Example

The file `int8toasc.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8toasc.ec *

The following program converts three string
constants to INT8 types and then uses ifx_int8toasc()
to convert the INT8 values to C char type values.
*/

#include <stdio.h>
#define END sizeof(result)

EXEC SQL include "int8.h";

char string1[] = "-12,555,444,333,786,456";
char string2[] = "480";
char string3[] = "5.2";
char result[40];

main()
{
    mint x;
    ifx_int8_t num1, num2, num3;

    printf("IFX_INT8TOASC Sample ESQL Program running.\n\n");

    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string3, strlen(string3), &num3))

```

```

    {
        printf("Error %d in converting string3 to INT8\n", x);
        exit(1);
    }
    printf("\nConverting INT8 back to ASCII\n");
    printf(" Executing: ifx_int8toasc(&num1, result, END - 1)");
    if (x = ifx_int8toasc(&num1, result, END - 1))
        printf("\tError %d in converting INT8 to string\n", x);
    else
    {
        result[END - 1] = '\0';          /* null terminate */
        printf("\n The value of the first INT8 is = %s\n", result);
    }
    printf("\nConverting second INT8 back to ASCII\n");
    printf(" Executing: ifx_int8toasc(&num2, result, END - 1)");
    if (x= ifx_int8toasc(&num2, result, END - 1))
        printf("\tError %d in converting INT8 to string\n", x);
    else
    {
        result[END - 1] = '\0';          /* null terminate */
        printf("\n The value of the 2nd INT8 is = %s\n", result);
    }

    printf("\nConverting third INT8 back to ASCII\n");
    printf(" Executing: ifx_int8toasc(&num3, result, END - 1)");
    /* note that the decimal is truncated */

    if (x= ifx_int8toasc(&num3, result, END - 1))
        printf("\tError %d in converting INT8 to string\n", x);
    else
    {
        result[END - 1] = '\0';          /* null terminate */
        printf("\n The value of the 3rd INT8 is = %s\n", result);
    }
    printf("\nIFX_INT8TOASC Sample Program over.\n\n");
    exit(0);
}

```

Output

```

IFX_INT8TOASC Sample ESQL Program running.

Converting INT8 back to ASCII
Executing: ifx_int8toasc(&num1, result, sizeof(result)-1)
The value of the first INT8 is = -12555444333786456

Converting second INT8 back to ASCII
Executing: ifx_int8toasc(&num2, result, sizeof(result)-1)
The value of the 2nd INT8 is = 480

Converting third INT8 back to ASCII
Executing: ifx_int8toasc(&num3, result, END)
The value of the 3rd INT8 is = 5

IFX_INT8TOASC Sample Program over.

```

The ifx_int8todbl() function

The ifx_int8todbl() function converts an **int8** type number into a C **double** type number.

Syntax

```
mint ifx_int8todbl(int8_val, dbl_val)
    ifx_int8_t *int8_val;
    double *dbl_val;
```

int8_val

A pointer to the **int8** structure whose value ifx_int8todbl() converts to a **double** type value.

dbl_val

A pointer to a **double** value where ifx_int8todbl() places the result of the conversion.

Usage

The floating-point format of the host computer can result in loss of precision in the conversion of an **int8** type number to a **double type number**.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The file `int8todbl.ec` in the `demo` directory contains the following sample program.

```
/*
 * ifx_int8todbl.ec *

The following program converts three strings to INT8
types and then to C double types and displays the
results.

*/

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "-12,555,444,333,786,456";
char string2[] = "480";
char string3[] = "5.2";

main()
{
    mint x;
```

```

double d =0;
ifx_int8_t num1, num2, num3;

printf("\nIFX_INT8TODBL Sample ESQL Program running.\n\n");

if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
    printf("Error %d in converting string1 to INT8\n", x);
    exit(1);
    }
if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
    {
    printf("Error %d in converting string2 to INT8\n", x);
    exit(1);
    }
if (x = ifx_int8cvasc(string3, strlen(string3), &num3))
    {
    printf("Error %d in converting string3 to INT8\n", x);
    exit(1);
    }
printf("\nConverting INT8 to double");
if (x= ifx_int8todbl(&num1, &d))
    {
    printf("\tError %d in converting INT8 to double\n", x);
    exit(1);
    }
else
    {
    printf("\nString 1= %s\n", string1);
    printf("INT8 value is = %.10f\n", d);
    }
printf("\nConverting second INT8 to double");
if (x= ifx_int8todbl(&num2, &d))
    {
    printf("\tError %d in converting INT8 to double\n", x);
    exit(1);
    }
else
    {
    printf("\nString2 = %s\n", string2);/*
    printf("INT8 value is = %.10f\n",d);
    }
printf("\nConverting third INT8 to double");
/* Note that the decimal places will be truncated. */

if (x= ifx_int8todbl(&num3, &d))
    {
    printf("\tError %d in converting INT8 to double\n", x);
    exit(1);
    }
else
    {
    printf("\nString3 = %s\n", string3);
    printf("INT8 value is = %.10f\n",d);
    }
printf("\nIFX_INT8TODBL Sample Program over.\n\n");
exit(0);
}

```

Output

```

IFX_INT8TODBL Sample ESQL Program running.

Converting INT8 to double

Executing: ifx_int8todbl(&num1,&d)
String 1= -12,555,444,333,786,456

The value of the first double is = -12555444333786456.0000000000

Converting second INT8 to double

Executing: ifx_int8todbl(&num2, &d)
String2 = 480

The value of the second double is = 480.0000000000

Converting third INT8 to double

Executing: ifx_int8todbl(&num3, &d)
String3 = 5.2

The value of the third double is = 5.0000000000

IFX_INT8TODBL Sample Program over.

```

The ifx_int8todec() function

The ifx_int8todec() function converts an **int8** type number into a **decimal** type number.

Syntax

```

mint ifx_int8todec(int8_val, dec_val)
    ifx_int8_t *int8_val;
    dec_t *dec_val;

```

int8_val

A pointer to an **int8** structure whose value ifx_int8todec() converts to a **decimal** type value.

dec_val

A pointer to a **decimal** structure in which ifx_int8todec() places the result of the conversion.

Return codes

0

The conversion was successful.

<0

The conversion was not successful.

Example

The file `int8todec.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8todec.ec *

The following program converts three strings to INT8 types and
converts the INT8 type values to decimal type values.
Then the values are displayed.

*/

#include <stdio.h>

EXEC SQL include "int8.h";
#define END sizeof(result)

char string1[] = "-12,555,444,333,786,456";
char string2[] = "480";
char string3[] = "5.2";
char result [40];

main()
{
    mint x;
    dec_t d;
    ifx_int8_t num1, num2, num3;

    printf("IFX_INT8TODEC Sample ESQL Program running.\n\n");

    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string3, strlen(string3), &num3))
    {
        printf("Error %d in converting string3 to INT8\n", x);
        exit(1);
    }

    printf("\n***Converting INT8 to decimal\n");
    printf("\nString 1= %s\n", string1);
    printf(" \nExecuting: ifx_int8todec(&num1,&d)");
    if (x= ifx_int8todec(&num1, &d))
    {
        printf("\tError %d in converting INT8 to decimal\n", x);
        exit(1);
    }
    else
    {

```

```

printf("\nConverting Decimal to ASCII for display\n");
printf("Executing: dectoaasc(&d, result, END, -1)\n");
if (x = dectoaasc(&d, result, END, -1))
    printf("\tError %d in converting DECIMAL1 to string\n", x);
else
    {
        result[END - 1] = '\0';          /* null terminate */
        printf("Result = %s\n", result);
    }
}
printf("\n***Converting second INT8 to decimal\n");
printf("\nString2 = %s\n", string2);
printf(" \nExecuting: ifx_int8todec(&num2, &d)");
if (x= ifx_int8todec(&num2, &d))
    {
        printf("\tError %d in converting INT8 to decimal\n", x);
        exit(1);
    }
else
    {
        printf("\nConverting Decimal to ASCII for display\n");
        printf("Executing: dectoaasc(&d, result, END, -1)\n");
        if (x = dectoaasc(&d, result, END, -1))
            printf("\tError %d in converting DECIMAL2 to string\n", x);
else
        {
            result[END - 1] = '\0';          /* null terminate */
            printf("Result = %s\n", result);
        }
    }
printf("\n***Converting third INT8 to decimal\n");
printf("\nString3 = %s\n", string3);
printf(" \nExecuting: ifx_int8todec(&num3, &d)");
if (x= ifx_int8todec(&num3, &d))
    {
        printf("\tError %d in converting INT8 to decimal\n", x);
        exit(1);
    }
else
    {
        printf("\nConverting Decimal to ASCII for display\n");
        printf("Executing: dectoaasc(&d, result, END, -1)\n");

        /* note that the decimal is truncated */

        if (x = dectoaasc(&d, result, END, -1))
            printf("\tError %d in converting DECIMAL3 to string\n", x);
        else
            {
                result[END - 1] = '\0';          /* null terminate */
                printf("Result = %s\n", result);
            }
    }
printf("\nIFX_INT8TODEC Sample Program over.\n\n");
exit(0);
}

```

Output

```

IFX_INT8TODEC Sample ESQL Program running.

***Converting INT8 to decimal

String 1= -12,555,444,333,786,456

Executing: ifx_int8todec(&num1,&d)
Converting Decimal to ASCII for display
Executing: dectoaasc(&d, result, END, -1)
Result = -12555444333786456.0

***Converting second INT8 to decimal

String2 = 480

Executing: ifx_int8todec(&num2, &d)
Converting Decimal to ASCII for display
Executing: dectoaasc(&d, result, END, -1)
Result = 480.0

***Converting third INT8 to decimal

String3 = 5.2

Executing: ifx_int8todec(&num3, &d)
Converting Decimal to ASCII for display
Executing: dectoaasc(&d, result, END, -1)
Result = 5.0

IFX_INT8TODEC Sample Program over.

```

The ifx_int8toflt() function

The `ifx_int8toflt()` function converts an **int8** type number into a C **float** type number.

Syntax

```

mint ifx_int8toflt(int8_val, flt_val)
    ifx_int8_t *int8_val;
    float *flt_val;

```

int8_val

A pointer to an **int8** structure whose value `ifx_int8toflt()` converts to a **float** type value.

flt_val

A pointer to a **float** value where `ifx_int8toflt()` places the result of the conversion.

Usage

The `ifx_int8toflt()` library function converts an **int8** value to a C float. The size of a C float depends upon the hardware and operating system of the computer you are using.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The file `int8toflt.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8toflt.ec *

The following program converts three strings to
INT8 values and then to float values and
displays the results.

*/

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "-12,555.765";
char string2[] = "480.76";
char string3[] = "5.2";

main()
{
    mint x;
    float f =0.0;
    ifx_int8_t num1, num2, num3;

    printf("\nIFX_INT8TOFLT Sample ESQL Program running.\n\n");
    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string3, strlen(string3), &num3))
    {
        printf("Error %d in converting string3 to INT8\n", x);
        exit(1);
    }

    printf("\nConverting INT8 to float\n");
    if (x= ifx_int8toflt(&num1, &f))
    {
        printf("\tError %d in converting INT8 to float\n", x);
    }
}

```

```

        exit(1);
    }
    else
    {
        printf("String 1= %s\n", string1);
        printf("INT8 value is = %f\n", f);
    }
    printf("\nConverting second INT8 to float\n");
    if (x= ifx_int8toflt(&num2, &f))
    {
        printf("\tError %d in converting INT8 to float\n", x);
        exit(1);
    }
    else
    {
        printf("String2 = %s\n", string2);
        printf("INT8 value is = %f\n", f);
    }
    printf("\nConverting third INT8 to integer\n");

/* Note that the decimal places will be truncated */

    if (x= ifx_int8toflt(&num3, &f))
    {
        printf("\tError %d in converting INT8 to float\n", x);
        exit(1);
    }
    else
    {
        printf("String3 = %s\n", string3);
        printf("INT8 value is = %f\n",f);
    }
    printf("\nIFX_INT8TOFLT Sample Program over.\n\n");
    exit(0);
}

```

Output

```

IFX_INT8TOFLT Sample ESQL Program running.

Converting INT8 to float

Executing: ifx_int8toflt(&num1,&f)
String 1= -12,555.765
The value of the first float is = -12555.000000

Converting second INT8 to float

Executing: ifx_int8toflt(&num2, &f)
String2 = 480.76
The value of the second float is = 480.000000

Converting third INT8 to integer

```

```

Executing: ifx_int8toflt(&num3, &f)
String3 = 5.2
The value of the third float is = 5.000000

IFX_INT8TOFLT Sample Program over.

```

The ifx_int8toint() function

The ifx_int8toint() function converts an **int8** type number into a C **int** type number.

Syntax

```

mint ifx_int8toint(int8_val, int_val)
    ifx_int8_t *int8_val;
    mint *int_val;

```

int8_val

A pointer to an **int8** structure whose value ifx_int8toint() converts to an **mint** type value.

int_val

A pointer to an **mint** value where ifx_int8toint() places the result of the conversion.

Usage

The ifx_int8toint() library function converts an **int8** value to a C integer. The size of a C integer depends upon the hardware and operating system of the computer you are using. Therefore, the ifx_int8toint() function equates an integer value with the SQL SMALLINT data type. The valid range of a SMALLINT is between 32767 and -32767. To convert larger **int8** values to larger integers, use the ifx_int8tolong() library function.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The file `int8toint.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8toint.ec *

The following program converts three strings to INT8 types and
converts the INT8 type values to C integer type values.
Then the values are displayed.

*/

#include <stdio.h>

```

```

EXEC SQL include "int8.h";

char string1[] = "-12,555";
char string2[] = "480";
char string3[] = "5.2";

main()
{
    mint x;
    mint i =0;
    ifx_int8_t num1, num2, num3;

    printf("IFX_INT8TOINT Sample ESQL Program running.\n\n");
    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
        {
            printf("Error %d in converting string1 to INT8\n", x);
            exit(1);
        }
    if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
        {
            printf("Error %d in converting string2 to INT8\n", x);
            exit(1);
        }
    if (x = ifx_int8cvasc(string3, strlen(string3), &num3))
        {
            printf("Error %d in converting string3 to INT8\n", x);
            exit(1);
        }
    printf("\nConverting INT8 to integer\n");
    if (x= ifx_int8toint(&num1, &i))
        {
            printf("\tError %d in converting INT8 to integer\n", x);
            exit(1);
        }
    else
        {
            printf("String 1= %s\n", string1);
            printf("INT8 value is = %d\n", i);
        }
    printf("\nConverting second INT8 to integer\n");
    if (x= ifx_int8toint(&num2, &i))
        {
            printf("\tError %d in converting INT8 to integer\n", x);
            exit(1);
        }
    else
        {
            printf("String2 = %s\n", string2);
            printf("INT8 value is = %d\n", i);
        }
    printf("\nConverting third INT8 to integer\n");

    /* note that the decimal will be truncated */

    if (x= ifx_int8toint(&num3, &i))
        {
            printf("\tError %d in converting INT8 to integer\n", x);

```

```

        exit(1);
    }
    else
    {
        printf("String3 = %s\n", string3);
        printf("INT8 value is = %d\n",i);
    }
    printf("\nIFX_INT8TOINT Sample Program over.\n\n");
    exit(0);
}

```

Output

```

IFX_INT8TOINT Sample ESQL Program running.

Converting INT8 to integer

Executing: ifx_int8toint(&num1,&i)
String 1= -12,555
The value of the first integer is = -12555

Converting second INT8 to integer

Executing: ifx_int8toint(&num2, &i)
String2 = 480
The value of the second integer is = 480

Converting third INT8 to integer

Executing: ifx_int8toint(&num3, &i)
String3 = 5.2
The value of the third integer is = 5

IFX_INT8TOINT Sample Program over.

```

The ifx_int8tolong() function

The ifx_int8tolong() function converts an **int8** type number into a C **long** type number.

Syntax

```

mint ifx_int8tolong(int8_val, lng_val)
    ifx_int8_t *int8_val;
    int4 *lng_val;

```

int8_val

A pointer to an **int8** structure whose value ifx_int8tolong() converts to an **int4** integer type value.

lng_val

A pointer to an **int4** integer where ifx_int8tolong() places the result of the conversion.

Return codes

0

The conversion was successful.

-1200

The magnitude of the **int8** type number is greater than 2,147,483,647.

Example

The file `int8tolong.ec` in the `demo` directory contains the following sample program.

```

/*
 * ifx_int8tolong.ec *

The following program converts three strings to INT8 types and
converts the INT8 type values to C long type values.
Then the values are displayed.

*/

#include <stdio.h>

EXEC SQL include "int8.h";

char string1[] = "-1,555,345,698";
char string2[] = "3,235,635";
char string3[] = "553.24";

main()
{
    int x;
    long l =0;
    ifx_int8_t num1, num2, num3;

    printf("IFX_INT8TOLONG Sample ESQL Program running.\n\n");

    if (x = ifx_int8cvasc(string1, strlen(string1), &num1))
    {
        printf("Error %d in converting string1 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string2, strlen(string2), &num2))
    {
        printf("Error %d in converting string2 to INT8\n", x);
        exit(1);
    }
    if (x = ifx_int8cvasc(string3, strlen(string3), &num3))
    {
        printf("Error %d in converting string3 to INT8\n", x);
        exit(1);
    }
    printf("\nConverting INT8 to long\n");
    if (x= ifx_int8tolong(&num1, &l))
    {
        printf("\tError %d in converting INT8 to long\n", x);
    }
}

```

```

        exit(1);
    }
    else
    {
        printf("String 1= %s\n", string1);
        printf("INT8 value is = %d\n", l);
    }

    printf("\nConverting second INT8 to long\n");
    if (x= ifx_int8tolong(&num2, &l))
    {
        printf("\tError %d in converting INT8 to long\n", x);
        exit(1);
    }
    else
    {
        printf("String2 = %s\n", string2);
        printf("INT8 value is = %d\n",l);
    }
    printf("\nConverting third INT8 to long\n");

/* Note that the decimal places will be truncated. */

    if (x= ifx_int8tolong(&num3, &l))
    {
        printf("\tError %d in converting INT8 to long\n", x);
        exit(1);
    }
    else
    {
        printf("String3 = %s\n", string3);
        printf("INT8 value is = %d\n",l);
    }
    printf("\nIFX_INT8TOLONG Sample Program over.\n\n");
    exit(0);
}

```

Output

```

IFX_INT8TOLONG Sample ESQL Program running.

Converting INT8 to long

Executing: ifx_int8tolong(&num1,&l)
String 1= -1,555,345,698
The value of the first long is = -1555345698

Converting second INT8 to long

Executing: ifx_int8tolong(&num2, &l)
String2 = 3,235,635
The value of the second long is = 3235635

Converting third INT8 to long

```

```

Executing: ifx_int8tolong(&num3, &l)
String3 = 553.24
The value of the third long is = 553

IFX_INT8TOLONG Sample Program over.

```

The ifx_lo_alter() function

The ifx_lo_alter() function alters the storage characteristics of an existing smart large object.

Syntax

```

mint ifx_lo_alter(LO_ptr, LO_spec)
    ifx_lo_t *LO_ptr;
    ifx_lo_create_spec_t *LO_spec;

```

LO_ptr

A pointer to an LO-pointer structure that identifies the smart large object whose storage characteristics are altered. For more information about LO-pointer structures, see [The LO-pointer structure on page 187](#).

LO_spec

A pointer to the LO-specification structure that contains the storage characteristics that ifx_lo_alter() saves for the smart large object that LO_ptr indicates. For more information about the LO-specification structure, see [The LO-specification structure on page 180](#).

Usage

The ifx_lo_alter() function updates the storage characteristics of an existing smart large object with the characteristics in the LO-specification structure to which LO_spec points. With ifx_lo_alter(), you can change only the following storage characteristics:

- Logging characteristics

You can set the LO_LOG or LO_NOLOG flag with the ifx_lo_specget_flags() function.

- Last-access time characteristics

You can set the LO_KEEP_LASTACCESS_TIME or LO_NOKEEP_LASTACCESS_TIME flag with the ifx_lo_specset_flags() function.

- Extent size

You can store a new integer value for the allocation extent size with the ifx_lo_specset_extsz() function. The new extent size applies only to extents written after the ifx_lo_alter() function completes.

The function obtains an exclusive lock for the entire smart large object before it proceeds with the update. It holds this lock until the update completes.

Return codes**0**

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The ifx_lo_close() function

The ifx_lo_close() function closes an open smart large object.

Syntax

```
mint ifx_lo_close(LO_fd)
mint LO_fd;
```

LO_fd

The LO file descriptor of the smart large object to close. For more information about an LO file descriptor, see [The LO file descriptor on page 189](#).

Usage

The ifx_lo_close() function closes the smart large object that is associated with the LO file descriptor, *LO_fd*. The ifx_lo_open() and ifx_lo_create() functions return an LO file descriptor when they successfully open a smart large object.

When the ifx_lo_close() function closes a smart large object, the database server attempts to unlock the smart large object. In some cases, the database server does not permit the release of the lock until the end of the transaction. (If you do not perform updates to smart large objects inside a BEGIN WORK transaction block, every update is a separate transaction.) This behavior might occur if the isolation mode is repeatable read or if the lock held is an exclusive lock.

Return codes**0**

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The ifx_lo_col_info() function

The ifx_lo_col_info() function sets the fields of an LO-specification structure to the column-level storage characteristics for a specified database column.

Syntax

```
mint ifx_lo_col_info(column_name, LO_spec)
char *column_name;
ifx_lo_create_spec_t *LO_spec;
```

column_name

A pointer to a buffer that contains the name of the database column whose column-level storage characteristics you want to use.

LO_spec

A pointer to the LO-specification structure in which to store the column-level storage characteristics for *column_name*. For more information about the LO-specification structure, see [The LO-specification structure on page 180](#).

Usage

The `ifx_lo_col_info()` function sets the fields of the LO-specification structure to which *LO_spec* points, to the storage characteristics for the *column_name* database column. If this specified column does not have column-level storage characteristics defined for it, the database server uses the storage characteristics that are inherited. For more information about the inheritance hierarchy, see [Obtain storage characteristics on page 184](#).

The *column_name* buffer must specify the column name in the following format:

```
database@server_name:table.column
```

If the column is in a database that is ANSI compliant, you can also include the *owner_name*, as follows:

```
database@server_name:owner.table.column
```



Important: You must call the `ifx_lo_def_create_spec()` function before you call `ifx_lo_col_info()`.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The ifx_lo_copy_to_file() function

The `ifx_lo_copy_to_file()` function copies the contents of a smart large object into an operating-system file.

Syntax

```
mint ifx_lo_copy_to_file(LO_ptr, fname, flags, result)
    ifx_lo_t *LO_ptr;
    char *fname;
    mint flags;
    char *result;
```

LO_ptr

A pointer to the LO-pointer structure that you provide to identify the smart large object to copy. For more information about LO-pointer structures, see [The LO-pointer structure on page 187](#).

fname

The full path name of the target file to hold the data.

flags

An integer that specifies the location of the *fname* file.

result

A pointer to a buffer that contains the file name that `ifx_lo_copy_to_file()` generates.

Usage

The `ifx_lo_copy_to_file()` function can create the target files on either the server or the client computer. The flag values for the *flags* argument indicate the location of the file to copy. Valid values include the following constants, which the `locator.h` header file defines.

File-location constant**Purpose****LO_CLIENT_FILE**

The *fname* file is on the client computer.

LO_SERVER_FILE

The *fname* file is on the server computer.

By default, the `ifx_lo_copy_to_file()` function generates a file name of the form:

```
fname.hex_id
```

In this format, *fname* is the file name you specify as an argument to `ifx_lo_copy_to_file()` and *hex_id* is the unique hexadecimal smart-large-object identifier. The maximum number of digits for a smart-large-object identifier is 17; however most smart large objects would have an identifier with fewer digits.

For example, suppose you specify a *pathname* value as `'/tmp/resume'`.

If the CLOB column has an identifier of **203b2**, the `ifx_lo_copy_to_file()` function creates the file: `/tmp/resume.203b2`.

To change this default file name, you can specify the following wildcards in the file name portion of *fname*:

- One or more contiguous question mark (?) characters in the file name can generate a unique file name.

The `ifx_lo_copy_to_file()` function replaces each question mark with a hexadecimal digit from the identifier of the BLOB or CLOB column. For example, suppose you specify a *pathname* value as `'/tmp/resume??.txt'`.

The `ifx_lo_copy_to_file()` function puts two digits of the hexadecimal identifier into the name. If the CLOB column has an identifier of **203b2**, the `ifx_lo_copy_to_file()` function would create the file `/tmp/resumb2.txt`.

If you specify more than 17 question marks, the `ifx_lo_copy_to_file()` function ignores them.

- An exclamation point (!) at the end of the file name indicates that the file name does not need to be unique.

For example, suppose you specify a path name value as `'/tmp/resume.txt!'`.

The `ifx_lo_copy_to_file()` function does not use the smart-large-object identifier in the file name so it generates the following file: `ifx_lo_copy_to_file()`

The exclamation point overrides the question marks in the file name specification.



Tip: These wildcards are also valid in the *fname* argument of the `ifx_lo_filename()` function. For more information about `ifx_lo_filename()`, see [The `ifx_lo_filename\(\)` function on page 686](#).

Your application must ensure that there is sufficient space to hold the generated file.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The `ifx_lo_copy_to_lo()` function

The `ifx_lo_copy_to_lo()` function copies the contents of a file into an open smart large object.

Syntax

```
mint ifx_lo_copy_to_lo(LO_fd, fname, flags)
mint LO_fd;
char *fname;
mint flags;
```

LO_fd

The LO file descriptor for the open smart large object in which to write the file contents. For more information about an LO file descriptor, see [The LO file descriptor on page 189](#).

fname

The full path name of the source file that contains the data to copy.

flags

An integer that specifies the location of the *fname* file.

Usage

The `ifx_lo_copy_to_lo()` function can copy the contents of a source file on either the server or the client computer. The flag values for the *flags* argument indicate the location of the file to copy. Valid values include the following constants, which the `locator.h` header file defines.

File-location constant

Purpose**LO_CLIENT_FILE**

The *fname* file is on the client computer.

LO_SERVER_FILE

The *fname* file is on the server computer.

LO_APPEND

Append the data in *fname* to the end of the specified smart large object. This flag can be masked with one of the preceding flags.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The ifx_lo_create() function

The `ifx_lo_create()` function creates a new smart large object and opens it for access within the IBM® Informix® ESQL/C program.

Syntax

```
mint ifx_lo_create(LO_spec, flags, LO_ptr, error)
    ifx_lo_create_spec_t *LO_spec;
    mint flags;
    ifx_lo_t *LO_ptr;
    mint *error;
```

LO_spec

A pointer to the LO-specification structure that contains the storage characteristics for new smart large objects. For information about the LO-specification structure, see [The LO-specification structure on page 180](#).

flags

An integer that specifies the mode in which to open the new smart large object. For more information, see [Access modes on page 192](#).

LO_ptr

A pointer to the LO-pointer structure for the new smart large object. For more information about LO-pointer structures, see [The LO-pointer structure on page 187](#).

error

A pointer to an integer that contains the error code that `ifx_lo_create()` sets.

Usage

The `ifx_lo_create()` function performs the following steps to create a new smart large object:

1. It creates a LO-pointer structure and assigns a pointer to this structure to the `LO_ptr` argument.
2. It assigns the storage characteristics for the smart large object from the LO-specification structure, `LO_spec`.

If the LO-specification structure does not contain storage characteristics (the associated fields are null), `ifx_lo_create()` uses the storage characteristics from the inheritance hierarchy for the new smart large object. The `ifx_lo_create()` function also uses the system-specified storage characteristics if the `LO_spec` pointer is null.

For more information about the inheritance hierarchy, see [Obtain storage characteristics on page 184](#).

3. It opens the new smart large object in the access mode that the `flags` argument specifies.

The flag values for the `flags` argument indicate the mode of the smart large object after `ifx_lo_create()` successfully completes. Valid values include all access-mode constants, which [Table 48: Access-mode flags for smart large objects on page 192](#) shows. For more information about access modes, see [Open a smart large object on page 192](#).

4. It returns an LO file descriptor that identifies the open smart large object.



Important: You must call the `ifx_lo_def_create_spec()` function to initialize an LO-specification structure before you call the `ifx_lo_create()` function.

HCL Informix® uses the default parameters that the call to `ifx_lo_create()` establishes to determine whether subsequent operations result in locking and/or logging of the corresponding smart large object. For more information, see [Lightweight I/O on page 194](#)

Each `ifx_lo_create()` call is implicitly associated with the current connection. When this connection closes, the database server deallocates any smart large objects that are not referenced by any columns (those with a reference count of zero).

If the `ifx_lo_create()` function is successful, it returns a valid LO-file descriptor (`LO_fd`). You can then use the `LO_fd` to identify which smart large object to access in subsequent function calls such as `ifx_lo_read()` and `ifx_lo_write()`. However, a `LO_fd` is only valid within the current database connection.

Return codes

A valid LO file descriptor

The function successfully created and opened the new smart large object.

-1

The function was not successful; examine the error for a detailed error code.

The `ifx_lo_def_create_spec()` function

The `ifx_lo_def_create_spec()` function allocates and initializes an LO-specification structure.

Syntax

```
mint ifx_lo_def_create_spec(LO_spec)
    ifx_lo_create_spec_t **LO_spec;
```

LO_spec

A pointer that points to a pointer to a new LO-specification structure that contains initialized fields. For information about the LO-specification structure, see [The LO-specification structure on page 180](#).

Usage

The `ifx_lo_def_create_spec()` function creates and initializes a new LO-specification structure, `ifx_lo_create_spec_t`. The `ifx_lo_def_create_spec()` function initializes the new `ifx_lo_create_spec_t` structure with the appropriate null values and places its address in the *LO_spec* pointer. At the time the database server stores the large object, the database server interprets the null values to mean that system-specified defaults should be used for the storage characteristics. For more information, see [The system-specified storage characteristics on page 185](#).

Because the `ifx_lo_def_create_spec()` function allocates memory for the `ifx_lo_create_spec_t` structure, you must call the `ifx_lo_spec_free()` function to free that memory when you are finished using the structure.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The `ifx_lo_filename()` function

The `ifx_lo_filename()` function returns the path name that the database server would use if you copied a smart large object to a file.

Syntax

```
mint ifx_lo_filename(LO_ptr, fname, result, result_buf_nbytes)
    ifx_lo_t *LO_ptr;
    char *fname;
    char *result;
    mint result_buf_nbytes;
```

LO_ptr

A pointer to the LO-pointer structure that identifies the smart large object to copy. For more information about LO-pointer structures, see [The LO-pointer structure on page 187](#)

fname

The full path name of the target file to hold the data.

result

A pointer to a buffer that contains the file name that `ifx_lo_copy_to_file()` would generate.

result_len

The size, in bytes, of the *result* character buffer.

Usage

The `ifx_lo_filename()` function generates a file name from the *fname* argument that you provide. Use the `ifx_lo_filename()` function to determine the file name that the `ifx_lo_filename()` function would create for its *fname* argument.

By default, the `ifx_lo_copy_to_file()` function generates a file name of the form:

```
fname.hex_id
```

However, you can specify wildcards in the *fname* argument that can change this default file name. You can use these wildcards in the *fname* argument of `ifx_lo_filename()` to see what file name these wildcards generate.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The ifx_lo_from_buffer() function

The `ifx_lo_from_buffer()` function copies a specified number of bytes from a user-defined buffer into a smart large object.

Syntax

```
mint ifx_lo_from_buffer(LO_ptr, size, buffer, error)
    ifx_lo_t *LO_ptr;
    mint size;
    char *buffer;
    mint *error;
```

LO_ptr

The LO-pointer structure for the smart large object into which you want to copy the data.

size

A **mint** that identifies the number of bytes to copy to the smart large object.

buffer

A pointer to a user-defined buffer from which you want to copy the data.

error

Contains the address of the **mint** that holds the error code that `ifx_lo_from_buffer()` sets

Usage

The `ifx_lo_from_buffer()` function copies bytes, up to the size specified by *size*, from the user-defined buffer into the smart large object that the *LO_ptr* argument identifies. The write operation to the smart large object starts at a zero-byte offset. To use the `ifx_lo_from_buffer()` function, the smart large object must exist in an sbspace before you copy the data.

Return codes

0

The function was successful.

-1

The function was not successful.

The `ifx_lo_lock()` function

The `ifx_lo_lock()` function allows you to lock an explicit range of bytes in a smart large object.

Syntax

```
mint ifx_lo_lock(LO_fd, offset, whence, range, lockmode)
  mint LO_fd;
  int8 *offset;
  mint whence;

  int8 *range;

  mint lockmode;
```

LO_fd

The LO-file descriptor for the smart large object in which to lock the range of bytes. For more information about an LO-file descriptor, see [The LO file descriptor on page 189](#)

offset

A pointer to the 8-byte integer (INT8) that specifies the offset within the smart large object at which the lock begins.

whence

A **mint** constant that specifies from what point the offset is calculated: the beginning of the smart large object, the current position within the smart large object, or the end of the smart large object.

range

A pointer to the 8-byte integer (INT8) that specifies the number of bytes to lock.

lockmode

The mode in which to lock the specified bytes. Set to `LO_EXCLUSIVE_MODE` for an exclusive lock or to `LO_SHARED_MODE` for a shared lock.

Usage

The `ifx_lo_lock()` function locks the number of bytes specified by *range*, beginning at the location specified by *offset* and *whence*, for the smart large object that *LO_fd* specifies. The `ifx_lo_lock()` function places the type of lock that *lockmode* specifies. If you specify `ISSLOCK`, `ifx_lo_lock()` places a shared lock on the byte range. If you specify `ISXLOCK`, `ifx_lo_lock()` places an exclusive lock on the byte range.

Before you call `ifx_lo_lock()`, you must obtain a valid LO-file descriptor by calling either `ifx_lo_create()` to create a new smart large object, or by calling `ifx_lo_open()` to open an existing smart large object.

The `ifx_lo_lock()` function uses the *whence* and *offset* arguments to determine the seek position, as follows:

- The *whence* value identifies the position from which to start the seek.

Valid values include the following constants, which the `locator.h` header file defines.

Whence constant

Starting seek position

LO_SEEK_SET

The start of the smart large object

LO_SEEK_CUR

The current seek position in the smart large object

LO_SEEK_END

The end of the smart large object

- The *offset* argument identifies the offset, in bytes, from the starting seek position (that the *whence* argument specifies) at which to begin locking bytes.

In addition to locking *nbytes*, you can also lock bytes from a specified offset to the end of the large object, which you can specify as either the current end or the maximum end of the large object. You can use two integer constants (`LO_CURRENT_END` and `LO_MAX_END`) to denote these values. To use one of these values, first convert it to an **int8** value and then use it for the *nbytes* argument.

Return codes

0

The function was successful

< 0

The function was unsuccessful. The value returned is the **sqlcode**, which is the number of the HCL Informix® error message.

The `ifx_lo_open()` function

The `ifx_lo_open()` function opens an existing smart large object for access.

Syntax

```
mint ifx_lo_open(LO_ptr, flags, error)
    ifx_lo_t *LO_ptr;
    mint flags;
    mint *error;
```

LO_ptr

A pointer to the LO-pointer structure that identifies the smart large object to open.

flags

A **mint** that specifies the mode in which to open the smart large object that *LO_ptr* identifies.

error

A pointer to a **mint** that contains the error code that `ifx_lo_open()` sets.

Usage

Your IBM® Informix® ESQL/C program must call the `ifx_lo_open()` function for each instance of a smart large object that it needs to access.

The value of the *flags* argument indicates the mode of the smart large object after `ifx_lo_open()` successfully completes. For a description of valid values for the *flags* argument, see [Table 48: Access-mode flags for smart large objects on page 192](#).

HCL Informix® uses the default parameters that `ifx_lo_open()` (or `ifx_lo_create()`) establishes to determine whether subsequent operations cause locking or logging to occur for the smart large object. For more information about the settings that affect the opening of a smart large object, see [Open a smart large object on page 192](#).

Each `ifx_lo_open()` call is implicitly associated with the current connection. When this connection closes, the database server deallocates any smart large objects that are not referenced by any columns (those with a reference count of zero).

If the `ifx_lo_open()` function is successful, it returns a valid LO file descriptor (*LO_fd*). You can then use the file descriptor to identify which smart large object to access in subsequent function calls such as `ifx_lo_read()` and `ifx_lo_write()`. A *LO_fd* is valid only within the current database connection.

After `ifx_lo_open()` has opened the smart large object, it sets the seek position in the returned LO file descriptor to byte 0. If the default range for locking is set for locking the entire smart large object, the `ifx_lo_open()` function can also obtain a lock on the smart large object, based on the following settings for the access mode:

- For dirty-read mode, the database server does not place a lock on the smart large object.
- For read-only mode, the database server obtains a shared lock on the smart large object.
- For write-only, write-append, or read-write mode, the database server obtains an update lock on the smart large object. When a call to the `ifx_lo_write()` or `ifx_lo_writewithseek()` function occurs, the database server promotes the lock to an exclusive lock.

The lock that `ifx_lo_open()` obtains is lost when the current transaction terminates. The database server obtains the lock again, however, when the next function that needs a lock executes. If this behavior is undesirable, use `BEGIN WORK`

transaction blocks and place a COMMIT WORK or ROLLBACK WORK statement after the last statement that needs to use the lock.

Return codes

-1

The function was not successful; examine the error for a detailed error code.

A valid LO file descriptor

The function has successfully opened the smart large object and returned a valid LO file descriptor.

The ifx_lo_read() function

The ifx_lo_read() function reads a specified number of bytes of data from an open smart large object.

Syntax

```
mint ifx_lo_read(LO_fd, buf, nbytes, error)
    mint LO_fd;
    char *buf;
    mint nbytes;
    mint *error;
```

LO_fd

The LO file descriptor for the smart large object from which to read.

buf

A pointer to a character buffer that contains the data that ifx_lo_read() reads from the smart large object.

nbytes

The size, in bytes, of the buf character buffer. This value cannot exceed 2 GB.

error

A pointer to a **mint** that contains the error code that ifx_lo_read() sets.

Usage

The ifx_lo_read() function reads *nbytes* of data from the open smart large object that the *LO_fd* file descriptor identifies. The read begins at the current seek position for *LO_fd*. You can use the ifx_lo_tell() function to obtain the current seek position.

The function reads this data into the user-defined buffer to which *buf* points. The *buf* buffer must be less than 2 GB in size. To read smart large objects that are larger than 2 GB, read them in 2-GB chunks.

Return codes

>=0

The number of bytes that the function has read from the smart large object into the *buf* character buffer.

-1

The function was not successful; examine the *error* for a detailed error code.

The ifx_lo_readwithseek() function

The ifx_lo_readwithseek() function performs a seek operation and then reads a specified number of bytes of data from an open smart large object.

Syntax

```
mint ifx_lo_readwithseek(LO_fd, buf, nbytes, offset, whence, error)
char *buf;
mint nbytes;
ifx_int8_t *offset;
mint whence;
mint *error;
```

LO_fd

The LO file descriptor for the smart large object from which to read.

buf

A pointer to a character buffer that contains the data that ifx_lo_readwithseek() reads from the smart large object.

nbytes

The size, in bytes, of the buf character buffer. This value cannot exceed 2 gigabytes.

offset

A pointer to the 8-byte integer (INT8) offset from the starting seek position.

whence

A mint value that identifies the starting seek position.

error

A pointer to a mint that contains the error code that ifx_lo_readwithseek() sets.

Usage

The ifx_lo_readwithseek() function reads *nbytes* of data from the open smart large object that the *LO_fd* file descriptor identifies.

The read begins at the seek position of *LO_fd* that the *offset* and *whence* arguments indicate, as follows:

- The *whence* argument identifies the position from which to start the seek.

Valid values include the following constants, which the `locator.h` header file defines.

Whence constant

Starting seek position

LO_SEEK_SET

The start of the smart large object

LO_SEEK_CUR

The current seek position in the smart large object

LO_SEEK_END

The end of the smart large object

- The *offset* argument identifies the offset, in bytes, from the starting seek position (that the *whence* argument specifies) to which the seek position is to be set.

The function reads this data into the user-defined buffer to which *buf* points. The size of the *buf* buffer must be less than 2 GB. To read smart large objects that are larger than 2 GB, read them in 2-GB chunks.

Return codes

>=0

The number of bytes that the function has read from the smart large object into the *buf* character buffer.

-1

The function was not successful; examine the *error* for a detailed error code.

The ifx_lo_release() function

The `ifx_lo_release()` function tells the database server to release the resources associated with a temporary smart large object.

Syntax

```
mint ifx_lo_release(LO_ptr)
      ifx_lo_t *LO_ptr;
```

LO_ptr

The LO-pointer structure for the smart large object for which you want to release resources.

Usage

The `ifx_lo_release()` function is useful for telling the database server when it is safe to release resources associated with temporary smart large objects. A *temporary* smart large object is one that has one or more LO handles, none of which have been inserted into a table. Temporary smart large objects can occur in the following ways:

- You create a smart large object with `ifx_lo_create()` but do not insert its LO handle into a column of the database.
- You invoke a user-defined routine that creates a smart large object in a query but never assigns its LO handle to a column of the database.

For example, the following query creates one smart large object for each row in the **table1** table and sends each one to the client application:

```
SELECT filetoblob(...) FROM table1;
```

The client application can use the `ifx_lo_release()` function to indicate to the database server when it finishes processing each of these smart large objects. After you call this function on a temporary smart large object, the database server can release the resources at any time. Further use of the LO handle and any associated LO file descriptors is not guaranteed to work.

Use of this function on smart large objects that are not temporary does not cause any incorrect behavior. However, the call is expensive and is not needed for permanent smart large objects.

Return codes

0

The function was successful.

< 0

The function was not successful.

The `ifx_lo_seek()` function

The `ifx_lo_seek()` function sets the file position for the next read or write operation on the open smart large object.

Syntax

```
mint ifx_lo_seek(LO_fd, offset, whence, seek_pos)
    mint LO_fd;
    ifx_int8_t *offset;
    mint whence;
    ifx_int8_t *seek_pos;
```

LO_fd

The LO file descriptor for the smart large object whose seek position you want to change.

offset

A pointer to the 8-byte integer offset from the starting seek position.

whence

A **mint** value that identifies the starting seek position.

seek_pos

A pointer to the resultant 8-byte integer offset, relative to the start of the file, that corresponds to the position for the next read/write operation.

Usage

The function uses the *whence* and *offset* arguments to determine the seek position, as follows:

- The *whence* value identifies the position from which to start the seek.

Valid values include the following constants, which the `locator.h` header file defines.

Whence constant

Starting seek position**LO_SEEK_SET**

The start of the smart large object

LO_SEEK_CUR

The current seek position in the smart large object

LO_SEEK_END

The end of the smart large object

- The *offset* argument identifies the offset, in bytes, from the starting seek position (that the *whence* argument specifies) at which to begin the seek position.

The `ifx_lo_tell()` function returns the current seek position for an open smart large object.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The `ifx_lo_spec_free()` function

The `ifx_lo_spec_free()` function frees the resources of an LO-specification structure.

Syntax

```
mint ifx_lo_spec_free(LO_spec)
      ifx_lo_create_spec_t *LO_spec;
```

LO_spec

A pointer to the LO-specification structure to free.

Usage

The `ifx_lo_spec_free()` function frees a LO-specification structure that was allocated by a call to `ifx_lo_spec_free()`. The *LO_spec* pointer points to the **`ifx_lo_create_spec_t`** structure which is to be freed.

IBM® Informix® ESQL/C does not perform memory management for a LO-specification structure. You must call `ifx_lo_spec_free()` for each LO-specification structure that you allocate with a call to the `ifx_lo_def_create_spec()` function.



Important: Do not use `ifx_lo_spec_free()` to free an **`ifx_lo_create_spec_t`** structure that you accessed through a call to the `ifx_lo_stat_cspec()` function. When you call `ifx_lo_stat_free()` to free the **`ifx_lo_stat_t`** structure, it also



automatically frees the `ifx_lo_create_spec_t` structure. Use `ifx_lo_spec_free()` only to free an `ifx_lo_create_spec_t` structure that you created through a call to `ifx_lo_def_create_spec()`.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The `ifx_lo_specget_def_open_flags()` function

The `ifx_lo_specget_def_open_flags()` function obtains the default open flags of a smart large object from an LO-specification structure.

Syntax

```
mint ifx_lo_specget_def_open_flags(LO_spec)
    ifx_lo_create_spec_t *LO_spec;
```

LO_spec

A pointer to the LO-specification structure from which to obtain the default open flags.

Usage

This function can be used to obtain the default open flags from a LO-specification structure. It can be used with `ifx_lo_stat_cspect()` to obtain the default open flags that were specified when an existing smart large object was created.

Return codes

>=0

The function was successful. The returned integer stores the values of the default open flags.

-1

The function was unsuccessful

The `ifx_lo_specget_estbytes()` function

The `ifx_lo_specget_estbytes()` function obtains from an LO-specification structure the estimated size of a smart large object.

Syntax

```
mint ifx_lo_specget_estbytes(LO_spec, estbytes)
    ifx_lo_create_spec_t *LO_spec;
    ifx_int8_t *estbytes;
```

LO_spec

A pointer to the LO-specification structure from which to obtain the estimated size.

estbytes

A pointer to an **ifx_int8_t** structure into which `ifx_lo_specget_estbytes()` puts the estimated number of bytes for the smart large object.

Usage

The *estbytes* value is the estimated final size, in bytes, of the smart large object. This estimate is an optimization hint for the smart-large-object optimizer. For more information about the estimated size, see [Table 46: Disk-storage information in the LO-specification structure on page 181](#).



Important: You must call the `ifx_lo_def_create_spec()` function to initialize an LO-specification structure before you call `ifx_lo_specget_estbytes()`. You can use the `ifx_lo_col_info()` function to store storage characteristics that are associated with a particular column in an LO-specification structure.

Return codes

0

The function was successful.

-1

The function was not successful.

The `ifx_lo_specget_extsz()` function

The `ifx_lo_specget_extsz()` function obtains from an LO-specification structure the allocation extent size of a smart large object.

Syntax

```
mint ifx_lo_specget_extsz(LO_spec)
    ifx_lo_create_spec_t *LO_spec;
```

LO_spec

A pointer to the LO-specification structure from which to obtain the extent size.

Usage

The *extsz* value specifies the size, in bytes, of the allocation extents to be allocated for the smart large object when the database server writes beyond the end of the current extent. This value overrides the estimate that HCL Informix® generates for how large an extent is to be. For more information about the allocation extent, see [Table 46: Disk-storage information in the LO-specification structure on page 181](#).



Important: You must call the `ifx_lo_def_create_spec()` function to initialize an LO-specification structure before you call `ifx_lo_specget_extsz()`. You can use the `ifx_lo_col_info()` function to store storage characteristics that are associated with a particular column in an LO-specification structure.

Return codes

>=0

The function was successful and the return value indicates the extent size.

-1

The function was not successful.

The `ifx_lo_specget_flags()` function

The `ifx_lo_specget_flags()` function obtains from an LO-specification structure the create-time flags of a smart large object.

Syntax

```
mint ifx_lo_specget_flags(LO_spec)
    ifx_lo_create_spec_t *LO_spec;
```

LO_spec

A pointer to the LO-specification structure from which to obtain the flag value.

Usage

The create-time flags provide the following information about a smart large object:

- Whether to use logging on the smart large object
- Whether to store the time of last access for the smart large object

These two indicators are masked together into the single flags value. For more information about the create-time flags, see [Table 47: Create-time flags in the LO-specification structure on page 182](#).



Important: You must call the `ifx_lo_def_create_spec()` function to initialize an LO-specification structure before you call `ifx_lo_specget_flags()`. You can use the `ifx_lo_col_info()` function to store storage characteristics that are associated with a particular column in an LO-specification structure.

Return codes

>=0

The function was successful and the return value is the value of the create-time flags.

-1

The function was not successful.

The ifx_lo_specget_maxbytes() function

The ifx_lo_specget_maxbytes() function obtains from an LO-specification structure the maximum size of a smart large object.

Syntax

```
mint ifx_lo_specget_maxbytes(LO_spec, maxbytes)
    ifx_lo_create_spec_t *LO_spec;
    ifx_int8_t *maxbytes;
```

LO_spec

A pointer to the LO-specification structure from which to obtain the maximum size.

maxbytes

A pointer to an **int8** value into which ifx_lo_specget_maxbytes() puts the maximum size, in bytes, of the smart large object. If this value is **-1**, the smart large object has no size limit.

Usage

HCL Informix® does not allow the size of a smart large object to exceed the *maxbytes* value. For more information about the maximum size, see [Table 46: Disk-storage information in the LO-specification structure on page 181](#).



Important: You must call the ifx_lo_def_create_spec() function to initialize an LO-specification structure before you call ifx_lo_specget_maxbytes(). You can use the ifx_lo_col_info() function to store storage characteristics that are associated with a particular column in an LO-specification structure.

Return codes

0

The function was successful.

-1

The function was not successful.

The ifx_lo_specget_sbospace() function

The ifx_lo_specget_sbospace() function obtains from an LO-specification structure the name of an sbospace where a smart large object is stored.

Syntax

```
mint ifx_lo_specget_sbospace(LO_spec, sbospace_name, length)
    ifx_lo_create_spec_t *LO_spec;
    char *sbospace_name;
    mint length;
```

LO_spec

A pointer to the LO-specification structure from which to obtain the sbospace name.

sbspace_name

A character buffer into which **ifx_lo_specget_sbspace()** puts the name of the sbspace for the smart large object.

length

A mint value that specifies the size, in bytes, of the *sbspace_name* buffer.

Usage

The `ifx_lo_specget_sbspace()` function returns the current setting for the name of the sbspace in which to store the smart large object. The function copies up to $(length-1)$ bytes into the *sbspace_name* buffer and ensures that it is null terminated. For more information about an sbspace name, see [Table 46: Disk-storage information in the LO-specification structure on page 181](#).



Important: You must call the `ifx_lo_def_create_spec()` function to initialize an LO-specification structure before you call `ifx_lo_specget_sbspace()`. You can use the `ifx_lo_col_info()` function to store storage characteristics that are associated with a particular column in an LO-specification structure.

An sbspace name can be up to 18 characters long. However, you might want to allocate at least 129 bytes for the *sbspace_name* buffer to accommodate future increases in the length of an sbspace name.

Return codes

0

The function was successful.

-1

The function was not successful.

The ifx_lo_specset_def_open_flags() function

The `ifx_lo_specset_def_open_flags()` function sets the default open flags for a smart large object.

Syntax

```
mint ifx_lo_specset_def_open_flags(LO_spec, flags)

    ifx_lo_create_spec_t *LO_spec;

    mint flags;
```

LO_spec

A pointer to the LO-specification structure in which the default open flags are to be set.

flags

A mint value for the default open flags of the smart large object.

Usage

The most common use of this function is to specify that the smart large object always is to be opened by using unbuffered I/O. This function can also be used to supply any required default open flags for a smart large object. The supplied flags are used whenever the smart large object is later opened, unless explicitly overridden at open time.

Return codes

0

The function was successful

-1

The function was unsuccessful

Example

```
/* use unbuffered I/O on all opens for this LO */
ret = ifx_lo_specset_def_open_flags(lospec, LO_NOBUFFER);
```

The ifx_lo_specset_estbytes() function

The ifx_lo_specset_estbytes() function sets the estimated size of a smart large object.

Syntax

```
mint ifx_lo_specset_estbytes(LO_spec, estbytes)
    ifx_lo_create_spec_t *LO_spec;
    ifx_int8_t *estbytes;
```

LO_spec

A pointer to the LO-specification structure in which to save the estimated size.

estbytes

A pointer to an **ifx_int8_t** structure that contains the estimated number of bytes for the smart large object.

Usage

The *estbytes* value is the estimated final size, in bytes, of the smart large object. This estimate is an optimization hint for the smart-large-object optimizer. For more information about the estimated byte size, see [Table 46: Disk-storage information in the LO-specification structure on page 181](#).

If you do not specify an *estbytes* value when you create a new smart large object, HCL Informix® obtains the value from the inheritance hierarchy of storage characteristics.

Do not change this system value unless you know the estimated size for the smart large object. If you do set the estimated size for a smart large object, do not specify a value much higher than the final size of the smart large object. Otherwise, the database server might allocate unused storage.

Return codes**0**

The function was successful.

-1

The function was not successful.

The ifx_lo_specset_extsz() function

The ifx_lo_specset_extsz() function sets the allocation extent size for a smart large object.

Syntax

```
mint ifx_lo_specset_extsz(LO_spec, extsz)
    ifx_lo_create_spec_t *LO_spec;
    mint extsz;
```

LO_spec

A pointer to the LO-specification structure in which to save the extent size.

extsz

An integer value for the size of the allocation extent of a smart large object.

Usage

The *extsz* value specifies the size of the allocation extents to be allocated for the smart large object when the database server writes beyond the end of the current extent. This value overrides the estimate that HCL Informix® generates for how large an extent is to be. For more information about the allocation extent, see [Table 46: Disk-storage information in the LO-specification structure on page 181](#).

If you do not specify an *extsz* value when you create a smart large object, HCL Informix® attempts to optimize the extent size based on past operations on the smart large object and other storage characteristics (such as maximum bytes) that it obtains from the inheritance hierarchy of storage characteristics.

Do not change this system value unless you know the allocation extent size for the smart large object. Only applications that encounter severe storage fragmentation should ever set the allocation extent size. For such applications, make sure that you know exactly the number of bytes by which to extend the smart large object.

Return codes**0**

The function was successful.

-1

The function was not successful.

The ifx_lo_specset_flags() function

The ifx_lo_specset_flags() function sets the create-time flags of a smart large object.

Syntax

```
mint ifx_lo_specset_flags(LO_spec, flags)
    ifx_lo_create_spec_t *LO_spec;
    mint flags;
```

LO_spec

A pointer to the LO-specification structure in which to save the flags value.

flags

An integer value for the create-time flags of the smart large object.

Usage

The create-time flags provide the following information about a smart large object:

- Whether to use logging on the smart large object
- Whether to store the time of last access for the smart large object

These two indicators are masked together into the single flags value. For more information about the create-time flags, see [Table 47: Create-time flags in the LO-specification structure on page 182](#).

If you do not specify a *flags* value when you create a new smart large object, HCL Informix® obtains the value from the inheritance hierarchy of storage characteristics.

Return codes

0

The function was successful.

-1

The function was not successful.

The ifx_lo_specset_maxbytes() function

The ifx_lo_specset_maxbytes() function sets the maximum size for a smart large object.

Syntax

```
mint ifx_lo_specset_maxbytes(LO_spec, maxbytes)
    ifx_lo_create_spec_t *LO_spec;
    ifx_int8_t *maxbytes;
```

LO_spec

A pointer to the LO-specification structure in which to save the maximum size.

maxbytes

A pointer to an **ifx_int8_t** structure that contains the maximum number of bytes for the smart large object. If this value is -1, the smart large object has no size limit.

Usage

HCL Informix® does not allow the size of a smart large object to exceed the *maxbytes* value. The database server does not obtain the value from the inheritance hierarchy of storage characteristics. For more information about the maximum size, see [Table 46: Disk-storage information in the LO-specification structure on page 181](#).

Return codes**0**

The function was successful.

-1

The function was not successful.

The ifx_lo_specset_sbspace() function

The `ifx_lo_specset_sbspace()` function sets the name of the sbspace for a smart large object.

Syntax

```
mint ifx_lo_specset_sbspace(LO_spec, sbspace_name)
    ifx_lo_create_spec_t *LO_spec;
    char *sbspace_name;
```

sbspace_name

A pointer to a buffer that contains the name of the sbspace in which to store the smart large object.

LO_spec

A pointer to the LO-specification structure in which to save the sbspace name.

Usage

The name of the sbspace can be at most 18 characters long. It must also be null terminated.

If you do not specify an *sbspace_name* when you create a new smart large object, HCL Informix® obtains the sbspace name from either the column information or from the SBSPACENAME parameter of the `onconfig` file.

Return codes**0**

The function was successful.

-1

The function was not successful.

The ifx_lo_stat() function

The ifx_lo_stat() function returns information about the status of an open smart large object.

Syntax

```
mint ifx_lo_stat(LO_fd, LO_stat)
    mint LO_fd;
    ifx_lo_stat_t **LO_stat;
```

LO_fd

The LO-file descriptor for the open smart large object whose status information you want to obtain.

LO_stat

A pointer that points to a pointer to an LO-status structure that ifx_lo_stat() allocates and completes with status information.

Usage

The ifx_lo_stat() function allocates an LO-status structure, **ifx_lo_stat_t**, and initializes it with the status information for the smart large object that the *LO_fd* file descriptor identifies. To access the status information, use the IBM® Informix® ESQL/C accessor functions for the LO-status structure. For more information about the status information and the corresponding accessor functions, see [Table 49: Status information in the LO-status structure on page 198](#).

Use the ifx_lo_stat_free() function to deallocate an LO-status structure.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The ifx_lo_stat_atime() function

The ifx_lo_stat_atime() function returns the time of last access for a smart large object.

Syntax

```
mint ifx_lo_stat_atime(LO_stat)
    ifx_lo_stat_t *LO_stat;
```

LO_stat

A pointer to an LO-status structure that ifx_lo_stat() allocates and completes with status information.

Usage

The time of last access is only guaranteed to be maintained if the smart large object has the `LO_KEEP_LASTACCESS_TIME` flag set. If you do not set this flag, the database server does not write this access-time value to disk. The resolution of the time that the `ifx_lo_stat_atime()` function returns is seconds.

The status information for the smart large object is in the LO-status structure to which `LO_stat` points. The `ifx_lo_stat()` function allocates this structure and fills it with the status information for a particular smart large object. Therefore, you must precede a call to `ifx_lo_stat_atime()` with a call to `ifx_lo_stat()`.

Return codes

>=0

The last-access time for the smart large object that `LO_stat` identifies.

-1

The function was not successful.

The `ifx_lo_stat_cspect()` function

The `ifx_lo_stat_cspect()` function returns the LO-specification structure for a smart large object.

Syntax

```
ifx_lo_create_spec_t *ifx_lo_stat_cspect(LO_stat)
ifx_lo_stat_t *LO_stat;
```

LO_stat

A pointer to an LO-status structure that `ifx_lo_stat()` allocates and completes with status information.

Usage

The `ifx_lo_stat_cspect()` function returns a pointer to an LO-specification structure, **`ifx_lo_create_spec_t`**, which contains the storage characteristics for the specified smart large object. You can use this LO-specification structure to create another smart large object with the same storage characteristics or to access the storage characteristics through the accessor (**`ifx_specget_`**) functions.

You must precede a call to `ifx_lo_stat_cspect()` with a call to `ifx_lo_stat()`. The `ifx_lo_stat()` function allocates the memory for the **`ifx_lo_create_spec_t`** structure, along with the **`ifx_lo_stat_t`** structure, and initializes it with the status information for the smart large object that you specified. When you call the `ifx_lo_stat_free()` function to free the **`ifx_lo_stat_t`** structure, it frees the **`ifx_lo_create_spec_t`** structure automatically.

Return codes

A valid pointer to an LO-specification (`ifx_lo_create_spec_t`) structure

The function was successful.

NULL

The function was not successful.

The ifx_lo_stat_ctime() function

The ifx_lo_stat_ctime() function returns the time of last change in status for a smart large object.

Syntax

```
mint ifx_lo_stat_ctime(LO_stat)
    ifx_lo_stat_t *LO_stat;
```

LO_stat

A pointer to an LO-status structure that ifx_lo_stat() allocates and completes with status information.

Usage

The last change in status includes modification of storage characteristics, including a change in the number of references and writes to the smart large object. The resolution of the time that the ifx_lo_stat_ctime() function returns is seconds.

The status information for the smart large object is in the LO-status structure to which *LO_stat* points. The ifx_lo_stat() function allocates this structure and fills it with the status information for a particular smart large object. Therefore, you must precede a call to ifx_lo_stat_ctime() with a call to ifx_lo_stat().

Return codes

>=0

The last-change time for the smart large object that *LO_stat* identifies.

-1

The function was not successful.

The ifx_lo_stat_free() function

The ifx_lo_stat_free() function frees an LO-status structure.

Syntax

```
mint ifx_lo_stat_free(LO_stat)
    ifx_lo_stat_t *LO_stat;
```

LO_stat

A pointer to an LO-status structure that the ifx_lo_stat() function has allocated.

Usage

The ifx_lo_stat() function returns status information about an open smart large object in an LO-status structure. When your application no longer needs this status information, use the ifx_lo_stat_free() function to deallocate the LO-status structure.

Return codes**0**

The function was successful.

-1

The function was not successful.

The ifx_lo_stat_mtime_sec() function

The ifx_lo_stat_mtime_sec() function returns the time of last modification for a smart large object.

Syntax

```
mint ifx_lo_stat_mtime_sec(LO_stat)
    ifx_lo_stat_t *LO_stat;
```

LO_stat

A pointer to an LO-status structure that ifx_lo_stat() allocates and completes with status information.

Usage

The resolution of the time that the ifx_lo_stat_mtime_sec() function returns is seconds.

The status information for the smart large object is in the LO-status structure to which *LO_stat* points. The ifx_lo_stat() function allocates this structure and completes it with the status information for a particular smart large object. Therefore, you must precede a call to ifx_lo_stat_mtime_sec() with a call to ifx_lo_stat().

Return codes**>=0**The last-modification time for the smart large object that *LO_stat* identifies.**-1**

The function was not successful.

The ifx_lo_stat_refcnt() function

The ifx_lo_stat_refcnt() function returns the number of references to a smart large object.

Syntax

```
mint ifx_lo_stat_refcnt(LO_stat)
    ifx_lo_stat_t *LO_stat;
```

LO_stat

A pointer to an LO-status structure that **ifx_lo_stat()** allocates and completes with status information.

Usage

The *refcnt* argument is the reference count for a smart large object. This count indicates the number of persistently stored LO-pointer (**ifx_lo_t**) structures that currently exist for the smart large object. The database server assumes that it can safely remove the smart large object and reuse any resources that are allocated to it when the reference count is zero and any of the following conditions exist:

- The transaction in which the reference count is decremented commits.
- The connection terminates and the smart large object is created during this connection but its reference count is not incremented.

The database server increments a reference counter when it stores the LO-pointer structure for a smart large object in a row.

The status information for the smart large object is in the LO-status structure to which *LO_stat* points. The *ifx_lo_stat()* function allocates this structure and fills it with the status information for a particular smart large object. Therefore, you must precede a call to *ifx_lo_stat_refcnt()* with a call to *ifx_lo_stat()*.

Return codes

>=0

The reference count for the smart large object that *LO_stat* identifies.

-1

The function was not successful.

The *ifx_lo_stat_size()* function

The *ifx_lo_stat_size()* function returns the size, in bytes, of a smart large object.

Syntax

```
mint ifx_lo_stat_size(LO_stat, size)
ifx_lo_stat_t *LO_stat;
ifx_int8_t *size;
```

LO_stat

A pointer to an LO-status structure that *ifx_lo_stat()* allocates and completes with status information.

size

A pointer to an **ifx_int8_t** structure that *ifx_lo_stat_size()* fills in with the size bytes, of the smart large object.

Usage

The status information for the smart large object is in the LO-status structure to which *LO_stat* points. The *ifx_lo_stat()* function allocates this structure and fills it with the status information for a particular smart large object. Therefore, you must precede a call to *ifx_lo_stat_size()* with a call to *ifx_lo_stat()*.

Return codes**0**

The function was successful.

-1

The function was not successful.

The ifx_lo_tell() function

The `ifx_lo_tell()` function returns the current file or seek position for an open smart large object.

Syntax

```
mint ifx_lo_tell(LO_fd, seek_pos)
mint LO_fd;
ifx_int8_t *seek_pos;
```

LO_fd

The LO file descriptor for the open smart large object whose seek position you want to determine.

seek_pos

A pointer to the 8-byte integer that identifies the current seek position.

Usage

The seek position is the offset for the next read or write operation on the smart large object that is associated with the LO file descriptor, `LO_fd`. The `ifx_lo_tell()` function returns this seek position in the user-defined `int8` variable, `seek_pos`.

Return codes**0**

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The ifx_lo_to_buffer() function

The `ifx_lo_to_buffer()` function copies a specified number of bytes from a smart large object into a user-defined buffer.

Syntax

```
mint ifx_lo_to_buffer(LO_ptr, size, buf_ptr)
ifx_lo_t *LO_ptr;

mint size;
char **buf_ptr;

mint error;
```

LO_ptr

The LO-pointer structure for the smart large object from which you want to copy the data.

size

A **mint** that identifies the number of bytes to copy from the smart large object

buf_ptr

A doubly indirect pointer to a user-defined buffer to which you want to copy the data.

error

Contains the address of the **mint** that holds the error code that `ifx_lo_to_buffer()` sets

Usage

The `ifx_lo_to_buffer()` function copies bytes, up to the size that the *size* argument specifies from the smart large object that the *LO_ptr* argument identifies. The read operation from the smart large object starts at a zero-byte offset. If the smart large object is smaller than the *size* value, `ifx_lo_to_buffer()` copies only the number of bytes in the smart large object. If the smart large object contains more than *size* bytes, the `ifx_lo_to_buffer()` function only copies up to *size* bytes into the user-defined buffer.

When **buf_ptr** is NULL, `ifx_lo_to_buffer()` allocates the memory for the user-defined buffer. Otherwise, the function assumes that you have allocated memory that *buf_ptr* identifies.

Return codes

0

The number of bytes copied from the smart large object to the user-defined buffer that *buf_ptr* identifies.

-1

The function was not successful.

The `ifx_lo_truncate()` function

The `ifx_lo_truncate()` function truncates a smart large object at a specified byte position.

Syntax

```
mint ifx_lo_truncate(LO_fd, offset)
    mint LO_fd;
    ifx_int8_t *offset;
```

LO_fd

The LO file descriptor for the open smart large object whose value you want to truncate.

offset

A pointer to the 8-byte integer that identifies the offset at which the truncation of the smart large object begins.

Usage

The `ifx_lo_truncate()` function sets the last valid byte of a smart large object to the specified *offset* value. If this *offset* value is beyond the current end of the smart large object, you actually extend the smart large object. If this *offset* value is less than the current end of the smart large object, the database server reclaims all storage, from the position that *offset* indicates to the end of the smart large object.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the failure.

The `ifx_lo_unlock()` function

The `ifx_lo_unlock()` function allows you to unlock a range of bytes in a smart large object that was locked by the `ifx_lo_lock()` function.

Syntax

```
mint ifx_lo_unlock(lofd, offset, whence, range)
    mint lofd;
    int8 *offset;
    mint whence;

    int8 *range;
```

LO_fd

The LO-file descriptor for the smart large object in which to unlock the range of bytes.

offset

A pointer to the 8-byte integer (INT8) that specifies the offset within the smart large object at which unlocking is to begin.

whence

An integer constant that specifies from what point the offset is calculated: the beginning of the smart large object, the current position within the smart large object, or the end of the smart large object.

range

A pointer to the 8-byte integer (INT8) that specifies the number of bytes to unlock.

Usage

The `ifx_lo_unlock()` function unlocks the number of bytes specified by *nbytes*, beginning at the offset specified by *offset* and *whence*, for the smart large object specified by *LO_fd*. Before calling `ifx_lo_unlock()`, you must obtain a valid LO-file descriptor by calling either `ifx_lo_create()` to create a new smart large object or by calling `ifx_lo_open()` to open an existing smart large object.

Return codes

0

The function was successful

< 0

The function was unsuccessful. The value returned is the **sqlcode**, which is the number of the HCL Informix® error message.

The ifx_lo_write() function

The ifx_lo_write() function writes a specified number of bytes of data to an open smart large object.

Syntax

```
mint ifx_lo_write(LO_fd, buf, nbytes, error)
  mint LO_fd;
  char *buf;
  mint nbytes;
  mint *error;
```

LO_fd

The LO file descriptor for the smart large object to which to write.

buf

A pointer to a buffer that contains the data that the function writes to the smart large object.

nbytes

The number of bytes to write to the smart large object. With a minimum length of 0, this value must be less than 2 GB.

error

A pointer to a **mint** that contains the error code that ifx_lo_write() sets.

Usage

The ifx_lo_write() function writes *nbytes* of data to the smart large object that the *LO_fd* file descriptor identifies. The write begins at the current seek position for *LO_fd*. You can use the ifx_lo_tell() function to obtain the current seek position.

The function obtains the data from the user-defined buffer to which *buf* points. The *buf* buffer must be less than 2 gigabytes in size.

If the database server writes less than *nbytes* of data to the smart large object, the ifx_lo_write() function returns the number of bytes that it wrote and sets the *error* value to point to a value that indicates the reason for the incomplete write operation. This condition can occur when the sbspace runs out of space.

Return codes

>=0

The number of bytes that the function has written from the *buf* character buffer to the open smart large object.

-1

The function was not successful; examine the *error* for a detailed error code.

The ifx_lo_writewithseek() function

The `ifx_lo_writewithseek()` function performs a seek operation and then writes a specified number of bytes of data to an open smart large object.

Syntax

```

mint ifx_lo_writewithseek(LO_fd, buf, nbytes, offset, whence, error)
    mint LO_fd;
    char *buf;
    mint nbytes;
    ifx_int8_t *offset;
    mint whence;
    mint *error;

```

LO_fd

The LO file descriptor for the smart large object to which to write.

buf

A pointer to a buffer that contains the data that the function writes to the smart large object.

nbytes

The number of bytes to write to the smart large object. This value cannot exceed 2 gigabytes.

offset

A pointer to the 8-byte integer (INT8) offset from the starting seek position.

whence

A **mint** value that identifies the starting seek position.

error

A pointer to a **mint** that contains the error code that `ifx_lo_writewithseek()` sets.

Usage

The `ifx_lo_writewithseek()` function writes *nbytes* of data to the smart large object that the *LO_fd* file descriptor identifies. The function obtains the data to write from the user-defined buffer to which *buf* points. The buffer must be less than 2 gigabytes in size.

The write begins at the seek position of *LO_fd* that the *offset* and *whence* arguments indicate, as follows:

- The *whence* argument identifies the position from which to start the seek.

Valid values include the following constants, which the `locator.h` header file defines.

Whence constant

Starting seek position

LO_SEEK_SET

The start of the smart large object

LO_SEEK_CUR

The current seek position in the smart large object

LO_SEEK_END

The end of the smart large object

- The *offset* argument identifies the offset, in bytes, from the starting seek position (that the *whence* argument specifies) to which the seek position should be set.

If the database server writes less than *nbytes* of data to the smart large object, the `ifx_lo_writewithseek()` function returns the number of bytes that it wrote and sets the *error* value to point to a value that indicates the reason for the incomplete write operation. This condition can occur when the sbspace runs out of space.

Return codes

>=0

The number of bytes that the function has written from the *buf* character buffer to the smart large object.

-1

The function was not successful; examine the *error* for a detailed error code.

The `ifx_lvar_alloc()` function

The `ifx_lvar_alloc()` function specifies whether to allocate memory when fetching **lvvarchar** data.

Syntax

```
mint ifx_lvar_alloc(mint alloc)
mint alloc;
```

alloc

The value of the allocation flag; either **1** or **0**

Usage

When the flag is set to 1, ESQL/C automatically performs this memory allocation. You can use a flag value of 1 before a `SELECT` statement when you are unsure of the amount of data that the `SELECT` statement returns. When the flag is set to 0, ESQL/C does not automatically perform this memory allocation.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the error.

The ifx_putenv() function

The ifx_putenv() function changes the value of an existing environment variable, creates an environment variable, or removes a variable from the runtime environment.

Syntax

```
int ifx_putenv( envstring );
const char *envstring;
```

envstring

A pointer to a string of the form *varname=string*, in which *varname* is the name of the environment variable to add or modify and *string* is the variable value.

Usage

The ifx_putenv() function adds new environment variables or modifies the values of existing environment variables in the **InetLogin** structure. These variables define the environment in which a process executes. If *varname* is already part of the environment, ifx_putenv() replaces the existing value with *string*; otherwise, ifx_putenv() adds *varname* to the environment, with the value *string*.

To remove a variable from the runtime environment, specify *varname* to its default value. If the default value is NULL, setting the variable to a null string with ifx_putenv() effectively removes it from the runtime environment. If the default value of the variable is not NULL, then setting the variable to a null string with ifx_putenv() resets the variable to its default value, but does not remove it from the runtime environment.

The ifx_putenv() function sets HCL Informix® variables first and then other variables. For a list of Informix® environment variables, see [Fields of the InetLogin structure on page 36](#).

The following call to the ifx_putenv() function changes the value of the **INFORMIXDIR** environment variable:

```
ifx_putenv( "informixdir=c:\informix" );
```

This function affects only the environment variable of the current process. The environment of the command processor does not change.

Return codes

0

The call to ifx_putenv() was successful.

-1

The call to `ifx_putenv()` was not successful.

The `ifx_strdate()` function

The `ifx_strdate()` function converts a character string to an internal DATE.

Syntax

```
mint ifx_strdate(str, jdate, dbcentury)
char *str;
int4 *jdate;
char dbcentury;
```

str

A is a pointer to the string that contains the date to convert.

jdate

A pointer to a **int4** integer that receives the internal DATE value for the *str* string.

dbcentury

Can be one of the following characters, which determines which century to apply to the year portion of the date:

R

Present. The function uses the two high-order digits of the current year to expand the year value.

P

Past. The function uses the past and present centuries to expand the year value. It compares these two dates against the current date and uses the century that is before the current century. If both dates are before the current date, the function uses the century closest to the current date.

F

Future. The function uses the present and the next centuries to expand the year value. It compares these centuries against the current date and uses the century that is later than the current date. If both dates are later than the current date, the function uses the date closest to the current date.

C

Closest. The function uses the past, present, and next centuries to expand the year value. It chooses the century that is closest to the current date.

Usage

For the default locale, US English, the `ifx_strdate()` function determines how to format the character string with the following precedence:

1. The format that the **DBDATE** environment variable specifies (if **DBDATE** is set). For more information about **DBDATE**, see the *HCL® Informix® Guide to SQL: Reference*.
2. The format that the **GL_DATE** environment variable specifies (if **GL_DATE** is set). For more information about **GL_DATE**, see the *HCL® Informix® GLS User's Guide*.
3. The default date form: `mm/dd/yyyy`. You can use any nonnumeric character as a separator between the month, day, and year. You can express the year as four digits (2007) or as two digits (07).

When you use a nondefault locale and do not set the **DBDATE** or **GL_DATE** environment variable, `ifx_strdate()` uses the date end-user format that the client locale defines. For more information, see the *HCL® Informix® GLS User's Guide*.

When you use a two-digit year in the date string, the `ifx_strdate()` function uses the value of the `dbcentury` argument to determine which century to use. If you do not set the `dbcentury` argument, `ifx_strdate()` uses the **DBCENTURY** environment variable to determine which century to use. If you do not set **DBCENTURY**, `ifx_strdate()` assumes the current century for two-digit years. For information about the **DBCENTURY** environment variable, see the *HCL® Informix® Guide to SQL: Reference*.

Return codes

0

The conversion was successful.

< 0

The conversion failed.

-1204

The `str` parameter specifies an invalid year.

-1205

The `str` parameter specifies an invalid month.

-1206

The `str` parameter specifies an invalid day.

-1212

Data conversion format must contain a month, day, or year component. **DBDATE** specifies the data conversion format.

-1218

The date specified by the `str` argument does not properly represent a date.

The `ifx_var_alloc()` function

The `ifx_var_alloc()` function allocates memory for the data buffer of an **lvarchar** or **var binary** host variable.

Syntax

var binary

```
mint ifx_var_alloc(var_bin, var_size)
var binary **var_bin
int4 var_size;
```

lvvarchar

```
mint ifx_var_alloc(lvar, var_size)
lvvarchar **lvar
int4 var_size;
```

var_bin

The address of the **var binary** pointer host variable whose data buffer is allocated.

lvar

The address of the **lvvarchar pointer** host variable whose data buffer is allocated.

var_size

The size, in bytes, of the data buffer to allocate.

Usage

The allocation flag of the `ifx_var_flag()` function notifies IBM® Informix® ESQL/C of the allocation method to use for the data buffer. If you set the allocation flag in `ifx_var_flag()` to 0, you must explicitly allocate memory for the data buffer of a **var binary** host variable with the `ifx_var_alloc()` function.



Important: Whether you allocate memory or allow Informix® ESQL/C to allocate the memory for you, you must free the allocated memory by using the `ifx_var_dealloc()` function.

Return codes

0

The function was successful.

<0

The function was not successful and the return value indicates the cause of the error.

The `ifx_var_dealloc()` function

The `ifx_var_dealloc()` function deallocates the memory that was allocated for the data buffer of a **var binary** host variable.

Syntax

var binary

```
mint ifx_var_dealloc(var_bin)
var binary **var_bin;
```

lvvarchar

```
mint ifx_var_dealloc(lvar)
lvvarchar **lvar;
```

var_bin

The address of the **var binary** pointer host variable whose data buffer is deallocated.

lvar

The address of the **lvarchar pointer** host variable whose data buffer is allocated.

Usage

The allocation flag of the `ifx_var_flag()` function tells IBM® Informix® ESQL/C which allocation method to use for the data buffer. Regardless of whether Informix® ESQL/C (allocation flag set to 1) or your application (allocation flag set to 0) allocates the memory, you must explicitly deallocate memory that was allocated to an **lvarchar** or the data buffer of **var binary** host variable.

Return codes**0**

The function was successful.

<0

The function was not successful and the return value indicates the cause of the error.

The `ifx_var_flag()` function

The `ifx_var_flag()` function determines how memory is allocated for the data buffer of an **lvarchar** or **var binary** host variable.

Syntax**var binary**

```
mint ifx_var_flag(var_bin, flag)
  var binary **var_bin;
  int2 flag;
```

lvarchar

```
mint ifx_var_flag(lvar, flag)
  lvarchar **lvar;
  int2 flag;
```

flag

The **int2** value of the allocation flag, either `0` or `1`.

var_bin

The address of the **var binary** host variable.

lvar

The address of the **lvarchar pointer** host variable.

Usage

The value of the *flag* argument is the allocation flag. It determines who handles memory allocation for the data of the *var_bin* host variable, as follows:

- When *flag* is one, IBM® Informix® ESQL/C automatically performs this memory allocation.

You can use a *flag* value of 1 before a SELECT statement when you are unsure of the amount of data that the SELECT returns.

- When *flag* is zero, Informix® ESQL/C does not automatically perform this memory allocation.

When you set *flag* to 0, you must allocate memory for the data buffer of the *lvar* or *var_bin* variable with the `ifx_var_alloc()` functions.

If you do not call the `ifx_var_flag()` function for an **lvarchar** or **var binary** host variable, Informix® ESQL/C allocates memory for its data buffer. Whether you allocate memory for the **lvarchar** or **var binary** variable, or allow Informix® ESQL/C to do it for you, you must free the memory with the `ifx_var_dealloc()` function.

Return codes

0

The function was successful.

<0

The function was *not* successful and the return value indicates the cause of the error.

The `ifx_var_freevar()` function

The `ifx_var_freevar()` function frees memory that has been allocated for the **var binary** and **lvarchar pointer** host variables.

Syntax

```
int ifx_var_freevar(var_bin)
var binary *var_bin;
```

var_bin

The address of the **var binary** or **lvarchar pointer** host variable.

Usage

Whenever you have a **var binary** or **lvarchar pointer** host variable, as shown in the following example, you must explicitly free memory that is allocated for it by using the `ifx_var_freevar()` function.

```
EXEC SQL var binary 'polygon' poly;
EXEC SQL lvarchar *c;
```

The following example illustrates the use of `ifx_var_freevar()`. You must explicitly free memory that has been allocated for **var binary** and **lvarchar pointer** host variables by using the `ifx_var_freevar()` function.

```
ifx_var_freevar(&poly);
ifx_var_freevar(&c);
```

If you do not use `ifx_var_dealloc()` to deallocate memory that has been allocated for the data buffer of the **var binary** host variable, `ifx_var_freevar()` will do so. It then frees the memory of the **var binary** and **lvarchar pointer** host variables. In the preceding example, after `ifx_var_freevar()` was called, *poly* and *c* would be set to null.

Return codes

0

The function was successful

<0

The function was not successful and the return value indicates the cause of the error

The ifx_var_getdata() function

The `ifx_var_getdata()` function returns the data from an **lvarchar** or **var binary** host variable.

Syntax

var binary

```
void *ifx_var_getdata(var_bin)
var binary **var_bin;
```

lvarchar

```
void *ifx_var_getdata(lvar)
lvarchar **lvar;
```

var_bin

The address of the **var binary** host variable whose data is retrieved.

lvar

The address of the **lvarchar pointer** host variable whose data is retrieved.

Usage

The `ifx_var_getdata()` function returns the data as a **void *** pointer. Your IBM® Informix® ESQL/C application must cast this pointer to the correct data type. When you use `ifx_var_getdata()` on an **lvarchar pointer**, you must cast the returned (void) pointer to a C-language **character pointer** (`char *`).

Return codes

Null pointer

The function was not successful.

Valid pointer to the data buffer

The function was successful.

The ifx_var_getlen() function

The ifx_var_getlen() function returns the length of the data in an **lvarchar pointer** or **var binary** host variable.

Syntax

var binary

```
mint ifx_var_getlen(var_bin)
var binary **var_bin;
```

lvarchar

```
mint ifx_var_getlen(lvar)
lvarchar **lvar;
```

var_bin

The address of the var binary host variable whose length is returned.

lvar

The address of the lvarchar pointer host variable whose length is returned.

Usage

The length that the ifx_var_getlen() function returns is the number of bytes that have been allocated for the data buffer of the *lvar* or *var_bin* host variable.

If you get an **lvarchar pointer** or **var binary** from a descriptor area by using the DATA clause of a GET DESCRIPTOR statement, the value is null terminated. If you use ifx_var_getlen() on such a variable, the length returned includes the null terminator. To get the correct length use the LENGTH clause of the GET DESCRIPTOR statement.

Return codes

>=0

The length of the data buffer for the *var_bin* host variable.

<0

The function was not successful.

The ifx_var_isnull() function

The ifx_var_isnull() function checks whether an **lvarchar** or **var binary** host variable contains a null value.

Syntax

var binary

```
mint ifx_var_isnull(var_bin)
var binary **var_bin;
```

lvarchar

```
mint ifx_var_isnull(lvar)
    lvarchar **lvar;
```

var_bin

The address of the **var binary** host variable.

lvar

The address of the **lvarchar pointer** host variable.

Usage

The `ifx_var_isnull()` function checks for a null value in an **lvarchar** or **var binary** host variable. To determine whether the IBM® Informix® ESQL/C host variable of any other data type contains null, use the `risnull()` library function.

Return codes**0**

The opaque-type data is not a null value.

1

The opaque-type data is a null value.

The `ifx_var_setdata()` function

The `ifx_var_setdata()` function stores data in an **lvarchar** or **var binary** host variable.

Syntax**var binary**

```
mint ifx_var_setdata(var_bin, buffer, buf_len)
    var binary **var_bin;
    char *buffer;
    int4 buf_len;
```

lvarchar

```
mint ifx_var_setdata(lvar, buffer, buf_len)
    lvarchar **lvar;
    char *buffer;
    int4 buf_len;
```

buffer

A character buffer that contains the data to store in the *lvar* or *var_bin* host variable.

buf_len

The length, in bytes, of the buffer.

var_bin

The address of the **var binary** host variable.

lvar

The address of the **lvvarchar pointer** host variable.

Usage

The `ifx_var_setdata()` function stores the data in *buffer* in the data buffer of the *lvar* or *var_bin* host variable. For an **lvvarchar pointer** host variable, IBM® Informix® ESQL/C expects the data inside *buffer* to be null-terminated ASCII data.

Return codes**0**

The function was successful.

<0

The function was not successful and the return value indicates the cause of the error.

The `ifx_var_setlen()` function

The `ifx_var_setlen()` function stores the length of the data buffer for an **lvvarchar** or **var binary** host variable.

Syntax**var binary**

```
mint ifx_var_setlen(var_bin, length)
  var binary **var_bin;
  int4 length
```

lvvarchar

```
mint ifx_var_setlen(lvar, length)
  lvvarchar **lvar;
  int4 length
```

length

The length, in bytes, of the data buffer to allocate for the **var binary** data.

var_bin

The address of the **var binary** host variable.

lvar

The address of the **lvvarchar pointer** host variable.

Usage

The *length* that the `ifx_var_setlen()` function sets is the number of bytes to allocate for the data buffer of the *lvar* or *var_bin* host variable. Call this function to change the size of the data buffer that the `ifx_var_alloc()` function allocated for the *lvar* or *var_bin* host variable.

Return codes**0**

The function was successful.

<0

The function was not successful and the return value indicates the cause of the error.

The ifx_var_setnull() functionThe ifx_var_setnull() function sets an **lvvarchar** or **var binary** host variable to a null value.**Syntax****var binary**

```
mint ifx_var_setnull(var_bin, flag)
  var binary **var_bin;
  mint flag
```

lvvarchar

```
mint ifx_var_setnull(var_bin, flag)
  var binary **var_bin;
  mint flag;
```

var_binThe address of the **var binary** host variable.***lvar***The address of the **lvvarchar pointer** host variable.**flag**

The value 0 to indicate a non-null value or 1 to indicate a null value.

UsageThe ifx_var_setnull() function sets a host variable of type **lvvarchar** or **var binary** to a null value. To set the IBM® Informix® ESQL/C host variable of any other data type to null, use the rsetnull() library function.**Return codes****0**

The function was successful.

<0

The function was not successful and the return value indicates the cause of the error.

The incvasc() functionThe incvasc() function converts a string that conforms to the ANSI SQL standard for an INTERVAL value to an **interval** value.

Syntax

```
mint incvasc(inbuf, invvalue)
char *inbuf;
intrvl_t *invvalue;
```

inbuf

A pointer to a buffer that contains an ANSI-standard INTERVAL string.

invvalue

A pointer to an initialized **interval** variable.

Usage

You must initialize the **interval** variable in *invvalue* with the qualifier that you want this variable to have.

The character string in *inbuf* can have leading and trailing spaces. However, from the first significant digit to the last, *inbuf* can only contain characters that are digits and delimiters that are appropriate to the qualifier fields of the **interval** variable.

If the character string is an empty string, the `incvasc()` function sets the value in *invvalue* to null. If the character string is acceptable, the function sets the value in the **interval** variable and returns zero. Otherwise, the function sets the value in the **interval** value to null.

Return codes

0

The conversion was successful.

-1260

It is not possible to convert between the specified types.

-1261

Too many digits in the first field of **datetime** or **interval**.

-1262

Non-numeric character in **datetime** or **interval**.

-1263

A field in a **datetime** or **interval** value is out of range or incorrect.

-1264

Extra characters at the end of a **datetime** or **interval** value.

-1265

Overflow occurred on a **datetime** or **interval** operation.

-1266

A **datetime** or **interval** value is incompatible with the operation.

-1267

The result of a **datetime** computation is out of range.

-1268

A parameter contains an invalid **datetime** or **interval** qualifier.

Example

The `demo` directory contains this sample program in the file `incvasc.ec`.

```

/*
 * incvasc.ec *

The following program converts ASCII strings into interval (intvl_t)
structure. It also illustrates error conditions involving invalid
qualifiers for interval values.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    mint x;

    EXEC SQL BEGIN DECLARE SECTION;
        interval day to second in1;
    EXEC SQL END DECLARE SECTION;

    printf("INCVASC Sample ESQL Program running.\n\n");

    printf("Interval string #1 = 20 3:10:35\n");
    if(x = incvasc("20 3:10:35", &in1))
        printf("Result = failed with conversion error:%d\n",x);
    else
        printf("Result = successful conversion\n");

    /*
     * Note that the following literal string has a 26 in the hours field
     */
    printf("\nInterval string #2 = 20 26:10:35\n");
    if(x = incvasc("20 26:10:35", &in1))
        printf("Result = failed with conversion error:%d\n",x);
    else
        printf("Result = successful conversion\n");

    /*
     * Try to convert using an invalid qualifier (YEAR to SECOND)
     */
    printf("\nInterval string #3 = 2007-02-11 3:10:35\n");
    in1.in_qual = TU_IENCODE(4, TU_YEAR, TU_SECOND);
    if(x = incvasc("2007-02-11 3:10:35", &in1))
        printf("Result = failed with conversion error:%d\n",x);
    else

```

```

    printf("Result = successful conversion\n");

    printf("\nINCVASC Sample Program over.\n\n");
}

```

Output

```

INCVASC Sample ESQL Program running.

Interval string #1 = 20 3:10:35
Result = successful conversion

Interval string #2 = 20 26:10:35
Result = failed with conversion error:-1263

Interval string #3 = 2007-02-11 3:10:35
Result = failed with conversion error:-1268

INCVASC Sample Program over.

```

The incvfmtasc() function

The `incvfmtasc()` function uses a formatting mask to convert a character string to an **interval** value.

Syntax

```

mint incvfmtasc(inbuf, fmtstring, invvalue)
    char *inbuf;
    char *fmtstring;
    intrvl_t *invvalue;

```

inbuf

A pointer to a buffer that contains the string to convert.

fmtstring

A pointer to the buffer that contains the formatting mask to use for the `inbuf` string. This time-formatting mask contains the same formatting directives that the **DBTIME** environment variable supports. (For a list of these directives, see the description of **DBTIME** in the *HCL® Informix® Guide to SQL: Reference*).

invvalue

A pointer to the initialized **interval** variable.

Usage

You must initialize the **interval** variable in `invvalue` with the qualifier you want this variable to have. The **interval** variable does not need to specify the same qualifier as the formatting mask. When the **interval** qualifier is different from the implied formatting-mask qualifier, `incvfmtasc()` converts the result to appropriate units as necessary. However, both qualifiers must belong to the same interval class: either the **year to month** class or the **day to fraction** class.

All fields in the character string in `inbuf` must be contiguous. In other words, if the qualifier is **hour to second**, you must specify all values for **hour**, **minute**, and **second** somewhere in the string, or `incvfmtasc()` returns an error.

The *inbuf* character string can have leading and trailing spaces. However, from the first significant digit to the last, *inbuf* can contain only digits and delimiters that are appropriate for the qualifier fields that the formatting mask implies.

If the character string is acceptable, the `incvfmtasc()` function sets the **interval** value in *invvalue* and returns zero. Otherwise, the function returns an error code and the **interval** variable contains an unpredictable value.

The formatting directives **%B**, **%b**, and **%p**, which the **DBTIME** environment variable accepts, are not applicable in *fmtstring* because *month name* and *a.m./p.m.* information is not relevant for intervals of time. Use the **%Y** directive if the **interval** is more than 99 years (**%y** can handle only two digits). For hours, use **%H** (not **%I**, because **%I** can represent only 12 hours). If *fmtstring* is an empty string, the function returns an error.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The `demo` directory contains this sample program in the file `incvfmtasc.ec`.

```
/* *incvfmtasc.ec*
The following program illustrates the conversion of two strings
to three interval values.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    char out_str[30];
    char out_str2[30];
    char out_str3[30];
    mint x;

EXEC SQL BEGIN DECLARE SECTION;
    interval day to minute short_time;
    interval minute(5) to second moment;
    interval hour to second long_moment;
EXEC SQL END DECLARE SECTION;

    printf("INCVFMTASC Sample ESQL Program running.\n\n");

    /* Initialize short_time */
    printf("Interval value #1 = 20 days, 3 hours, 40 minutes\n");
    x = incvfmtasc("20 days, 3 hours, 40 minutes",
        "%d days, %H hours, %M minutes", &short_time);
```

```

/*Convert the internal format to ascii in ANSI format, for displaying. */
x = intoasc(&short_time, out_str);
printf("Interval value (day to minute) = %s\n", out_str);

/* Initialize moment */
printf("\nInterval value #2 = 428 minutes, 30 seconds\n");
x = incvfmtasc("428 minutes, 30 seconds",
              "%M minutes, %S seconds", &moment);

/* Convert the internal format to ascii in ANSI format, for displaying. */
x = intoasc(&moment, out_str2);
printf("Interval value (minute to second) = %s\n", out_str2);

/* Initialize long_moment */
printf("\nInterval value #3 = 428 minutes, 30 seconds\n");
x = incvfmtasc("428 minutes, 30 seconds",
              "%M minutes, %S seconds", &long_moment);

/*Convert the internal format to ascii in ANSI format, for displaying. */
x = intoasc(&long_moment, out_str3);
printf("Interval value (hour to second) = %s\n", out_str3);

printf("\nINCVFMTASC Sample Program over.\n\n");
}

```

Output

```

INVCVMTASC Sample ESQL Program running.

Interval value #1 = 20 days, 3 hours, 40 minutes
Interval value (day to minute) = 20 03:40

Interval value #2 = 428 minutes, 30 seconds
Interval value (minute to second) = 428:30

Interval value #3 = 428 minute, 30 seconds
Interval value (hour to second) = 7:08:30

INVCVMTASC Sample Program over.

```

The intoasc() function

The intoasc() function converts the field values of an **interval** variable to an ASCII string that conforms to the ANSI SQL standard.

Syntax

```

mint intoasc(invvalue, outbuf)
    intrvl_t *invvalue;
    char *outbuf;

```

invvalue

A pointer to an initialized **interval** variable to convert.

outbuf

A pointer to the buffer that receives the ANSI-standard INTERVAL string for the value in *invvalue*.

Usage

The `intoasc()` function converts the digits of the fields in the **interval** variable to their character equivalents and copies them to the *outbuf* character string with delimiters (hyphen, space, colon, or period) between them. You must initialize the **interval** variable in *invvalue* with the qualifier that you want the character string to have.

The character string does not include the qualifier or the parentheses that SQL statements use to delimit an INTERVAL literal. The *outbuf* string conforms to ANSI SQL standards. It includes one character for each delimiter (hyphen, space, colon, or period) plus fields with the following sizes.

Field**Field size****Leading field**

As specified by precision

Fraction

As specified by precision

All other fields

Two digits

An **interval** value with the **day(5) to fraction(5)** qualifier produces the maximum length of output. The string equivalent contains 16 digits, 4 delimiters, and the null terminator, for a total of 21 bytes:

```
DDDDD HH:MM:SS.FFFFF
```

If you do not initialize the qualifier of the **interval** variable, the `intoasc()` function returns an unpredictable value, but this value does not exceed 21 bytes.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The `demo` directory contains this sample program in the file `intoasc.ec`.

```
/*
 * intoasc.ec *

The following program illustrates the conversion of an interval (intvl_t)
into an ASCII string.
```



```

*/

#include <stdio.h>

EXEC SQL include datatype;

main()
{
    mint x;
    char out_str[10];

    EXEC SQL BEGIN DECLARE SECTION;
        interval day(3) to day in1;
    EXEC SQL END DECLARE SECTION;

    printf("INTOASC Sample ESQL Program running.\n\n");

    printf("Interval (day(3) to day) string is '3'\n");
    if(x = incvasc("3", &in1))
        printf("Initial conversion failed with error: %d\n",x);
    else
    {
        /* Convert the internal format to ascii for displaying */
        intoasc(&in1, out_str);
        printf("\tInterval value after conversion is '%s'\n", out_str);
    }

    printf("\nINTOASC Sample Program over.\n\n");
}

```

Output

```

INTOASC Sample ESQL Program running.

Interval (day(3) to day) string is '3'
Interval value afer conversion is '  3'

INTOASC Sample Program over.

```

The intofmtasc() function

The intofmtasc() function uses a formatting mask to convert an **interval** variable to a character string.

Syntax

```

mint intofmtasc(invvalue, outbuf, buflen, fmtstring)
    intrvl_t *invvalue;
    char *outbuf;
    mint buflen;
    char *fmtstring;

```

invvalue

A pointer to an initialized **interval** variable to convert.

outbuf

A pointer to the buffer that receives the string for the value in *invvalue*.

buflen

The length of the *outbuf* buffer.

fmtstring

A pointer to the buffer that contains the formatting mask to use for the *outbuf* string. This time-formatting mask contains the same formatting directives that the **DBTIME** environment variable supports. (For a list of these directives, see the description of **DBTIME** in the *HCL® Informix® Guide to SQL: Reference*).

Usage

You must initialize the **interval** variable in *invvalue* with the qualifier that you want the character string to have. If you do not initialize the **interval** variable, the function returns an unpredictable value. The character string in *outbuf* does not include the qualifier or the parentheses that SQL statements use to delimit an INTERVAL literal.

The formatting mask, *fmtstring*, does not need to imply the same qualifiers as the **interval** variable. When the implied formatting-mask qualifier is different from the **interval** qualifier, `intofmtasc()` converts the result to appropriate units, as necessary (as if it called the `invextend()` function). However, both qualifiers must belong to the same class: either the **year to month** class or the **day to fraction** class.

If *fmtstring* is an empty string, the `intofmtasc()` function sets *outbuf* to an empty string.

The formatting directives **%B**, **%b**, and **%p**, which the **DBTIME** environment variable accepts, are not applicable in *fmtstring* because *month name* and *a.m./p.m.* information is not relevant for intervals of time. Use the **%Y** directive if the **interval** is more than 99 years (**%y** can handle only two digits). For hours, use **%H** (not **%I**, because **%I** can represent only 12 hours). If *fmtstring* is an empty string, the function returns an error.

If the character string and the formatting mask are acceptable, the `intofmtasc()` function sets the **interval** value in *invvalue* and returns zero. Otherwise, the function returns an error code and the **interval** variable contains an unpredictable value.

Return codes

0

The conversion was successful.

<0

The conversion failed.

Example

The `demo` directory contains this sample program in the file `intofmtasc.ec`.

```
/*
 *intofmtasc.ec*
 The following program illustrates the conversion of interval values
 to ASCII strings with the specified formats.
```

```

*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    char out_str[60];
    char out_str2[60];
    char out_str3[60];
    mint x;

    EXEC SQL BEGIN DECLARE SECTION;
        interval day to minute short_time;
        interval minute(5) to second moment;
    EXEC SQL END DECLARE SECTION;

    printf("INTOFMTASC Sample ESQL Program running.\n\n");

    /* Initialize short_time (day to minute) interval value */
    printf("Interval string #1 = '20 days, 3 hours, 40 minutes'\n");
    x = incvfmtasc("20 days, 3 hours, 40 minutes",
        "%d days, %H hours, %M minutes", &short_time);
    /* Turn the interval into ascii string of a certain format. */
    x = intofmtasc(&short_time, out_str, sizeof(out_str),
        "%d days, %H hours, %M minutes to go!");
    printf("\tFormatted value: %s\n", out_str);

    /* Initialize moment (minute(5) to second interval value */
    printf("\nInterval string #2: '428 minutes, 30 seconds'\n");
    x = incvfmtasc("428 minutes, 30 seconds",
        "%M minutes, %S seconds", &moment);

    /* Turn each interval into ascii string of a certain format. Note
     * that the second and third calls to intofmtasc both use moment
     * as the input variable, but the output strings have different
     * formats.
     */
    x = intofmtasc(&moment, out_str2, sizeof(out_str2),
        "%M minutes and %S seconds left.");
    x = intofmtasc(&moment, out_str3, sizeof(out_str3),
        "%H hours, %M minutes, and %S seconds still left.");

    /* Print each resulting string */
    printf("\tFormatted value: %s\n", out_str2);
    printf("\tFormatted value: %s\n", out_str3);

    printf("\nINTOFMTASC Sample Program over.\n\n");
}

```

Output

```
INTOFMTASC Sample ESQL Program running.
```

```
Interval string #1: '20 days, 3 hours, 40 minutes'
Formatted value: 20 days, 03 hours, 40 minutes to go!
```

```
Interval string #2: '428 minutes, 30 seconds'
Formatted value: 428 minutes and 30 seconds left.
Formatted value: 07 hours, 08 minutes, and 30 seconds still left.

INTOFMTASC Sample Program over.
```

The invdivdbl() function

The invdivdbl() function divides an **interval** value by a numeric value.

Syntax

```
mint invdivdbl(iv, num, ov)
    intrvl_t *iv;
    double num;
    intrvl_t *ov;
```

iv

A pointer to an **interval** variable to be divided.

num

A numeric divisor value.

ov

A pointer to an **interval** variable with a valid qualifier.

Usage

The input and output qualifiers must both belong to the same **interval** class: either the **year to month** class or the **day to fraction(5)** class. If the qualifier for *ov* is different from the qualifier for *iv* (within the same class), the invdivdbl() function extends the result (as the invextend() function defines).

The invdivdbl() function divides the **interval** value in *iv* by *num* and stores the result in *ov*.

The value in *num* can be either a positive or a negative value.

Return codes

0

The division was successful.

<0

The division failed.

-1200

A numeric value is too large (in magnitude).

-1201

A numeric value is too small (in magnitude).

-1202

The *num* parameter is zero (0).

-1265

Overflow occurred on an **interval** operation.

-1266

An **interval** value is incompatible with the operation.

-1268

A parameter contains an invalid **interval** qualifier.

Example

The `demo` directory contains this sample program in the file `invdivdbl.ec`.

```

/*
 * invdivdbl.ec *

The following program divides an INTERVAL type variable by a numeric
value and stores the result in an INTERVAL variable. The operation is
done twice, using INTERVALs with different qualifiers to store the result.
*/

#include <stdio.h>

EXEC SQL include datatype;

main()
{
    char out_str[16];

    EXEC SQL BEGIN DECLARE SECTION;
        interval day to second daytosec1;
        interval hour to minute hrtomin;
        interval day to second daytosec2;
    EXEC SQL END DECLARE SECTION;

    printf("INVDIVDBL Sample ESQL Program running.\n\n");

    /* Input is 3 days, 5 hours, 27 minutes, and 30 seconds */
    printf("Interval (day to second) string = '3 5:27:30'\n");
    incvasc("3 5:27:30", &daytosec1);

    /* Divide input value by 3.0, store in hour to min interval */
    invdivdbl(&daytosec1, (double) 3.0, &hrtomin);

    /* Convert the internal format to ascii for displaying */
    intoasc(&hrtomin, out_str);
    printf("Divisor (double)           =           3.0 \n");
    printf("-----\n");
    printf("Quotient #1 (hour to minute) = '%s'\n", out_str);

    /* Divide input value by 3.0, store in day to sec interval variable */

```

```

    invdivdbl(&hrtomin, (double) 3.0, &daytosec2);

    /* Convert the internal format to ascii for displaying */
    intoasc(&daytosec2, out_str);
    printf("Quotient #2 (day to second)    = '%s'\n", out_str);

    printf("\nINVDIVDBL Sample Program over.\n\n");
}

```

Output

```

INVDIVDBL Sample ESQL Program running.

Interval (day to second) string = '3 5:27:30'
Divisor (double)                =          3.0
-----
Quotient #1 (hour to minute)    = ' 25:49'
Quotient #2 (day to second)    = ' 1 01:49:10'

INVDIVDBL Sample Program over.

```

The invdivinv() function

The `invdivinv()` function divides an **interval** value by another **interval** value.

Syntax

```

mint invdivinv(i1, i2, num)
    intrvl_t *i1, *i2;
    double *num;

```

i1

A pointer to an **interval** variable that is the dividend.

i2

A pointer to an **interval** variable that is the divisor.

num

A pointer to the **double** value that is the quotient.

Usage

The `invdivinv()` function divides the **interval** value in *i1* by *i2*, and stores the result in *num*. The result can be either positive or negative.

Both the input and output qualifiers must belong to the same **interval** class: either the **year to month** class or the **day to fraction(5)** class. If necessary, the `invdivinv()` function extends the **interval** value in *i2* to match the qualifier for *i1* before the division.

Return codes

0

The division was successful.

<0

The division failed.

-1200

A numeric value is too large (in magnitude).

-1201

A numeric value is too small (in magnitude).

-1266

An **interval** value is incompatible with the operation.

-1268

A parameter contains an invalid **interval** qualifier.

Example

The `demo` directory contains this sample program in the file `invdivinv.ec`.

```

/*
 * invdivinv.ec *

The following program divides one interval value by another and
displays the resulting numeric value.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    mint x;
    char out_str[16];

    EXEC SQL BEGIN DECLARE SECTION;
        interval hour to minute hrtomin1, hrtomin2;
        double res;
    EXEC SQL END DECLARE SECTION;

    printf("INVDIVINV Sample ESQL Program running.\n\n");

    printf("Interval #1 (hour to minute) = 75:27\n");
    incvasc("75:27", &hrtomin1);
    printf("Interval #2 (hour to minute) = 19:10\n");
    incvasc("19:10", &hrtomin2);

    printf("-----\n");

```

```

    invdivinv(&hrtomin1, &hrtomin2, &res);
    printf("Quotient (double)           = %.1f\n", res);

    printf("\nINVDIVINV Sample Program over.\n\n");
}

```

Output

```

INVDIVINV Sample ESQL Program running.

Interval #1 (hour to minute) = 75.27
Interval #2 (hour to minute) = 19:10
-----
Quotient (double)           = 3.9

INVDIVINV Sample Program over.

```

The invextend() function

The `invextend()` function copies an **interval** value under a different qualifier.

Extending is the operation of adding or dropping fields of an **INTERVAL** value to make it match a given qualifier. For **INTERVAL** values, both qualifiers must belong to the same **interval** class: either the **year to month** class or the **day to fraction(5)** class.

Syntax

```

mint invextend(in_inv, out_inv)
    intrvl_t *in_inv, *out_inv;

```

in_inv

A pointer to the **interval** variable to extend.

out_inv

A pointer to the **interval** variable with a valid qualifier to use for the extension.

Usage

The `invextend()` function copies the qualifier-field digits of *in_inv* **interval** variable to the *out_inv* **interval** variable. The qualifier of the *out_inv* variable controls the copy.

The function discards any fields in *in_inv* that are to the right of the least-significant field in *out_inv*. The function completes any fields in *out_inv* that are not present in *in_inv* as follows:

- It fills the fields to the right of the least-significant field in *in_inv* with zeros.
- It sets the fields to the left of the most-significant field in *in_inv* to valid **interval** values.

Return codes

0

The conversion was successful.

<0

The conversion failed.

-1266

An **interval** value is incompatible with the operation.

-1268

A parameter contains an invalid **interval** qualifier.

Example

The `demo` directory contains this sample program in the file `invextend.ec`. The example illustrates **interval** extension. In the second result, the output contains zeros in the **seconds** field, and the **days** field has been set to 3.

```

/*
 * invextend.ec *

The following program illustrates INTERVAL extension. It extends an INTERVAL
value to another INTERVAL value with a different qualifier. Note that in the
second example, the output contains zeros in the seconds field and the
days field has been set to 3.
*/

#include <stdio.h>
EXEC SQL include datetime;

main()
{
    mint x;
    char out_str[16];
;
    EXEC SQL BEGIN DECLARE SECTION;
        interval hour to minute hrtomin;
        interval hour to hour hrtohr;
        interval day to second daytosec;
    EXEC SQL END DECLARE SECTION;

    printf("INVEXTEND Sample ESQL Program running.\n\n");

    printf("Interval (hour to minute) value =      75.27\n");
    incvasc("75:27", &hrtomin);

    /* Extend to hour-to-hour and convert the internal format to
     * ascii for displaying
     */
    invextend(&hrtomin, &hrtohr);
    intoasc(&hrtohr, out_str);
    printf("Extended (hour to hour) value =    %s\n", out_str);

    /* Extend to day-to-second and convert the internal format to
     * ascii for displaying
     */
    invextend(&hrtomin, &daytosec);

```

```

intoasc(&daytosec, out_str);
printf("Extended (day to second) value =: %s\n", out_str);

printf("\nINVEXTEND Sample Program over.\n\n");
}

```

Output

```

INVEXTEND Sample ESQL Program running.

Interval (hour to minute) value =    75:27
Extended (hour to hour) value   =     75
Extended (day to second) value  = 3 03:27:00

INVEXTEND Sample Program over.

```

The invmuldbl() function

The invmuldbl() function multiplies an **interval** value by a numeric value.

Syntax

```

mint invmuldbl(iv, num, ov)
    intrvl_t *iv;
    double num;
    intrvl_t *ov;

```

iv

A pointer to the **interval** variable to multiply.

num

The numeric **double** value.

ov

A pointer to the **interval** variable with a valid qualifier.

Usage

The invmuldbl() function multiplies the **interval** value in *iv* by *num* and stores the result in *ov*. The value in *num* can be either positive or negative.

Both the input and output qualifiers must belong to the same **interval** class: either the **year to month** class or the **day to fraction(5)** class. If the qualifier for *ov* is different from the qualifier for *iv* (but of the same class), the invmuldbl() function extends the result (as the invextend() function defines).

Return codes

0

The multiplication was successful.

<0

The multiplication failed.

-1200

A numeric value is too large (in magnitude).

-1201

A numeric value is too small (in magnitude).

-1266

An **interval** value is incompatible with the operation.

-1268

A parameter contains an invalid **interval** qualifier.

Example

The `demo` directory contains this sample program in the file `invmuldbl.ec`. The example illustrates how to multiply an **interval** value by a numeric value. The second multiplication illustrates the result of **interval** multiplication when the input and output qualifiers are different.

```

/*
 * invmuldbl.ec *

The following program multiplies an INTERVAL type variable by a numeric value
and stores the result in an INTERVAL variable. The operation is done twice,
using INTERVALs with different qualifiers to store the result.
*/

#include <stdio.h>

EXEC SQL include datetime;

main()
{
    char out_str[16];

    EXEC SQL BEGIN DECLARE SECTION;
        interval hour to minute hrtomin1;
        interval hour to minute hrtomin2;
        interval day to second daytosec;
    EXEC SQL END DECLARE SECTION;

    printf("INVMULDBL Sample ESQL Program running.\n\n");

    /* input is 25 hours, and 49 minutes */
    printf("Interval (hour to minute)      =      25:49\n");
    incvasc("25:49", &hrtomin1);
    printf("Multiplier (double)           =      3.0\n");
    printf("-----\n");

    /* Convert the internal format to ascii for displaying */
    invmuldbl(&hrtomin1, (double) 3.0, &hrtomin2);
    intoasc(&hrtomin2, out_str);
    printf("Product #1 (hour to minute) =      '%s'\n", out_str);
}

```

```

/* Convert the internal format to ascii for displaying */
invmuldbl(&hrtomin1, (double) 3.0, &daytosec);
intoasc(&daytosec, out_str);
printf("Product #2 (day to second)   = '%s'\n", out_str);

printf("\nINVMULDBL Sample Program over.\n\n");
}

```

Output

```

INVMULDBL Sample ESQL Program running.

Interval (hour to minute) =      25:49
Multiplier (double) =      3.0
-----
Product #1 (hour to minute) =    ' 77:27'
Product #2 (day to second)  =    ' 3 05:27:00'

INVMULDBL Sample Program over.

```

The ldchar() function

The ldchar() function copies a fixed-length string into a null-terminated string and removes any trailing blanks.

Syntax

```

void ldchar(from, count, to)
char *from;
mint count;
char *to;

```

from

A pointer to the fixed-length source string.

count

The number of bytes in the fixed-length source string.

to

A pointer to the first byte of a null-terminated destination string. The to argument can point to the same location as the *from* argument, or to a location that overlaps the *from* argument. If so, ldchar() does not preserve the value to which *from* points.

Example

This sample program is in the ldchar.ec file in the demo directory.

```

/*
 * ldchar.ec *

The following program loads characters to specific locations in an array
that is initialized to z's. It displays the result of each ldchar()
operation.
*/

```

```

#include <stdio.h>

main()
{
    static char src1[] = "abcd  ";
    static char src2[] = "abcd g ";
    static char dest[40];

    printf("LDCHAR Sample ESQL Program running.\n\n");

    ldchar(src1, stleng(src1), dest);
    printf("\tSource: [%s]\n\tDestination: [%s]\n\n", src1, dest);

    ldchar(src2, stleng(src2), dest);
    printf("\tSource: [%s]\n\tDestination: [%s]\n", src2, dest);

    printf("\nLDCHAR Sample Program over.\n\n");
}

```

Output

```

LDCHAR Sample ESQL Program running.

Source: [abcd  ]
Destination: [abcd]

Source: [abcd g ]
Destination: [abcd g]

LDCHAR Sample Program over.

```

The rdatestr() function

The `rdatestr()` function converts an internal DATE to a character string.

Syntax

```

mint rdatestr(jdate, outbuf)
    int4 jdate;
    char *outbuf;

```

jdate

The internal representation of the date to format.

outbuf

A pointer to the buffer that receives the string for the `jdate` value.

Usage

For the default locale, US English, the `rdatestr()` function determines how to interpret the format of the character string with the following precedence:

1. The format that the **DBDATE** environment variable specifies (if **DBDATE** is set). For more information about **DBDATE**, see the *HCL® Informix® Guide to SQL: Reference*.
2. The format that the **GL_DATE** environment variable specifies (if **GL_DATE** is set). For more information about **GL_DATE**, see the *HCL® Informix® GLS User's Guide*.
3. The default date form: `mm/dd/yyyy`.

When you use a nondefault locale and do not set the **DBDATE** or **GL_DATE** environment variable, `rdatestr()` uses the date end-user format that the client locale defines. For more information, see the *HCL® Informix® GLS User's Guide*.

Return codes

0

The conversion was successful.

<0

The conversion failed.

-1210

The internal date could not be converted to the character string format.

-1212

Data conversion format must contain a month, day, or year component. **DBDATE** specifies the data conversion format.

Example

The `demo` directory contains this sample program in the `rtoday.ec` file.

```

/*
 * rtoday.ec *

The following program obtains today's date from the system.
It then converts it to ASCII for displaying the result.
*/

#include <stdio.h>

main()
{
    mint errnum;
    char today_date[20];
    int4 i_date;

    printf("RTODAY Sample ESQL Program running.\n\n");

    /* Get today's date in the internal format */
    rtoday(&i_date);

    /* Convert date from internal format into a mm/dd/yyyy string */
    if ((errnum = rdatestr(i_date, today_date)) == 0)
        printf("\n\tToday's date is %s.\n", today_date);
}

```

```

else
    printf("\n\tError %d in converting date to mm/dd/yyyy\n", errnum);

printf("\nRTODAY Sample Program over.\n\n");
}

```

Output

```

RTODAY Sample ESQL Program running.

Today's date is 10/26/2007.

RTODAY Sample Program over.

```

The rdayofweek() function

The rdayofweek() function returns the day of the week as an integer value for an internal DATE.

Syntax

```

mint rdayofweek(jdate)
int4 jdate;

```

jdate

The internal representation of the date.

Return codes

0

Sunday

1

Monday

2

Tuesday

3

Wednesday

4

Thursday

5

Friday

6

Saturday

Example

The `demo` directory contains this sample program in the `rdayofweek.ec` file.

```

/*
 * rdayofweek.ec *

The following program accepts a date entered from the console.
*/

#include <stdio.h>

main()
{
    mint errnum;
    int4 i_date;
    char *day_name;
    char date[20];
    int x;

    static char fmtstr[9] = "mmdyyyy";

    printf("RDAYOFWEEK Sample ESQL Program running.\n\n");

    /* Allow user to enter a date */
    printf("Enter a date as a single string, month.day.year\n");
    gets(date);

    printf("\nThe date string is %s.\n", date);

    /* Put entered date in internal format */
    if (x = rdefmtdate(&i_date, fmtstr, date))
        printf("Error %d on rdefmtdate conversion\n", x);
    else
    {
        /* Figure out what day of the week i_date is */
        switch (rdayofweek(i_date))
        {
            case 0:    day_name = "Sunday";
                       break;
            case 1:    day_name = "Monday";
                       break;
            case 2:    day_name = "Tuesday";
                       break;
            case 3:    day_name = "Wednesday";
                       break;
            case 4:    day_name = "Thursday";
                       break;
            case 5:    day_name = "Friday";
                       break;
            case 6:    day_name = "Saturday";
                       break;
        }
        printf("This date is a %s.\n", day_name);
    }
}

```



```
printf("\nRDAYOFWEEK Sample Program over.\n\n");
}
```

Output

```
RDAYOFWEEK Sample ESQL Program running.

Enter a date as a single string, month.day.year
10.13.07

The date string is 10.13.07.
This date is a Saturday.

RDAYOFWEEK Sample Program over.
```

The rdefmtdate() function

The `rdefmtdate()` function uses a formatting mask to convert a character string to an internal DATE format.

Syntax

```
mint rdefmtdate(jdate, fmtstring, inbuf)
    int4 *jdate;
    char *fmtstring;
    char *inbuf;
```

jdate

A pointer to a **int4** integer value that receives the internal DATE value for the *inbuf* string.

fmtstring

A pointer to the buffer that contains the formatting mask to use the *inbuf* string.

inbuf

A pointer to the buffer that contains the date string to convert.

Usage

The *fmtstring* argument of the `rdefmtdate()` function points to the date-formatting mask, which contains formats that describe how to interpret the date string. For more information about these date formats, see [Format date strings on page 125](#)

The *input* string and the *fmtstring* must be in the same sequential order in terms of month, day, and year. They need not, however, contain the same literals or the same representation for month, day, and year.

You can include the weekday format (`ww`), in *fmtstring*, but the database server ignores that format. Nothing from the *inbuf* corresponds to the weekday format.

The following combinations of *fmtstring* and *input* are valid.

Formatting mask

Input

mmddy

Dec. 25th, 2007

mmddyyy

Dec. 25th, 2007

mmm. dd. yyyy

dec 25 2007

mmm. dd. yyyy

DEC-25-2007

mmm. dd. yyyy

122507

mmm. dd. yyyy

12/25/07

yy/mm/dd

07/12/25

yy/mm/dd

2007, December 25

yy/mm/dd

In the year 2007, the month of December, it is the 25th day

dd-mm-yy

This 25th day of December 2007

If the value stored in *inbuf* is a four-digit year, the `rdefmtdate()` function uses that value. If the value stored in *inbuf* is a two-digit year, the `rdefmtdate()` function uses the value of the **DBCENTURY** environment variable to determine which century to use. If you do not set **DBCENTURY**, IBM® Informix® ESQL/C uses the 20th century. For information about how to set **DBCENTURY**, see the *HCL® Informix® Guide to SQL: Reference*.

When you use a nondefault locale whose dates contain eras, you can use extended-format strings in the *fmtstring* argument of `rdefmtdate()`.

Return codes

If you use an invalid date-string format, `rdefmtdate()` returns an error code and sets the internal DATE to the current date. The following are possible return codes.

0

The operation was successful.

-1204

The **input* parameter specifies an invalid year.

-1205

The **input* parameter specifies an invalid month.

-1206

The **input* parameter specifies an invalid day.

-1209

Because **input* does not contain delimiters between the year, month, and day, the length of **input* must be exactly 6 or 8 bytes.

-1212

**fmtstring* does not specify a year, a month, and a day.

Example

The `demo` directory contains this sample program in the `rdefmtdate.ec` file.

```

/*
 * rdefmtdate.ec *

The following program accepts a date entered from the console,
converts it into the internal date format using rdefmtdate().
It checks the conversion by finding the day of the week.
*/

#include <stdio.h>

main()
{
    mint x;
    char date[20];
    int4 i_date;
    char *day_name;

    static char fmtstr[9] = "mddyyy";

    printf("RDEFMTDATE Sample ESQL Program running.\n\n");

    printf("Enter a date as a single string, month.day.year\n");
    gets(date);

    printf("\nThe date string is %s.\n", date);

    if (x = rdefmtdate(&i_date, fmtstr, date))
        printf("Error %d on rdefmtdate conversion\n", x);
    else
    {
        /* Figure out what day of the week i_date is */
        switch (rdayofweek(i_date))
        {

```

```

    case 0:  day_name = "Sunday";
             break;
    case 1:  day_name = "Monday";
             break;
    case 2:  day_name = "Tuesday";
             break;
    case 3:  day_name = "Wednesday";
             break;
    case 4:  day_name = "Thursday";
             break;
    case 5:  day_name = "Friday";
             break;
    case 6:  day_name = "Saturday";
             break;
        }
    printf("\nThe day of the week is %s.\n", day_name);
}

printf("\nRDEFMTDATE Sample Program over.\n\n");
}

```

Output

```

RDEFMTDATE Sample ESQL Program running.

Enter a date as a single string, month.day.year
080894

The date string is 080894
The day of the week is Monday.

RDEFMTDATE Sample Program over.

```

The rdownshift() function

The `rdownshift()` function changes all the uppercase characters within a null-terminated string to lowercase characters.

Syntax

```

void rdownshift(s)
char *s;

```

s

A pointer to a null-terminated string.

Usage

The `rdownshift()` function refers to the current locale to determine uppercase and lowercase letters. For the default locale, US English, `rdownshift()` uses the ASCII lowercase (a-z) and uppercase (A-Z) letters.

If you use a nondefault locale, `rdownshift()` uses the lowercase and uppercase letters that the locale defines. For more information, see the *HCL® Informix® GLS User's Guide*.

Return codes

This sample program is in the `rdownshift.ec` file in the `demo` directory.

```

/*
 * rdownshift.ec *

 The following program uses rdownshift() on a string containing
 alphanumeric and punctuation characters.
*/

#include <stdio.h>

main()
{
    static char string[] = "123ABCDEFGH'IJK'.;";

    printf("RDOWNSHIFT Sample ESQL Program running.\n\n");

    printf("\tInput string...: [%s]\n", string);
    rdownshift(string);
    printf("\tAfter downshift: [%s]\n", string);

    printf("\nRDOWNSHIFT Sample Program over.\n\n");
}

```

Output

```

RDOWNSHIFT Sample ESQL Program running.

    Input string...: [123ABCDEFGH'IJK'.;]
    After downshift: [123abcdefghijk'.;]

RDOWNSHIFT Sample Program over.

```

The ReleaseConnect() function (Windows™)

The `ReleaseConnect()` function is available only in Windows™ environments. It releases, or terminates, the explicit connection and clears all allocated memory.



Important: IBM® Informix® ESQL/C supports the `ReleaseConnect()` connection library function for compatibility with Version 5.01 Informix® ESQL/C for Windows™ applications. When you write new Informix® ESQL/C applications for Windows™ environments, use the SQL `DISCONNECT` statement to terminate an established explicit connection.

Syntax

```
void *ReleaseConnect ( void *CnctHndl )
```

CnctHndl

A connection handle returned by a previous `GetConnect()` call.

Usage

The `ReleaseConnect()` function maps to a simple SQL `DISCONNECT` statement (one *without* an `ALL`, `CURRENT`, or `DEFAULT` option). The `ReleaseConnect()` call *by itself* is equivalent to the following SQL statement:

```
EXEC SQL disconnect db_connection;
```

In this example, `db_connection` is the name of an existing connection that the `GetConnect()` function has established. You pass this `db_connection` name to `ReleaseConnect()` as an argument; it is a connection handle for the desired connection.

For example, the following code fragment uses `ReleaseConnect()` to close an explicit connection to the **stores7** database on the default database server:

```
void *cnctHndl;
;;

cnctHndl = GetConnect();
EXEC SQL database stores7;
;;

EXEC SQL close database;
cnctHndl = ReleaseConnect( cnctHndl );
```

Call `ReleaseConnect()` once for each connection that `GetConnect()` has established. The `ReleaseConnect()` function closes any open database before it terminates the current connection. It fails if any transactions are open in the current connection.

It is good programming practice to close the database explicitly with the SQL `CLOSE DATABASE` statement before the call to `ReleaseConnect()`



Important: Because the `ReleaseConnect()` function maps to a `DISCONNECT` statement, it sets the `SQLCODE` and `SQLSTATE` status codes to indicate the success or failure of the connection termination request. This behavior differs from `ReleaseConnect()` in Version 5.01 Informix® ESQL/C for Windows™, in which this function did not set the `SQLCODE` and `SQLSTATE` values.

The `ReleaseConnect()` function differs from the `DISCONNECT` statement in the way that it obtains the connection name. `ReleaseConnect()` uses an internally generated name that is stored in the connection handle; you must specify this handle as an argument to the `ReleaseConnect()` call. The `DISCONNECT` statement uses an internally generated connection name only for a connection that a `CONNECT` statement without an `AS` clause has established; if the connection has a user-defined connection name (which the `AS` clause of the `CONNECT` statement specifies), `DISCONNECT` uses this name.

Return codes

CnctHndl

The call to `ReleaseConnect()` was successful if the function has returned a connection handle that matches the one passed to it.

The `rfmtdate()` function

The `rfmtdate()` function uses a formatting mask to convert an internal `DATE` format to a character string.

Syntax

```
mint rfmtdate(jdate, fmtstring, outbuf)
    int4 jdate;
    char *fmtstring;
    char *outbuf;
```

jdate

The internal representation of a date to convert.

fmtstring

A pointer to the buffer that contains the formatting mask to use the *jdate* value.

outbuf

A pointer to the buffer that receives the formatted string for the *jdate* value.

Usage

The *fmtstring* argument of the `rfmtdate()` function points to the date-formatting mask, which contains formats that describe how to format the date string. For more information about these date formats, see [Format numeric strings on page 118](#).

The examples in the following list use the formatting mask in *fmtstring* to convert the integer *jdate*, whose value corresponds to December 25, 2007, to a formatted string *outbuf*. You must specify one or more fields.

Formatting mask

Formatted result

"mmdd"

1225

"mmddy"

122507

"ddmmy"

251207

"yydd"

0725

"yymmdd"

071225

"dd"

25

"yy/mm/dd"

07/12/25

"yy mm dd"

07 12 25

"yy-mm-dd"

07-12-25

"mmm. dd, yyyy"

Dec. 25, 2007

"mmm dd yyyy"

Dec 25 2007

"yyyy dd mm"

2007 25 12

"mmm dd yyyy"

Dec 25 2007

"ddd, mmm. dd, yyyy"

Tue, Dec. 25, 2007

"ww mmm. dd, yyyy"

Tue Dec. 25, 2007

"(ddd) mmm. dd, yyyy"

(Tue) Dec. 25, 2007

"mmyyddmm"

25071225

""

unpredictable result

When you use a nondefault locale whose dates contain eras, you can use extended-format strings in the *fmtstring* argument of *rfmtdate()*.

Return codes

0

The conversion was successful.

-1210

The internal date cannot be converted to month-day-year format.

-1211

The program ran out of memory (memory-allocation error).

-1212

Format string is NULL or invalid.

ExampleThe `demo` directory contains this sample program in the `rfmtdate.ec` file.

```

/*
 * rfmtdate.ec *

The following program converts a date from internal format to
a specified format using rfmtdate().
*/

#include <stdio.h>

main()
{
    char the_date[15];
    int4 i_date;
    mint x;
    int errnum;
    static short mdy_array[3] = { 12, 10, 2007 };

    printf("RFMTDATE Sample ESQL Program running.\n\n");

    if ((errnum = rmdyjul(mdy_array, &i_date)) == 0)
    {

        /*
         * Convert date to "mm-dd-yyyy" format
         */
        if (x = rfmtdate(i_date, "mm-dd-yyyy", the_date))
            printf("First rfmtdate() call failed with error %d\n", x);
        else
            printf("\tConverted date (mm-dd-yyy): %s\n", the_date);

        /*
         * Convert date to "mm.dd.yy" format
         */
        if (x = rfmtdate(i_date, "mm.dd.yy", the_date))
            printf("Second rfmtdate() call failed with error %d\n",x);
        else
            printf("\tConverted date (mm.dd.yy): %s\n", the_date);

        /*
         * Convert date to "mmm ddth, yyyy" format
         */
        if (x = rfmtdate(i_date, "mmm ddth, yyyy", the_date))
            printf("Third rfmtdate() call failed with error %d\n", x);
        else
            printf("\tConverted date (mmm ddth, yyyy): %s\n", the_date);
    }

    printf("\nRFMTDATE Sample Program over.\n\n");
}

```

Output

```
RFMTDATE Sample ESQL Program running.

Converted date (mm-dd-yy): 12-10-2007.
Converted date (mm.dd.yy): 12.10.07.
Converted date (mmm ddth, yyyy): Dec 10th, 2007

RFMTDATE Sample Program over.
```

The rfmtdec() function

The rfmtdec() function uses a formatting mask to convert a **decimal** value to a character string.

Syntax

```
mint rfmtdec(dec_val, fmtstring, outbuf)
dec_t *dec_val;
char *fmtstring;
char *outbuf;
```

dec_val

A pointer to the **decimal** value to format.

fmtstring

A pointer to a character buffer that contains the formatting mask to use for the dec_val value.

outbuf

A pointer to a character buffer that receives the formatted string for the dec_val value.

Usage

The *fmtstring* argument of the rfmtdec() function points to the numeric-formatting mask, which contains characters that describe how to format the **decimal** value. For more information about these formatting characters, see [Format numeric strings on page 118](#).

When you use rfmtdec() to format MONEY values, the function uses the currency symbols that the **DBMONEY** environment variable specifies. If you do not set this environment variable, rfmtdec() uses the currency symbols that the client locale defines. The default locale, US English, defines currency symbols as if you set **DBMONEY** to \$, .. (For a discussion of **DBMONEY**, see the *HCL® Informix® Guide to SQL: Reference*.)

When you use a nondefault locale that has a multibyte code set, rfmtdec() supports multibyte characters in the format string. For more information, see the *HCL® Informix® GLS User's Guide*.

Return codes

0

The conversion was successful.

-1211

The program ran out of memory (memory-allocation error).


```

        x, strings[s]);
    break;
}
f = 0;
while(formats[f])
{
    /*
     * Format DECIMAL num for each of formats[f]
     */
    rfmtdec(&num, formats[f], result);
    /*
     * Display result and bump to next format (f++)
     */
    result[40] = '\0';
    printf("  Format String = '%s'\t", formats[f++]);
    printf("\tResult = '%s'\n", result);
}
++s;                                /* bump to next string */
printf("\n");                          /* separate result groups */
}

printf("\nRFMTDEC Sample Program over.\n\n");
}

```

Output

RFMTDEC Sample ESQL Program running.

String = 210203.204

Format String = '#####'	Result = '** 210203'
Format String = '\$\$\$\$\$\$\$\$.##'	Result = ' \$210203.20'
Format String = '(&&, &&&, &&&.)'	Result = ' 000210,203. '
Format String = '<, <<<, <<<, <<<'	Result = '210,203'
Format String = '\$*****.**'	Result = '\$***210203.20'

String = 4894

Format String = '#####'	Result = ' ** 4894'
Format String = '\$\$\$\$\$\$\$\$.##'	Result = ' \$4894.00'
Format String = '(&&, &&&, &&&.)'	Result = ' 000004,894. '
Format String = '<, <<<, <<<, <<<'	Result = '4,894'
Format String = '\$*****.**'	Result = '\$*****4894.00'

String = 443.334899312

Format String = '#####'	Result = ' ** 443'
Format String = '\$\$\$\$\$\$\$\$.##'	Result = ' \$443.33'
Format String = '(&&, &&&, &&&.)'	Result = ' 0000000443. '
Format String = '<, <<<, <<<, <<<'	Result = ' 443'
Format String = '\$*****.**'	Result = '\$*****443.33'

String = -12344455

Format String = '#####'	Result = ' ** 12344455'
Format String = '\$\$\$\$\$\$\$\$.##'	Result = ' \$12344455.00'
Format String = '(&&, &&&, &&&.)'	Result = '(12,344,455.)'
Format String = '<, <<<, <<<, <<<'	Result = '12,344,455'
Format String = '\$*****.**'	Result = '\$*12344455.00'

RFMTDEC Sample Program over.

The rfmtdouble() function

The rfmtdouble() function uses a formatting mask to convert a **double** value to a character string.

Syntax

```
mint rfmtdouble(dbl_val, fmtstring, outbuf)
double dbl_val;
char *fmtstring;
char *outbuf;
```

dbl_val

The **double** number to format.

fmtstring

A pointer to a character buffer that contains the formatting mask for the value in *dbl_val*.

outbuf

A pointer to a character buffer that receives the formatted string for the value in *dbl_val*.

Usage

The *fmtstring* argument of the rfmtdouble() function points to the numeric-formatting mask, which contains characters that describe how to format the **double** value. For more information about these formatting characters, see [Format numeric strings on page 118](#).

When you use rfmtdouble() to format MONEY values, the function uses the currency symbols that the **DBMONEY** environment variable specifies. If you do not set this environment variable, rfmtdouble() uses the currency symbols that the client locale defines. The default locale, US English, defines currency symbols as if you set **DBMONEY** to \$,.,. (For a discussion of **DBMONEY**, see the *HCL® Informix® Guide to SQL: Reference*.)

When you use a nondefault locale that has a multibyte code set, rfmtdouble() supports multibyte characters in the format string. For more information, see the *HCL® Informix® GLS User's Guide*.

Return codes

0

The conversion was successful.

-1211

The program ran out of memory (memory-allocation error).

-1217

The format string is too large.

Example

The `demo` directory contains this sample program in the file `rfmtdouble.ec`.


```

    ++i;                /* bump to next double */
    printf("\n");        /* separate result groups */
}
printf("\nRFMTDOUBLE Sample Program over.\n\n");
}

```

Output

```

RFMTDOUBLE Sample ESQL Program running.

Double Number = 210203
Format String = '#####'           Result = '      210203'
Format String = '<, <<<, <<<, <<<'  Result = '210,203'
Format String = '$$$$$$$$$$.##'    Result = ' $210203.20'
Format String = '(&&, &&&, &&&.)'    Result = ' 000210,203.'
Format String = '$*****.**'       Result = '$***210203.20'

Double Number = 4894
Format String = '#####'           Result = '      4894'
Format String = '<, <<<, <<<, <<<'  Result = '4,894'
Format String = '$$$$$$$$$$.##'    Result = ' $4894.00'
Format String = '(&&, &&&, &&&.)'    Result = ' 000004,894.'
Format String = '$*****.**'       Result = '$*****4894.00'

Double Number = 443.335
Format String = '#####'           Result = '      443'
Format String = '<, <<<, <<<, <<<'  Result = '443'
Format String = '$$$$$$$$$$.##'    Result = ' $443.33'
Format String = '(&&, &&&, &&&.)'    Result = ' 0000000443.'
Format String = '$*****.**'       Result = '$*****443.33'

Double Number = -1.23445e+07
Format String = '#####'           Result = ' 12344455'
Format String = '<, <<<, <<<, <<<'  Result = '12,344,455'
Format String = '$$$$$$$$$$.##'    Result = ' $12344455.00'
Format String = '(&&, &&&, &&&.)'    Result = '(12,344,455.)'
Format String = '$*****.**'       Result = '$*12344455.00'

RFMTDOUBLE Sample Program over.

```

The rfmtlong() function

The `rfmtlong()` function uses a formatting mask to convert a C **long** value to a character string.

Syntax

```

mint rfmtlong(lng_val, fmtstring, outbuf)
    int4 lng_val;
    char *fmtstring;
    char *outbuf;

```

lng_val

The **int4** integer that `rfmtlong()` converts to character value.

fmtstring

A pointer to a character buffer that contains the formatting mask for the value in `lng_val`.

outbuf

A pointer to a character buffer that receives the formatted string for the value in lng_val.

Usage

The *fmtstring* argument of the `rfmtlong()` function points to the numeric-formatting mask, which contains characters that describe how to format the **long integer** value. For more information about these formatting characters, see [Format numeric strings on page 118](#).

When you use `rfmtlong()` to format MONEY values, the function uses the currency symbols that the **DBMONEY** environment variable specifies. If you do not set this environment variable, `rfmtlong()` uses the currency symbols that the client locale defines. The default locale, US English, defines currency symbols as if you set **DBMONEY** to "\$,.". (For a discussion of **DBMONEY**, see the *HCL® Informix® Guide to SQL: Reference*.)

When you use a nondefault locale that has a multibyte code set, `rfmtlong()` supports multibyte characters in the format string. For more information, see the *HCL® Informix® GLS User's Guide*.

Return codes**0**

The conversion was successful.

-1211

The program ran out of memory (memory-allocation error).

-1217

The format string is too large.

Example

The `demo` directory contains this sample program in the file `rfmtlong.ec`.

```

/*
 * rfmtlong.ec *

The following program applies a series of format specifications to a series
of longs and displays the result of each format.
*/

#include <stdio.h>

long lngs[] =
{
    21020304,
    334899312,
    -334899312,
    -12344455,
    0
};

char *formats[] =

```



```

Format String = '(&,&&&,&&&,&&&.)'           Result = ' 00334,899,312. '
Format String = '<<<<, <<<, <<<, <<<'         Result = '334,899,312'
Format String = '$*****. **'               Result = '$***334899312.00'

Long Number = -334899312
Format String = '#####'                   Result = '          334899312'
Format String = '$$$$$$$$$$.##'           Result = ' $334899312.00'
Format String = '(&,&&&,&&&,&&&.)'           Result = '(00334,899,312.)'
Format String = '<<<<, <<<, <<<, <<<'         Result = '334,899,312'
Format String = '$*****. **'               Result = '$***334899312.00'

Long Number = -12344455
Format String = '#####'                   Result = '          12344455'
Format String = '$$$$$$$$$$.##'           Result = ' $12344455.00'
Format String = '(&,&&&,&&&,&&&.)'           Result = '(00012,344,455.)'
Format String = '<<<<, <<<, <<<, <<<'         Result = '12,344,455'
Format String = '$*****. **'               Result = '$***12344455.00'

RFMTLONG Sample Program over.

```

The rgetlmsg() function

The `rgetlmsg()` function retrieves the corresponding error message for a given error number that is specific to HCL Informix®. The `rgetlmsg()` function allows for error numbers in the range of a **long** integer.

Syntax

```

mint rgetlmsg(msgnum, msgstr, lenmsgstr, msglen)
int4  msgnum;
char *msgstr;
mint  lenmsgstr;
mint *msglen;

```

msgnum

The error number. The four-byte parameter provides for the full range of error numbers that are specific to Informix®.

msgstr

A pointer to the buffer that receives the message string (the output buffer).

lenmsgstr

The size of the `msgstr` output buffer. Make this value the size of the largest message that you expect to retrieve.

msglen

A pointer to the `mint` that contains the actual length of the message that `rgetlmsg()` returns.

Usage

The `msgnum` error number is typically the value of **SQLCODE** (or `sqlca.sqlcode`). You can also retrieve message text for ISAM errors (in `sqlca.sqlerrd[1]`). The `rgetlmsg()` function uses the Informix® error message files (in the `$INFORMIXDIR/msg` directory) for error message text.

The `rgetlmsg()` function returns the actual size of the message that you request in the fourth parameter, `msglen`. You can use this value to adjust the size of the message area if it is too small. If the returned message is longer than the buffer that you provide, the function truncates the message. You can also use the `msglen` value to display only that portion of the `msgstr` message buffer that contains error text.

Return codes

0

The conversion was successful.

-1227

Message file not found.

-1228

Message number not found in message file.

-1231

Cannot seek within message file.

-1232

Message buffer too small.

Example

This sample program is in the `rgetlmsg.ec` file in the `demo` directory.

```

/*
 * rgetlmsg.ec *
 *
 * The following program demonstrates the usage of rgetlmsg() function.
 * It displays an error message after trying to create a table that
 * already exists.
 */
EXEC SQL include sqlca; /* this include is optional */

main()
{
    mint msg_len;
    char errmsg[400];

    printf("\nRGETLMSG Sample ESQL Program running.\n\n");
    EXEC SQL connect to 'stores7';

    EXEC SQL create table customer (name char(20));

    if(SQLCODE != 0)
    {
        rgetlmsg(SQLCODE, errmsg, sizeof(errmsg), &msg_len);
        printf("\nError %d: ", SQLCODE);
        printf(errmsg, sqlca.sqlerrm);
    }
    printf("\nRGETLMSG Sample Program over.\n\n");
}

```

This example uses the error message parameter in `sqlca.sqlerrm` to display the name of the table. This use of `sqlca.sqlerrm` is valid because the error message contains a format parameter that `printf()` recognizes. If the error message did not contain the format parameter, no error would result.

Output

```
RGETLMSG Sample ESQL Program running.

Error -310: Table (informix.customer) already exists in database.

RGETLMSG Sample Program over.
```

The rgetmsg() function

The `rgetmsg()` function retrieves the error message text for a given error number that is specific to HCL Informix®. The `rgetmsg()` function can handle a **short** error number and, therefore, can only handle error numbers in the range of -32768 - +32767. For this reason, use the `rgetlmsg()` function in all new Informix® ESQL/C code.

Syntax

```
mint rgetmsg(msgnum, msgstr, lenmsgstr)
    mint msgnum;
    char *msgstr;
    mint lenmsgstr;
```

msgnum

The error number. The two-byte parameter restricts error numbers to -32768 - +32767.

msgstr

A pointer to the buffer that receives the message string (the output buffer).

lenmsgstr

The size of the *msgstr* output buffer. Make this value the size of the largest message that you expect to retrieve.

Usage

Typically `SQLCODE` (`sqlca.sqlcode`) contains the error number. You can also retrieve message text for ISAM errors (in `sqlca.sqlerrd[1]`). The `rgetmsg()` function uses the Informix® error message files (in the `$INFORMIXDIR/msg` directory) for error message text. If the message is longer than the size of the buffer that you provide, the function truncates the message to fit.

! **Important:** Informix® ESQL/C supports the `rgetmsg()` function for compatibility with earlier versions. Some Informix® error numbers currently exceed the range that the **short** integer, `msgnum`, supports. The `rgetlmsg()` function, which supports **long** integers as error numbers, is recommended over `rgetmsg()`.

If your program passes the value in the `SQLCODE` variable (or `sqlca.sqlcode`) directly as `msgnum`, cast the `SQLCODE` value as a **short** data type. The `msgnum` argument of `rgetmsg()` and has a **short** data type while the `SQLCODE` value has a **long** data type.

Return codes

0

The conversion was successful.

-1227

Message file not found.

-1228

Message number not found in message file.

-1231

Cannot seek within message file.

-1232

Message buffer too small.

Example

This sample program is in the `rgetmsg.ec` file in the `demo` directory.

```

/*
 * rgetmsg.ec *
 *
 * The following program demonstrates the usage of the rgetmsg() function.
 * It displays an error message after trying to create a table that already
 * exists.
 */
EXEC SQL include sqlca; /* this include is optional */

main()
{
    char errmsg[400];

    printf("\nRGETMSG Sample ESQL Program running.\n\n");
    EXEC SQL connect to 'stores7';

    EXEC SQL create table customer (name char(20));
    if(SQLCODE != 0)
    {
        rgetmsg((short)SQLCODE, errmsg, sizeof(errmsg));
        printf("\nError %d: ", SQLCODE);
        printf(errmsg, sqlca.sqlerrm);
    }
}

```

```

    }
    printf("\nRGETMSG Sample Program over.\n\n");
}

```

Output

```

RGETMSG Sample ESQL Program running.

Error -310: Table (informix.customer) already exists in database.

RGETMSG Sample Program over.

```

The risnull() function

The risnull() function checks whether the C or the IBM® Informix® ESQL/C variable contains a null value.

Syntax

```

mint risnull(type; ptrvar)
    mint type;
    char *ptrvar;

```

type

An integer that corresponds to the data type of a C or Informix® ESQL/C variable. This *type* can be any data type except **var binary** or an **lvarchar** pointer variable. For more information, see [Data type constants on page 82](#)

ptrvar

A pointer to the C or Informix® ESQL/C variable.

Usage

The risnull() function determines whether Informix® ESQL/C variables of all data types except **var binary** and **lvarchar** pointer variables contain a null value. To determine whether a **var binary** or **lvarchar** pointer host variable contains null, use the ifx_var_isnull() macro. For more information, see [The ifx_var_isnull\(\) function on page 723](#).

Return codes

1

The variable does contain a null value.

0

The variable does not contain a null value.

Example

This sample program is in the risnull.ec file in the demo directory.

```

/*
 * risnull.ec *

```

```

This program checks the paid_date column of the orders table for NULL
to determine whether an order has been paid.
*/

#include <stdio.h>

EXEC SQL include sqltypes;

#define WARNNOTIFY          1
#define NOWARNNOTIFY       0

main()
{
    char ans;
    int4 ret, exp_chk();

    EXEC SQL BEGIN DECLARE SECTION;
        int4 order_num;

        mint order_date, ship_date, paid_date;
    EXEC SQL END DECLARE SECTION;

    printf("RISNULL Sample ESQL Program running.\n\n");
    EXEC SQL connect to 'stores7';          /* open stores7 database*/
    exp_chk("CONNECT TO stores7", NOWARNNOTIFY)

    EXEC SQL declare c cursor for
        select order_num, order_date, ship_date, paid_date from orders;
    EXEC SQL open c;
    if(exp_chk("OPEN c", WARNNOTIFY) == 1) /* Found warnings */
        exit(1);
    printf("\n Order#\tPaid?\n");          /* print column hdgs */
    while(1)
    {
        EXEC SQL fetch c into :order_num, :order_date, :ship_date, :paid_date;
        if ((ret = exp_chk("FETCH c")) == 100) /* if end of rows */
            break; /* terminate loop */
        if(ret < 0)
            exit(1);
        printf("%5d\t", order_num);
        if (risnull(CDATETYPE, (char *)&paid_date)) /* is price NULL ? */
            printf("NO\n");
        else
            printf("Yes\n");
    }
    printf("\nRISNULL Sample Program over.\n\n");
}

/*
 * The exp_chk() file contains the exception handling functions to
 * check the SQLSTATE status variable to see if an error has occurred
 * following an SQL statement. If a warning or an error has
 * occurred, exp_chk() executes the GET DIAGNOSTICS statement and
 * prints the detail for each exception that is returned.
 */

EXEC SQL include exp_chk.ec

```

For a complete listing of the `exp_chk()` function, see [Guide to the exp_chk.ec file on page 309](#) or see the `exp_chk.ec` file for a listing of this exception-handling function.

Output

```
RISNULL Sample ESQL Program running.
```

Order#	Paid?
1001	Yes
1002	Yes
1003	Yes
1004	NO
1005	Yes
1006	NO
1007	NO
1008	Yes
1009	Yes
1010	Yes
1011	Yes
1012	NO
1013	Yes
1014	Yes
1015	Yes
1016	NO
1017	NO
1018	Yes
1019	Yes
1020	Yes
1021	Yes
1022	Yes
1023	Yes

```
RISNULL Sample Program over.
```

The `rjulmdy()` function

The `rjulmdy()` function creates an array of three **short** integer values that represent the month, day, and year from an internal DATE value.

Syntax

```
mint rjulmdy(jdate, mdy)
    int4 jdate;
    int2 mdy[3];
```

jdate

The internal representation of the date.

mdy

An array of **short** integers, where `mdy[0]` is the month (1 - 12), `mdy[1]` is the day (1 - 31), and `mdy[2]` is the year (1 - 9999).

Return codes

0

The operation was successful.

< 0

The operation failed.

-1210

The internal date could not be converted to the character string format.

Example

The `demo` directory contains this sample program in the `rjulmdy.ec` file.

```

/*
 * rjulmdy.ec *

The following program accepts a date entered from the console and converts
it to an array of three short integers that contain the month, day, and year.
*/

#include <stdio.h>

main()
{
    int4 i_date;
    short mdy_array[3];
    mint errnum;
    char date[20];
    mint x;

    static char fmtstr[9] = "mddyymm";

    printf("RJULMDY Sample ESQL Program running.\n\n");

    /* Allow user to enter a date */
    printf("Enter a date as a single string, month.day.year\n");
    gets(date);

    printf("\nThe date string is %s.\n", date);

    /* Put entered date in internal format */
    if (x = rdefmtdate(&i_date, fmtstr, date))
        printf("Error %d on rdefmtdate conversion\n", x);
    else
        {

    /* Convert from internal format to MDY array */
    if ((errnum = rjulmdy(i_date, mdy_array)) == 0)
        {
            printf("\tThe month component is: %d\n", mdy_array[0]);
            printf("\tThe day component is: %d\n", mdy_array[1]);
            printf("\tThe year component is: %d\n", mdy_array[2]);
        }
        }
}

```

```

    else
        printf("rjulmdy() call failed with error %d", errnum);
    }

    printf("\nRJULMDY Sample Program over.\n\n");
}

```

Output

```

RJULMDY Sample ESQL Program running.

Enter a date as a single string, month.day.year
10.12.07

The date string is 10.12.07.
The month component is: 10
The day component is: 12
The year component is: 2007

RJULMDY Sample Program over.

```

The rleapyear() function

The `rleapyear()` function returns 1 (TRUE) when the argument that is passed to it is a leap year and 0 (FALSE) when it is not.

Syntax

```

mint rleapyear(year)
mint year;

```

year

An integer.

Usage

The argument *year* must be the year component of a date and not the date itself. You must express the *year* in full form (2007) and not abbreviated form (07).

Return codes

1

The year is a leap year.

0

The year is not a leap year.

Example

The `demo` directory contains this sample program in the `rleapyear.ec` file.

```

/*
 * rleapyear.ec *

The following program accepts a date entered from the console

```

```

and stores this date into an int4, which stores the date in
an internal format. It then converts the internal format into an array of
three short integers that contain the month, day, and year portions of the
date. It then tests the year value to see if the year is a leap year.
*/

#include <stdio.h>

main()
{
    int4 i_date;
    mint errnum;
    short mdy_array[3];
    char date[20];
    mint x;

    static char fmtstr[9] = "mddyymm";

    printf("RLEAPYEAR Sample Program running.\n\n");

    /* Allow user to enter a date */
    printf("Enter a date as a single string, month.day.year\n");
    gets(date);

    printf("\nThe date string is %s.\n", date);

    /* Put entered date in internal format */
    if (x = rdefmtdate(&i_date, fmtstr, date))
        printf("Error %d on rdefmtdate conversion\n", x);
    else
    {
        /* Convert internal format into a MDY array */
        if ((errnum = rjulmdy(i_date, mdy_array)) == 0)
        {
            /* Check if it is a leap year */
            if (rleapyear(mdy_array[2]))
                printf("%d is a leap year\n", mdy_array[2]);
            else
                printf("%d is not a leap year\n", mdy_array[2]);
        }
        else
            printf("rjulmdy() call failed with error %d", errnum);
    }

    printf("\nRLEAPYEAR Sample Program over.\n\n");
}

```

Output

```

RLEAPYEAR Sample ESQL Program running.

Enter a date as a single string, month.day.year
10.12.07

The date string is 10.12.07.
2007 is not a leap year

```

```
RLEAPYEAR Sample Program over.
```

The rmdyjul() function

The rmdyjul() function creates an internal DATE from an array of three **short** integer values that represent month, day, and year.

Syntax

```
mint rmdyjul(mdy, jdate)
    int2 mdy[3];
    int4 *jdate;
```

mdy

An array of **short** integer values, where *mdy*[0] is the month (1 - 12), *mdy*[1] is the day (1 - 31), and *mdy*[2] is the year (1 - 9999).

jdate

A pointer to a **long** integer that receives the internal DATE value for the *mdy* array.

Usage

You can express the year in full form (2007) or abbreviated form (07).

Return codes

0

The operation was successful.

-1204

The *mdy*[2] variable contains an invalid year.

-1205

The *mdy*[0] variable contains an invalid month.

-1206

The *mdy*[1] variable contains an invalid day.

Example

The `demo` directory contains this sample program in the `rmdyjul.ec` file.

```
/*
 * rmdyjul.ec *

This program converts an array of short integers containing values
for month, day and year into an integer that stores the date in
internal format.
*/

#include <stdio.h>
```

```

main()
{
    int4 i_date;
    mint errnum;
    static short mdy_array[3] = { 12, 21, 2007 };
    char str_date[15];

    printf("RMDYJUL Sample ESQL Program running.\n\n");

    /* Convert MDY array into internal format */
    if ((errnum = rmdyjul(mdy_array, &i_date)) == 0)
    {
        rfmdtdate(i_date, "mmm dd yyyy", str_date);
        printf("Date '%s' converted to internal format\n", str_date);
    }
    else
        printf("rmdyjul() call failed with errnum = %d\n", errnum);

    printf("\nRMDYJUL Sample Program over.\n\n");
}

```

Output

```

RMDYJUL Sample ESQL Program running.

Date 'Dec 21 2007' converted to internal format

RMDYJUL Sample Program over.

```

The rsetnull() function

The `rsetnull()` function sets a C variable to a value that corresponds to a database null value.

Syntax

```

mint rsetnull(type, ptrvar)
    mint type;
    char *ptrvar;

```

type

A **mint** that corresponds to the data type of a C or IBM® Informix® ESQL/C variable. This *type* can be any data type except **var binary** or an **lvvarchar** pointer variable. For more information, see [Data type constants on page 82](#).

ptrvar

A pointer to the C or Informix® ESQL/C variable.

Usage

The `rsetnull()` function sets to null Informix® ESQL/C variables of all data types except **var binary** and **lvvarchar** pointer host variables. To set a **var binary** or **lvvarchar** pointer host variable to null, use the `ifx_var_setnull()` macro. For more information, see [The ifx_var_setnull\(\) function on page 726](#)

Example

This sample program is in the `rsetnull.ec` file in the `demo` directory.

```

/*
 * rsetnull.ec *

This program fetches rows from the stock table for a chosen manufacturer
and allows the user to set the unit_price to NULL.
*/

#include <stdio.h>
#include <ctype.h>
EXEC SQL include decimal;
EXEC SQL include sqltypes;

#define WARNNOTIFY      1
#define NOWARNNOTIFY   0

#define LCASE(c) (isupper(c) ? tolower(c) : (c))

char format[] = "$$, $$$, $$$.&&";

main()
{
    char decdsply[20];
    char ans;
    int4 ret, exp_chk();

    EXEC SQL BEGIN DECLARE SECTION;
        short stock_num;
        char description[16];
        dec_t unit_price;
        char manu_code[4];
    EXEC SQL END DECLARE SECTION;

    printf("RSETNULL Sample ESQL Program running.\n\n");
    EXEC SQL connect to 'stores7';          /* connect to stores7 */
    exp_chk("Connect to stores7", NOWARNNOTIFY);

    printf("This program selects all rows for a given manufacturer\n");
    printf("from the stock table and allows you to set the unit_price\n");
    printf("to NULL.\n");
    printf("\nTo begin, enter a manufacturer code - for example: 'HSK'\n");
    printf("\nEnter Manufacturer code: ");          /* prompt for mfr. code */
    gets(manu_code);          /* get mfr. code */
    EXEC SQL declare upcurs cursor for          /* declare cursor */
        select stock_num, description, unit_price from stock
        where manu_code = :manu_code
        for update of unit_price;
    rupshift(manu_code);          /* Make mfr code upper case */
    EXEC SQL open upcurs; /* open select cursor */
    if(exp_chk("Open cursor", WARNNOTIFY) == 1)
        exit(1);

    /*
     * Display Column Headings

```

```

*/
printf("\nStock # \tDescription \t\tUnit Price");
while(1)
{
/* get a row */
EXEC SQL fetch upcurs into :stock_num, :description, :unit_price;
if ((ret = exp_chk("fetch", WARNNOTIFY)) == 100) /* if end of rows */
break;
if(ret == 1)
exit(1);
if(risnull(CDECIMALTYPE, (char *) &unit_price)) /* unit_price NULL? */
continue; /* skip to next row */
rfmtdec(&unit_price, format, decdsply); /* format unit_price */
/* display item */
printf("\n\t%d\t\t%15s\t%s", stock_num, description, decdsply);
ans = ' ';
/* Set unit_price to NULL? y(es) or n(o) */
while((ans = LCASE(ans)) != 'y' && ans != 'n')
{
printf("\n. . . Set unit_price to NULL ? (y/n) ");
scanf("%1s", &ans);
}
if (ans == 'y') /* if yes, NULL to unit_price */
{
rsetnull(CDECIMALTYPE, (char *) &unit_price);
EXEC SQL update stock set unit_price = :unit_price
where current of upcurs; /* and update current row */
if(exp_chk("UPDATE", WARNNOTIFY) == 1)
exit(1);
}
}
printf("\nRSETNULL Sample Program over.\n\n");
}

/*
* The exp_chk() file contains the exception handling functions to
* check the SQLSTATE status variable to see if an error has occurred
* following an SQL statement. If a warning or an error has
* occurred, exp_chk() executes the GET DIAGNOSTICS statement and
* prints the detail for each exception that is returned.
*/

EXEC SQL include exp_chk.ec

```

For a complete listing of the `exp_chk()` function, see [Guide to the exp_chk.ec file on page 309](#) or see the `exp_chk.ec` file for a listing of this exception-handling function.

Output

```
RSETNULL Sample ESQL Program running.
```

```
This program selects all rows for a given manufacturer
from the stock table and allows you to set the unit_price
to NULL.
```

```
To begin, enter a manufacturer code - for example: 'HSK'
```

```

Enter Manufacturer code: HSK

Stock #      Description      Unit Price
   1         baseball gloves    $800.00
. . . Set unit_price to NULL ? (y/n) n

   3         baseball bat       $240.00
. . . Set unit_price to NULL ? (y/n) y

   4         football          $960.00
. . . Set unit_price to NULL ? (y/n) n

  110        helmet            $600.00
. . . Set unit_price to NULL ? (y/n) y

RSETNULL Sample Program over.

```

The rstrtod() function

The rstrtod() function converts a null-terminated string into a **double** value.

Syntax

```

mint rstrtod(string, double_val)
char *string;
double *double_val;

```

string

A pointer to a null-terminated string.

double_val

A pointer to a **double** value that holds the converted value.

Usage

=0

The conversion was successful.

!=0

The conversion failed.

Example

This sample program is in the `rstrtod.ec` file in the `demo` directory.

```

/*
 * rstrtod.ec *

The following program tries to convert three strings to doubles.
It displays the result of each attempt.
*/

#include <stdio.h>

```



```

main()
{
    mint errnum;
    char *string1 = "1234567887654321";
    char *string2 = "12345678.87654321";
    char *string3 = "zzzzzzzzzzzzzzzz";
    double d;

    printf("RSTOD Sample ESQL Program running.\n\n");

    printf("Converting String 1: %s\n", string1);
    if ((errnum = rstod(string1, &d)) == 0)
        printf("\tResult = %f\n", d);
    else
        printf("\tError %d in conversion of string 1\n\n", errnum);

    printf("Converting String 2: %s\n", string2);
    if ((errnum = rstod(string2, &d)) == 0)
        printf("\tResult = %.8f\n", d);
    else
        printf("\tError %d in conversion of string 2\n\n", errnum);

    printf("Converting String 3: %s\n", string3);
    if ((errnum = rstod(string3, &d)) == 0)
        printf("\tResult = %.8f\n", d);
    else
        printf("\tError %d in conversion of string 3\n\n", errnum);

    printf("\nRSTOD Sample Program over.\n\n");
}

```

Output

```

RSTOD Sample ESQL Program running.

Converting String 1: 123456788764321
Result = 1234567887654321.000000

Converting String 2: 12345678.87654321
Result = 12345678.87654321

Converting String 3: zzzzzzzzzzzzzzzz
Error -1213 in conversion of string 3

RSTOD Sample Program over.

```

The rstoi() function

The `rstoi()` function converts a null-terminated string into a **short integer** value.

Syntax

```

mint rstoi(string, ival)
char *string;
mint *ival;

```

string

A pointer to a null-terminated string.

ival

A pointer to a **mint** value that holds the converted value.

Usage

The legal range of values is `-32767 - 32767`. The value `-32768` is not valid because this value is a reserved value that indicates null.

If *string* corresponds to a null integer, *ival* points to the representation for a SMALLINT null. To convert a string that corresponds to a long integer, use `rstol()`. Failure to do so can result in corrupted data representation.

Return codes

=0

The conversion was successful.

!=0

The conversion failed.

Example

This sample program is in the `rstoi.ec` file in the `demo` directory.

```

/*
 * rstoi.ec *

The following program tries to convert three strings to integers.
It displays the result of each conversion.
*/

#include <stdio.h>

EXEC SQL include sqltypes;

main()
{
    mint err;
    mint i;
    short s;

    printf("RSTOI Sample ESQL Program running.\n\n");

    i = 0;
    printf("Converting String 'abc':\n");
    if((err = rstoi("abc", &i)) == 0)
        printf("\tResult = %d\n", i);
    else
        printf("\tError %d in conversion of string #1\n", err);
}

```

```

i = 0;
printf("Converting String '32766':\n");
if((err = rstoi("32766", &i)) == 0)
    printf("\tResult = %d\n", i);
else
    printf("\tError %d in conversion of string #2\n", err);

i = 0;
printf("Converting String '':\n");
if((err = rstoi("", &i)) == 0)
{
    s = i;
    if (risnull(CSHORTTYPE, (char *) &s)) /* assign to a SHORT variable */
        printf("\tResult = NULL\n"); /* and then test for NULL */
    else
        printf("\tResult = %d\n", i);
}
else
    printf("\tError %d in conversion of string #3\n", err);

printf("\nRSTOI Sample Program over.\n");
}

```

Output

```

RSTOI Sample ESQL Program running.

Converting String 'abc':
    Error -1213 in conversion of string #1

Converting String '32766':
    Result = 32766

Converting String '':
    Result = NULL

RSTOI Sample Program over.

```

The `rstol()` function

The `rstol()` function converts a null-terminated string into a **long integer** value.

Syntax

```

mint rstol(string, long_int)
char *string;
mlong *long_int;

```

string

A pointer to a null-terminated string.

long_int

A pointer to an **mlong** value that holds the converted value.

Usage

The legal range of values is `-2,147,483,647 - 2,147,483,647`. The value `-2,147,483,648` is not valid because this value is a reserved value that indicates null.

Return codes

`=0`

The conversion was successful.

`!=0`

The conversion failed.

Example

This sample program is in the `rstol.ec` file in the `demo` directory.

```

/*
 * rstol.ec *

The following program tries to convert three strings to longs. It
displays the result of each attempt.
*/

#include <stdio.h>

EXEC SQL include sqltypes;

main()
{
    mint err;
    mlong l;

    printf("RSTOL Sample ESQL Program running.\n\n");

    l = 0;
    printf("Converting String 'abc':\n");
    if((err = rstol("abc", &l)) == 0)
        printf("\tResult = %ld\n\n", l);
    else
        printf("\tError %d in conversion of string #1\n\n", err);

    l = 0;
    printf("Converting String '2147483646':\n");
    if((err = rstol("2147483646", &l)) == 0)
        printf("\tResult = %ld\n\n", l);
    else
        printf("\tError %d in conversion of string #2\n\n", err);

    l = 0;
    printf("Converting String '':\n");
    if((err = rstol("", &l)) == 0)
    {
        if(risnull(CLONGTYPE, (char *) &l))
            printf("\tResult = NULL\n\n", l);
    }
}

```

```

    else
        printf("\tResult = %ld\n\n", l);
    }
    else
        printf("\tError %d in conversion of string #3\n\n", err);

    printf("\nRSTOL Sample Program over.\n\n");
}

```

Output

```

RSTOL Sample ESQL Program running.

Converting String 'abc':
  Error -1213 in conversion of string #1

Converting String '2147483646':
  Result = 2147483646

Converting String '':
  Result = NULL

RSTOL Sample Program over.

```

The rstrdate() function

The rstrdate() function converts a character string to an internal DATE.

Syntax

```

mint rstrdate(inbuf, jdate)
char *inbuf;
int4 *jdate;

```

inbuf

A pointer to the string that contains the date to convert.

jdate

A pointer to an **int4** integer that receives the internal DATE value for the *inbuf* string.

Usage

For the default locale, US English, the rstrdate() function determines how to format the character string with the following precedence:

1. The format that the **DBDATE** environment variable specifies (if **DBDATE** is set). For more information about **DBDATE**, see the *HCL® Informix® Guide to SQL: Reference*.
2. The format that the **GL_DATE** environment variable specifies (if **GL_DATE** is set). For more information about **GL_DATE**, see the *HCL® Informix® GLS User's Guide*.
3. The default date form: `mm/dd/yyyy`. You can use any nonnumeric character as a separator between the month, day, and year. You can express the year as four digits (2007) or as two digits (07).

When you use a nondefault locale and do not set the **DBDATE** or **GL_DATE** environment variable, `rstrdate()` uses the date end-user format that the client locale defines. For more information, see the *HCL® Informix® GLS User's Guide*.

When you use a two-digit year in the date string, the `rstrdate()` function uses the value of the **DBCENTURY** environment variable to determine which century to use. If you do not set **DBCENTURY**, `rstrdate()` assumes the 20th century for two-digit years. For information about how to set **DBCENTURY**, see the *HCL® Informix® Guide to SQL: Reference*.

Return codes

0

The conversion was successful.

< 0

The conversion failed.

-1204

The *inbuf* parameter specifies an invalid year.

-1205

The *inbuf* parameter specifies an invalid month.

-1206

The *inbuf* parameter specifies an invalid day.

-1212

Data conversion format must contain a month, day, or year component. **DBDATE** specifies the data conversion format.

-1218

The date specified by the *inbuf* argument does not properly represent a date.

Example

The `demo` directory contains this sample program in the `rstrdate.ec` file.

```
/*
 * rstrdate.ec *
 * The following program converts a character string
 * in "mmddyyyy" format to an internal date format.
 */

#include <stdio.h>

main()
{
    int4 i_date;
    mint errnum;
    char str_date[15];

    printf("RSTRDATE Sample ESQL Program running.\n\n");
}
```

```

/* Convert Sept. 6th, 2007 into i_date */
if ((errno = rstrdate("9.6.2007", &i_date)) == 0)
{
    rfmtdate(i_date, "mmm dd yyyy", str_date);
    printf("Date '%s' converted to internal format\n" str_date);
}
else
    printf("rstrdate() call failed with error %d\n", errno);

printf("\nRSTRDATE Sample Program over.\n\n");
}

```

Output

```

RSTRDATE Sample ESQL Program running.

Date 'Sep 06 2007' converted to internal format

RSTRDATE Sample Program over.

```

The rtoday() function

The rtoday() function returns the system date as a long integer value.

Syntax

```

void rtoday(today)
int4 *today;

```

today

A pointer to an **int4** value that receives the internal DATE.

Usage

The rtoday() function obtains the system date on the client computer, not the server computer.

Example

The `demo` directory contains this sample program in the `rtoday.ec` file.

```

/*
 * rtoday.ec *

The following program obtains today's date from the system,
converts it to ASCII using rdatestr(), and displays the result.
*/

#include <stdio.h>

main()
{
    mint errno;
    char today_date[20];
    int4 i_date;

```

```

printf("RTODAY Sample ESQL Program running.\n\n");

/* Get today's date in the internal format */
rtoday(&i_date);

/* Convert date from internal format into a mm/dd/yyyy string */
if ((errno = rdatestr(i_date, today_date)) == 0)
    printf("\n\tToday's date is %s.\n", today_date);
else
    printf("\n\tError %d in converting date to mm/dd/yyyy\n", errno);

printf("\nRTODAY Sample Program over.\n\n");
}

```

Output

```

RTODAY Sample ESQL Program running.

Today's date is 09/16/2007.

RTODAY Sample Program over.

```

The rtypalign() function

The rtypalign() function returns the position of the next proper boundary for a variable of the specified data type.

Syntax

32 bit

```

mint rtypalign(pos, type)
    mint pos;
    mint type;

```

64 bit

```

mlong rtypalign(pos, type)
    mlong pos;
    mint type;

```

pos

The current position in a buffer.

type

An integer that corresponds to the data type of a C or IBM® Informix® ESQL/C variable. This type can be any data type except the following:

- **var binary**
- CFIXBINTYPE
- CVARBINTYPE
- SQLUDTVAR
- SQLUDTFIXED

For more information, see [Data type constants on page 82](#).

Usage

The `rtyalign()` and `rtpmsize()` functions are useful when you use an `sqllda` structure to dynamically fetch data into a buffer. On many hardware platforms, integer and other numeric data types must begin on a work boundary. The C language memory allocation routines allocate memory that is suitably aligned for any data type, including structures. However, these routines do not perform alignment for the constituent components of the structure. The programmer is responsible for performing that alignment with functions such as `rtyalign()` and `rtpmsize()`. These functions provide machine independence for storing column data.

After a DESCRIBE statement determines column information, Informix® ESQL/C stores the value of type in `sqllda.sqlvar->sqltype`.

You can see an application of the `rtyalign()` function in the `unload.ec` demonstration program.

Return codes

>0

The return value is the offset of the next proper boundary for a variable of `type` data type.

Example

This sample program is in the `rtyalign.ec` file in the `demo` directory.

```

/*
 * rtyalign.ec *

The following program prepares a select on all columns of the orders
table and then calculates the proper alignment for each column in a buffer.
*/

#include <decimal.h>

EXEC SQL include sqltypes;

#define WARNNOTIFY      1
#define NOWARNNOTIFY   0

main()
{
    mint i, pos;
    int4 ret, exp_chk();
    struct sqllda *sql_desc;
    struct sqlvar_struct *col;

    printf("RTYPALIGN Sample ESQL Program running.\n\n");

    EXEC SQL connect to 'stores7';           /* open stores7 database */
    exp_chk("Connect to", NOWARNNOTIFY);

    EXEC SQL prepare query_1 from "select * from orders"; /* prepare select */
    if(exp_chk("Prepare", WARNNOTIFY) == 1)

```


<code>type</code>	<code>len</code>	<code>next posn</code>	<code>aligned posn</code>
<code>date</code>	4	4	4
<code>integer</code>	4	8	8
<code>char</code>	40	12	12
<code>char</code>	1	52	52
<code>char</code>	10	53	53
<code>date</code>	4	63	64
<code>decimal</code>	22	68	68
<code>money</code>	22	90	90
<code>date</code>	4	112	112

RTYPALIGN Sample Program over.

The `rtpysize()` function

The `rtpysize()` function returns the number of bytes you must allocate in memory for the specified IBM® Informix® ESQL/C or SQL data type.

Syntax

```
mint rtpysize(sqltype, sqlen)
    mint sqltype;
    mint sqlen;
```

sqltype

The integer code of the Informix® ESQL/C or SQL data type. For more information, see [Data type constants on page 82](#).

sqlen

The number of bytes in the data file for the specified data type.

Usage

The `rtpalign()` and `rtpysize()` functions are useful when you use an **`sqlda`** structure to dynamically fetch data into a buffer. These functions provide machine independence for the column-data storage.

The `rtpysize()` function is provided to use with the **`sqlda`** structure that a DESCRIBE statement initializes. After a DESCRIBE statement determines column information, the value of *sqltype* and *sqlen* components are in the components of the same name in each **`sqlda.sqlvar`** structure.

When `rtpysize()` determines sizes for character data, keep in mind the following size information:

- For CCHARTYPE (**char**) and CSTRINGTYPE (**string**), Informix® ESQL/C adds one byte to the number of characters for the null terminator.
- For CFIXCHARTYPE (**fixchar**), Informix® ESQL/C does not add a null terminator.

You can see an application of the `rtypmsize()` function in the `unload.ec` demonstration program.

Return codes

0

The *sqltype* is not a valid SQL type.

>0

The return value is the number of bytes that the *sqltype* data type requires.

Example

This sample program is in the `rtypmsize.ec` file in the `demo` directory.

```

/*
 * rtypmsize.ec *

This program prepares a select statement on all columns of the
catalog table. Then it displays the data type of each column and
the number of bytes needed to store it in memory.
*/

#include <stdio.h>

EXEC SQL include sqltypes;

#define WARNNOTIFY      1
#define NOWARNNOTIFY   0

EXEC SQL BEGIN DECLARE SECTION;
    char db_name[20];
EXEC SQL END DECLARE SECTION;

main(argc, argv)
int argc;
char *argv[];
{
    mint i;
    char db_stmt[50];
    int4 exp_chk();
    struct sqllda *sql_desc;
    struct sqlvar_struct *col;

    printf("RTYPMSIZE Sample ESQL Program running.\n\n");

    if (argc > 2)          /* correct no. of args? */
    {
        printf("\nUsage: %s [database]\nIncorrect no. of argument(s)\n",
            argv[0]);
        exit(1);
    }
}

```

```

    }
    strcpy(db_name, "stores7");
    if (argc == 2)
        strcpy(db_name, argv[1]);

    EXEC SQL connect to :db_name;
    sprintf(db_stmnt, "CONNECT TO %s", argv[1]);
    exp_chk(db_stmnt, NOWARNNOTIFY);

    printf("Connected to '%s' database.", db_name);

    EXEC SQL prepare query_1 from 'select * from catalog!'; /* prepare select */
    if(exp_chk("Prepare", WARNNOTIFY) == 1)
        exit(1);
    EXEC SQL describe query_1 into sql_desc;           /* setup sqlda */
    if(exp_chk("Describe", WARNNOTIFY) == 1)
        exit(1);
    printf("\n\tColumn          Type      Size\n\n");      /* column hdgs. */
    /*
    * For each column in the catalog table display the column name and
    * the number of bytes needed to store the column in memory.
    */
    for(i = 0, col = sql_desc->sqlvar; i < sql_desc->sqld; i++, col++)
        printf("\t%-20s%-8s%3d\n", col->sqlname, rtypname(col->sqltype),
            rtypmsize(col->sqltype, col->sqllen));

    printf("\nRTYPMSIZE Sample Program over.\n\n");
}

/*
 * The exp_chk() file contains the exception handling functions to
 * check the SQLSTATE status variable to see if an error has occurred
 * following an SQL statement. If a warning or an error has
 * occurred, exp_chk() executes the GET DIAGNOSTICS statement and
 * prints the detail for each exception that is returned.
 */
EXEC SQL include exp_chk.ec

```

For a complete listing of the `exp_chk()` function, see [Guide to the exp_chk.ec file on page 309](#) or see the `exp_chk.ec` file for a listing of this exception-handling function.

Output

```

RTYPMSIZE Sample ESQL Program running.

Connected to stores7 database.

Column          Type      Size
catalog_num     serial    4
stock_num       smallint  s
manu_code       char      4
cat_descr       text      64
cat_picture     byte      64
cat_advert      varchar   256

RTYPMSIZE Sample Program over.

```

The rtypename() function

The rtypename() function returns a null-terminated string that contains the name of the specified SQL data type.

Syntax

```
char *rtypname(sqltype)
mint sqltype;
```

sqltype

An integer code for one of the SQL data types. For more information, see [Data type constants on page 82](#)

The rtypename() function converts a constant for the HCL Informix® SQL data type (which `sqltypes.h` defines) to a character string.

Return codes

The rtypename() function returns a pointer to a string that contains the name of the data type specified *sqltype*. If *sqltype* is an invalid value, rtypename() returns a null string ("").

Example

This sample program is in the `rtypname.ec` file in the `demo` directory.

```
/*
 * rtypename.ec *

This program displays the name and the data type of each column
in the 'orders' table.
*/

#include <stdio.h>

EXEC SQL include sqltypes;

#define WARNNOTIFY      1
#define NOWARNNOTIFY    0

main(argc, argv)
int argc;
char *argv[];
{
    mint i;
    int4 err_chk();
    char db_stmt[50];
    char *rtypname();
    struct sqllda *sql_desc;
    struct sqlvar_struct *col;

    EXEC SQL BEGIN DECLARE SECTION;
    char db_name[20];
    EXEC SQL END DECLARE SECTION;

    printf("RTYPNAME Sample ESQL Program running.\n\n");
```

```

if (argc > 2)          /* correct no. of args? */
{
    printf("\nUsage: %s [database]\nIncorrect no. of argument(s)\n",
        argv[0]);
    exit(1);
}
strcpy(db_name, "stores7");

if (argc == 2)
    strcpy(db_name, argv[1]);

EXEC SQL connect to :db_name;
sprintf(db_stmnt, "CONNECT TO %s", argv[1]);
exp_chk(db_stmnt, NOWARNNOTIFY);

printf("Connected to '%s' database.", db_name);
EXEC SQL prepare query_1 from 'select * from orders'; /* prepare select */
if(exp_chk("Prepare", WARNNOTIFY) == 1)
    exit(1);
EXEC SQL describe query_1 into sql_desc;          /* initialize sqllda */
if(exp_chk("Describe", WARNNOTIFY) == 1)
    exit(1);
printf("\n\tColumn Name      \t\tSQL type\n\n");

/*
 * For each column in the orders table display the column name and
 * the name of the SQL data type
 */
for (i = 0, col = sql_desc->sqlvar; i < sql_desc->sqlld; i++, col++)
printf("\t%-15s\t\t%s\n", col->sqlname, rtypname(col->sqltype));

printf("\nRTYPNAME Sample Program over.\n\n");
}

/*
 * The exp_chk() file contains the exception handling functions to
 * check the SQLSTATE status variable to see if an error has occurred
 * following an SQL statement. If a warning or an error has
 * occurred, exp_chk() executes the GET DIAGNOSTICS statement and
 * prints the detail for each exception that is returned.
 */

EXEC SQL include exp_chk.ec

```

For a complete listing of the `exp_chk()` function, see [Guide to the `exp_chk.ec` file on page 309](#) or see the `exp_chk.ec` file for a listing of this exception-handling function.

Output

```

RTYPNAME Sample ESQL Program running.

Connected to stores7 database
Column Name          SQL type

order_num            serial
order_date           date
customer_num         integer

```

```

ship_instruct      char
backlog           char
po_num            char
ship_date         date
ship_weight       decimal
ship_charge       money
paid_date         date

```

```
RTYPNAME Sample Program over.
```

The rtypsize() function

The rtypsize() function returns the internal storage sizes of data for clients that use the Change Data Capture API.

Syntax

```

mint rtypsize(sqltype, sqlen)
mint sqltype;
mint sqlen;

```

sqltype

The integer code of the Informix® ESQL/C or SQL data type. For more information, see [Data type constants on page 82](#).

sqlen

The number of bytes in the data file for the specified data type.

Usage

While similar to the rtypsize() function, the rtypsize() function returns internal server storage lengths rather than ESQL/C data lengths.

The rtypsize() function is provided to use with the **sqlda** structure that a DESCRIBE statement initializes. After a DESCRIBE statement determines column information, the value of *sqltype* and *sqlen* components are in the components of the same name in each **sqlda.sqlvar** structure.

You can see an application of the rtypsize() function in the `cdcap1.ec` sample program in the `demo` directory.

Return codes

0

The *sqltype* is not a valid SQL type.

>0

The return value is the number of bytes that the *sqltype* data type requires.

Example

The following code fragment from the `cdcap1.ec` file in the `demo` directory shows the usage of the rtypsize() function.

```

sprintf(sql_stm, "select * from %s", tablename);
$prepare select_id from $sql_stm;

```



```

CHK_SQL_CODE(sql_stm);

$describe select_id into sqlda;
CHK_SQL_CODE("Describe");

/*
 * Save the description of the column descriptor for the table.
 * We will use this later to process the insert/update/delete records
 * for this table.
 */
for (col = 0; col < sqlda->sqld; col++)
{
    colsize = rtpsize(sqlda->sqlvar[col].sqltype,
                    sqlda->sqlvar[col].sqllen);
    printStdoutAndFile("\tColumn %d is %s, type = %d, size = %d\n", col,
                      sqlda->sqlvar[col].sqlname, sqlda->sqlvar[col].sqltype, colsize);

    coldesc.colobj[col].coltype = sqlda->sqlvar[col].sqltype;
    coldesc.colobj[col].colsize = colsize;
    coldesc.colobj[col].colxid = sqlda->sqlvar[col].sqlxid;
    coldesc.colobj[col].colname =
        malloc(strlen(sqlda->sqlvar[col].sqlname)+1);
    strcpy(coldesc.colobj[col].colname, sqlda->sqlvar[col].sqlname);
}
coldesc.num_of_columns = col;

```

The rtypwidth() function

The `rtypwidth()` function returns the minimum number of characters that a character data type needs to avoid truncation when you convert a value with an SQL data type to a character data type.

Syntax

```

mint rtypwidth(sqltype, sqllen)
    mint sqltype;
    mint sqllen;

```

sqltype

The integer code of the SQL data type. For more information, see [Data type constants on page 82](#).

sqllen

The number of bytes in the data file for the specified SQL data type.

Usage

The `rtypwidth()` function is provided for use with the `sqlda` structure that a DESCRIBE statement initializes. The `sqltype` and `sqllen` components correspond to the components of the same name in each `sqlda.sqlvar` structure.

Return codes

0

The `sqltype` is not a valid SQL data type.

>0

The return value is the minimum number of characters that the *sqltype* data type requires.

Example

This sample program is in the `rtypwidth.ec` file in the `demo` directory.

```

/*
 * rtypwidth.ec *

This program displays the name of each column in the 'orders' table and
the number of characters required to store the column when the
data type is converted to characters.
*/

#include <stdio.h>

#define WARNNOTIFY      1
#define NOWARNNOTIFY    0

main(argc, argv)
int argc;
char *argv[];
{
    mint i, numchars;

    int4 exp_chk();
    char db_stmt[50];
    struct sqllda *sql_desc;
    struct sqlvar_struct *col;

    EXEC SQL BEGIN DECLARE SECTION;
    char db_name[20];
    EXEC SQL END DECLARE SECTION;

    printf("RTYPWIDTH Sample ESQL Program running.\n\n");

    if (argc > 2)          /* correct no. of args? */
    {
        printf("\nUsage: %s [database]\nIncorrect no. of argument(s)\n",
            argv[0]);
        exit(1);
    }
    strcpy(db_name, "stores7");
    if (argc == 2)
        strcpy(db_name, argv[1]);

    EXEC SQL connect to :db_name;
    sprintf(db_stmt, "CONNECT TO %s", argv[1]);
    exp_chk(db_stmt, NOWARNNOTIFY);

    printf("Connected to %s\n", db_name);

    EXEC SQL prepare query_1 from 'select * from orders'; /* prepare select */
    if(exp_chk("Prepare", WARNNOTIFY) == 1)
        exit(1);
}

```

```

EXEC SQL describe query_1 into sql_desc;          /* setup sqllda */
if(exp_chk("Describe", WARNNOTIFY) == 1)
    exit(1);
printf("\n\tColumn Name    \t# chars\n");

/*
 * For each column in orders print the column name and the minimum
 * number of characters required to convert the SQL type to a character
 * data type
 */
for (i = 0, col = sql_desc->sqlvar; i < sql_desc->sqld; i++, col++)
{
    numchars = rtypwidth(col->sqltype, col->sqllen);
    printf("\t%-15s\t%d\n", col->sqlname, numchars);
}

printf("\nRTYPWIDTH Sample Program over.\n\n");
}

/*
 * The exp_chk() file contains the exception handling functions to
 * check the SQLSTATE status variable to see if an error has occurred
 * following an SQL statement. If a warning or an error has
 * occurred, exp_chk() executes the GET DIAGNOSTICS statement and
 * prints the detail for each exception that is returned.
 */
EXEC SQL include exp_chk.ec

```

Output

```

RTYPWIDTH Sample ESQL Program running.

Connected to stores7

Column Name          # chars
order_num            11
order_date           10
customer_num         11
ship_instruct        40
backlog              1
po_num               10
ship_date            10
ship_weight          10
ship_charge          9
paid_date            10

RTYPWIDTH Sample Program over.

```

The rupshift() function

The rupshift() function changes all the characters within a null-terminated string to uppercase characters.

Syntax

```

void rupshift(s)
char *s;

```

s

A pointer to a null-terminated string.

Usage

The `rupshift()` function refers to the current locale to determine uppercase and lowercase letters. For the default locale, US English, `rupshift()` uses the ASCII lowercase (a-z) and uppercase (A-Z) letters.

If you use a nondefault locale, `rupshift()` uses the lowercase and uppercase letters that the locale defines. For more information, see the *HCL® Informix® GLS User's Guide*.

Example

This sample program is in the `rupshift.ec` file in the `demo` directory.

```

/*
 * rupshift.ec *

The following program displays the result of rupshift() on a string
of numbers, letters and punctuation.
*/

#include <stdio.h>

main()
{
    static char string[] = "123abcdefghijkl;.";

    printf("RUPSHIFT Sample ESQL Program running.\n\n");

    printf("\tInput string: %s\n", string);
    rupshift(string);
    printf("\tAfter upshift: %s\n", string);    /* Result */

    printf("\nRUPSHIFT Sample Program over.\n\n");
}

```

Output

```

RUPSHIFT Sample ESQL Program running.

Input string: 123abcdefghijkl;.
After upshift: 123ABCDEFGHIJKL;.

RUPSHIFT Sample Program over.

```

The SetConnect() function (Windows™)

The `SetConnect()` function is available only in Windows™ environments. It switches the connection to a specified explicit connection.

! **Important:** IBM® Informix® ESQL/C supports the SetConnect() connection library function for compatibility with Version 5.01 Informix® ESQL/C for Windows™ applications. When you write new Informix® ESQL/C applications for Windows™ environments, use the SQL SET CONNECTION statement to switch to another active connection.

Syntax

```
void *SetConnect ( void *CnctHndl)
```

CnctHndl

A connection handle that a previous GetConnect() call has returned.

Usage

The SetConnect() function maps to a simple SQL SET CONNECTION statement (one without a DEFAULT option). The SetConnect() call is equivalent to the following SQL statement:

```
EXEC SQL set connection db_connection;
```

In this example, *db_connection* is the name of an existing connection that the GetConnect() function has established. You pass this *db_connection* name to the SetConnect() function as an argument. It is a connection handle for the connection that you want to make active.

If you pass a null handle, the SetConnect() function returns the current connection handle and does not change the current connection. If no current connection exists when you pass a null handle, SetConnect() returns null.

For example, the following code fragment uses SetConnect() to switch from a connection to the **accounts** database on the **acctsvr** database server (**cnctHndl2**) to a **customers** database on the **mainsrvr** database server (**cnctHndl1**):

```
void *cnctHndl1, *cnctHndl2, *prevHndl;
;;

/* Establish connection 'cnctHndl1' to customers@mainsrvr */
strcpy(InetLogin.InfxServer, "mainsrvr");
cnctHndl1 = GetConnect();
EXEC SQL database customers;
;;

/* Establish connection 'cnctHndl2' to accounts@acctsvr */
strcpy(InetLogin.InfxServer, "acctsvr");
cnctHndl2 = GetConnect();
EXEC SQL database accounts;
;;

prevHndl = SetConnect( cnctHndl1 );
```

! **Important:** Because the SetConnect() function maps to a SET CONNECTION statement, it sets the SQLCODE and SQLSTATE status codes to indicate the success or failure of the connection switch request. This behavior differs



from SetConnect() in Version 5.01 Informix® ESQL/C for Windows™, in which this function did not set the SQLCODE and SQLSTATE values.

The SetConnect() function differs from the SET CONNECTION statement in the way that it obtains the connection name. SetConnect() uses an internally generated name that is stored in the connection handle. You must specify this handle as an argument to the SetConnect() call. The SET CONNECTION statement uses the user-defined connection name that the AS clause of the CONNECT statement specifies.



Important: Because the GetConnect() function maps to a CONNECT statement with the WITH CONCURRENT TRANSACTION clause, it allows an explicit connection with open transactions to become dormant. Your Informix® ESQL/C application does not need to ensure that the current transaction was committed or rolled back before it calls the SetConnect() function to switch to another explicit connection.

Return codes

CnctHndl

The call to SetConnect() was successful if the function has returned a connection handle of the connection that is now dormant.

null pointer

The call to SetConnect() was not successful, indicating that no explicit connection was established.

The sqgetdbs() function

The sqgetdbs() function returns the names of databases that a database server can access.

Syntax

```
mint sqgetdbs(ret_fcnt, dbnarray, dbnsize, dbnbuffer, dbnbufsz)
mint *ret_fcnt;
char **dbnarray;
mint dbnsize;
char *dbnbuffer;
mint dbnbufsz;
```

ret_fcnt

A pointer to the number of database names that the function returns.

dbnarray

A user-defined array of character pointers.

dbnsize

The size of the *dbnarray* user-defined array.

dbnbuffer

A pointer to a user-defined buffer that contains the names of the databases that the function returns.

dbnbufsz

The size of the *dbnbuffer* user-defined buffer.

Usage

You must provide the following user-defined data structures to the `sqgetdbs()` function:

- The *dbnbuffer* buffer holds the names of the null-terminated database names that `sqgetdbs()` returns.
- The *dbnarray* array holds pointers to the database names that the function stores in the *dbnbuffer* buffer. For example, *dbnarray*[0] points to the first character of the first database name (in *dbnbuffer*), *dbnarray*[1] points to the first character of the second database name, and so on.

If the application is connected to a database server, a call to the `sqgetdbs()` function returns the names of the databases that are available in the database server of the current connection. This includes the user-defined databases and the **sysmaster** database. Otherwise, it returns the database names that are available in the default database server (that the **INFORMIXSERVER** environment variable indicates). If you use the **DBPATH** environment variable to identify additional database servers that contain databases, `sqgetdbs()` also lists the databases that are available on these database servers. It first lists the databases that are available through **DBPATH** and then the databases that are available through the **INFORMIXSERVER** environment variable.

Return codes

0

Successfully obtained database names

<0

Unable to obtain database names

Example

The `sqgetdbs.ec` file in the `demo` directory contains this sample program.

```

/*
 * sqgetdbs.ec *

This program lists the available databases in the database server
of the current connection.
*/

#include <stdio.h>

/* Defines used with exception-handling function: exp_chk() */
#define WARNNOTIFY    1
#define NOWARNNOTIFY  0

/* Defines used for user-defined data structures for sqgetdbs() */
#define BUFFSZ        256
#define NUM_DBNAMES   10

main()

```

```

{
  char db_buffer[ BUFFSZ ];      /* buffer for database names */
  char *dbnames[ NUM_DBNAMES ]; /* array of pointers to database
                                names in 'db_buffer' */

  mint num_returned;           /* number of database names returned */
  mint ret, i;

  printf("SQGETDBS Sample ESQL Program running.\n\n");

  EXEC SQL connect to default;
  exp_chk("CONNECT TO default server", NOWARNNOTIFY);
  printf("Connected to default server.\n");

  ret = sqgetdbs(&num_returned, dbnames, NUM_DBNAMES,
                db_buffer, BUFFSZ);
  if(ret < 0)
  {
    printf("Unable to obtain names of databases.\n");
    exit(1);
  }

  printf("\nNumber of database names returned = %d\n", num_returned);

  printf("Databases currently available:\n");
  for (i = 0; i < num_returned; i++)
    printf("\t%s\n", dbnames[i]);
  printf("\nSQGETDBS Sample Program over.\n\n");
}

/*
 * The exp_chk() file contains the exception handling functions to
 * check the SQLSTATE status variable to see if an error has occurred
 * following an SQL statement. If a warning or an error has
 * occurred, exp_chk() executes the GET DIAGNOSTICS statement and
 * displays the detail for each exception that is returned.
 */
EXEC SQL include exp_chk.ec;

```

Output

The output you see from the **sqgetdbs** sample program depends on how you set your **INFORMIXSERVER** and **DBPATH** environment variables. The following sample output assumes that the **INFORMIXSERVER** environment variable is set to **mainserver** and that this database server contains three databases that are called **stores7**, **sysmaster**, and **tpc**. This output also assumes that the **DBPATH** environment is not set.

```

SQGETDBS Sample ESQL Program running.

Connected to default server.

Number of database names returned = 3
Databases currently available:
  stores7@mainserver
  sysmaster@mainserver
  tpc@mainserver

SQGETDBS Sample Program over.

```


The sqlbreak() function

The sqlbreak() function sends the database server a request to interrupt processing of the current SQL request. You generally call this function to interrupt long queries.

Syntax

```
mint sqlbreak();
```

Usage

The sqlbreak() function sends the interrupt request to the database server of the current connection. When the database server receives this request, it must determine if the SQL request is interruptible. Some types of database operations are not interruptible and others cannot be interrupted at certain points. You can interrupt the following SQL statements.

- ALTER INDEX
- ALTER TABLE
- CREATE INDEX
- CREATE TABLE
- DELETE
- EXECUTE PROCEDURE
- INSERT
- OPEN
- SELECT
- UPDATE

If the SQL request can be interrupted, the database server takes the following actions:

1. Discontinues execution of the current SQL request
2. Sets SQLCODE (**sqlca.sqlcode**) to a negative value (-213)
3. Returns control to the application

When the application regains control after an interrupted SQL request, any resources that are allocated to the SQL statement remain allocated. Any open databases, cursors, and transactions remain open. Any system-descriptor areas or **sqllda** structures remain allocated. The application program is responsible for the graceful termination of the program; it must release resources and roll back the current transaction.

While the database server executes an SQL request, the application is blocked, waiting for results from the database server. To call sqlbreak(), you must first set up some mechanism to unblock the application process. Two possible methods follow:

- Provide the application user with the ability to interrupt an SQL request once it has begun execution.

When the user presses the Interrupt key, the application becomes unblocked and calls the SIGINT signal-handler function. This signal-handler function includes a call to sqlbreak() to interrupt the database server. For more information, see [Allow a user to interrupt on page 340](#).

- Specify a timeout interval with the `sqlbreakcallback()` function.

After the timeout interval elapses, the application becomes unblocked and calls the callback function. This callback function includes a call to `sqlbreak()` to interrupt the database server. For more information, see [Set up a timeout interval on page 341](#).

Before your program calls `sqlbreak()`, verify with the `sqldone()` function that the database server is currently processing an SQL request.

Return codes

0

The call to `sqlbreak()` was successful. The database server connection exists and either a request to interrupt was sent successfully or the database server was idle.

!=0

No database server is running (no database connection exists) when you called `sqlbreak()`.

The `sqlbreakcallback()` function

The `sqlbreakcallback()` function allows you to specify a timeout interval and to register a callback function. The callback function provides a method for the application to regain control when the database server is processing an SQL request.



Restriction: Do not use the `sqlbreakcallback()` function if your IBM® Informix® ESQL/C application uses shared memory (`onipcshm`) as the **nettype** to connect to the HCL Informix® database server. Shared memory is not a true network protocol and does not handle the nonblocking I/O that is needed to support a callback function. When you use `sqlbreakcallback()` with shared memory, the call appears to register the callback function successfully (it returns zero); however, during SQL requests, the application never calls the callback function.

Syntax

```
mint sqlbreakcallback(timeout, callbackfunc_ptr);
int4 timeout;
void (* callbackfunc_ptr)(int status);
```

timeout

The interval of time to wait for an SQL request to execute before the application process regains control.

This value can be as follows:

-1

Clears the timeout value.

0

Immediately calls the function that `callbackfunc_ptr` indicates.

>0

Sets the timeout interval to the number of milliseconds to elapse before the application calls the function that *callbackfunc_ptr* indicates.

The *timeout* parameter is a 4-byte variable. This parameter is operating-system dependent: it can be a variable with an **int**, **long**, or **short** data type.

callbackfunc_ptr

A pointer to the user-defined callback function.

Usage

After you register a callback function with `sqlbreakcallback()`, the application calls this function at three different points in the execution of an SQL request. The value in the *status* argument of the callback function indicates the point at which the application calls the function. The following table summarizes the *status* values.

When callback function is called	Value of status argument
When the database server begins processing an SQL request	<i>status</i> = 1
While the database server executes an SQL request, when the timeout interval has elapsed	<i>status</i> = 2
When the database server completes the processing of an SQL request	<i>status</i> = 0

When you call the callback function with a *status* value of 2, the callback function can determine whether the database server can continue processing with one of following actions:

- It can call the `sqlbreak()` function to cancel the SQL request.
- It can omit the call to `sqlbreak()` to continue the SQL request.

The callback function, and any of its subroutines, can contain only the following Informix® ESQL/C control functions: `sqldone()`, `sqlbreak()`, and `sqlbreakcallback()`. For more information about the callback function, see [The timeout interval on page 341](#).


If you call `sqlbreakcallback()` with a timeout value of zero, the callback function executes immediately. The callback function executes over and over again unless it contains a call to `sqlbreakcallback()` to redefine the callback function with one of the following actions:

- It disassociates the callback function to discontinue the calling of the callback function, as follows:

```
sqlbreakcallback(-1L, (void *)NULL);
```

- It defines some other callback function or resets the timeout value to a nonzero value, as follows:

```
sqlbreakcallback(timeout, callbackfunc_ptr);
```

 **Important:** Small timeout values might adversely affect the performance of your application.

For more information about the timeout interval, see [The timeout interval on page 341](#).

You must establish a database server connection before you call the `sqlbreakcallback()` function. The callback function remains in effect for the duration of the connection or until the `sqlbreakcallback()` function redefines the callback function.

Return codes

0

The call to `sqlbreakcallback()` was successful.

<0

The call to `sqlbreakcallback()` was not successful.

The `sqldetach()` function

The `sqldetach()` function detaches a process from the database server. You generally call this function when an application forks a new process to begin a new stream of execution.

Syntax

```
mint sqldetach();
```


Usage

If an application creates one or more processes after it initiates a connection to a database server, all the child processes inherit that database server connection from the parent process (the application process that spawned the child). However, the database server still assumes that this connection has only one process. If one database server connection tries to serve both the parent and child processes at the same time, problems can result. For example, if both processes send messages to do something, the database server has no way of knowing which messages belong to which process. The database server might not receive messages in an order that makes sense and might therefore generate an error (such as error -408).

In this situation, call the `sqldetach()` function from the child process. The `sqldetach()` function detaches the child process from the connection that the parent process establishes (which the child inherits). This action drops all database server connections in the child process. The child process can then establish its own connection to a database server.

Use the `sqldetach()` function with the `fork()` system call. When you create a child process from an application process with a database server connection, sequence the function calls as follows:

1. Call `fork()` from the parent process to create a copy of the parent process (the *child* process). Now both parent and child share the same connection to the database server.
2. Call `sqldetach()` from the child process to detach the child process from the database server. This call closes the connection in the child process.

 **Restriction:** You cannot use `sqldetach()` after a `vfork()` call because `vfork()` does not execute a true process fork until the `exec()` function is called. Do not use `sqldetach()` after the parent process uses an `exec()`; when `exec()` starts the child process, the child process does not inherit the connection that the parent process established.

A call to the `sqldetach()` function does not affect the database server sessions of the parent process. Therefore, after `sqldetach()` executes in the child process, the parent process retains any open cursors, transactions, or databases, and the child process does not have database server sessions or database server connections.

When you call the `sqlexit()` function from the parent process, the function drops the connection in the parent process but does not affect the connections in the child process. Similarly, when you call `sqlexit()` from the child process, the function drops only the child connections; it does not affect the parent connections. The `sqlexit()` function rolls back any open transactions before it closes the connection.

If you execute the `DISCONNECT` statement from a child process, you disconnect the process from database server connections and terminate the database server sessions that correspond to those connections. The `DISCONNECT` fails if any transactions are open.

If the child process application has only one implicit connection before it calls `sqldetach()`, execution of the next SQL statement or of the `sqlstart()` library function reestablishes an implicit connection to the default database server. If the application has made one or more explicit connections, you must issue a `CONNECT` statement before you execute any other SQL statements.

The **sqldetach** demonstration program illustrates how to use the `sqldetach()` function.

Return codes

0

The call to `sqldetach()` was successful.

<0

The call to `sqldetach()` was not successful.

Example

The `sqldetach.ec` file in the `demo` directory contains this sample program.

```

/*
 * sqldetach.ec *

This program demonstrates how to detach a child process from a
parent process using the ESQL/C sqldetach() library function.
*/

main()
{
    EXEC SQL BEGIN DECLARE SECTION;
        mint pa;
    EXEC SQL END DECLARE SECTION;

```

```

printf("SQLDETACH Sample ESQL Program running.\n\n");

printf("Beginning execution of parent process.\n\n");
printf("Connecting to default server...\n");
EXEC SQL connect to default;
chk("CONNECT");
printf("\n");

printf("Creating database 'aa'...\n");
EXEC SQL create database aa;
chk("CREATE DATABASE");
printf("\n");

printf("Creating table 'tab1'...\n");
EXEC SQL create table tab1 (a integer);
chk("CREATE TABLE");
printf("\n");

printf("Inserting 4 rows into 'tab1'...\n");
EXEC SQL insert into tab1 values (1);
chk("INSERT #1");
EXEC SQL insert into tab1 values (2);
chk("INSERT #2");
EXEC SQL insert into tab1 values (3);
chk("INSERT #3");
EXEC SQL insert into tab1 values (4);
chk("INSERT #4");
printf("\n");

printf("Selecting rows from 'tab1' table...\n");
EXEC SQL declare c cursor for select * from tab1;
chk("DECLARE");

EXEC SQL open c;
chk("OPEN");

printf("\nForking child process...\n");
fork_child();

printf("\nFetching row from cursor 'c'...\n");
EXEC SQL fetch c into $pa;
chk("Parent FETCH");
if (sqlca.sqlcode == 0)
    printf("Value selected from 'c' = %d.\n", pa);
printf("\n");

printf("Cleaning up...\n");
EXEC SQL close database;
chk("CLOSE DATABASE");
EXEC SQL drop database aa;
chk("DROP DATABASE");
EXEC SQL disconnect all;
chk("DISCONNECT");

printf("\nEnding execution of parent process.\n");
printf("\nSQLDETACH Sample Program over.\n\n");
}

```

```

fork_child()
{
    mint rc, status, pid;

    EXEC SQL BEGIN DECLARE SECTION;
        mint cnt, ca;
    EXEC SQL END DECLARE SECTION;

    pid = fork();
    if (pid < 0)
        printf("can't fork child.\n");

    else if (pid == 0)
    {
        printf("\n*****\n");
        printf("* Beginning execution of child process.\n");
        rc = sqldetach();
        printf("* sqldetach() call returns %d.\n", rc);

        /* Verify that the child is not longer using the parent's
         * connection and has not inherited the parent's connection
         * environment.
         */
        printf("* Trying to fetch row from cursor 'c'...\n");
        EXEC SQL fetch c into $ca;
        chk("* Child FETCH");
        if (sqlca.sqlcode == 0)
            printf("* Value from 'c' = %d.\n", ca);

        /* startup a connection for the child, since
         * it doesn't have one.
         */
        printf("\n* Establish a connection, since child doesn't have one\n");
        printf("* Connecting to database 'aa'...\n");
        EXEC SQL connect to 'aa';
        chk("* CONNECT");
        printf("* \n");
        printf("* Determining number of rows in 'tab1'...\n");
        EXEC SQL select count(*) into $cnt from tab1;
        chk("* SELECT");
        if (sqlca.sqlcode == 0)
            printf("* Number of entries in 'tab1' = %d.\n", cnt);
        printf("* \n");

        printf("* Disconnecting from 'aa' database...\n");
        EXEC SQL disconnect current;
        chk("* DISCONNECT");
        printf("* \n");
        printf("* Ending execution of child process.\n");
        printf("*****\n");

        exit();
    }

    /* wait for child process to finish */
    while ((rc = wait(&status)) != pid && rc != -1);
}

```

```

}

chk(s)
char *s;
{
    mint msglen;
    char buf1[200], buf2[200];

    if (SQLCODE == 0)
    {
        printf("%s was successful\n", s);
        return;
    }
    printf("\n%s:\n", s);
    if (SQLCODE)
    {
        printf("\tSQLCODE = %6d: ", SQLCODE);
        rgetlmsg(SQLCODE, buf1, sizeof(buf1), &msglen);
        sprintf(buf2, buf1, sqlca.sqlerrm);
        printf(buf2);
        if (sqlca.sqlerrd[1])
        {
            printf("\tISAM Error = %6hd: ", sqlca.sqlerrd[1]);
            rgetlmsg(sqlca.sqlerrd[1], buf1, sizeof(buf1), &msglen);
            sprintf(buf2, buf1, sqlca.sqlerrm);
            printf(buf2);
        }
    }
}
}

```

Output

```

SQLDETACH Sample ESQL Program running.

Beginning execution of parent process.

Connecting to default server...
CONNECT was successful

Creating database 'aa'...
CREATE DATABASE was successful

Creating table 'tab1'...
CREATE TABLE was successful

Inserting 4 rows into 'tab1'...
INSERT #1 was successful
INSERT #2 was successful
INSERT #3 was successful
INSERT #4 was successful

Selecting rows from 'tab1' table...
DECLARE was successful
OPEN was successful

Forking child process...

```



```

*****
* Beginning execution of child process.
* sqldetach() call returns 0.
* Trying to fetch row from cursor 'c'...

* Child FETCH:
  SQLCODE =   -404: The cursor or statement is not available.

* Establish a connection, since child doesn't have one
* Connecting to database 'aa'...
* CONNECT was successful
*
* Determining number of rows in 'tab1'...
* SELECT was successful
* Number of entries in 'tab1' =  4.
*
* Disconnecting from 'aa' database...
* DISCONNECT was successful
*
* Ending execution of child process.
*****
SQLDETACH Sample ESQL Program running.

Beginning execution of parent process.

Connecting to default server...
CONNECT was successful

Creating database 'aa'...
CREATE DATABASE was successful

Creating table 'tab1'...

CREATE TABLE was successful

Inserting 4 rows into 'tab1'...
INSERT #1 was successful
INSERT #2 was successful
INSERT #3 was successful
INSERT #4 was successful

Selecting rows from 'tab1' table...
DECLARE was successful
OPEN was successful

Forking child process...

Fetching row from cursor 'c'...
Parent FETCH was successful
Value selected from 'c' = 1.

Cleaning up...
CLOSE DATABASE was successful
DROP DATABASE was successful
DISCONNECT was successful

```

```
Ending execution of parent process.
```

```
SQLDETACH Sample Program over.
```

The sqldone() function

The sqldone() function determines whether the database server is currently processing an SQL request.

Syntax

```
mint sqldone();
```

Usage

Use sqldone() to test the status of the database server in the following situations:

- Before a call to the sqlbreak() function to determine if the database server is processing an SQL request.
- In a signal-handler function, before a call to the longjmp() system function. Only use longjmp() in a signal-handler function if sqldone() returns zero (the database server is idle).

When the sqldone() function determines that the database server is not currently processing an SQL request, you can assume that the database server does not begin any other processing until your application issues its next request.

You might want to create a defined constant for the -439 value to make your code more readable. For example, the following code fragment creates the SERVER_BUSY constant and then uses it to test the sqldone() return status:

```
#define SERVER_BUSY -439
:
if (sqldone() == SERVER_BUSY)
```

Return codes

0

The database server is not currently processing an SQL request: it is idle.

-439

The database server is currently processing an SQL request.

The sqlexit() function

The sqlexit() function terminates all database server connections and frees resources. You can use sqlexit() to reduce database overhead in programs that refer to a database only briefly and after long intervals, or that access a database only during initialization.

Syntax

```
mint sqlexit();
```

Usage

Only call the `sqlexit()` function when no databases are open. If an open database uses transactions, `sqlexit()` rolls back any open transactions before it closes the database. The behavior of this function is similar to that of the `DISCONNECT ALL` statement. However, the `DISCONNECT ALL` statement *fails* if any current transactions exist. Use the `CLOSE DATABASE` statement to close open databases before you call `sqlexit()`.

If the application has only one implicit connection before it calls `sqlexit()`, execution of the next SQL statement or of the `sqlstart()` library function reestablishes an implicit connection to the default database server. If the application makes one or more explicit connections, you must issue a `CONNECT` statement before you execute any other SQL statements.

Return codes

0

The call to `sqlexit()` was successful.

<0

The call to `sqlexit()` was not successful.

The `sqlsignal()` function

The `sqlsignal()` function enables or disables signal handling of the signals that the IBM® Informix® ESQL/C library handles.

Syntax

```
void sqlsignal(sigvalue, sigfunc_ptr, mode)
    mint sigvalue;
    void (*sigfunc_ptr) (void);
    int mode;
```

sigvalue

The **mint** value of the particular signal that needs to be trapped (as `signal.h` defines).

Currently, this parameter is a placeholder for future functionality. Initialize this argument to `-1`.

sigfunc_ptr

A pointer to the user-defined function, which takes no arguments, to call as a signal handler for the *sigvalue* signal.

Currently, this parameter is a placeholder for future functionality. Initialize this argument to a null pointer to a function that receives no arguments.

mode

Can be one of three possible modes:

0

Initializes signal handling.

1

Disables signal handling.

2

Re-enables signal handling.

Usage

The `sqlsignal()` function currently provides handling only for the SIGCHLD signal. In some instances, defunct child processes remain after the application ends. If the application does not clean up these processes, they can cause needless use of process IDs and increase the risk that you run out of processes. This behavior is only apparent when the application uses pipes for client-server communication (that is, the **nettype** field of the `sqlhosts` file is **ipcpip**). You do not need to call `sqlsignal()` for other communication mechanisms (for example, a **nettype** of **tlipcp**).

The *mode* argument of `sqlsignal()` determines the task that `sqlsignal()` performs, as follows:

- Set *mode* to `0` to initialize signal handling.

```
sqlsignal(-1, (void (*)(void))0, 0);
```

When you initialize signal handling with `sqlsignal()`, the Informix® ESQL/C library traps the SIGCHLD signal to handle the cleanup of defunct child processes. This initial call to `sqlsignal()` must occur at the beginning of your application, before the first SQL statement in the program. If you omit this initial call, you cannot turn on the signal-handling capability later in your program.

- Enable and disable signal handling.

If you want to have the Informix® ESQL/C library perform signal handling for portions of the program and your own code perform signal handling for other portions, you can take the following actions:

- To disable signal handling, call `sqlsignal()` with *mode* set to `1`, at the point where you want your program to handle signals:

```
sqlsignal(-1, (void (*)(void))0, 1);
```


- To re-enable signal handling, call `sqlsignal()` with *mode* set to `2`, at the point where you want the HCL Informix® ESQL library to handle signals:

```
sqlsignal(-1, (void (*)(void))0, 2);
```

When you initialize SIGCHLD signal handling with `sqlsignal()`, you allow the Informix® ESQL/C library to process SIGCHLD cleanup. Otherwise, your application must perform the cleanup for these processes if defunct child processes are a problem.

The `sqlstart()` function

The `sqlstart()` function starts an implicit default connection. An implicit default connection can support one connection to the default database server (that the **INFORMIXSERVER** environment variable specifies).

 **Tip:** Restrict use of `sqlstart()` to applications before version 6.0 that only use one connection. IBM® Informix® ESQL/C continues to support this function for compatibility with earlier versions of these applications. For applications of Version 6.0 and later, use the `CONNECT` statement to establish explicit connections to a default database server.

Syntax

```
mint sqlstart();
```

Usage

Informix® ESQL/C provides the `sqlstart()` function for pre-Version 6.0 applications that can only support single connections. In this context, possible uses of `sqlstart()` are as follows:

- You only need to verify that the default database server is available but you do not intend to open a database. If the call to `sqlstart()` fails, you can check the return status to verify that the default database server is not available.
- You need to speed up the execution of the `DATABASE` statement when the application runs over a network. When you put the call to `sqlstart()` in an initialization routine, the application establishes a connection before the user begins interaction with the application. The `DATABASE` statement can then open the specified database.
- You do not know the name of the actual database to access, or your application plans to create a database. The call to `sqlstart()` can establish the implicit default connection and the application can later determine the name of the database to access or create.

If you have an application before version 6.0 that needs an implicit default connection for any other reason, use the `DATABASE` statement instead of `sqlstart()`. For applications of version 6.0 and later, use the `CONNECT` statement to establish database server connections.

When you call the `sqlstart()` function, make sure that the application has not yet established any connections, implicit or explicit. When the application has established an explicit connection, `sqlstart()` returns error -1811. If an implicit connection was established, `sqlstart()` returns error -1802.

You can call this function several times before you establish an explicit connection, as long as each implicit connection is disconnected before the next call to `sqlstart()`. For information about disconnecting, see [Terminate a connection on page 344](#). For more information about explicit and implicit connections, see [Establish a connection on page 326](#).

Return codes

0

The call to `sqlstart()` was successful.

<0

The call to `sqlstart()` was not successful.

The `stcat()` function

The `stcat()` function concatenates one null-terminated string to the end of another.

Syntax

```
void stcat(s, dest)
char *s, *dest;
```

s

A pointer to the start of the string that stcat() places at the end of the destination string.

dest

A pointer to the start of the null-terminated destination string.

Example

This sample program is in the `stcat.ec` file in the `demo` directory.

```
/*
 * stcat.ec *

 This program uses stcat() to append user input to a SELECT statement.
*/

#include <stdio.h>

/*
 * Declare a variable large enough to hold
 * the select statement + the value for customer_num entered from the terminal.
 */
char selstmt[80] = "select fname, lname from customer where customer_num = ";

main()
{
    char custno[11];

    printf("STCAT Sample ESQL Program running.\n\n");

    printf("Initial SELECT string:\n '%s'\n", selstmt);

    printf("\nEnter Customer #: ");
    gets(custno);

    /*
     * Add custno to "select statement"
     */
    printf("\nCalling stcat(custno, selstmt)\n");
    stcat(custno, selstmt);
    printf("SELECT string is:\n '%s'\n", selstmt);

    printf("\nSTCAT Sample Program over.\n\n");
}
```

Output

```
STCAT Sample ESQL Program running.

Initial SELECT string:
```

```
'select fname, lname from customer where customer_num = '
Enter Customer #: 104
Calling stcat(custno, selstmt)
SELECT string is:
  'select fname, lname from customer where customer_num = 104'
STCAT Sample Program over.
```

The stchar() function

The stchar() function stores a null-terminated string in a fixed-length string, padding the end with blanks, if necessary.

Syntax

```
void stchar(from, to, count)
char *from;
char *to;
mint count;
```

from

A pointer to the first byte of a null-terminated source string.

to

A pointer to the fixed-length destination string. This argument can point to a location that overlaps the location to which the *from* argument points. In this case, IBM® Informix® ESQL/C discards the value to which *from* points.

count

The number of bytes in the fixed-length destination string.

Example

This sample program is in the stchar.ec file in the demo directory.

```
/*
 * stchar.ec *

The following program shows the blank padded result produced by
stchar() function.
*/

#include <stdio.h>

main()
{
    static char src[] = "start";
    static char dst[25] = "123abcdefghijklmnopq.;";

    printf("STCHAR Sample ESQL Program running.\n\n");

    printf("Source string: [%s]\n", src);
    printf("Destination string before stchar: [%s]\n", dst);
```

```

stchar(src, dst, sizeof(dst) - 1);

printf("Destination string after stchar: [%s]\n", dst);

printf("\nSTCHAR Sample Program over.\n\n");
}

```

Output

```

STCHAR Sample ESQL Program running.

Source string: [start]
Destination string before stchar: [123abcdefghijkl;.]
Destination string after stchar: [start           ]

STCHAR Sample Program over.

```

The stcmp() function

The stcmp() function compares two null-terminated strings.

Syntax

```

int stcmp(s1, s2)
char *s1, *s2;

```

s1

A pointer to the first null-terminated string.

s2

A pointer to the second null-terminated string.



Important: *s1* is greater than *s2* when *s1* appears after *s2* in the ASCII collation sequence.

Return codes

=0

The two strings are identical.

<0

The first string is less than the second string.

>0

The first string is greater than the second string.

Example

This sample program is in the `stcmp.ec` file in the `demo` directory.


```

/*
 * stcmp.ec *

The following program displays the results of three string
comparisons using stcmp().
*/

#include <stdio.h>

main()
{
    printf("STCMR Sample ESQL Program running.\n\n");

    printf("Executing: stcmp(\"aaa\", \"aaa\")\n");
    printf("  Result = %d", stcmp("aaa", "aaa")); /* equal */
    printf("\nExecuting: stcmp(\"aaa\", \"aaaa\")\n");
    printf("  Result = %d", stcmp("aaa", "aaaa")); /* less */
    printf("\nExecuting: stcmp(\"bbb\", \"aaaa\")\n");
    printf("  Result = %d\n", stcmp("bbb", "aaaa")); /* greater */

    printf("\nSTCMR Sample Program over.\n\n");
}

```

Output

```

STCMR Sample ESQL Program running.

Executing: stcmp("aaa", "aaa")
  Result = 0
Executing: stcmp("aaa", "aaaa")
  Result = -1
Executing: stcmp("bbb", "aaaa")
  Result = 1

STCMR Sample Program over.

```

The stcopy() function

The stcopy() function copies a null-terminated string from one location in memory to another location.

Syntax

```

void stcopy(from, to)
char *from, *to;

```

from

A pointer to the null-terminated string that you want stcopy() to copy.

to

A pointer to a location in memory where stcopy() copies the string.

Example

This sample program is in the `stcopy.ec` file in the `demo` directory.

```

/*
 * stcopy.ec *

  This program displays the result of copying a string using stcopy().
*/

#include <stdio.h>

main()
{
  static char string[] = "abcdefghijklmnopqrstuvwxyz";

  printf("STCOPY Sample ESQL Program running.\n\n");

  printf("Initial string:\n [%s]\n", string);          /* display dest */
  stcopy("John Doe", &string[15]);                 /* copy */
  printf("After copy of 'John Doe' to position 15:\n [%s]\n",
        string);

  printf("\nSTCOPY Sample Program over.\n\n");
}

```

Output

```

STCOPY Sample ESQL Program running.

Initial string:
 [abcdefghijklmnopqrstuvwxyz]
After copy of 'John Doe' to position 15:
 [abcdefghijklmnopJohn Doe]

STCOPY Sample Program over.

```

The stleng() function

The stleng() function returns the length, in bytes, of a null-terminated string that you specify.

Syntax

```

mint stleng(string)
char *string;

```

string

A pointer to a null-terminated string.

Usage

The length does not include the null terminator.

Example

This sample program is in the stleng.ec file in the demo directory.

```

/*
 * stleng.ec *

```

```

    This program uses stleng to find strings that are greater than 35
    characters in length.
*/

#include <stdio.h>

char *strings[] =
{
    "Your First Season's Baseball Glove",
    "ProCycle Stem with Pearl Finish",
    "Athletic Watch w/4-Lap Memory, Olympic model",
    "High-Quality Kickboard",
    "Team Logo Silicone Swim Cap - fits all head sizes",
};

main(argc, argv)
int argc;
char *argv[];
{
    mint length, i;

    printf("STLENG Sample ESQL Program running.\n\n");

    printf("Strings with lengths greater than 35:\n");
    i = 0;
    while(strings[i])
    {
        if((length = stleng(strings[i])) > 35)
        {
            printf(" String[%d]: %s\n", i, strings[i]);
            printf(" Length: %d\n\n", length);
        }
        ++i;
    }
    printf("\nSTLENG Sample Program over.\n\n");
}

```

Output

```

STLENG Sample ESQL Program running.

Strings with lengths greater than 35:
String[2]: Athletic Watch w/4-Lap Memory, Olympic model
Length: 44

String[4]: Team Logo Silicone Swim Cap - fits all head sizes
Length: 49

STLENG Sample Program over.

```

Examples for smart-large-object functions

These examples illustrate how to use the IBM® Informix® ESQL/C library functions to access smart large objects. These examples apply only if you are using HCL Informix® as your database server.

Prerequisites

The examples in this section depend on the existence of the following, alternate **catalog** table for the **stores7** database. The examples also depend on the presence of an sbspace, **s9_sbspc**, that stores the contents of the BLOB and CLOB columns, **picture** and **advert_descr**, in the alternate **catalog** table.

```
-- create table that uses smart large objects (CLOB & BLOB) to
-- store the catalog advertisement data.

CREATE TABLE catalog
(
  catalog_num    SERIAL8 (10001) primary key,
  stock_num     SMALLINT,
  manu_code     CHAR(3),
  unit         CHAR(4),
  advert       ROW (picture BLOB, caption VARCHAR(255, 65)),
  advert_descr  CLOB,
  FOREIGN KEY (stock_num, manu_code) REFERENCES stock constraint aa
)
PUT advert IN (s9_sbspc)
  (EXTENT SIZE 100),
advert_descr IN (s9_sbspc)
  (EXTENT SIZE 20, KEEP ACCESS TIME)
```

The following example illustrates typical commands to create an sbspace. The values of specific options can vary. You must replace **PATH** with the complete file name of the file that you allocate for the sbspace.

```
touch s9_sbspc
onspaces -c -S s9_sbspc -g 4 -p PATH -o 0 -s 2000
```

For more information about how to create an sbspace, and particularly on the onspaces utility, see your *HCL® Informix® Administrator's Guide*.

The following code illustrates the format of entries in a load file that you might use to load data into the alternate **catalog** table. A load file contains data that the LOAD statement loads into a table. Each line in the following figure loads one row in the table. The following figure shows only a sample of code that you can use to load the **catalog** table. For more information about the LOAD statement, see the *HCL® Informix® Guide to SQL: Syntax*:

```
0|1|HRO|case|ROW(/tmp/cn_1001.gif,"Your First Season's Baseball Glove")|0,62,
  /tmp/catalog.des|
0|1|HSK|case|ROW(NULL,"All Leather, Hand Stitched, Deep Pockets, Sturdy
  Webbing That Won't Let Go")||
0|1|SMT|case|ROW(NULL,"A Sturdy Catcher's Mitt With the Perfect Pocket")||
0|2|HRO|each|ROW(NULL,"Highest Quality Ball Available, from the
  Hand-Stitching to the Robinson Signature")||
0|3|HSK|case|ROW(NULL,"High-Technology Design Expands the Sweet Spot")||
0|3|SHM|case|ROW(NULL,"Durable Aluminum for High School and Collegiate
  Athletes")||
0|4|HSK|case|ROW(NULL,"Quality Pigskin with Norm Van Brocklin Signature")||
```

The following code fragment illustrates the format of information in the **catalog.des** file, to which the preceding code refers. The entry for **advert_descr** (0, 62, /tmp/catalog.des) in the preceding code specifies the offset, length, and file name from which the description is loaded. The offset and length are hexadecimal values.

Brown leather. Specify first baseman's or infield/outfield style.
Specify right- or left-handed.

Double or triple crankset with choice of chainrings. For double crankset, chainrings from 38–54 teeth. For triple crankset, chainrings from 24–48 teeth.

No buckle so no plastic touches your chin. Meets both ANSI and Snell standards for impact protection. 7.5 oz. Lycra cover.

Fluorescent yellow.

Super shock-absorbing gel pads disperse vertical energy into a horizontal plane for extraordinary cushioned comfort. Great motion control.
Mens only. Specify size

This section contains the following example programs.

Program	Description	See
<code>create_clob.ec</code>	Inserts a row that contains a CLOB column into the alternate catalog table.	The create_clob.ec program on page 825
<code>get_lo_info.ec</code>	Appends the price from the stock table of the stores7 database to the advert_descr column of the alternate catalog table.	The get_lo_info.ec program on page 828
<code>upd_lo_descr.ec</code>	Obtains the price of catalog items for which the advert_descr column is not null and appends the price to the description.	The upd_lo_descr.ec program on page 832

The create_clob.ec program

The **create_clob** program demonstrates how to perform the following tasks on a smart large object:

- Create a smart large object with user-defined storage characteristics.
- Insert the new smart large object into a database column.

Storage characteristics for the example

The **create_clob** program creates an **advert_descr** smart large object that has the following user-defined storage characteristics:

- Logging is on: LO_LOG
- Keep last access time (default from **advert_descr** column): LO_KEEP_ACCESSTIME
- Integrity is high
- Allocation extent size is 10 KB

```
EXEC SQL include int8;
EXEC SQL include locator;

EXEC SQL define BUFSZ 10;
```

```

extern char statement[80];

main()
{
EXEC SQL BEGIN DECLARE SECTION;
    int8 catalog_num, estbytes, offset;
    int error, numbytes, lofd, ic_num, buflen = 256;
    char buf[256], srvr_name[256], col_name[300];
    ifx_lo_create_spec_t *create_spec;
    fixed binary 'clob' ifx_lo_t descr;
EXEC SQL END DECLARE SECTION;

    void nullterm(char *);
    void handle_lo_error(int);

    EXEC SQL whenever sqlerror call whenexp_chk;
    EXEC SQL whenever sqlwarning call whenexp_chk;

    printf("CREATE_CLOB Sample ESQL program running.\n\n");
    strcpy(statement, "CONNECT stmt");
    EXEC SQL connect to 'stores7';
    EXEC SQL get diagnostics exception 1
        :srvr_name = server_name;
    nullterm(srvr_name);

/* Allocate and initialize the LO-specification structure
*/
    error = ifx_lo_def_create_spec(&create_spec);
    if (error < 0)
    {
        strcpy(statement, "ifx_lo_def_create_spec()");
        handle_lo_error(error);
    }

/* Get the column-level storage characteristics for the
* CLOB column, advert_descr.
*/
    sprintf(col_name, "stores7@%s:catalog.advert_descr",
        srvr_name);
    error = ifx_lo_col_info(col_name, create_spec);
    if (error < 0)
    {
        strcpy(statement, "ifx_lo_col_info()");
        handle_lo_error(error);
    }

/* Override column-level storage characteristics for
* advert_desc with the following user-defined storage
* characteristics:
* no logging
* extent size = 10 kilobytes
*/
    ifx_lo_specset_flags(create_spec, LO_LOG);
    ifx_int8cvint(BUFSZ, &estbytes);
    ifx_lo_specset_estbytes(create_spec, &estbytes);

```

```

/* Create an LO-specification structure for the smart large object
*/

if ((lofd = ifx_lo_create(create_spec, LO_RDWR,
    &descr, &error)) == -1)
{
    strcpy(statement, "ifx_lo_create()");
    handle_lo_error(error);
}
/* Copy data into the character buffer 'buf' */

sprintf(buf, "%s %s",
    "Pro model infielder's glove. Highest quality leather and
    stitching. "
    "Long-fingered, deep pocket, generous web.");

/* Write contents of character buffer to the open smart
* large object that lofd points to. */

ifx_int8cvint(0, &offset);
numbytes = ifx_lo_writewithseek(lofd, buf, buflen,
    &offset, LO_SEEK_SET, &error);
if ( numbytes < buflen )
{
    strcpy(statement, "ifx_lo_writewithseek()");
    handle_lo_error(error);
}

/* Insert the smart large object into the table */
strcpy(statement, "INSERT INTO catalog");
EXEC SQL insert into catalog values (0, 1, 'HSK', 'case', ROW(NULL,
NULL),
:descr);

/* Need code to find out what the catalog_num value was assigned to new
* row */
/* Close the LO file descriptor */
ifx_lo_close(lofd);

/* Select back the newly inserted value. The SELECT
* returns an LO-pointer structure, which you then use to
* open a smart large object to get an LO file descriptor.
*/
ifx_getserial8(&catalog_num);
strcpy(statement, "SELECT FROM catalog");
EXEC SQL select advert_descr into :descr from catalog
    where catalog_num = :catalog_num;

/* Use the returned LO-pointer structure to open a smart
* large object and get an LO file descriptor.
*/
lofd = ifx_lo_open(&descr, LO_RDONLY, &error);
if (error < 0)
{
    strcpy(statement, "ifx_lo_open()");
    handle_lo_error(error);
}

```

```

/* Use the LO file descriptor to read the data in the
 * smart large object.
 */
ifx_int8cvint(0, &offset);
strcpy(buf, "");
numbytes = ifx_lo_readwithseek(lofd, buf, buflen,
    &offset, LO_SEEK_CUR, &error);
if (error || numbytes == 0)
{
    strcpy(statement, "ifx_lo_readwithseek()");
    handle_lo_error(error);
}
if(ifx_int8toint(&catalog_num, &ic_num) != 0)
    printf("\nifx_int8toint failed to convert catalog_num to int");
printf("\nContents of column \'descr\' for catalog_num:
%d \n\t%s\n",
    ic_num, buf);
/* Close open smart large object */
ifx_lo_close(lofd);
/* Free LO-specification structure */
ifx_lo_spec_free(create_spec);
}

void handle_lo_error(error_num)
int error_num;
{
    printf("%s generated error %d\n", statement, error_num);
    exit(1);
}

void nullterm(str)
char *str;
{
    char *end;

    end = str + 256;
    while(*str != ' ' && *str != '\0' && str < end)
    {
        ++str;
    }
    if(str >= end)
        printf("Error: end of str reached\n");
    if(*str == ' ')
        *str = '\0';
}

/* Include source code for whenexp_chk() exception-checking
 * routine
 */
EXEC SQL include exp_chk.ec;

```

The get_lo_info.ec program

This program retrieves information about smart large objects stored in a BLOB column.


```

#include <time.h>

EXEC SQL define BUFSZ 10;

extern char statement[80];

main()
{
    int error, ic_num, oflags, cflags, extsz, imsize, isize, iebytes;
    time_t time;
    struct tm *date_time;
    char col_name[300], sbspc[129];

    EXEC SQL BEGIN DECLARE SECTION;
    fixed binary 'blob' ifx_lo_t picture;
    char srvr_name[256];
    ifx_lo_create_spec_t *cspec;
    ifx_lo_stat_t *stats;
    ifx_int8_t size, c_num, estbytes, maxsize;
    int lofd;
    long atime, ctime, mtime, refcnt;
    EXEC SQL END DECLARE SECTION;

    void nullterm(char *);
    void handle_lo_error(int);

    imsize = isize = iebytes = 0;
    EXEC SQL whenever sqlerror call whenexp_chk;
    EXEC SQL whenever sqlwarning call whenexp_chk;

    printf("GET_LO_INFO Sample ESQL program running.\n\n");
    strcpy(statement, "CONNECT stmt");
    EXEC SQL connect to 'stores7';
    EXEC SQL get diagnostics exception 1
        :srvr_name = server_name;
    nullterm(srvr_name);

    EXEC SQL declare ifxcursor cursor for
        select catalog_num, advert.picture
        into :c_num, :picture
        from catalog
        where advert.picture is not null;

EXEC SQL open ifxcursor;
while(1)
{
    EXEC SQL fetch ifxcursor;
    if (strncmp(SQLSTATE, "00", 2) != 0)
    {
        if(strncmp(SQLSTATE, "02", 2) != 0)
            printf("SQLSTATE after fetch is %s\n", SQLSTATE);
        break;
    }
    /* Use the returned LO-pointer structure to open a smart
    * large object and get an LO file descriptor.
    */
    lofd = ifx_lo_open(&picture, LO_RDONLY, &error);

```

```

    if (error < 0)
    {
        strcpy(statement, "ifx_lo_open()");
        handle_lo_error(error);
    }
    if(ifx_lo_stat(lofd, &stats) < 0)
    {
        printf("\nifx_lo_stat() < 0");
        break;
    }
    if(ifx_int8toint(&c_num, &ic_num) != 0)
        ic_num = 99999;
    if((ifx_lo_stat_size(stats, &size) < 0)
        isize = 0;
    else
        if(ifx_int8toint(&size, &isize) != 0)
        {
            printf("\nFailed to convert size");
            isize = 0;
        }
    if((refcnt = ifx_lo_stat_refcnt(stats)) < 0)
        refcnt = 0;
    printf("\n\nCatalog number %d", ic_num);
    printf("\nSize is %d, reference count is %d", isize, refcnt);

    if((atime = ifx_lo_stat_atime(stats)) < 0)
        printf("\nNo atime available");
    else
    {
        time = (time_t)atime;
        date_time = localtime(&time);
        printf("\nTime of last access: %s", asctime(date_time));
    }
    if((ctime = ifx_lo_stat_ctime(stats)) < 0)
        printf("\nNo ctime available");
    else
    {
        time = (time_t)ctime;
        date_time = localtime(&time);
        printf("Time of last change: %s", asctime(date_time));
    }

    if((mtime = ifx_lo_stat_mtime_sec(stats)) < 0)
        printf("\nNo mtime available");
    else
    {
        time = (time_t)mtime;
        date_time = localtime(&time);
        printf("Time to the second of last modification: %s",
            asctime(date_time));
    }
    if((cspec = ifx_lo_stat_cspec(stats)) == NULL)
    {
        printf("\nUnable to access ifx_lo_create_spec_t structure");
        break;
    }
    oflags = ifx_lo_specget_def_open_flags(cspec);
    printf("\nDefault open flags are: %d", oflags);

```

```

    if(ifx_lo_specget_estbytes(cspec, &estbytes) == -1)
    {
        printf("\nifx_lo_specget_estbytes() failed");
        break;
    }
    if(ifx_int8toint(&estbytes, &iebytes) != 0)
    {
        printf("\nFailed to convert estimated bytes");
    }
    printf("\nEstimated size of smart LO is: %d", iebytes);
    if((extsz = ifx_lo_specget_extsz(cspec)) == -1)
    {
        printf("\nifx_lo_specget_extsz() failed");
        break;
    }
    printf("\nAllocation extent size of smart LO is: %d", extsz);
    if((cflags = ifx_lo_specget_flags(cspec)) == -1)
    {
        printf("\nifx_lo_specget_flags() failed");
        break;
    }
    printf("\nCreate-time flags of smart LO are: %d", cflags);
    if(ifx_lo_specget_maxbytes(cspec, &maxsize) == -1)
    {
        printf("\nifx_lo_specget_maxsize() failed");
        break;
    }
    if(ifx_int8toint(&maxsize, &imsize) != 0)
    {
        printf("\nFailed to convert maximum size");
        break;
    }
    if(imsize == -1)
        printf("\nMaximum size of smart LO is: No limit");
    else
        printf("\nMaximum size of smart LO is: %d\n", imsize);
    if(ifx_lo_specget_sbspace(cspec, sbspc, sizeof(sbspc)) == -1)
        printf("\nFailed to obtain sbspace name");
    else
        printf("\nSbspace name is %s\n", sbspc);
}

/* Close smart large object */
ifx_lo_close(lofd);
ifx_lo_stat_free(stats);
EXEC SQL close ifxcursor;
EXEC SQL free ifxcursor;
}

void handle_lo_error(error_num)
int error_num;
{
    printf("%s generated error %d\n", statement, error_num);
    exit(1);
}

void nullterm(str)
char *str;

```

```

{
    char *end;

    end = str + 256;
    while(*str != ' ' && *str != '\0' && str < end)
    {
        ++str;
    }
    if(str >= end)
        printf("Error: end of str reached\n");
    if(*str == ' ')
        *str = '\0';
}
/* Include source code for whenexp_chk() exception-checking
 * routine
 */
EXEC SQL include exp_chk.ec;

```

The upd_lo_descr.ec program

This program obtains the price of catalog items for which the **advert_descr** column is not null and appends the price to the description.

```

EXEC SQL include sqltypes;

EXEC SQL define BUFSZ 10;

extern char statement[80];

main()
{
    int error, isize;
    char format[] = "<<<<, <<<. &&";
    char decdsply[20], buf[50000], *end;

    EXEC SQL BEGIN DECLARE SECTION;
    dec_t price;
    fixed binary 'clob' ifx_lo_t descr;
    smallint stockno;
    char svr_name[256], mancd[4], unit[5];
    ifx_lo_stat_t *stats;
    ifx_int8_t size, offset, pos;
    int lofd, ic_num;
    EXEC SQL END DECLARE SECTION;

    void nullterm(char *);
    void handle_lo_error(int);

    isize = 0;
    EXEC SQL whenever sqlerror call whenexp_chk;
    EXEC SQL whenever sqlwarning call whenexp_chk;

    printf("UPD_LO_DESCR Sample ESQL program running.\n\n");
    strcpy(statement, "CONNECT stmt");
    EXEC SQL connect to 'stores7';
    EXEC SQL get diagnostics exception 1

```

```

        :srvr_name = server_name;
    nullterm(srvr_name);

/* Selects each row where the advert.picture column is not null and
 * displays
 * status information for the smart large object.
 */
    EXEC SQL declare ifxcursor cursor for
        select catalog_num, stock_num, manu_code, unit, advert_descr
        into :ic_num, :stockno, :mancd, :unit, :descr
        from catalog
        where advert_descr is not null;

EXEC SQL open ifxcursor;
while(1)
{
    EXEC SQL fetch ifxcursor;
    if (strncmp(SQLSTATE, "00", 2) != 0)
    {
        if(strncmp(SQLSTATE, "02", 2) != 0)
            printf("SQLSTATE after fetch is %s\n", SQLSTATE);
        break;
    }
    EXEC SQL select unit_price into :price
        from stock
        where stock_num = :stockno
        and manu_code = :mancd
        and unit = :unit;
    if (strncmp(SQLSTATE, "00", 2) != 0)
    {
        printf("SQLSTATE after select on stock: %s\n", SQLSTATE);
        break;
    }
    if(risnull(CDECIMALTYPE, (char *) &price)) /* NULL? */
        continue; /* skip to next row */
    rfmtdec(&price, format, decdsply); /* format unit_price */
    /* Use the returned LO-pointer structure to open a smart
     * large object and get an LO file descriptor.
     */
    lofd = ifx_lo_open(&descr, LO_RDWR, &error);
    if (error < 0)
    {
        strcpy(statement, "ifx_lo_open()");
        handle_lo_error(error);
    }
    ifx_int8cvint(0, &offset);
    if(ifx_lo_seek(lofd, &offset, LO_SEEK_SET, &pos) < 0)
    {
        printf("\nifx_lo_seek() < 0\n");
        break;
    }
    if(ifx_lo_stat(lofd, &stats) < 0)
    {
        printf("\nifx_lo_stat() < 0");
        break;
    }
    if((ifx_lo_stat_size(stats, &size)) < 0)
    {

```

```

        printf("\nCan't get size, isize = 0");
        isize = 0;
    }
    else
        if(ifx_int8toint(&size, &isize) != 0)
        {
            printf("\nFailed to convert size");
            isize = 0;
        }
    if(ifx_lo_read(lofd, buf, isize, &error) < 0)
    {
        printf("Read operation failed\n");
        break;
    }
end = buf + isize;
strcpy(end++, "(");
strcat(end, decdsply);
end += strlen(decdsply);
strcat(end++, ")");
if(ifx_lo_writewithseek(lofd, buf, (end - buf), &offset,
    LO_SEEK_SET,
    &error) < 0)
{
    printf("Write error on LO: %d", error);
    continue;
}
printf("\nNew description for catalog_num %d is: \n%s\n", ic_num,
    buf);
}
/* Close smart large object */
ifx_lo_close(lofd);
ifx_lo_stat_free(stats);
/* Free LO-specification structure */
EXEC SQL close ifxcursor;
EXEC SQL free ifxcursor;
}

void handle_lo_error(error_num)
int error_num;
{
    printf("%s generated error %d\n", statement, error_num);
    exit(1);
}

void nullterm(str)
char *str;
{
    char *end;

    end = str + 256;
    while(*str != ' ' && *str != '\0' && str < end)
    {
        ++str;
    }
    if(str >= end)
        printf("Error: end of str reached\n");
    if(*str == ' ')
        *str = '\0';
}

```

```
}  
  
/* Include source code for whenexp_chk() exception-checking  
* routine  
*/  
  
EXEC SQL include exp_chk.ec;
```

Index

Special Characters

- ansi preprocessor option 49, 326
- c processor option 70, 72, 72
- cc processor option 70
- e preprocessor option 49, 57
- ED preprocessor option 49, 59
- EU preprocessor option 49, 59
- f processor option 49, 71
- g preprocessor option 61
- G preprocessor option 49, 49, 61
- I preprocessor option 49, 60
- icheck preprocessor option 25, 49, 60
- I processor option 76
- libs processor option 49, 75
- local preprocessor option 49, 61, 400
- log preprocessor option 49, 61
- lw preprocessor option 49
- mserr preprocessor option 49, 68
- N processor option 49
- nl preprocessor option 49, 61
- nowarn preprocessor option 49, 62, 68
- o preprocessor option 49, 49, 69, 72
- r processor option 76
- runtime processor option 72
- Sc processor option 72, 72
- ss processor option 72, 72
- static preprocessor option 49, 367, 367, 382
- subsystem processor option 72, 72
- Sw processor option 72, 72, 72, 72
- target processor option 72, 72, 79, 324
- thread preprocessor option 49, 58, 367, 374, 380
 - for dynamic thread library 399
- ts preprocessor option 49
- V preprocessor option 57
- V processor option 49
- version processor option 49
- wd processor option 72, 72, 79, 324
- we processor option 72, 72
- xopen preprocessor option 49, 62, 452, 453
- .c file extension 46, 57, 70, 75, 297, 372
- .def file extension 72, 75
- .dll file extension 70, 78, 329
- .ec file extension 46, 49, 70, 71
- .ecp file extension 46, 49
- .exe file extension 70, 78, 329
- .h file extension 31
- .o file extension 75
- .obj file extension 70
- .rc file extension 75, 76
- .res file extension 75, 76
- .sl file extension 371
- .so file extension 368, 371

A

- Access mode flags, locks on smart large objects 195
- Aggregate functions 24, 25, 284, 294
- ALLOCATE COLLECTION statement 211
- ALLOCATE DESCRIPTOR statement 478, 480, 480
- ALLOCATE ROW statement 241
- Allocating memory
 - for fetch arrays 471
- Allocation extent size 181, 697, 702
- ALLOW_NEWLINE parameter 9
- ALTER INDEX statement 339, 447, 805

- ALTER TABLE statement 339, 447, 805
- Ampersand (&) symbol 118
- ANSI C standards 380
- ANSI SQL standards
 - checking for Informix extensions 284, 289, 294, 326
 - connecting to a database 326
 - declaring host variables 11
 - defining ESQL/C function prototypes 27
 - delimiting identifiers 15
 - delimiting strings 15
 - escape character 8
 - for datetime and interval values 132, 620, 731
 - getting diagnostic information 278
 - preparing SQL statements 400
 - specifying host variables 10
 - SQLSTATE class values 283
 - using EXEC SQL keywords 31
 - using GOTO in the WHENEVER statement 305
 - using INDICATOR keyword 26
 - warning values 289
- ANSI-compliant database
 - determining 284, 289, 294, 334
 - indicating NOT FOUND condition 288, 299
 - inserting character data 105
 - nonstandard syntax in sqlwarn 294
- ANSI-style parameters as host variables 21
- Arithmetic operations
 - description of 90
- Array
 - and truncated SQL value 26
 - dimension limit 18
 - in a host-variable typedef 20
 - of host variables 18
- ASKPASSATCONNECT network parameter 36, 324, 324
- Asterisk (*) symbol
 - as formatting character 118
 - as overflow character 88, 131
- AUTOFREE feature 411
 - enabling 412
 - for a particular cursor 412
 - with Deferred-PREPARE and OPTOFC features 423

B

- Backslash (\) character 8
- BIGINT
 - corresponding SQL data type 80
- bigint data type
 - character conversion 561
 - decimal conversion 563
 - double conversion 562
 - float conversion 563
 - int (2-byte) conversion 564
 - int (4-byte) conversion 564
 - int (8-byte) conversion 563
- BIGINT data type
 - corresponding ESQL/C data type 80, 85
 - corresponding SQL data type 80
 - defined constant 82, 82, 82
- bigintcvasc() function 558
- bigintcvdbl() function 558
- bigintcvdec() function 559

- bigintcvflt() function 559
- bigintcvfix_int8() function 560
- bigintcvint2() function 560
- bigintcvint4 function 561
- biginttoasc() function 561
- biginttodbl() function 562
- biginttodec() function 563
- biginttoflt() function 563
- biginttofix_int8() function 563
- biginttoint2() function 564
- biginttoint4() function 564
- BIGSERIAL data type
 - corresponding ESQL/C data type 80, 85
- BLOB data type
 - corresponding ESQL/C datatype 80, 85
 - declaring host variable for 180
 - implementation of 276
 - on optical disc 200
 - role of locator.h 85
- boolean data type
 - corresponding SQL data type 85
 - defined constant 84
- Boolean data type
 - declaration 112
- BOOLEAN data type
 - corresponding ESQL/C data type 80, 85
 - data conversion 89, 112
 - defined constant 82
 - distinct-bit constant 460
 - distinct-bit macro 460
- Build file 72
- Built-in data types
 - as element type of collection 207
 - as field type in row 237
- bympr() library function 565
- bycopy() library function 567
- byfill() library function 568
- byleng() library function 570
- BYTE data type
 - corresponding ESQL/C datatype 80, 85
 - declaring host variable for 137
 - defined constant 82
 - inserting 146, 151, 156, 159
 - locator structure shown 137
 - on optical disc 164
 - role of locator.h 27, 85
 - selecting 144, 150, 154, 159
 - subscripting 137
- Byte range lock, description 195
- Bytes
 - comparing 565
 - copying 567
 - determining number of 570
 - filling with a character 568

C

- C compiler
 - c option 72
 - #define preprocessor statement 33
 - #include preprocessor statement 30, 31, 60
 - ANSI C 30, 30
 - called by esql 47
 - generating thread-safe code 381
 - initializer expressions 12
 - linking in other files 75
 - naming restrictions 12
 - options invoked implicitly 72
 - passing arguments to 70

- role in compiling ESQL/C programs 47
- specifying 70
- C header files
 - for conditional compilation of ESQL/C programs 63
 - for defining host variables 63
 - including in EXEC SQL declare section 65
 - shared between ESQL/C and C programs 65
- C preprocessor
 - role in compiling ESQL/C programs 47
 - running first 47, 63
- C preprocessor directives, using to define ESQL/C host variables 47
- C programs, compiling 75
- Callback function
 - declaring 341, 341
 - defining 341, 348
 - definition of 341
 - determining current connection 336
 - disassociating 341, 806
 - registering 341, 806
- calloc() system call 521
- Cardinality, ifx_cl_card() 627
- Case sensitivity 6, 15
- CBOOLTYPE data-type constant 84, 112
- CC8BITLEVEL environment variable 36
- CCHARTYPE data-type constant 84, 791, 796
- CCOLTYPE data-type constant 84
- CDATETYPE data-type constant 84
- CDECIMALTYPE data-type constant 84
- CDOUBLETTYPE data-type constant 84
- CDTIMETYPE data-type constant 84
- CFILETYPE data-type constant 84
- CFIXBINTYPE data-type constant 84
- CFIXCHARTYPE data-type constant 84
- CFLOATTYPE data-type constant 84
- char (C) data type
 - bigint conversion 558
- char data type
 - converting from decimal 587, 597, 758
 - converting from double 761
 - converting from int8 663
 - converting from long int 763
 - converting to decimal 576
 - converting to int8 646
 - defined constant 84, 84
 - definition of 94, 94
 - fetching into 89, 90, 100, 101, 104, 118, 131
 - inserting from 101, 103, 104, 105
 - with ANSI-compliant database 105
- CHAR data type
 - corresponding ESQL/C data type 80, 85, 94
 - data conversion 100
 - defined constant 82, 85
 - fetching 100
 - inserting 101, 105
- Child process
 - detaching from database server 808
 - handling defunct 815
- CINT8TYPE data-type constant 84
- CINTTYPE data-type constant 84
- CINVTYPE data-type constant 84
- CLIENT_GEN_VER version macro 372
- CLIENT_GLS_VER version macro 372
- CLIENT_LOCALE environment variable
 - in InetLogin structure 36
- CLIENT_OS_VER version macro 372
- CLIENT_SQLL_VER version macro 372
- Client-server environment
 - architecture of 318
 - connecting to a database 326
 - local connection 318
 - locating simple large objects 141
 - optimized message transfers 344
 - remote connection 318
- Client-side collection variable 210
- CLOB data type
 - corresponding ESQL/C data type 80, 85
 - declaring host variable for 180
 - implementation of 276
 - on optical disc 200
 - role of locator.h 85
- CLOCATORTYPE data-type constant 84
- CLONGTYPE data-type constant 84
- CLOSE DATABASE statement 326, 327, 344, 447, 753, 814
- CLOSE statement 220, 405, 406, 408
 - optimizing 421
- CLVCHARTYPE data-type constant 84
- CMONEYTYPE data-type constant 84
- COLLCHAR environment variable
 - in InetLogin structure 36
- colct.h header file
 - definition of 27
- Collection data type
 - cardinality, returning 627
 - selecting entire row from 222
- collection data type (ESQL/C)
 - allocating memory for 211
 - client-side 210
 - Collection Derived Table clause 212
 - corresponding SQL data type 80, 80, 80, 85, 85, 85
 - deallocating memory for 211
 - declaration 206
 - defined constant 84
 - fetching from 221
 - fetching into 214
 - initializing 214
 - insert cursor for 218
 - inserting into 215
 - literal values 227
 - operating on 212
 - preparing statements that contain 402
 - select cursor for 223
 - typed collection variable 207
 - untyped collection variable 209
 - updating 224
- Collection data type (SQL)
 - accessing 204
 - as element type of collection 207
 - as field type in row 237
 - declaring host variables for 206
 - deleting 235
 - extended identifier 440, 444
 - fetching 214, 221
 - in dynamic SQL 444
 - inserting into 215, 233, 234
 - literal values 227, 234, 252
 - nested collection 221, 230, 234, 252
 - owner of 440, 444
 - selecting from 233
 - simple collection 212
 - updating 224, 233, 233, 234
- Collection data type (SQL), selecting a row from 222
- Collection derived table
 - for collection variables 212
 - for row variables 241
 - in DELETE 228, 247
 - in INSERT 215, 217, 245
 - in SELECT 221, 222, 245
 - in UPDATE 224
- Colon (:)
- between main variable and indicator variable 25
- preceding host variables 10
- specifying indicator variable 25
- Column (database)
 - determining if truncated 284, 294
 - using data conversion 87
- Comma (,) symbol 118
- Comments in ESQL/C program 9
- COMMIT WORK statement 336, 447
- Compiler
 - for ESQL/C programs 49
 - preprocessing 49
 - redirecting errors 61
 - syntax 49
 - version information 57
- Compiler version independence 77
- Compiling an ESQL/C program
 - default order, overview of 48
 - esql command 5
 - ESQL/C preprocessor 46
- Compiling dynamic thread application 399
- Compiling ESQL/C programs
 - default order 63
 - non-default order 64
- Compiling the ESQL/C program
 - esql command 46
 - overview 46
- Conditional compilation directives
 - description of 31
 - processing of 46
- Configuration information
 - in InetLogin structure 36
 - locations of 41
 - reading in 41
- CONNECT statement 322, 364
 - and explicit connections 326
 - determining database server features 334
 - determining name of a connection 280
 - determining name of a database server 280, 336
 - establishing a connection 328, 374
 - with an active transaction 336
 - WITH CONCURRENT TRANSACTION clause 336
- Connection authentication 77
- Connection handle 364
- Connections
 - using InetLogin structure 36, 321
- Constants
 - for distinct bit 460
 - for ESQL/C data types 84
 - for smart large objects 182, 192, 681, 683, 692
 - for SQL data types 82, 452, 482
 - for SQL statements 297, 447
 - for varchar data 96
 - for X/Open SQL data types 85
 - with dynamic-management structures 447, 452
- COUNT descriptor field
 - after a DESCRIBE 446, 480
 - definition of 440
 - determining number of return values 492
 - initializing 480
 - saving 483, 486, 487, 496
 - setting 482, 500, 501
- CPFIRST environment variable 64

- CREATE DATABASE statement 326, 327, 328, 334, 447
- CREATE FUNCTION statement 430
- CREATE INDEX statement 339, 447, 805
- CREATE OPAQUE TYPE statement, maxlength value and lvarchar 256
- CREATE PROCEDURE statement 430, 447
- CREATE TABLE statement 186, 250, 339, 447, 805
- Create-time flags 698, 703
- CROWTYPE data-type constant 84
- CSHORTTYPE data-type constant 84
- CSTRINGTYPE data-type constant 84, 791, 796
- Cursor (database)
 - and sqlca.sqlerrd 294
 - deferring PREPARE 416
 - definition of 406
 - dynamic 374, 409
 - for receiving rows 406
 - for sending rows 408
 - freeing 405, 411
 - hold 406, 408
 - identifying variable mismatch 284, 289, 294
 - in thread-safe application 379
 - insert 408
 - interrupting the database server 805
 - naming 409
 - optimizing 409
 - scroll 406
 - sequential 406, 408
 - sizing the cursor buffer 410
 - update 406
 - using 406
- Cursor buffer
 - default size 411
 - description 410
 - fetch buffer 410
 - insert buffer 410
 - sizing 410
- Cursor function
 - definition of 431
 - known at compile time 432
 - not known at compile time 495, 537
 - parameterized 435
 - with sqlda structure 537
 - with system-descriptor area 495
- Cursor names
 - case sensitivity 6
 - scope rules 61, 379
 - specifying 409
 - using delimited identifiers 15, 409
 - using host variables 409
- CVARBINTYPE data-type constant 84
- CVCHARTYPE data-type constant 84

D

- Data conversion
 - arithmetic operations 90
 - definition of 87
 - for boolean values 89, 112
 - for CHAR data type 100
 - for char values 576, 587, 597, 646, 663
 - for character data types 88, 89, 90, 90, 100, 118
 - for DATE values 132, 132
 - for DATETIME values 90, 130, 132, 615
 - for decimal values 576, 578, 582, 583, 587, 597, 599, 601, 603, 668
 - for DECIMAL values 91, 650, 758
 - for double values 578, 599, 666, 761

- for floating-point data types 89, 118
- for int values 582, 601
- for int4 values 603
- for int8 values 674
- for INTERVAL values 90, 130, 132
- for long int values 583, 656, 676, 763
- for MONEY values 758, 761, 763
- for numeric data types 88, 90, 91
- for NVARCHAR data type 101
- for VARCHAR values 90, 101
- when fetching DATETIME 131
- when fetching INTERVAL 131
- when inserting DATETIME 131
- when inserting INTERVAL 131
- DATA descriptor field
 - after a DESCRIBE 480, 481
 - after a FETCH 484, 486, 487, 495, 501
 - allocating memory for 480
 - definition of 440
 - freeing memory for 485
 - setting column value 496, 496
 - setting input parameter 500, 501
 - setting simple-large-object column 507
- Data transfer
 - error checking 343
- Data types
 - array of host variables 18
 - defined constants for 452, 482
 - for dynamic thread library 392
 - int1 108
 - int2 108
 - int4 108
 - locale-specific 94
 - locator structure 137
 - MCHAR 108
 - mint 108
 - mlong 108
 - MSHORT 108
 - pointers 20
 - relationship between C and SQL types 80
 - structures 18, 19
 - typedef expressions 20
 - X/Open defined constants for 85, 453
- Database cursor
 - in explicit connection 364
- Database server connection
 - active 336, 374, 639
 - checking status of 338
 - current 326, 336, 336, 347, 639, 689
 - detaching from 338
 - determining features 334
 - determining name of 280, 336
 - dormant 326, 336, 374
 - freeing resources of 814
 - in thread-safe application 374
 - interrupting 338
 - switching between 335
 - terminating 344, 377
 - types of 326
 - using across threads 376
- Database servers
 - connecting to 329
 - current 322
 - default 36, 321, 322, 333
 - determining available databases 338
 - determining features of 334
 - determining name of 280, 336
 - determining type of 284, 289
 - in InetLogin structure 36
 - interrupting 805

- message request 339, 341, 361, 411, 411, 416, 416, 421
- optimized message transfers 344
- optimizing OPEN, FETCH, and CLOSE 421
- receiving configuration information 321
- reducing messages 416
- specified 322
- DATABASE statement 625
 - and implicit connections 326, 327, 816
 - defined statement constant 447
 - determining name of a connection 280
 - determining name of a database server 280, 336
 - opening a database 334
 - starting a database server 328
- Databases
 - closing 344
 - determining available 338
 - determining if ANSI-compliant 284, 289, 294, 334
 - determining transaction logging 284, 289, 294, 334
 - environment 319
 - fetching CHAR data 100
 - fetching DATETIME data 130
 - fetching INTERVAL data 131
 - fetching VARCHAR data 101
 - inserting CHAR data 101
 - inserting NCHAR data 101
 - inserting NVARCHAR data 103
 - inserting VARCHAR data 103
- date data type
 - corresponding SQL data type 80, 85
 - data conversion 132, 132
 - declaration 125
 - defined constant 84
- DATE data type
 - corresponding ESQL/C variable type 80, 85
 - data conversion 132, 132
 - declaring host variables for 125
 - defined constant 82
 - ifx_defmtdate() 630
 - ifx_strdate() 717
 - rdatestr() 745
 - rdayofweek() 747
 - rdefmtdate() 749
 - rfmtdate() 754
 - rjulmday() 772
 - reapyear() 774
 - rmdayjul() 776
 - rstrdate() 785
 - rtdat() 787
- Date expressions
 - formatting 125
 - valid characters 125
- datetime data type
 - corresponding SQL data type 80
 - data conversion 132
 - declaration 127
 - defined constant 84
 - definition of 126
 - fetching into 130
 - inserting from 130
 - role of datetime.h 85
- DATETIME data type
 - ANSI-standard qualifiers 132
 - corresponding ESQL/C data type 80, 85
 - data conversion 90, 130, 131, 131, 132, 132, 615
 - datetime.h, role of 27
 - declaring host variables for 127

- defined constant 82
- dtaddinv() 606
- dtcurrent() 608
- dtcvasc() 609
- dtcvfntasc() 612
- dtextend() 615
- dtsub() 616
- dtsubinv() 619
- dttoasc() 620
- dttofmntasc() 622
- dynamically allocating structures for 524
- extending 130, 615
- fetching 90, 130
- ifx_dtcvasc() 632
- ifx_dtcvfmntasc() 634
- ifx_dttofmntasc() 636
- inserting 90, 130
- macros 129
- precision of underlying decimal value 126
- qualifiers 127, 132
- role of datetime.h 85
- datetime.h header file
 - contents and use 126
 - data types defined 85
 - definition of 27
 - macros defined 129, 524
- DB_LOCALE environment variable 36
- DBALSBC environment variable 36
- DBANSIWARN environment variable 36, 58, 289, 294, 326
- DBAPICODE environment variable 36
- DBASCIIBC environment variable 36
- DBCENTURY environment variable 36, 609, 612, 622, 630, 634, 636, 717, 749, 785
- DBCODASET environment variable 36
- DBCONNECT environment variable 36
- DBCSCONV environment variable 36
- DBCSCOVERRIDE environment variable 36
- DBCWIDTH environment variable 36
- DBDATE environment variable 36, 612, 622, 634, 636, 717, 745, 785
- DBFLTMASK environment variable 36
- DBLANG environment variable 36
- DBMONEY environment variable 36, 118, 118, 118, 758, 761, 763
- DBMONEYSCALE environment variable 36
- DBPATH environment variable 36, 333, 802
- DBSS2 environment variable 36
- DBSS3 environment variable 36
- DBTEMP environment variable 36
- DBTIME environment variable 36, 612, 622, 634, 636, 729, 733
- DEALLOCATE COLLECTION statement 211
- DEALLOCATE DESCRIPTOR statement 478, 485
- DEALLOCATE ROW statement 241
- dec_t typedef
 - defined constant for DECIMAL data type 84
 - defined constant for MONEY data type 84
 - definition of 113
- decadd() library function 571
- deccmp() library function 573
- deccopy() library function 575
- deccvasc() library function 576
- deccvdbl() library function 578
- deccvflt() library function 580
- deccvint() library function 582
- deccvlong() library function 583
- deccdiv() library function 585, 585
- dececv() library function 379, 383, 587, 628
- decfcvt() library function 379, 383, 587, 628
- Decimal arithmetic
 - addition 571
 - division 585, 585
 - multiplication 591
 - subtraction 595
- decimal data
 - bigint conversion 559
- decimal data type
 - addition 571
 - comparing 573
 - converting from double 578
 - converting from int8 668
 - converting from integer 582
 - converting from long int 583
 - converting from text 576
 - converting to double 599
 - converting to int 601
 - converting to int8 650
 - converting to long int 603
 - converting to text 587, 597, 758
 - copying 575
 - corresponding SQL data type 80
 - data conversion 91
 - declaration 113
 - defined constant for DECIMAL data type 84
 - defined constant for MONEY data type 84
 - division 585
 - floating-point decimals 91, 92
 - in thread-safe application 379
 - multiplication 591
 - role of decimal.h 85
 - rounding 593
 - subtraction 595
 - truncating 604
- DECIMAL data type
 - corresponding ESQ/C variable type 80, 85
 - data conversion 90, 91, 91, 650, 758
- decadd() 571
- deccmp() 573
- deccopy() 575
- deccvasc() 576
- deccvbl() 578
- deccvint() 580, 582
- deccvlong() 583
- deccdiv() 585, 585
- dececv() 587
- decfcvt() 587
- decimal structure shown 113
- declaring host variables for 113
- decmul() 591
- decround() 593
- decsb() 595
- dectoasc() 597
- dectodbl() 599
- dectoint() 601
- dectolong() 603
- dectrunc() 604
- defined constant 82, 85
- fixed-point decimals 91, 92
- number of decimal digits 89
- role of decimal.h 27, 85
- scale and precision 92, 440
- decimal structure 113
- decimal.h header file
 - data types defined 85, 113
 - definition of 27
- DECLARE SECTION 11
 - excluding C header file statements from 67
 - including C declaration syntax in 67
- DECLARE statement
 - and sqlca structure 294, 301
 - in thread-safe application 379
 - insert cursor for collection variable 218
 - select cursor for collection variable 223
 - with a SELECT statement 406
 - with an EXECUTE FUNCTION statement 406, 495, 537
 - with an INSERT statement 408
 - with deferred PREPARE 416
 - with OPTOFC and Deferred-PREPARE features 423
- decmul() library function 591
- decround() library function 593
- decsb() library function 595
- dectoasc() library function 597
- dectodbl() library function 599
- dectoint() library function 601
- dectolong() library function 603
- dectrunc() library function 604
- Default order of compilation of ESQ/C programs, overview of 48
- Deferred-PREPARE feature 416
 - enabling 417
 - restrictions on 416
 - SET DEFERRED_PREPARE statement 417
 - with AUTOFREE and OPTOFC features 423
 - with OPTOFC feature 423
- define directives, ESQ/C
 - processing of 46
- define preprocessor directive 31, 33, 59
- DELETE statements 447
 - and NOT FOUND condition 288, 299
 - collection columns 235
 - Collection Derived Table clause 228, 247
 - defined-statement constant 447
 - determining estimated cost of 294
 - determining number of rows deleted 279, 294
 - determining rowid 294
 - dynamic 424, 434, 434, 456
 - failing to access rows 294
 - in ANSI-compliant database 105
 - interrupting 339, 805
 - known at compile time 424, 424, 424, 434
 - not known at compile time 456
 - parameterized 434, 456, 506, 547
 - row variables 247
 - WHERE CURRENT OF clause 409
 - with DESCRIBE 446, 454
 - without WHERE clause 284, 289, 294, 447, 454
- DELIMIT environment variable 15, 36, 247
- Delimited identifiers 15, 247, 409
- demo1 sample program 43
- demo2 sample program 435, 435
- demo3 sample program 487, 501, 530
- demo4 sample program 435, 435, 487, 540
- Demonstration programs
 - location 43
 - source files for 547
- DESCRIBE statement
 - allocating memory for data 480, 481, 524, 788
 - allocating memory for sqlca 521
 - and deferred PREPARE 417
 - and lvarchar host variables 481
 - and sqlca structure 454
 - determining column data type 82, 96, 453, 453
 - determining return-value data type 453
 - determining SQL statement type 294, 297, 447

- initializing sqllda structure 521
- initializing system-descriptor area 480
- INTO clause 446, 519, 521, 521, 547
- role in dynamic SQL 403
- setting COUNT field 480
- SQLCODE value 297, 447
- USING SQL DESCRIPTOR clause 446, 478, 480, 486, 496, 506
- warnings after 284, 289, 294
- with an item descriptor 486, 496
- with deferred PREPARE 416
- with input parameters 481
- with sqlvar_struct 529, 535
- Diagnostic information
 - definition of 277
 - with GET DIAGNOSTICS statement 279
 - with the sqlca structure 293
- Diagnostics area
 - CLASS_ORIGIN field 280, 289, 289, 289, 292, 292, 292
 - CONNECTION_NAME field 280, 336
 - definition of 279
 - INFORMIX_SQLCODE field 280, 282
 - MESSAGE_LENGTH field 280
 - MESSAGE_TEXT field 280, 292
 - MORE field 279
 - NUMBER field 279
 - RETURNED_SQLSTATE field 280, 282
 - ROW_COUNT field 279
 - SERVER_NAME field 280, 336
 - SUBCLASS_ORIGIN field 280, 289, 289, 289, 292, 292, 292
 - undefined fields 282
- DISCONNECT statement 364, 753
 - and explicit connections 326
 - and open transactions 814
 - in thread-safe application 377
 - terminating a database server connection 344
- dispcat_pic sample program 166, 309
- Distinct bit 460
- Distinct data types
 - algorithm for determining 460
 - distinct bit 460
 - dynamically executing 460
 - extended identifier 440, 444
 - in dynamic SQL 444
 - name of 440, 444
 - owner of 440, 444
 - source data type 440, 444, 460
- Distributed computing environment (DCE) 373, 380, 380
- DLL Registry 77
- Dollar (\$) sign
 - as formatting character 118
 - between main variable and indicator variable 25
 - for function parameters 21
 - relation to SQL keyword protection 68
 - to declare host variables 10, 11
 - with embedded SQL statements 6
 - with preprocessor directives 31
- Dot notation 245, 251
- Double dash (-) 9
- double data type
 - bigint conversion 558
 - converting from decimal 599
 - converting from int8 666
 - converting to decimal 578
 - converting to int8 648
 - converting to text 761
- corresponding SQL data type 80, 85, 117
- data conversion 91
- defined constant 84
- Double quotes (" ")
 - delimiting identifiers 15, 247
 - escaping 8
 - in a literal collection 234
 - in a literal row 252
 - in a quoted string 8
- DROP DATABASE statement 326, 327, 328, 447
- DROP FUNCTION statement 430
- DROP PROCEDURE statement 430
- dtaddinv() library function 606
- dtcurrent() library function 608
- dtcvasc() library function 132, 609
- dtcvmtasc() library function 132, 612
- dtextend() library function 132, 132, 615
- dtime structure 127
- dtime_t typedef
 - defined constant 84
 - definition 127, 130
 - setting qualifiers for DATETIME 524
- dtsub() library function 616
- dtsubinv() library function 619
- dttoasc() library function 132, 620
- dttofmtasc() library function 132, 507, 622
- dyn_sql sample program 309
- Dynamic link library (DLL)
 - and import library 78
 - building 79
 - definition 78
 - ESQL client interface 324
 - esqlauth.dll 77, 324
 - locating 79
 - Registry 77
 - sharing 329
 - with WHENEVER 305
- Dynamic SQL
 - assembling the statement string 400
 - definition of 399, 400
 - describing the statement 403, 446
 - executing the statement 403
 - freeing resources 405
 - memory management 438
 - non-SELECT statements known at compile time 424
 - non-SELECT statements not known at compile time 456, 456
 - preparing the statement 400
 - SELECT statements known at compile time 425
 - SELECT statements not known at compile time 455, 456
 - statements not known at compile time 458
 - statements used 403, 406, 408, 478, 519
 - statements with user-defined data types 458
 - user-defined functions known at compile time 430
 - user-defined functions not known at compile time 457
- Dynamic thread functions, registering 395
- Dynamic thread library
 - creating 389
 - data types for 392
 - registering functions 395
- Dynamic-management structure
 - sqllda structure 442, 519
 - system-descriptor area 439, 477
- dynthr_init() function 395

E

- elif preprocessor directive 31, 34
- else preprocessor directive 31, 34
- endif preprocessor directive 31, 34
- Environment variables
 - CC8BITLEVEL 36
 - CLIENT_LOCALE 36
 - COLLCHAR 36
 - CPFIRST 64
 - DB_LOCALE 36
 - DBALSBC 36
 - DBANSIWARN 36, 58, 289, 294, 326
 - DBASCIIBC 36
 - DBCENTURY 36, 609, 612, 622, 630, 634, 636, 717, 749, 785
 - DBCODASET 36
 - DBCCONNECT 36
 - DBCSCONV 36
 - DBCSEVERIDE 36
 - DBCWIDTH 36
 - DBDATE 36, 612, 622, 634, 636, 717, 745, 785
 - DBFLTMASK 36
 - DBLANG 36
 - DBMONEY 36, 118, 118, 118, 758, 761, 763
 - DBMONEYSCALE 36
 - DBPATH 36, 333, 802
 - DBSS2 36
 - DBSS3 36
 - DBTEMP 36
 - DBTIME 36, 612, 622, 634, 636, 729, 733
 - DELIMIDENT 15, 36
 - ESQLMF 36
 - FET_BUF_SIZE 36
 - GL_DATE 36, 612, 622, 634, 636, 717, 745, 785
 - GL_DATETIME 36
 - IFX_AUTOFREE 412
 - IFX_DEFERRED 417
 - IFX_LOB_XFERSIZE 343
 - IFX_SESSION_MUX 331
 - in thread-safe application 379
 - INFORMIXCONRETRY 36
 - INFORMIXCONTIME 36
 - INFORMIXDIR 36, 49, 49, 60
 - INFORMIXSERVER 36, 44, 321, 507, 802, 816
 - INFORMIXSQLHOSTS 320
 - LANG 36
 - LC_COLLATE 36
 - LC_CTYPE 36
 - LC_MONETARY 36
 - LC_NUMERIC 36
 - LC_TIME 36
 - LD_LIBRARY_PATH 369, 398
 - OPTMSG 345
 - OPTOFC 422
 - PATH 79
 - precedence 41
 - retrieving 35
 - setting 35
 - THREADLIB 380, 380, 398
- eprotect utility
 - u mode 64, 67
 - protecting SQL keywords 67
- Error code
 - finderr utility 4
- Error handling
 - checking during data transfer 343
 - retrieving an error message 766

- role of sqlca.h 27
- using in-line code 303
- with optimized message transfers 347
- Error messages
 - determining length of 280
 - Informix
 - specific 302, 307
 - obtaining parameters 294
 - redirecting 61
 - retrieving text of 280, 306, 766, 768
- Escape character 8, 234, 252
- Escape characters, multibyte filter for 4
- ESQL client-interface DLL 324
 - contents of 78
 - description 77
- ESQL client-interface library 78
- esql command
 - calling C preprocessor and compiler 47
 - compatibility issues 370
 - library options 367
 - linking options 75
 - options passed implicitly 72
 - preprocessing options 57
 - requirements for using 46, 49
 - steps esql performs 49
 - syntax 49
 - version information 49
- ESQL preprocessor
 - stage 1 46
- ESQL/C conditional compilation directives
 - processing of 46
- ESQL/C data types
 - BIGINT 80
 - BIGSERIAL 80
 - boolean 85
 - char 94, 94
 - character data types 94
 - collection 80, 85, 204
 - date 80, 85, 125
 - datetime 80, 85, 126
 - decimal 80, 85
 - defined constants for 82, 84, 453
 - double 80, 85, 117
 - fixchar 80, 85, 94, 95
 - fixed binary 80, 85
 - float 80, 85, 117
 - floating-point data types 117
 - ifx_loc_t 80, 85, 179
 - int8 80, 109
 - integer data types 108
 - interval 80, 85, 126
 - loc_t 80, 85, 136
 - long int 85, 108
 - lvarchar 80, 85, 94, 99
 - row 80, 85, 235
 - short int 85, 108
 - string 80, 85, 94, 95
 - trailing blanks 95
 - var binary 80, 85
 - varchar 80, 85, 94, 96
- ESQL/C define directives, processing of 46
- ESQL/C Dynamic Link Libraries 77
- ESQL/C files for Windows 4
- ESQL/C host variables, using C preprocessor directives to define 47
- ESQL/C include directives, preprocessing of 46
- ESQL/C library functions
 - character and string functions 105
 - connection functions 364
 - database server control functions 340, 341, 347
 - DATE type functions 125
 - DATETIME type functions 134
 - DECIMAL type functions 383, 383
 - environment variable functions 35
 - error message functions 306
 - formatting functions 124
 - function prototypes 30
 - INT8 type functions 110
 - INTERVAL type functions 134
 - numeric formatting functions 124
 - size and alignment functions 93
 - smart-large-object functions 200
- ESQL/C preprocessor, stage 2 46
- ESQLAUTH sample program 324
- esqlauth.c authorization file 324
- esqlauth.dll ESQL client-interface DLL 77
- esqlauth.dll
 - Informix
 - DLL 324
 - ESQLMF environment variable 36
 - ESQLMF.EXE multibyte filter 4
- Exception handling
 - definition of 277
 - determining number of exceptions 279
 - displaying error text 302, 307
 - NOT FOUND condition 288, 299, 299, 305
 - retrieving error message text 280, 306
 - runtime errors 292, 300, 305
 - success condition 288, 298
 - using the WHENEVER statement 305
 - warning conditions 289, 300, 305
 - with sqlca structure 298
 - with SQLSTATE variable 287
- Exclamation point (!), wildcard in smart large object filenames 681
- EXEC SQL keywords
 - to declare host variables 11
 - with embedded SQL statements 6
 - with preprocessor directives 31
- exec() system call 380, 808
- EXECUTE FUNCTION statement
 - associated with a cursor 406, 406, 432, 432
 - defined statement constant 447, 491, 492, 535
 - executing a cursor function 432
 - executing a noncursor function 431
 - for user-defined functions 430, 431, 457
 - INTO host_var clause 431
 - known at compile time 427, 431
 - not known at compile time 455, 456
 - parameterized 433, 435, 456
 - with DESCRIBE 446, 457, 480, 521, 521
 - with dynamic-management structures 457
 - with sqllda structure 535
 - with system-descriptor area 491
- EXECUTE IMMEDIATE statement 301, 425, 430
- EXECUTE PROCEDURE statement 339, 424, 430, 430, 434, 447, 456
- EXECUTE statement
 - INTO DESCRIPTOR clause 519, 527, 536
 - INTO host_var clause 294, 426, 431
 - INTO SQL DESCRIPTOR clause 478, 484, 491, 492
 - role in dynamic SQL 403, 403
 - SQLCODE values 302
 - USING DESCRIPTOR clause 478, 519, 527, 538, 545, 546, 546, 547
- USING host_var clause 434
- USING SQL DESCRIPTOR clause 484, 484, 496, 505, 505, 506, 506
- with non-SELECT statements known at compile time 424
- with noncursor functions known at compile time 431
- with singleton SELECT statements known at compile time 426
- with user-defined procedures 430
- exit() system call 297, 303
- Explicit connection
 - connection handle 364
 - default 333
 - definition of 326, 329
 - establishing 329, 625
 - identifying 336
 - limits of 364
 - starting 328, 328
 - switching to 800
 - terminating 344, 753
 - when to use 329
 - with sqlexit() 814
- Exporting runtime routines 77
- Extended identifier 440, 444, 460
- External function
 - definition 430
 - executing dynamically 431, 432, 492, 495, 536, 537
 - iterator function 432
- External procedure 430, 430
- External routines 430
- EXTYPEID descriptor field 440
- EXTYPELENGTH descriptor field 440
- EXTYPELENGTH descriptor field 440
- EXTYPEOWNERLENGTH descriptor field 440
- EXTYPEOWNERNAME descriptor field 440

F

- fclose() system call 60
- FET_BUF_SIZE environment variable 36
- FetArrSize global variable 471
 - and FetBufSize 471
 - with a fetch array 462
- FetBufSize global variable 42
 - and FetArrSize 471
- Fetch array
 - allocating memory for 471
 - allocating memory, example 472
 - and simple large objects 462
 - description of 462
 - FetArrSize global variable 462
 - freeing memory 477
 - obtaining values from 475
 - sample program 463
 - use of ifx_loc_t structure 472
 - using 462
 - USING DESCRIPTOR clause 462
 - using sqllda structure with 462
 - with Deferred PREPARE and OPTOFC features 462
- Fetch buffer 406, 410
- FETCH statement
 - and NOT FOUND condition 288, 299
 - checking for truncation 294
 - fetching into a collection variable 223
 - getting values from a system-descriptor area 483
 - INTO DESCRIPTOR clause 537
 - INTO host_var clause 19, 294
 - INTO SQL DESCRIPTOR clause 495

- optimizing 421
- retrieving a row 406
- USING DESCRIPTOR clause 519, 527, 530, 537, 540
- USING SQL DESCRIPTOR clause 478, 484, 486, 487, 495, 501
- warnings 294
- with aggregate functions 294
- with fetch array 462
- with OPTOFC and Deferred PREPARE features 423
- Fetching
 - CHAR values 100
 - character data 100
 - collection data 214
 - data conversion 88
 - DATETIME values 90, 130
 - determining rowid 294
 - INTERVAL values 90, 131
 - into char host variable 89, 90, 100, 101, 104, 118, 131
 - into collection host variable 230, 233
 - into datetime host variable 130
 - into fixchar host variable 89, 90, 100, 101, 104, 118, 131
 - into fixed binary host variable 268
 - into ifx_lo_t host variable 191
 - into interval host variable 131
 - into lvarchar host variable 261
 - into row host variable 251
 - into string host variable 89, 90, 100, 101, 104, 118, 131
 - into var binary host variable 274
 - into varchar host variable 89, 100, 104, 118
 - NCHAR values 101
 - NVARCHAR values 103
 - row-type data 243
 - VARCHAR values 90, 101
- File extensions
 - .c 46, 57, 70, 75, 372
 - .def 72, 75
 - .dll 70, 78, 329
 - .ec 46, 49, 70, 71
 - .ecp 49
 - .exe 70, 78, 329
 - .h 31
 - .o 75
 - .obj 70
 - .rc 75, 76
 - .res 75, 76
 - .sl 371
 - .so 368, 371
- File name
 - compiled resource file 75
 - ESQL/C executable 49, 49, 69
 - ESQL/C libraries 49, 75
 - include file 49
 - log file 49
 - module-definition file 75
 - options for 57
 - project file 49, 71
 - resource file 75
 - response file 49, 71
- File-open mode flags 149
- Files
 - copying a smart large object to 681
 - copying to a smart large object 683
 - getting name for a smart large object 686
 - named file as a simple-large-object location 153, 496, 496
- open file as a simple-large-object location 149
- finderr utility 4
- fixchar data type
 - corresponding SQL data type 80, 80, 85, 85
 - defined constant 84
 - definition of 94, 95
 - fetching into 89, 90, 100, 101, 104, 118, 131
 - for boolean values 112
 - inserting from 101, 103, 104, 105
 - with ANSI-compliant database 105
- fixed binary data type
 - checking for null 268
 - corresponding SQL data type 80, 85
 - declaration 264
 - defined constant 84
 - fetching into 268
 - inserting from 267
 - setting to null 267
 - use with smart large objects 180
- Fixed-length opaque data type
 - declaring host variable for 264
 - inserting 260, 267
 - selecting 261, 268
- Fixed-point decimals 91, 92
- float (C) data type
 - bigint conversion 559
- float data type
 - corresponding SQL data type 80, 85, 117
 - data conversion 91
 - defined constant 84
 - passed as double 117
- FLOAT data type
 - corresponding ESQL/C data type 80, 85, 117
 - data conversion 90, 91, 91
 - defined constant 82, 85
 - determining how stored 284, 289, 294, 334
 - number of decimal digits 89
- Floating-point decimals 89, 91, 92, 118, 599, 666
- FLUSH statement 220, 408, 500, 539
- fork() system call 60
- fork() system call 380, 808
- Formatting function
 - ifx_defmtdate() 630
 - rdefmtdate() 749
 - rfmtdate() 754
 - rfmtdec() 758
 - rfmtdouble() 761
 - rfmtlong() 763
- fread() system call 60
- FREE statement
 - freeing cursor resources 405, 406, 408
 - freeing statement-identifier resources 405
 - role in dynamic SQL 405, 405
- free() system call
 - freeing a simple-large-object memory buffer 144
 - freeing an sqllda structure 531, 531
 - freeing column data buffer 531, 531
- Freeing a cursor automatically 411
- Freeing memory, fetch array 477
- Function cursor
 - definition of 407
 - fetch buffer 410
 - statements that manage 406
 - using 432
 - with sqllda structure 537
 - with system-descriptor area 495
- Function libraries, for ESQL/C 4
- Function library
 - bycmpr() 565
 - bycopy() 567
 - byfill() 568
 - byleng() 570
 - decadd() 571
 - deccmp() 573
 - deccopy() 575
 - deccvasc() 576
 - deccvdbl() 578
 - deccvflt() 580
 - deccvint() 582
 - deccvlong() 583
 - decdiv() 585, 585
 - dececv() 379, 383, 587, 628
 - decfcvt() 379, 383, 587, 628
 - decmul() 591
 - decround() 593
 - decsb() 595
 - dectoasc() 597
 - dectodbl() 599
 - dectoint() 601
 - dectolong() 603
 - detrunc() 604
 - dtaddinv() 606
 - dtcurrent() 608
 - dtcvasc() 609
 - dtcvfmtasc() 612
 - dtxtend() 615
 - dtsb() 616
 - dtsbinv() 619
 - dttoasc() 620
 - dttofmtasc() 507, 622
 - GetConnect() 364, 625
 - ifx_cl_card() 627
 - ifx_dececv() 379, 628
 - ifx_decfcvt() 379, 628
 - ifx_defmtdate() 630
 - ifx_dtcvasc() 632
 - ifx_dtcvfmtasc() 634
 - ifx_dttofmtasc() 636
 - ifx_getcur_conn_name() 639
 - ifx_getenv() 638
 - ifx_getserial8() 639
 - ifx_int8add() 640
 - ifx_int8cmp() 642
 - ifx_int8copy() 644
 - ifx_int8cvasc() 646
 - ifx_int8cvdbl() 648
 - ifx_int8cvdec() 650
 - ifx_int8cvint() 652, 654
 - ifx_int8cvlong() 656
 - ifx_int8div() 657
 - ifx_int8mul() 659
 - ifx_int8sub() 661
 - ifx_int8toasc() 663
 - ifx_int8todbl() 666
 - ifx_int8todec() 668
 - ifx_int8toint() 671, 674
 - ifx_int8tolong() 676
 - ifx_lo_ 694
 - ifx_lo_alter() 679
 - ifx_lo_close() 680
 - ifx_lo_col_info() 680
 - ifx_lo_copy_to_file() 627, 681
 - ifx_lo_copy_to_lo() 683
 - ifx_lo_create() 684
 - ifx_lo_def_create_spec() 685
 - ifx_lo_filename() 686
 - ifx_lo_from_buffer() 687
 - ifx_lo_lock() 688

ifx_lo_open() 687, 689
 ifx_lo_read() 691
 ifx_lo_readwith 692
 ifx_lo_release() 693
 ifx_lo_spec_free() 695
 ifx_lo_specget_estbytes() 696
 ifx_lo_specget_extsz() 697
 ifx_lo_specget_flags() 698
 ifx_lo_specget_maxbytes() 699
 ifx_lo_specget_sbspace() 699
 ifx_lo_specset_estbytes() 701
 ifx_lo_specset_extsz() 702
 ifx_lo_specset_flags() 703
 ifx_lo_specset_maxbytes() 703
 ifx_lo_specset_sbspace() 704
 ifx_lo_stat_atime() 705
 ifx_lo_stat_cspect() 706
 ifx_lo_stat_ctime() 707
 ifx_lo_stat_free() 707
 ifx_lo_stat_mtime_sec() 708
 ifx_lo_stat_refcnt() 708
 ifx_lo_stat_size() 709
 ifx_lo_stat() 705
 ifx_lo_tell() 710
 ifx_lo_to_buffer() 710
 ifx_lo_truncate() 711
 ifx_lo_unlock() 712
 ifx_lo_write() 713
 ifx_lo_writewith 714
 ifx_lvar_alloc() 715
 ifx_putenv() 716
 ifx_strdate() 717
 incvasc() 726
 incvmtasc() 729
 intoasc() 731
 intofntasc() 507, 733
 invdivdbl() 736
 invdivinv() 738
 invxtend() 740
 inmuldbl() 742
 ldchar() 175, 744
 rdatestr() 745
 rdayofweek() 747
 rdefmtdate() 749
 rdownshift() 752
 ReleaseConnect() 364, 753
 rfmtdate() 507, 754
 rfmtdec() 507, 758
 rfmtdouble() 761
 rfmtlong() 763
 rgetlmsg() 766
 rgetmsg() 768, 768
 risnull() 770
 rjulmday() 772
 rileapyear() 774
 rmdyjul() 776
 rsetnull() 777
 rstod() 780
 rstoi() 781
 rstol() 783
 rstrdate() 785
 rtoday() 787
 rtypalign() 524, 531, 788
 rtypmsize() 524, 531, 791
 rtypename() 794
 rtypsize() 796
 rtypwidth() 797
 rupshift() 799
 SetConnect() 364, 800
 sqgetdbs() 802
 sqlbreak() 338, 348, 805

sqlbreakcallback() 341, 806
 sqldetach() 338, 344, 380, 808
 sqldone() 338, 348, 814
 sqlexit() 344, 814
 sqlsignal() 815
 sqlstart() 328, 814, 816
 stcat() 400, 817
 stchar() 819
 stcmpr() 820
 stcopy() 400, 821
 stleng() 822

Functions
 callback 341
 cursor 431, 432
 dynamic thread library 389
 dynamic thread, registering 389
 iterator 432
 noncursor 431, 431
 parameters 409, 507
 signal handler 340

G

GB18030-2000 codeset 62
 GET DESCRIPTOR statement
 getting COUNT field 486, 496
 getting fields 478, 483
 getting row values 486
 setting COUNT field 483
 with OPTOFC and Deferred-PREPARE features 423
 GET DIAGNOSTICS
 failure and SQLSTATE 292
 GET DIAGNOSTICS statement
 and OPTOFC feature 421
 ANSI SQL compliance 278
 description 279
 examples of use 279, 280, 292, 307
 exception information 280
 retrieving multiple exceptions 292
 RETURNED_SQLSTATE field 282
 SQLCODE variable 282
 SQLSTATE variable 282
 statement information 279
 X/Open compliance 278
 getcd_me sample program 144
 getcd_nf sample program 154
 getcd_of sample program 150
 GetConnect() library function 364, 625
 GL_DATE environment variable 36, 612, 622, 634, 636, 717, 745, 785
 GL_DATETIME environment variable 36
 GL_USEGLU environment variable 62
 Global ESQL/C variables 42
 Global Language Support (GLS) environment
 character data types for host variables 94
 inserting character data 101, 103
 naming host variables 12
 naming indicator variables 24
 transferring character data 100
 Global variable
 OptMsg 345
 GLS for Unicode (GLU) 62
 gls.h header file
 definition of 27
 GLU. 62

H

HCL
Informix
 checking for secondary mode 284, 289, 294, 334
 connect statement 289

DATASKIP feature 25, 284, 289, 294
 determining type 284, 289
 interrupting 341, 806

HCL

Informix

SE

284

Header file

 automatic inclusion 30, 30

 collct.h 27

 datetime.h 27

 decimal.h 27

 gls.h 27

 ifxgls.h 27

 ifxtypes.h 27

 infxexp.c 27

 int8.h 27, 109

 list of 85

 locator.h 27, 180

 login.h 27, 36, 324

 pthread.h 380

 sqlca.h 27

 sqlda.h 27, 30

 sqlhdr.h 27, 30, 372

 sqliapi.h 27

 sqlproto.h 27, 30

 sqlstype.h 27

 sqlstypes.h 507

 sqltypes.h 27

 sqlxtype.h 27

 syntax for including 30, 31

 system 44

 value.h 27

 varchar.h 27

Hold cursor 218, 406, 408

HOST network parameter 36, 324

Host variable

 array of 18, 18

 as ANSI-style parameter 21

 as C structure 19

 as cursor name 409

 as function parameter 409, 507

 as input parameter 433

 as pointer 20

 as routine argument 426

 as SQL identifier 15

 assigning a value to 14

 based on definitions in C header files 63

 Boolean data type 112

 case sensitivity 6

 char data type 90, 94, 131

 choosing data type for 12, 80, 84, 453, 527

 collection data type 204

 date data type 125

 datetime data type 127

 decimal data type 113

 declaring 11

 fetching DATETIME value 90

 fetching INTERVAL value 90

 fetching VARCHAR value 90

 fixchar data type 90, 95, 131

 fixed binary data type 264

 ifx_lo_t data type 180

 in embedded SQL 10

 in EXECUTE FUNCTION 431, 432

 in GLS environment 12

 in nonparameterized SELECT 426, 427

 in parameterized DELETE or UPDATE 434

 in parameterized EXECUTE FUNCTION 435

 in parameterized SELECT 435

 in typedef expressions 20

- initializing 12
- inserting DATETIME value 90
- inserting INTERVAL value 90
- inserting VARCHAR 90
- int8 data type 109
- interval data type 128, 130, 131
- loc_t data type 137
- lvarchar data type 99, 256
- naming 12
- row data type 235
- scope of 13
- string data type 90, 95, 131
- truncation of 26
- using data conversion 87
- var binary data type 268
- varchar data type 96
- with float values 118
- with null values 18, 723, 726, 770, 777
- HostInfoStruct structure
 - AskPassAtConnect field 324
 - definition of 324
 - Host field 324
 - InfxServer field 324
 - Options field 324
 - Pass field 324
 - Protocol field 324
 - Service field 324
 - User field 324
- Hyphen
 - as formatting character 118
 - double(--) 9

I

- ICU. 62
- IDATA descriptor field 440, 500
- ifdef preprocessor directive 31, 34
- ifndef preprocessor directive 31, 34
- ifx_allow_newline() user-defined routine 9
- IFX_AUTOFREE environment variable 412
 - client only 422
- ifx_cl_card() library function 627
- ifx_dececv() library function 379, 628
- ifx_decfv() library function 379, 628
- IFX_DEFERRED_PREPARE environment variable 417
 - client only 422
- ifx_defmtdate() library function 630
- ifx_dtcvasc() library function 632
- ifx_dtcvmtasc() library function 634
- ifx_dttofmtasc() library function 636
- ifx_getcur_conn_name() library function 639
- ifx_getenv() library function 638
- ifx_getserial8() library function 639
- ifx_getversion utility 371
- ifx_int8add() library function 640
- ifx_int8cmp() library function 642
- ifx_int8copy() library function 644
- ifx_int8cvasc() library function 646
- ifx_int8cvdbl() library function 648
- ifx_int8cvdec() library function 650
- ifx_int8cvint() library function 652, 654
- ifx_int8cvlong() library function 656
- ifx_int8div() library function 657
- ifx_int8mul() library function 659
- ifx_int8sub() library function 661
- ifx_int8toasc() library function 663
- ifx_int8todbl() library function 666
- ifx_int8todec() library function 668
- ifx_int8toint() library function 671, 674
- ifx_int8tolong() library function 676
- ifx_lo_ 196, 197, 694

- ifx_lo_alter() library function 679
 - lightweight I/O 194
- ifx_lo_close() library function 197, 680
 - lightweight I/O 194
- ifx_lo_col_info() library function 680
- ifx_lo_copy_to_file() library function 627, 681, 686
- ifx_lo_copy_to_lo() library function 683
- ifx_lo_create() library function 185, 187, 192, 684
 - duration of open 196
 - lightweight I/O 194
 - locks on smart large objects 195
- ifx_lo_def_create_spec() library function 185, 186, 685
- ifx_lo_filename() library function 686
- ifx_lo_from_buffer() library function 189, 200, 687
- ifx_lo_lock() library function 688
- ifx_lo_open() library function 192, 687, 689
 - duration of open 196
 - lightweight I/O 194
 - locks on smart large objects 195
- ifx_lo_read() library function 196, 691
- ifx_lo_readwith 196, 692
- ifx_lo_release 687
- ifx_lo_release() library function 189, 200, 693
- ifx_lo_spec_free() library function 187, 695
- ifx_lo_specget_estbytes() library function 696
- ifx_lo_specget_extsz() library function 181, 697
- ifx_lo_specget_flags() library function 182, 698
- ifx_lo_specget_maxbytes() library function 181, 699
- ifx_lo_specget_sbspace() library function 181, 699
- ifx_lo_specset_estbytes() library function 701
- ifx_lo_specset_extsz() library function 181, 702
- ifx_lo_specset_flags() library function 182, 703
- ifx_lo_specset_maxbytes() library function 181, 703
- ifx_lo_specset_sbspace() library function 704
- ifx_lo_stat_atime() library function 198, 705
- ifx_lo_stat_csperc() library function 198, 706
- ifx_lo_stat_ctime() library function 198, 707
- ifx_lo_stat_free() library function 199, 707
- ifx_lo_stat_mtime_sec() library function 198, 708
- ifx_lo_stat_refcnt() library function 198, 708
- ifx_lo_stat_size() library function 198, 709
- ifx_lo_stat() library function 197, 705
- ifx_lo_t data type
 - corresponding SQL data type 80, 85, 85
 - declaration 180
 - definition of 179
 - fetching into 191, 191
 - inserting from 187
 - use of fixed binary data type 180, 276
- ifx_lo_tell() library function 196, 197, 710
- ifx_lo_to_buffer() function 200
- ifx_lo_to_buffer() library function 189, 710
- ifx_lo_truncate() library function 711
- ifx_lo_unlock() library function 712
- ifx_lo_write() library function 197, 713
- ifx_lo_writewith 197, 714
- IFX_LOB_XFERSIZE
 - environment variable 343
- ifx_loc_t structure, with fetch array 472
- ifx_lvar_alloc() library function 715
- ifx_putenv() function 345, 422

- ifx_putenv() library function 716
- ifx_release() library function 200
- IFX_SESSION_MUX environment variable, for Windows 331
- ifx_strdate() library function 717
- ifx_var_alloc() function 718
- ifx_var_dealloc() function 719
- ifx_var_flag() function 720
- ifx_var_getdata() function 722
- ifx_var_getlen() function 723
- ifx_var_isnull() function 274, 723
- ifx_var_setdata() function 724
- ifx_var_setlen() function 725
- ifx_var_setnull() function 272, 726
- ifx_varlena_t structure 270
- ifxgls.h header file
 - definition of 27
- ifxtypes.h file
 - description of 27
- ILENGTH descriptor field 440, 500
- ILogin sample program 4
- ILOGIN sample program 40
- Implicit connection
 - default 333
 - definition of 327
 - starting 328, 328, 328, 328, 328, 816
 - terminating 344
 - with sqlexit() 814
- Import library 78
- Include directives, ESQ/L/C
 - preprocessing of 46
- Include files
 - header files as 27
 - preprocessor directive for 31
 - search path 60
 - specifying search path 60
 - syntax for 30, 31
- Include preprocessor directive 30, 31, 31
- incvasc() library function 132, 726
- incvmtasc() library function 132, 729
- INDICATOR descriptor field 440, 460, 500
- INDICATOR keyword 25, 26, 426
- Indicator variable
 - checking for missing indicator 60
 - declaring 24
 - definition of 24
 - determining null data 18, 25, 26
 - in GLS environment 24
 - in INTO clause of EXECUTE 426
 - indicating truncation 26, 100, 101, 103, 104, 131, 460
 - inserting null values 25
 - specifying in SQL statement 25
 - valid data types 24
 - with opaque data type 460
 - with sqlda structure 444, 521, 521, 538, 539
 - with system-descriptor area 440, 500
- InetLogin structure
 - application example 40, 322
 - AskPassAtConnect field 36, 324, 324
 - CC8BitLevel field 36
 - Client_Loc field 36
 - CollChar field 36
 - connection information in 321
 - ConRetry field 36
 - ConTime field 36
 - DB_Loc field 36
 - DbAIsBc field 36
 - DbAnsiWarn field 36
 - DbApiCode field 36
 - DbAsciiBc field 36

- DbCentury field 36
- DbCodeset field 36
- DbConnect field 36
- DbCsConv field 36
- DbCsOverride field 36
- DbCsWidth field 36
- DbDate field 36
- DbFltMsk field 36
- DbLang field 36
- DbMoney field 36
- DbMoneyScale field 36
- DbPath field 36
- DbSS2 field 36
- DbSS3 field 36
- DbTemp field 36
- DbTime field 36
- DelimIdent field 36
- description of 36
- determining default database server 36
- EsqLMF field 36
- FetBuffSize field 36
- fields of 36
- GIDate field 36
- GIDateTime field 36
- Host field 36, 324
- Informix
 - Dir field 36
 - Informix 36
 - SqlHosts field 36
 - InfxServer field 36, 322, 324, 625
 - Lang field 36
 - Lc_Collate field 36
 - Lc_CType field 36
 - Lc_Monetary field 36
 - Lc_Numeric field 36
 - Lc_Time field 36
 - Options field 36, 324
 - Pass field 36, 324
 - precedence 41
 - Protocol field 36, 324
 - Service field 36, 324
 - setting fields 40
 - User field 36, 324
 - with HostInfoStruct 324
- Informix
 - general library
 - actual name 367, 368
 - API version 372
 - choosing version of 366
 - compatibility issues 370
 - default version 369
 - description of 365
 - libasf 76, 366
 - libgen 76, 366
 - libgls 76, 366
 - libos 76, 366
 - libsql 76, 366
 - linking 367, 367, 369, 380
 - location of 366
 - naming 367, 368
 - obtaining version of 371
 - shared 365, 368, 370
 - static 365, 367
 - symbolic name 368
 - thread-safe 365
 - thread-safe shared 382
 - thread-safe static 382
 - INFORMIX Registry subkey
 - connection information in 41
 - Informix
 - Server Information dialog box (Setnet32 utility) 625
 - INFORMIXCONRETRY environment variable 36
 - INFORMIXCONTIME environment variable 36
 - INFORMIXDIR
 - location of demonstration programs 4, 4
 - INFORMIXDIR environment variable 49, 49, 60, 366
 - in InetLogin structure 36
 - location of DLLs 77
 - location of executable files 4
 - location of function libraries 4
 - location of import library 72
 - location of include files 72
 - INFORMIXSERVER environment variable 44, 321, 507, 802, 816
 - and GetConnect() 625
 - in HostInfoStruct structure 324
 - in InetLogin structure 36
 - INFORMIXSQLHOSTS environment variable 36, 320
 - infxexp.c header file
 - definition of 27
 - Input parameter
 - definition of 400, 433, 433
 - in singleton SELECT 426
 - not known at compile time 455
 - specifying value in a system-descriptor area 484
 - specifying value in an sqlda structure 527
 - specifying values for EXECUTE FUNCTION statements 433, 435, 456
 - specifying values for non-SELECT statements 434, 456
 - specifying values for SELECT statements 433, 435, 456
 - specifying values for user-defined routines 426
 - with DESCRIBE 481
 - Insert
 - from var binary-host variable 272
 - Insert buffer 408, 410
 - Insert cursor 527
 - definition of 408
 - description of 410
 - executing with sqlda structure 539
 - executing with system-descriptor area 500
 - for collection variable 218
 - input parameters in VALUES clause 484
 - insert buffer 410
 - required for 408
 - statements that manage 408
 - with system-descriptor area 484
 - INSERT statements
 - and NOT FOUND condition 288, 299
 - associated with a cursor 408
 - collection columns 233
 - Collection Derived Table clause 215, 245
 - defined statement constant 447
 - determining estimated cost of 294
 - determining number of rows inserted 279, 294
 - determining rowid 294
 - dynamic 408, 424, 434, 456, 456
 - executing with sqlda structure 538
 - executing with system-descriptor area 496
 - failing to access rows 294
 - inserting CHAR data 101, 105
 - inserting collection data 215, 231, 234
 - inserting NCHAR data 101
 - inserting NVARCHAR data 103
 - inserting opaque-type data 260, 267, 272, 458
 - inserting row-type data 245, 252
 - inserting smart-large-object data 187
 - inserting VARCHAR data 103
 - interrupting 339, 805
 - known at compile time 424, 434
 - not known at compile time 455
 - obtaining generated SERIAL value 294
 - parameterized 434
 - VALUES clause 19, 434
 - with DESCRIBE 446, 480, 521, 521
 - with null values 25

Inserting

 - CHAR values 101
 - character data 100, 105
 - data conversion 88
 - DATETIME values 90, 130
 - from char host variable 101, 103, 104
 - from datetime host variable 130
 - from fixchar host variable 101, 103, 104
 - from fixed binary host variable 267
 - from fixed-size lvarchar 260
 - from ifx_lo_t host variable 187
 - from interval host variable 131
 - from string host variable 101, 103, 104
 - from varchar host variable 101, 103, 104
 - INTERVAL values 90, 131
 - into collection column 231, 233, 234
 - into collection variable 215
 - into row variable 245
 - into row-type column 252
 - opaque-type values 458
 - smart-large-object data 187
 - VARCHAR values 90, 103

int (2-byte) data type

 - bigint conversion 560

int (4-byte) data type

 - bigint conversion 561

int (8-byte) data type

 - bigint conversion 560

int data type 84

 - converting from decimal 601
 - converting from int8 674
 - converting to decimal 582

int1 data type 108

int2 data type 108

int4 data type 108

int8 data type

 - addition 640
 - comparing 642
 - converting from decimal 650
 - converting from double 648
 - converting from integer 652, 654
 - converting from long int 656
 - converting from text 646
 - converting to decimal 668
 - converting to double 666
 - converting to int 671, 674
 - converting to long 674
 - converting to long int 676
 - converting to text 663
 - copying 644
 - corresponding ESQL/C data type 80, 85, 117
 - corresponding SQL data type 80
 - declaration 109
 - declaring host variable for 109
 - defined constant 84
 - division 657

- getting SERIAL8 values 639
- ifx_getserial8() 639
- ifx_int8add() 640
- ifx_int8cmp() 642
- ifx_int8copy() 644
- ifx_int8cvasc() 646
- ifx_int8cvdbl() 648
- ifx_int8cvdec() 650
- ifx_int8cvint() 652, 654
- ifx_int8cvlong() 656
- ifx_int8div() 657
- ifx_int8mul() 659
- ifx_int8sub() 661
- ifx_int8toasc() 663
- ifx_int8todbl() 666
- ifx_int8todec() 668
- ifx_int8toflt() 671
- ifx_int8toint() 674
- ifx_int8tolong() 676
- int8 structure shown 109
- multiplication 659
- subtraction 661
- INT8 data type
 - corresponding ESQ/C data type 108
 - defined constant 82
- int8.h header file 85, 85, 109
- definition of 27
- INTEGER data type
 - corresponding ESQ/C data type 80, 85, 108
 - data conversion 90, 91, 91
 - defined constant 82, 85
- International Components for Unicode (ICU) 62
- interval data type
 - corresponding SQL data type 80
 - data conversion 132
 - declaration 128
 - defined constant 84
 - definition of 126
 - fetching into 131
 - inserting from 131
 - role of datetime.h 85
- INTERVAL data type
 - ANSI-standard qualifiers 132
 - classes of 131, 132
 - corresponding ESQ/C data type 80, 85
 - data conversion 90, 130, 131, 131, 132
 - datetime.h, role of 27
 - declaring host variables for 128
 - defined constant 82
 - dynamically allocating structures for 524
 - fetching 90, 131
 - incvasc() 726
 - incvfmtasc() 729
 - inserting 90, 131
 - intoasc() 731
 - intofmtasc() 733
 - invdivdbl() 736
 - invdivinv() 738
 - invxtend() 740
 - invmuldbl() 742
 - macros 129
 - precision of underlying decimal value 126
 - qualifiers 128, 132
 - role of datetime.h 85
- intoasc() library function 132, 731
- intofmtasc() library function 132, 507, 733
- intrvl structure 128
- intrvl_t typedef
 - defined constant 84

- definition of 128, 131
- setting qualifier for INTERVAL 524
- invdivdbl() library function 736
- invdivinv() library function 738
- invxtend() library function 131, 740
- invmuldbl() library function 742
- ISAM error code
 - and sqlerrd 294, 300
 - retrieving message text 280, 766, 768
- ISDISTINCTBOOLEAN distinct-bit macro 460
- ISDISTINCTLVARCHAR distinct-bit macro 460
- ISDISTINCTTYPE distinct-bit macro 460
- Item descriptor
 - definition of 439
 - EXTYPEID field 440
 - EXTYPELENGTH field 440
 - EXTYPENAME field 440
 - EXTYPEOWNERLENGTH field 440
 - EXTYPEOWNERNAME field 440
 - getting field values 483
 - IDATA field 440, 500
 - ILENGTH field 440, 500
 - INDICATOR field 440, 460, 500
 - ITYPE field 440, 500
 - NAME field 440, 480, 487
 - NULLABLE field 440, 480, 487
 - PRECISION field 440, 480
 - SCALE field 440, 480
 - setting fields 482
 - setting maximum number 480
 - SOURCEID field 440, 460
 - SOURCETYPE field 440, 460
- Iterator functions 432, 495, 537
- ITYPE descriptor field 440, 482, 500

L

- LANG environment variable 36
- LC_COLLATE environment variable 36
- LC_CTYPE environment variable 36
- LC_MONETARY environment variable 36
- LC_NUMERIC environment variable 36
- LC_TIME environment variable 36
- LD_LIBRARY_PATH environment variable 369
- ldchar() library function 175, 744
- LENGTH descriptor field
 - after a DESCRIBE 480, 487
 - definition of 440
 - for varchar data 96
 - inserting opaque-type data 458
 - setting input parameter length 500, 501
- Less than (<) 118
- libasf
- Informix library
 - 76, 366
- libgen
- Informix library
 - 76, 366
- libgls
- Informix library
 - 76, 366
- libos
- Informix library
 - 76, 366
- Libraries
 - thread-safe
 - shared 382
- Library
 - creating dynamic thread 389
 - ESQ/C client-interface 78
 - import 78
 - of ESQ/C functions 4
 - runtime search path 369
 - shared 365, 368, 370
 - static 365, 367
 - static-link 78, 78
 - thread-safe 365
 - shared 382
 - static 382
- libsql
- Informix library
 - 76, 366
- Lightweight I/O
 - for smart large objects 194
 - specifying for all smart large objects 194
 - switching to buffered I/O 194
- Line wrapping 68
- Linker
 - linking the ESQ/C client-interface DLL 78
 - options invoked implicitly 72
 - passing arguments to 76
- LIST data type
 - accessing 206
 - after a DESCRIBE 521
 - corresponding ESQ/C data type 80, 85
 - declaring host variable for 207
 - defined constant 82
 - definition of 204
 - inserting many elements into 217
- LO file descriptor
 - deallocating 197
 - description of 189
 - ESQ/C functions for 190
- LO handle, deallocating 693
- LO_APPEND access-mode constant 192, 193
- LO_APPEND file-location constant 683
- LO_BUFFER access-mode flag 194
- LO_CLIENT_FILE file-location constant 681, 683
- LO_DIRTY_READ access-mode constant 192
- LO_KEEP_LASTACCESS_TIME create-time constant 182, 198
- LO_LOCKALL flag 195
- LO_LOCKRANGE flag 195
- LO_LOG create-time constant 182
- LO_NOBUFFER access-mode flag 194
- LO_NOKEEP_LASTACCESS_TIME create-time constant 182
- LO_NOLOG create-time constant 182
- LO_RDONLY access-mode constant 192, 193
- LO_RDWR access-mode constant 192, 193
- LO_SERVER_FILE file-location constant 681, 683
- LO_WRONGLY access-mode constant 192, 193
- LO-pointer structure
 - creating 187
 - description of 188
 - ESQ/C functions for 189
 - in INSERT 187
 - in UPDATE 187
 - obtaining a valid 197
- LO-specification structure
 - allocating 180, 685
 - allocation extent size 697, 702
 - create-time flags 182, 698, 703
 - deallocating 187, 695
 - description of 180
 - disk-storage information 181

- ESQL/C functions for 183
- estimated size 696, 701
- initializing 685
- maximum size 699, 703
- sbspace name 699, 704
- setting 680, 706
- storage characteristics 184
- LO-status structure
 - allocating 197
 - deallocating 199, 707
 - description of 198
- LOC_ALLOC locator constant 143
- LOC_APPEND locator mask 149, 150
- LOC_DESCRIPTOR locator mask 164
- LOC_READONLY locator mask 149, 151, 159
- loc_t data type
 - corresponding SQL data type 80
 - declaration 137
 - defined constant 84
 - definition of 136
 - role of locator.h 85, 85
- loc_t.loc_loctype field
 - assigning values to 141
 - definition of 140, 141
 - LOCFILE value 141, 149
 - LOCFILENAME value 141, 153
 - LOCMEMORY value 141, 142, 507
 - LOCUSER value 141, 158
- loc_t.loc_oflags field
 - file-open mode flags 149
 - setting for memory 143
 - setting for named file 153
 - setting for open file 149
 - setting for optical disc 164
 - using LOC_APPEND mask 149
 - using LOC_READONLY mask 149, 159
 - using LOC_USEALL mask 156
 - using LOC_WONLY mask 149, 159
- loc_t.loc_size field
 - definition of 140
 - determining transfer size 156
 - indicating simple-large-object size 143, 144
 - inserting a simple large object 151, 159
- LOC_USEALL locator mask 156
- LOC_WONLY locator mask 149, 159
- Locating a simple large object
 - in a client-server environment 141
 - in a named file 153, 153, 496, 496
 - in an open file 149
 - in memory 142, 507
 - locations for 141
 - on optical disc 164
 - with user-defined functions 158
- Locator structure
 - definition of 136, 137
 - fields of 140
 - lc_union structure 140, 142, 148, 158
 - loc_buffer field 142, 143
 - loc_bufsize field 142, 143, 143, 507
 - loc_close field 158, 159, 159, 163
 - loc_currdata_p field 142
 - loc_fd field 148, 149, 151, 151, 151
 - loc_fname field 148, 153
 - loc_indicator field 140, 144
 - loc_mflags field 142, 143
 - loc_mode field 148
 - loc_open field 149, 158, 159, 159, 160
 - loc_position field 148, 149
 - loc_read field 158, 159, 161
 - loc_status field 140, 143, 149, 153
 - loc_type field 140

- loc_user_env field 158
- loc_write field 158, 159, 162
- loc_xfercount field 158
- memory buffer 143
- locator.h header file
 - access-mode constants 192
 - create-time constants 182
 - data types defined 85, 85, 85, 137
 - definition of 27
 - description of 180
 - field-name shortcuts 142, 148
 - file-location constants 681, 141, 149
 - file-open mode flags 149
 - LO-pointer structure 188
 - LO-specification structure 180
 - LO-status structure 198
 - LOC_ALLOC constant 143
 - location constants 141
 - whence constants 688, 692, 694, 714
 - LOCFILE location constant 141, 141, 149
 - LOCFILENAME location constant 141, 141, 153
- Locks, on smart large objects
 - byte range 195
 - description of 195
 - LO_LOCKALL flag 195
 - LO_LOCKRANGE flag 195
- LOCMEMORY location constant 141, 141, 142, 507
- LOCUSER location constant 141, 141, 158
- login.h header file 27, 36, 324
- long data type
 - converting from int8 674
- long identifier
 - determining if truncated 334
- long int data type
 - converting from decimal 603
 - converting from int8 676
 - converting to decimal 583
 - converting to int8 656
 - converting to text 763
 - corresponding SQL data type 85, 85, 108
 - data conversion 91
 - defined constant 84
- longjmp() system call 340, 814
- lvarchar data type
 - checking for null 261
 - corresponding SQL data type 80, 80, 85
 - CREATE OPAQUE TYPE statement 256
 - declaration 257
 - declaring 99
 - defined constant 84
 - definition of 94, 99
 - description of 99
 - fetching from column 104
 - fetching into 261
 - inserting from 105
 - inserting from, fixed size 260, 260
 - inserting to column 104
 - of a fixed size 100
 - of fixed size 258
 - opaque type name 259
 - pointer host variable 100, 258
 - allocating memory 258
 - and ifx_var() functions 259
 - functions for 275
 - ifx_var_alloc() function 718
 - ifx_var_dealloc() function 719
 - ifx_var_flag() function 720
 - ifx_var_getdata() function 722
 - ifx_var_getlen() function 723
 - ifx_var_isnull() function 723

- ifx_var_setdata() function 724
- ifx_var_setlen() function 725
- ifx_var_setnull() function 726
- inserting from 262
 - selecting into 263
 - using 261
- selecting into, fixed size 261
- setting to null 260
- truncation, fixed size 100
- using 259
- with ANSI-compliant database 105
- with DESCRIBE statement 481
- LVARCHAR data type
 - corresponding ESQL/C data type 80, 85
 - defined constant 82
 - distinct-bit constant 460
 - distinct-bit macro 460

M

- Macro
 - for datetime and interval data types 129, 129
 - for distinct bit 460
 - for library versions 372
 - for thread-safe status variables 381
 - for var binary data type 275
 - for varchar data type 96
- malloc() system call 144, 144, 521, 524, 531, 531
- MAXVCLEN varchar constant 96
- MCHAR data type 108
- Memory allocation, LO handle 693
- Memory management
 - ESQL/C functions 524
 - for sqlda structure 521
 - for system-descriptor area 480, 481
 - freeing resources 405, 485, 528
- Message chaining 345
- Message request
 - definition of 339
 - interrupting 339
 - optimizing for cursor 411, 411, 416, 416, 421
 - representing 361
 - with callback function 341
- Message transfers, optimized 344
- mi_lo_release() function 693
- mint data type 108
- mlong data type 108
- MONEY data type
 - corresponding ESQL/C data type 80, 85
 - data conversion 91, 758, 761, 763
 - defined constant 82
 - role of decimal.h 27, 85
 - scale and precision 440
- MSHORT data type 108
- Multiplexed connection
 - Windows requirement 331
- Multibyte filter 4
- Multiplexed connection
 - and multithreaded applications on Windows 331
 - description of 331
 - IFX_SESSION_MUX environment variable 331
 - limitations on 332
- MULTISET data type
 - accessing 206
 - after a DESCRIBE 521
 - corresponding ESQL/C data type 80, 85
 - declaring host variable for 207

- defined constant 82
- definition of 204
- inserting many elements into 217
- Multithreaded applications
- warning for Windows 331

N

- NAME descriptor field 440, 480, 487
- Named row type
 - after a DESCRIBE 521
 - declaring host variable for 238
 - in a collection-derived table 239
 - in a typed table 250
 - literal values 252
- Named row variable 238
- NCHAR data type
 - corresponding ESQ/C data type 80, 85, 94
 - defined constant 82
 - fetching 101
 - transferring with host variables 100
- Network parameter
 - ASKPASSATCONNECT 36, 324, 324
 - HOST 36, 324
 - INFORMIXSERVER 36, 324
 - OPTIONS 36
 - PASSWORD 36, 324
 - precedence 41
 - PROTOCOL 36, 324
 - SERVICE 36, 324
 - setting with InetLogin 40
 - USER 36, 324
- Newline, including in quoted strings 9
- Non-default compilation of ESQ/C programs
 - options for 63
- Non-default order of compilation
 - for all ESQ/C files 64
- Non-parameterized non-SELECT statements 424
- Non-parameterized SELECT statements 425, 455, 486, 529
- Non-SELECT statements
 - definition of 424
 - known at compile time 424, 424
 - nonparameterized 424
 - not known at compile time 456
 - parameterized 434, 456, 506, 547
 - preparing 424
 - with sqlda structure 547
 - with system-descriptor area 506
- Noncursor function
 - definition of 431
 - known at compile time 431
 - not known at compile time 492, 536
 - parameterized 433
 - with sqlda structure 536
 - with system-descriptor area 492
- NOT FOUND condition
 - definition of 277
 - using SQLCODE 299
 - using SQLSTATE 288
 - using the WHENEVER statement 305
- Null values
 - determining in dynamic SQL 440, 538
 - for simple-large-object values 140, 146, 151, 156
 - ifx_var_isnull() 723
 - ifx_var_setnull() 272, 726
 - in aggregate function 284, 294
 - in host variables 18
 - inserting code to check for 60
 - inserting into table 25

- returned in indicator 25
- risnull() 18, 770
- rsetnull() 18, 777
- setting to 18, 260, 267, 272, 726, 777
- testing for 18, 24, 261, 268, 268, 274, 723, 770

- NULLABLE descriptor field 440, 480, 487
- Numeric expressions
 - example formats 118
 - formatting 118
 - rfmtdec() function 758
 - rfmtdouble() function 761
 - rfmtlong() function 763
 - valid characters 118
- NVARCHAR data type
 - corresponding ESQ/C data type 80, 85, 94, 94, 95
 - data conversion 101
 - defined constant 82
 - fetching 103
 - transferring with host variables 100

O

- ONCONFIG file
 - ALLOW_NEWLINE parameter 9
- onspaces database utility 185
- Opaque data types
 - after a DESCRIBE 521
 - as element type of collection 207
 - as field type of row 237
 - corresponding ESQ/C data type 80, 85
 - defined constant 82, 82
 - definition of 254
 - dynamically executing 458
 - extended identifier 440, 444
 - in dynamic SQL 444
 - inserting 458
 - name of 440, 444
 - owner of 440, 444
 - predefined 276
 - truncation of data 460
- OPEN statement
 - and deferred PREPARE 417
 - executing a cursor 406, 406, 408
 - executing with PREPARE 416
 - interrupting 339
 - optimizing 421
 - role in dynamic SQL 403
 - USING DESCRIPTOR clause 519, 527, 540, 546
 - USING host_var clause 435
 - USING SQL DESCRIPTOR clause 478, 484, 501, 505
 - with a SELECT statement 406
 - with an EXECUTE FUNCTION statement 406, 495, 537
 - with an INSERT statement 408
 - with deferred PREPARE 416
 - with OPTOFC and Deferred-PREPARE features 423
- OPEN, FETCH, and CLOSE (OPTOFC) feature restrictions 421
- open() system call 148
- Optimized message transfers
 - description of 344
 - enabling 345
 - error handling 347
 - reasons to disable 345
 - restrictions on 344
- Optimizing
 - OPEN, FETCH, and CLOSE statements 421

- OPTIONS network parameter 36
- OPTMSG environment variable 345
 - setting 345
- OptMsg global variable 345
 - setting 345
- OPTOFC environment variable 422
 - client only 422
- OPTOFC feature
 - and static cursors 421
 - enabling 422
 - with AUTOFREE and Deferred-PREPARE features 423
 - with Deferred-PREPARE feature 423

P

- PARAMETER keyword 21, 409, 507
- Parameterized non-SELECT statements 434, 456, 506, 547
- Parameterized SELECT statements 435, 456, 500, 505, 539, 546
- Parenthesis symbol 118
- PASSWORD network parameter 36, 324
- PATH environment variable 79
 - required 46
- Period (.) symbol 118, 251
- Plus (+) sign 118
- Pointer, as host variable 20
- Pound (#) sign 118
- PRECISION descriptor field 440, 480
- PREPARE statement
 - and sqlca.sqlerrd[0] 294, 294, 294, 301, 403, 403, 403
 - deferring execution of 416, 416
 - exceptions returned 403
 - for collection variables 402, 402
 - in thread-safe application 378
 - role in dynamic SQL 400
 - SQLCODE value 301, 403
 - with DATABASE statement 327
 - with EXECUTE 424
 - with EXECUTE FUNCTION 491, 492, 535
 - with EXECUTE PROCEDURE 430
 - with EXECUTE...INTO 426, 431
 - with INSERT 496
 - with OPTOFC and Deferred- PREPARE features 423
 - with SELECT 486
- Preprocessor
 - case sensitivity 6
 - conditional compilation 34
 - definitions 33, 59
 - generating thread-safe code 374
 - header files 30, 30
 - include files 31
 - line numbers 61
 - redirecting errors 61
 - search path for included files 60
 - stage 1 31, 59
 - stage 2 34, 63
 - syntax 49
 - version information 49
- Preprocessor directive
 - define 33, 59
 - definition of 31
 - elif 34
 - else 34
 - endif 34
 - ifdef 34
 - ifndef 34
 - include 30, 31
 - undef 33, 59

Preprocessor option

- ansi 49, 326
- e 49, 57
- ED 49, 59
- EU 49, 59
- g 61
- G 49, 61
- I 49, 60
- icheck 49, 60
- I for dynamic thread library 399
- libs 49
- local 49, 61, 400
- log 49, 61
- lw 49
- mserr 49, 68
- nln 49, 61
- nowarn 49, 62, 68
- o 49, 49, 69
- static 49, 367, 367, 382
- thread 49, 58, 367, 374, 380
- ts 49
- V 57
- xopen 49, 62, 452, 453

those affecting linking 75

those affecting preprocessing 57

those for Informix libraries 367

Preprocessor, ESQL stage 1 46

Preprocessor, ESQL/C stage 2 46

Process

- child 338, 808
- parent 297, 338, 808

Processor

- associating options with files 57
- creating a response file 71
- naming executable file 69
- using a project file 71

Processor option

- c 70
- cc 70
- f 49, 71
- I 76
- libs 75
- N 49
- o 72
- r 76
- runtime 72
- Sc 72
- ss 72
- subsystem 72
- Sw 72
- target 72, 79
- V 49
- version 49
- wd 72, 79
- we 72

placement of 57

Program

- checking library version 372
- commenting 9
- compiling 47, 70, 370
- including files 30, 30, 31
- linking 47, 75, 367, 367, 369, 370, 380
- message request 339, 341, 361, 411, 411, 416, 416, 421
- naming the executable file 49, 49, 69
- preprocessing 31, 57, 57
- running 48
- suppressing compilation 57
- suppressing linking 70

Project file 49, 71

PROTOCOL network parameter 36, 324

pthread_lock_global_np() DCE function 380

pthread_yield() DCE function 380

pthread.h DCE header file 380

PUT statement

- inserting a row 408
- inserting into a collection variable 219
- USING DESCRIPTOR clause 519, 527, 539
- USING SQL DESCRIPTOR clause 478, 484, 500

putenv() system call 345, 422

Q

Question mark (?) 433

- wildcard in smart-large-object filenames 681

Quotation marks

- escaping 8, 234, 252

R

rdatestr() library function 745

rdayofweek() library function 747

rdefmtdate() library function 132, 749

rdownshift() library function 752

Reference count 198, 708

Registering dynamic thread functions 395

Registry

- in-memory copy 41

Informix Server 625

precedence 41

ReleaseConnect() library function 364, 753

Resource compiler

- default options 72
- passing arguments to 76

Resource file 75

Response file 49, 71

Restrictions

- on optimized message transfers 344
- on OPTOFC feature 421

Retrieving an error message 766

rfmtdate() library function 132, 507, 754

rfmtddec() library function 507, 758

rfmtdouble() library function 761

rfmtlong() library function 763

rgetlmsg() library function 766

rgetmsg() library function 768

risnull() library function 770

rijulmdy() library function 772

rleapyear() library function 774

rmidyjul() library function 776

ROLLBACK WORK statement 336, 447

Row constructor 249

row data type (ESQL/C)

- accessing a typed table 250
- allocating memory for 241
- client-side 240
- Collection Derived Table clause 242
- corresponding SQL data type 80, 85
- deallocating memory for 241
- declaration 236
- defined constant 84
- deleting from 247
- fetching from 245
- fetching into 243
- field names 247
- field values 248
- initializing 243
- inserting into 245
- literal values 248
- named row variable 238
- nested rows 245
- operating on 241
- typed row variable 237
- untyped row variable 238
- updating 247

Row data type(ESQL/C) with a collection 222

ROW data types

- accessing 235
- as element type of collection 207
- as field type of row 237
- constructed rows 249
- corresponding ESQL/C data type 80, 85
- declaring host variables for 236
- defined constant 82
- definition of 235
- deleting 247, 253
- dot notation 245, 251
- extended identifier 440, 444
- fetching 243, 245
- in dynamic SQL 444
- inserting into 245, 252
- literal values 248, 252, 252, 252
- nested 249
- owner of 440, 444
- selecting from 251
- typed table 250
- updating 247, 252

rsetnull() library function 777

rstod() library function 780

rstoi() library function 781

rstol() library function 783

rstrdate() library function 785

rtoday() library function 787

rtpalign() library function 524, 531, 788

rtypmsize() library function 524, 531, 791

rtypname() library function 794

rtypsize() library function 796

rtypwidth() library function 797

Running C preprocessor first options for 63

Runtime environment 35

Runtime errors

- definition of 277
- in user-defined routines 284, 292

Informix -specific messages 292

- using rgetlmsg() 766
- using rgetmsg() 768
- using sqlca structure 300
- using SQLSTATE variable 292
- using the WHENEVER statement 305

Runtime routines, exporting 77

rupshift() library function 799

S

Sample program

- bycmpr 565
- bycopy 567
- byfill 568
- byleng 570
- decadd 571
- deccmp 573
- deccopy 575
- deccvasc 113, 576
- deccvdbl 578, 580

- deccvint 582
- deccvlong 583
- decdiv 585
- decevt 587
- decfvt 587
- decmul 591
- decround 593
- decsub 595
- dectoasc 597
- dectodbl 599
- dectoint 601
- dectolong 603
- dectrunc 604
- demo1 43
- demo2 435, 435
- demo3 487, 501, 530
- demo4 435, 435, 487, 540
- dispcat_pic 309
- dtaddin 606
- dtcurrent 608
- dtcvasc 609
- dtcvfntasc 612
- dtextend 615
- dtsub 616
- dtsubinv 619
- dttoasc 620
- dttoftasc 622
- dyn_sql 309
- ESQLAUTH 324
- getcd_me 144
- getcd_nf 154
- getcd_of 150
- ILOGIN 40
- incvasc 726
- incvftasc 729
- intoasc 731
- intofmtasc 733
- invidivbl 736
- invidinv 738
- invextend 740
- invmuldbl 742
- ldchar 744
- rdatestr 745
- rdayofweek 747
- rdefmdate 749
- rdownshift 752
- rfmdate 754
- rfmtdec 758
- rfmtdouble 761
- rfmthlong 763
- rgetlmsg 766
- rgetmsg 768
- risnull 770
- rjulmdy 772
- rleapyear 774
- rmdyjul 776
- rsetnull 777
- rstod 780
- rstoi 781
- rstol 783
- rstrdate 785
- rtday 787
- rtpalign 788
- rtpmsize 791
- rtpname 794
- rtpsize 796
- rtpwidth 797
- rupshift 799
- sqgetdbs 802
- sqldetach 808
- stcat 817
- stchar 819
- stcmpr 820
- stcopy 821
- stleng 822
- timeout 348
- upcd_me 146
- upcd_nf 156
- upcd_of 151
- varchar 96
- WDEMO 79
- SBSPPACENAME configuration parameter 185
- sbspaces
 - definition of 181
 - getting name of 699
 - on optical disc 200
 - running out of space 713, 714
 - setting 704
 - storage characteristics for 185
- SCALE descriptor field 440, 480
- Scope of
 - cursor names 61, 379
 - host variables 13
 - preprocessor definitions 33
 - statement identifiers 61, 378
- Scroll cursors 406
- Select cursor
 - definition of 407
 - fetch buffer 410
 - for collection variable 223
 - statements that manage 406
 - using 427
- SELECT statements
 - and NOT FOUND condition 288, 299
 - associated with a cursor 406, 406, 478, 519
 - checking for truncation 294
 - Collection Derived Table clause 221, 245
 - defined statement constant 447
 - determining estimated cost of 294
 - determining rowid 294, 298
 - executing a singleton SELECT 426
 - failing to access rows 294
 - fetching CHAR data 100, 105
 - fetching collection data 214, 221, 230, 233
 - fetching DATETIME data 130
 - fetching INTERVAL data 131
 - fetching opaque-type data 261, 268, 274
 - fetching row-type data 243, 245, 251
 - fetching smart-large-object data 191
 - fetching VARCHAR data 101
 - identifying variable mismatch 284, 289, 294
 - in ANSI-compliant database 105
 - interrupting 339, 805
 - INTO host_var clause 294, 400
 - INTO TEMP clause 288, 299
 - known at compile time 425
 - nonparameterized 425, 455, 486, 529
 - not known at compile time 455, 456
 - parameterized 433, 435, 456, 500, 505, 539, 546
 - singleton 403, 407, 426, 478, 484, 519
 - with aggregate functions 294
 - with DESCRIBE 446, 480, 521, 521
 - with sqlda structure 529, 539
 - with system-descriptor area 486, 500, 505, 546
- SENDRECV data type
 - defined constant 82
- Sequential cursor 218, 223, 406, 408
- SERIAL data type
 - corresponding ESQL/C data type 80, 85, 108
 - data conversion 90
 - defined constant 82
 - obtaining value after INSERT 294
 - using typedefs 20
- SERIAL8 data type
 - corresponding ESQL/C data type 80, 85, 108
 - declaring host variable for 109
 - ifx_getserial8() 639
- SERVICE network parameter 36, 324
- SET AUTOFREE (SQL) statement 412
 - setting 412
- SET AUTOFREE statement 412, 412
- SET CONNECTION statement 364, 800
 - and explicit connections 326
 - determining database server features 334
 - making connection dormant 374, 376, 378
 - managing connections across threads 376
 - switching to a dormant connection 336, 374
 - with an active transaction 336
- SET data type
 - accessing 206
 - after a DESCRIBE 521
 - corresponding ESQL/C data type 80, 85
 - declaring host variable for 207
 - defined constant 82
 - definition of 204
 - inserting many elements into 217
- SET DEFERRED PREPARE statement 417
- SET DESCRIPTOR statement
 - setting COUNT field 482, 500
 - setting fields 478, 482, 500
 - VALUE keyword 500
- SetConnect() library function 364, 800
- setjmp() system call 340
- Setnet32 utility 322
 - description 4
 - determining default database server 625
 - use of ixreg.dll 77
- Shared libraries
 - creating for dynamic thread functions 398
- short int data type
 - corresponding SQL data type 85, 108
 - data conversion 91
 - defined constant 84
- Signal handling
 - of ESQL/C library 815
 - of SIGINT 340
- Signal-handler function 340, 340
- signal() system call 340
- Signals
 - SIGCHLD 815
 - SIGINT 340
- Simple large objects, and a fetch array 462
- Simple-large-object data type
 - compared with smart large objects 136
 - declaring host variable for 137
 - definition of 135
 - inserting 146, 151, 156, 159, 496
 - null values 140
 - on optical disc 164
 - programming with 136
 - selecting 144, 150, 154, 159, 507
 - subscripting 137
- Simple-large-object descriptor 164
- Single quotes (')
 - delimiting strings 15
 - escaping 8
 - in a literal collection 234
 - in a literal row 252

- in a quoted string 8
- SMALLFLOAT data type
 - corresponding ESQL/C data type 80, 85, 117
 - data conversion 90, 91, 91
 - defined constant 82
 - number of decimal digits 89
- SMALLINT data type
 - corresponding ESQL/C data type 80, 85, 108
 - creating a typedef for 20
 - data conversion 90, 91, 91
 - defined constant 82, 85
- Smart large objects, permanent 693
- Smart-large-object data type
 - access modes 192
 - accessing 191
 - advantages 136
 - allocation extent size 697, 702
 - altering 679
 - closing 197, 680
 - compared with simple large objects 136
 - copying from user-defined buffer 687
 - copying to a file 681
 - copying to a user-defined buffer 710
 - create-time flags 698, 703
 - creating 191, 684
 - declaring host variable for 180
 - definition of 178, 203
 - determining storage characteristics of 684
 - duration of open 196
 - ESQL/C functions for 200
 - estimated size 181, 696, 701
 - file position 694, 710
 - format on disk 200
 - getting size of 198, 709
 - hexadecimal identifier for 187, 681
 - ifx_lo_ 694
 - ifx_lo_alter() 679
 - ifx_lo_close() 680
 - ifx_lo_col_info() 680
 - ifx_lo_copy_to_file() 627, 681
 - ifx_lo_copy_to_lo() 683
 - ifx_lo_create() 684
 - ifx_lo_def_create_spec() 685
 - ifx_lo_filename() 686
 - ifx_lo_from_buffer() 687
 - ifx_lo_open() 687, 689
 - ifx_lo_read() 691
 - ifx_lo_readwith 692
 - ifx_lo_release() 693
 - ifx_lo_spec_free() 695
 - ifx_lo_specget_estbytes() 696
 - ifx_lo_specget_extsz() 697
 - ifx_lo_specget_flags() 698
 - ifx_lo_specget_maxbytes() 699
 - ifx_lo_specget_sbspace() 699
 - ifx_lo_specset_estbytes() 701
 - ifx_lo_specset_extsz() 702
 - ifx_lo_specset_maxbytes() 703
 - ifx_lo_specset_sbspace() 704
 - ifx_lo_stat_atime() 705
 - ifx_lo_stat_cspec() 706
 - ifx_lo_stat_ctime() 707
 - ifx_lo_stat_free() 707
 - ifx_lo_stat_mtime_sec() 708
 - ifx_lo_stat_refcnt() 708
 - ifx_lo_stat_size() 709
 - ifx_lo_stat() 705
 - ifx_lo_tell() 710
 - ifx_lo_to_buffer() 710
 - ifx_lo_truncate() 711
 - ifx_lo_write() 713
 - ifx_lo_writewith 714
 - inserting 187
 - lightweight I/O 194
 - LO file descriptor 189
 - LO-pointer structure 188
 - LO-specification structure 180
 - LO-status structure 198
 - locking 195, 680, 684, 689
 - locks 195
 - maximum size 181, 699, 703
 - modifying 196
 - obtaining status of 197, 705
 - on optical disc 200
 - opening 192, 684, 689
 - programming with 179
 - reading from 196, 691, 692
 - reference count 198, 708
 - sample program 825
 - sbspaces 699, 704
 - selecting 191
 - storage characteristics 180, 184
 - storing 187
 - temporary smart large objects 693
 - temporary, releasing resources 693
 - time of last access 198, 705
 - time of last change in status 198, 707
 - time of last modification 198, 708
 - truncating 711
 - updating 187
 - writing to 197, 713, 714
- SOURCEID descriptor field 440, 460
- SOURCETYPE descriptor field 440, 460
- SPL function
 - cursor function 424
 - definition 430
 - executing dynamically 431, 492, 495, 536, 537
- SPL procedure 430, 430
- SPL routines 339, 430
- sqgetdbs() library function 802
- SQL data types
 - BIGINT 80, 85, 108
 - BIGSERIAL 85, 108
 - BLOB 80, 85, 178
 - BOOLEAN 80, 85, 112
 - BYTE 80, 85, 135
 - CHAR 80, 85, 94
 - CLOB 80, 85
 - collections 204
 - DATE 80, 85, 125
 - DATETIME 80, 85, 126
 - DECIMAL 80, 85
 - defined constants for 82, 453
 - distinct 458
 - FLOAT 80, 85, 117
 - int8 80, 85, 108, 117
 - INT8 109
 - INTEGER 80, 85, 108
 - INTERVAL 80, 85, 126
 - LIST 80, 85, 204
 - LVARCHAR 80, 85
 - MONEY 80, 85
 - MULTISET 80, 85, 204
 - named row type 235
 - NCHAR 80, 85, 94
 - NVARCHAR 80, 85, 94, 94, 95
 - opaque 80, 85, 254
 - row types 80, 235
 - SERIAL 80, 85, 108
 - SERIAL8 80, 85, 108, 109
 - SET 80, 85, 204
 - SMALLFLOAT 80, 85, 117
 - SMALLINT 80, 85, 108
 - TEXT 80, 85, 135
 - unnamed row type 85, 235
 - VARCHAR 80, 85, 94
 - X/Open defined constants 85
- SQL identifier 15, 433
- SQL keyword protection
 - against interpretation by C preprocessor 67
 - relation to the dollar (\$) sign 68
- SQL statements
 - case sensitivity 6
 - CLOSE DATABASE 753
 - CONNECT 322, 364
 - cursor-management statements 406, 408
 - DATABASE 625
 - defined constants for 297, 447
 - DISCONNECT 364, 753
 - for dynamic SQL 403, 406, 408, 478, 519
 - interruptable 339
 - obtaining diagnostic information 277
 - parameterized 433
 - SET CONNECTION 364, 800
 - static 294, 399
 - sqlauth() authentication function 36, 77, 324
 - SQLBIGSERIAL data-type constant 82, 82
 - SQLBOOL data-type constant 82
 - sqlbreak() library function 338, 348, 805
 - sqlbreakcallback() library function 336, 341, 806
 - SQLBYTES data-type constant 82
 - sqlca structure 42
 - and DESCRIBE 454
 - and PREPARE 403
 - checking for exceptions 293
 - definition of 294
 - determining database server features 294, 300, 334
 - in thread-safe code 374, 381
 - indicating truncation 26, 88
 - relation to SQLCODE status variable 296
 - retrieving error message text 306
 - sqlerrm 300, 766
 - using the WHENEVER statement 305
 - warning values 300
 - sqlca.h header file
 - constant definitions 299
 - definition of 27
 - structure definition 381
 - variable definitions 282, 296, 381
 - sqlca.sqlerrd array
 - sqlerrd[1] 294, 298, 298, 298, 298, 298, 300, 300, 300, 301, 403, 403, 403, 766, 768
 - sqlca.sqlwarn structure
 - definition of 300
 - sqlwarn0 294, 294, 294, 294, 294, 294
 - sqlwarn1 100, 104, 131, 294, 294, 334, 334
 - sqlwarn2 294, 294, 334
 - sqlwarn3 294, 334
 - sqlwarn4 294, 334, 454
 - sqlwarn5 294
 - sqlwarn6 294, 334
 - sqlwarn7 294, 294, 334
 - SQLCHAR data-type constant 82
 - SQLCODE value 42, 625, 753, 800
 - SQLCODE variable
 - after a DESCRIBE statement 297, 447
 - after a GET DIAGNOSTICS statement 282
 - after a PREPARE statement 301

- after a simple-large-object access 140
- after an ALLOCATE COLLECTION 211
- after an ALLOCATE ROW 241
- after an EXECUTE statement 302
- and sqlerrd 294
- definition of 296
- in diagnostics area 280, 282
- in thread-safe code 374, 381
- indicating an interrupt 805
- indicating runtime errors 300
- relation to sqlca structure 296
- result codes 298
- retrieving error message text 766, 768
- sqlda
 - and a fetch array 462
- sqlda structure
 - allocating memory for 374, 521, 524
 - assigning values to 526
 - data type lengths 96
 - declaring 520
 - definition of 442
 - desc_name field 446
 - desc_next field 446
 - desc_occ field 446
 - examples 530, 540
 - fetching rows into 527
 - fields of 442, 443, 444
 - for columns of a SELECT 529
 - for columns of an INSERT 538
 - for distinct-type columns 460
 - for input parameters 539, 547
 - for opaque-type columns 458, 460
 - for return values of a user-defined function 535
 - freeing memory for 528
 - getting field values 526
 - initializing 521
 - interrupting database server 805
 - managing 519
 - obtaining values from 526
 - setting fields 526
 - specifying input parameter values for 527
 - uses of 528
 - using an indicator variable 444
- sqlda.h header file 27, 30, 520
- sqlda.sqld field
 - after a DESCRIBE 446, 521, 521, 531
 - definition of 442, 443
 - saving 529, 538
 - setting 539, 541
- sqlda.sqlvar structure
 - after a DESCRIBE 521
 - definition of 444
 - getting field values 526
 - setting fields 526
 - sqlflags field 444
 - sqlformat field 444
 - sqlidata field 444, 539
 - sqlilen field 444, 539
 - sqlind field 444, 460, 521, 521, 538, 539
 - sqlitype field 444, 539
 - sqlname field 444, 521, 521, 531, 531, 531
 - sqlownerlen field 444
 - sqlownername field 444
 - sqlsourceid field 444, 460
 - sqlsourcetype field 444, 460
 - sqltypelen field 444
 - sqltypename field 444
 - sqlxid field 444
- sqlda.sqlvar.sqldata field
 - after a DESCRIBE 521, 521
- after a FETCH 527, 529, 531, 531, 537, 541
- allocating memory for 442, 524, 531
- definition of 444
- freeing memory for 528, 531, 531
- setting column value 538, 538
- setting input parameter data 539, 541
- sqlda.sqlvar.sqllen field
 - after a DESCRIBE 521, 521, 521
 - definition of 444
 - determining host variable type 527, 531, 531
 - for varchar data 96
 - inserting opaque-type data 458
 - setting input parameter length 539, 541
 - used to allocate memory 524, 524, 529, 531, 535
- sqlda.sqlvar.sqltype field
 - after a DESCRIBE 521, 521
 - column type values 452, 460, 526
 - definition of 444
 - determining host variable type 527, 531, 531
 - indicating distinct-type data 460
 - inserting opaque-type data 458
 - setting input parameter type 539, 541
 - used to allocate memory 524, 529, 531, 535
- SQLDATE data-type constant 82
- SQLDBOOLEAN distinct-bit constant 460, 460
- SQLDECIMAL data-type constant 82
- sqldetach() library function 338, 344, 380, 808
- SQLDISTINCT distinct-bit constant 460, 460
- SQLDLVARCHAR distinct-bit constant 460, 460
- sqldone() library function 338, 348, 814
- SQLDTIME data-type constant 82
- sqllexit() library function 344, 814
- SQLFLOAT data-type constant 82
- sqlhdr.h header file 27, 30
 - determining product version 372
 - var binary macros 275
- sqlhdr.h, and OptMsg global variable 345
- sqlhosts file 320
 - accessing 320
 - on UNIX 320
- sqlhosts file or registry
 - multiplexed connections 331
- sqlhosts registry
 - a central 323
 - and InetLogin 321
 - and Setnet32 322
 - information in 322
 - on Windows 321
- sqliapi.h header file
 - definition of 27
- SQLINFXBIGINT data-type constant 82
- SQLINT data-type constant 82
- SQLINT8 data-type constant 82
- SQLINTERVAL data-type constant 82
- SQLKEYWORD_ prefix 67
- SQLLIST data-type constant 82
- SQLLVARCHAR data-type constant 82
- SQLMONEY data-type constant 82
- SQLMULTISET data-type constant 82
- SQLNCHAR data-type constant 82
- SQLNOTFOUND constant
 - definition of 299
 - detecting NOT FOUND condition 305
- SQLNVCHAR data-type constant 82
- sqlproto.h header file 27, 30
- SQLROW data-type constant 82
- SQLSENDRECV data type constant 82
- SQLSERIAL data-type constant 82
- SQLSET data-type constant 82
- sqlsignal() library function 815
- SQLSMFLOAT data-type constant 82
- SQLSMINT data-type constant 82
- sqlstart() library function 328, 814, 816
- SQLSTATE values 42, 625, 753, 800
- SQLSTATE variable
 - after a GET DIAGNOSTICS statement 282
 - class and subclass codes 280, 283, 284
 - determining database server features 289, 334
 - determining number of exceptions 279
 - determining origin of class portion 280, 289, 289, 289, 292, 292, 292
 - determining origin of subclass portion 280, 289, 289, 289, 292, 292, 292
 - in diagnostics area 280
 - in thread-safe code 374, 381
 - indicating truncation 100, 104
 - result codes 287
 - using 282
 - using the WHENEVER statement 305
 - warning values 289
- sqlstypes.h header file
 - definition of 27
 - statement-type constants 297, 447
- sqlstypes.h header file 507
- SQLTEXT data-type constant 82
- sqltypes.h header file
 - data-type constants 82, 452, 482
 - definition of 27
 - distinct-bit constants 460
 - distinct-bit macros 460
 - simple-large-object data types 137, 140
 - source type for distinct columns 440, 444
- SQLUDTFIXED data-type constant 82, 460
- SQLUDTVAR data-type constant 82, 460
- sqlvar_struct structure
 - with fetch array 471
- SQLVCHAR data-type constant 82
- sqlxtype.h header file
 - definition of 27
 - X/Open data types 62, 85, 453
- START DATABASE statement 326, 328
- Statement identifier
 - case sensitivity 6
 - creating 400
 - freeing 405
 - scope rules 61, 378
 - structure 400
 - using delimited identifiers 15
- Static cursor
 - with OPTOFC feature 421
- Static-link library 78, 78
- stcat() library function 400, 817
- stchar() library function 819
- stcmpr() library function 820
- stcopy() library function 400, 821
- stleng() library function 822
- Storage characteristics
 - altering 679
 - column level 186, 680
 - create-time flags 182
 - disk-storage information 181
 - inheritance hierarchy 184
 - obtaining 184, 198, 706
 - sbspace level 185
 - system default 185
 - system level 685
 - system specified 185
 - user defined 186

- Stored procedures 430
- string data type
 - corresponding SQL data type 80, 85
 - defined constant 84
 - definition of 94, 95
 - fetching into 89, 90, 100, 101, 104, 118, 131
 - inserting from 101, 103, 104, 105
 - with ANSI-compliant database 105
- strncmp() system call 288, 289
- Structure
 - as host variable 19
 - decimal 113
 - dtime 127
 - for dynamic management 438
 - ifx_int8_t 109
 - ifx_lo_create_spec_t 180
 - ifx_lo_stat_t 198
 - ifx_lo_t 188
 - intrvl 128
 - nesting 19
 - sqlca 293
 - sqlda 442
 - sqlvar_struct 444
- System call
 - calloc() 521
 - DCE restrictions 380
 - exec() 380, 808
 - exit() 297, 303
 - fclose() 60
 - fopen() 60
 - fork() 380, 808
 - freadd() 60
 - free() 144, 531, 531, 531, 531
 - longjmp() 340, 814
 - malloc() 144, 144, 521, 524, 531, 531
 - open() 148
 - setjmp() 340
 - signal() 340
 - strncmp() 288, 289
 - vfork() 808
- System-descriptor area
 - allocating memory for 480
 - assigning values to 482
 - data type lengths 96
 - definition of 439, 477
 - examples 487, 492, 496, 501
 - fetching rows into 484
 - fields of 439, 440, 440
 - for columns of a SELECT 486, 496
 - for columns of an INSERT 496
 - for distinct-type columns 460
 - for input parameters 500, 505, 506, 546
 - for opaque-type columns 458, 460
 - for return values of a user-defined function 491
 - freeing memory for 485
 - getting field values 483
 - initializing 480
 - interrupting database server 805
 - item descriptor fields 440
 - managing 478
 - obtaining values from 482
 - setting fields 482
 - specifying input parameter values for 484
 - uses for 485
 - using an indicator variable 440, 500

T

- Tabs 68
- TEXT data type
 - corresponding ESQL/C data type 80, 85

- declaring host variable for 137
- defined constant 82
- inserting 146, 151, 156, 159, 496
- locator structure shown 137
- on optical disc 164
- role of locator.h 27, 85
- selecting 144, 150, 154, 159, 496
- subscripting 137
- Thread-safe application
 - concurrent connections 374
 - connections across threads 376
 - creating 373
 - cursors across threads 379
 - DCE restrictions 380
 - decimal values 379, 383
 - DISCONNECT ALL statement 377
 - environment variables 379
 - linking 380
 - preparing statements 378
 - programming hints 374
 - resource allocation 380
 - sample 384
 - SET CONNECTION statement 374, 374, 376
 - thread-safe code 374
- thread-safe DLLs for Windows 58
- THREADLIB environment variable 380, 380
- Timeout interval 341, 348, 806, 806
- timeout sample program 348
- Trailing blanks
 - in VARCHAR conversion 101, 103
 - inserting into database 103
 - removing 744
 - with ESQL/C data types 95
- Transactions
 - committing 336
 - determining if used 284, 289, 294, 334
 - exiting all connections 814
 - interrupting the database server 805
 - rolling back 336
 - switching server connections 336
- Truncated value
 - in CHAR conversion 100, 104
 - in decimal conversion 604
 - in VARCHAR conversion 101, 103
 - indicated by sqlca 294
 - indicated by SQLSTATE 284
 - of opaque data type 460
 - using indicator variable 24, 26
 - with pointers 20
- TU_DAY qualifier macro 129
- TU_DTENCODE qualifier macro 129, 608
- TU_ENCODE qualifier macro 129
- TU_END qualifier macro 129
- TU_FLEN qualifier macro 129
- TU_Fn qualifier macro 129
- TU_FRAC qualifier macro 129
- TU_HOUR qualifier macro 129
- TU_IENCODE qualifier macro 129, 129
- TU_LEN qualifier macro 129
- TU_MINUTE qualifier macro 129
- TU_MONTH qualifier macro 129
- TU_SECOND qualifier macro 129
- TU_START qualifier macro 129
- TU_YEAR qualifier macro 129
- TYPE descriptor field
 - after a DESCRIBE 480, 487
 - column-type values 452, 482
 - definition of 440
 - indicating distinct-type data 460
 - inserting opaque-type data 458
 - setting column type 460, 496

- setting input parameter type 501
- setting input-parameter type 500
- Typed collection variable
 - allocating memory for 211
 - deallocating memory for 211
 - declaring 207
 - operating on 212
- Typed row variable
 - allocating memory for 241
 - deallocating memory for 241
 - declaring 237
 - operating on 241
- typedef
 - as host variable 20
 - dec_t 113
 - dtime_t 127, 130
 - intrvl_t 128, 131

U

- undef preprocessor directive 31, 33, 59
- Unicode 62
- Union of structures 20, 140
- Unnamed row type
 - after a DESCRIBE 521
 - literal values 252
- Untyped collection variable
 - allocating memory for 211
 - deallocating memory for 211
 - declaring 209
 - operating on 212
- Untyped row variable
 - allocating memory for 241
 - deallocating memory for 241
 - declaring 238
 - operating on 241
- Update cursor 223, 223, 406
- UPDATE statements
 - and NOT FOUND condition 288, 299
 - collection columns 233, 233, 234
 - collection data 224
 - Collection Derived Table clause 224
 - defined statement constant 447
 - determining estimated cost of 294
 - determining number of rows updated 279, 294
 - determining rowid 294
 - dynamic 424, 434, 434, 456
 - failing to access rows 294
 - in ANSI-compliant database 105
 - interrupting 339, 805
 - known at compile time 424, 434
 - not known at compile time 456
 - parameterized 434, 456, 506, 547
 - row-type columns 252
 - row-type data 247
 - SET clause 19, 434
 - updating smart-large-object data 187
 - WHERE CURRENT OF clause 409
 - with DESCRIBE 446, 454
 - without WHERE clause 284, 289, 294, 447, 454
- updc_d_me sample program 146
- updc_d_nf sample program 156
- updc_d_of sample program 151
- USER network parameter 36, 324
- User-defined function
 - arguments 426
 - compared with procedure 430
 - creating 430
 - cursor 431, 432, 478, 519
 - definition 430

- determining return values dynamically 457
- dropping 430
- executing 430, 431
- executing dynamically 430, 431
- known at compile time 430
- noncursor 427, 431, 431, 478, 484, 519
- not known at compile time 457
- parameterized 426, 433, 435, 505, 546, 546
- with sqllda structure 535
- with system-descriptor area 491
- User-defined procedure
 - arguments 426
 - compared with function 430
 - creating 430
 - definition 430
 - dropping 430
 - executing 430, 430
 - executing dynamically 430
 - parameterized 426, 434, 506, 546
- user-defined routines
 - ifx_allow_newline() 9
- User-defined routines
 - definition 430
 - error messages 284, 292
 - languages supported 430
 - warning messages 284, 289
- USING DESCRIPTOR clause
 - of EXECUTE statement 519, 527, 538, 545, 547
 - of FETCH statement 519, 527
 - of OPEN statement 519, 527
 - of PUT statement 519, 527, 539
 - with a fetch array 462
- USING host_var clause
 - of EXECUTE statement 434
 - of OPEN statement 435
- USING SQL DESCRIPTOR clause
 - of DESCRIBE statement 478, 480, 486, 496
 - of EXECUTE statement 478, 484, 484, 496
 - of FETCH statement 478, 484, 486
 - of OPEN statement 478, 484
 - of PUT statement 478, 484, 500
- Utilities
 - finderr 4
 - lLogin 4
 - Setnet32 4

V

- VALUE descriptor field 487
- value.h header file 27
- var binary data type
 - checking for null 274, 718, 723
 - corresponding SQL data type 80, 85
 - deallocating data buffer 719
 - declaration 269
 - defined constant 84
 - fetching into 274
 - getting data buffer from 722
 - getting size of data buffer 723
 - setting data buffer 724
 - setting size of data buffer 725
 - setting to null 272, 726
 - specifying memory allocation 720
- varchar data type
 - corresponding SQL data type 80, 85
 - defined constant 84
 - definition of 94, 96
 - fetching into 89, 100, 104, 118
 - inserting from 101, 103, 104, 105
 - role of varchar.h 27
 - with ANSI-compliant database 105

- VARCHAR data type
 - corresponding ESQL/C data type 80, 85, 94
 - data conversion 90, 101
 - defined constant 82
 - fetching 90, 101
 - inserting 90, 103
 - macros 96
 - role of varchar.h 27
 - truncating values 101, 103
 - with null-terminated strings 94, 95
- varchar.h header file 27, 96
- Varying-length opaque data type
 - declaring host variable for 269
 - inserting 272
 - selecting 274
- VLENGTH varchar macro 96
- VCMAX varchar macro 96
- VCMIN varchar macro 96
- VCSIZ varchar macro 96
- Version independence 77
- Version information 49, 49
- vfork() system call 808

W

- Warnings
 - definition of 277
 - displaying in Microsoft format 68
 - extensions to X/Open standards 62
 - in user-defined routines 284, 289
- Informix
 - specific messages 289, 300
 - redirecting 61
 - suppressing 62, 68
 - using sqlca structure 300
 - using SQLSTATE variable 289
 - using the WHENEVER statement 305
 - X/Open messages 289
- WDEMO sample program 79
- WHENEVER statement 305
- Wildcard character
 - exclamation point (!) 681
 - question mark (?) 681
 - with smart-large-object filenames 681
- WORM optical disc 164, 200

X

- X/Open standards
 - checking for Informix extensions to 62
 - connecting to a database 326
 - data type defined constants 62, 85, 453
 - getting diagnostic information 278
 - nonstandard system descriptor fields 440
 - runtime error values 292
 - SQLSTATE class values 283
 - TYPE field values 500
 - using dynamic SQL statements 438, 455, 456, 456, 457
 - warning values 289
 - warnings on extensions 62
- XSQLCHAR data-type constant 85
- XSQLDECIMAL data-type constant 85
- XSQLFLOAT data-type constant 85
- XSQLINT data-type constant 85
- XSQLSMINT data-type constant 85